

1998

Remington.

C O U N T R Y

F I R E A R M S A M M U N I T I O N A C C E S S O R I E S



For sportsmen, Remington Country is a special place. It can be where we are, where we'd like to be, or where we've been. Sometimes it is an actual location, other times just a state of mind. It can include a favorite lifetime hunting spot, or it can be the hay bale shooting range where you coached your kids through their first box of .22s. What's most important about Remington Country is not the form it takes, but that it exists. It is a precious personal asset that can enrich our lives at any moment; a heritage passed down to us - one we're fortunate to have, and one we have an obligation to preserve and pass on to future generations. It is the appreciation of, and participation in, outdoor experiences.

Remington® would like to ask each of you to consider sharing that special feeling with your family, friends, neighbors, co-workers, or anyone else that is a part of your life. This is the focus of the National Shooting Sports Foundation's new program, "Step Outside." We all need to be not only ambassadors, but also recruiters of our sport.

In the past two years, Remington has presented shooting, hunting, fishing, and firearms safety to a new audience of millions of people through NASCAR Winston Cup Racing. For 32 weeks each year, huge and growing national audiences see the tradition we love in a positive light, and that participating in outdoor experiences is something everyone can enjoy.

For 1998, the exciting new product introductions in firearms, ammunition and accessories are a direct result of Remington's deep commitment to and investment in new product research and development. Combining cutting-edge research and development with almost 200 years of manufacturing excellence has yielded products that continue to provide you, our customer, with a great tradition in outdoor performance.

Best wishes for a great season!

Tommy Millner

Tommy Millner
President

TABLE OF CONTENTS

FIREARMS	3-31
AMMUNITION	32-51
ACCESSORIES	52-66
SHOOTING SCHOOL/STREN®	67


MODEL 870™ EXPRESS® SUPER MAGNUM™

- 28" vent rib barrel with with 3 1/2" chamber and Mod. Rem™ Choke
- Wood stock and fore-end with checkering and vented recoil pad
- Suggested retail is \$332



MODEL 870™ EXPRESS® SUPER MAGNUM™ SYNTHETIC™

- 26" vent rib barrel with with 3 1/2" chamber and Mod. Rem™ Choke
- Black synthetic stock and fore-end with checkering and vented recoil pad
- Suggested retail is \$339

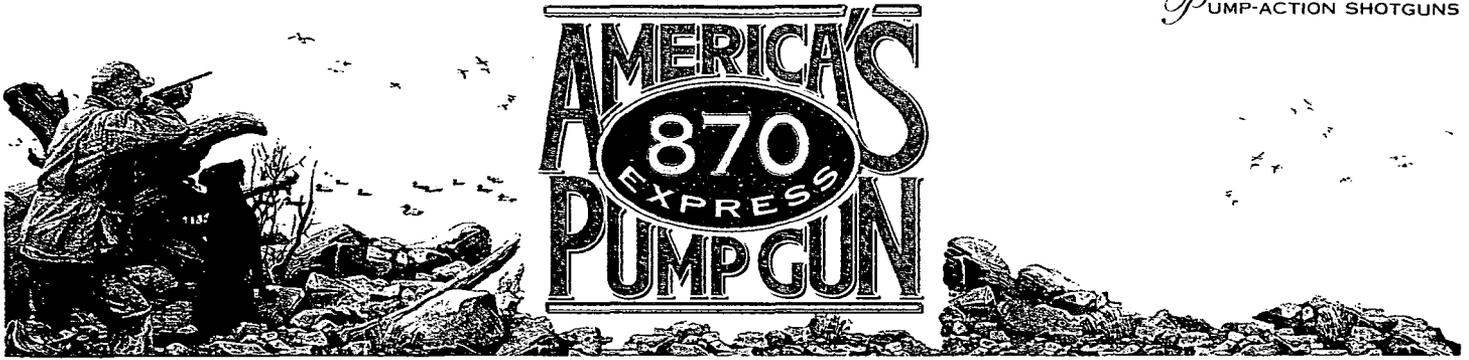


The Model 870™ 3½" Express® Super Magnum™ — America's Pump Gun Just Developed Some Serious Muscle.

If you want to take advantage of the power and reach of 12-gauge 3½" magnum shotshells, then take advantage of the best value in high performance shotgunning — the Model 870™ Express® Super Magnum™. These guns are built with the brute strength and lifetime reliability of our legendary Model 870™ Wingmaster®, but with the added versatility of being able to handle 12-ga. 2¾" to 3½" loads. The inherent strength of the field-proven 870™ design allowed us to re-engineer the existing breech bolt and receiver to accommodate the big shells.* But most important, the new Express® Super Magnums have the same great 870™ balance, swing, and feel that have earned them the well-deserved title of "America's Pump Gun."

Superior design and inherent strength of 870™ receiver easily accommodates the power and longer length of 3½" shells.

Super Magnum™ receiver is same size as all 12-ga. 870™ shotguns for similar balance.

Trigger mechanism retains same dimensions and crisp feel of all 12-ga. Model 870s.

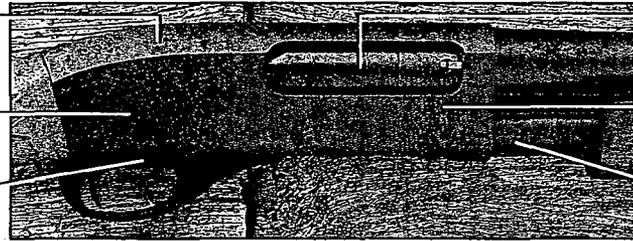

Breakthrough bolt re-design keeps cycle stroke equal for all three sizes of 12-ga. shotshells!

Express® Super Magnums will function with 2¾", 3", and 3½" shells interchangeably.

Magazine length unchanged for same balance point; capacity is three 3½", and four 2¾" or 3" shells.

EXPRESS® SUPER MAGNUM™ DESIGN FEATURES

MODEL 870™ EXPRESS® SUPER MAGNUM™ TURKEY CAMO

- 23" vent rib barrel with 3½" chamber and Turkey Extra Full Rem™ Choke
- Synthetic stock and fore-end with checkering and vented recoil pad
- Fully camouflaged with RealTree® Advantage®
- Suggested retail is \$439

MODEL 870™ EXPRESS® SUPER MAGNUM™ COMBO


- 26" vent rib barrel with 3½" chamber and Mod. Rem™ Choke
- 20" fully rifled deer barrel with 3" chamber and rifle sights
- Wood stock and fore-end with checkering and vented recoil pad
- Suggested retail is \$465

NOTE: Parts from Model 870™ Express® Super Magnums and all other Model 870™ shotguns are not interchangeable.

The Model 870™ Express® — The All-American Pump Gun That's All Business.

Our Model 870™ Express® is America's pump gun. It brings performance-oriented hunters the best of both worlds — beneath its no-nonsense, ready-for-work exterior lie the same quality of materials, precision manufacture, and lifetime reliability as in our standard Model 870™ Wingmaster®, the pump gun without peer. But it also delivers these to shooters at a truly economical price. As a result, not only is it the best value version of the best-selling shotgun ever designed, it's the best value in shotguns, period. And it earns this position with a variety of choices that span the spectrum of shotgunning applications.


NEW!

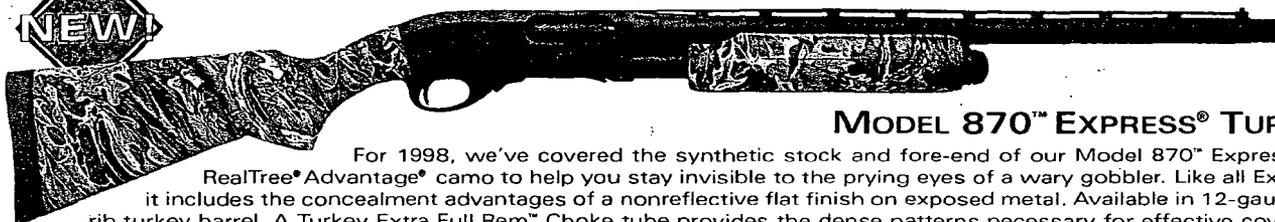

MODEL 870™ EXPRESS® TURKEY CAMO


For 1998, we've covered the synthetic stock and fore-end of our Model 870™ Express® Turkey gun in RealTree® Advantage® camo to help you stay invisible to the prying eyes of a wary gobbler. Like all Express® shotguns, it includes the concealment advantages of a nonreflective flat finish on exposed metal. Available in 12-gauge, with 21" vent rib turkey barrel. A Turkey Extra Full Rem™ Choke tube provides the dense patterns necessary for effective coverage of the vital head and neck area of a big gobbler. Suggested retail is \$372.

NEW!

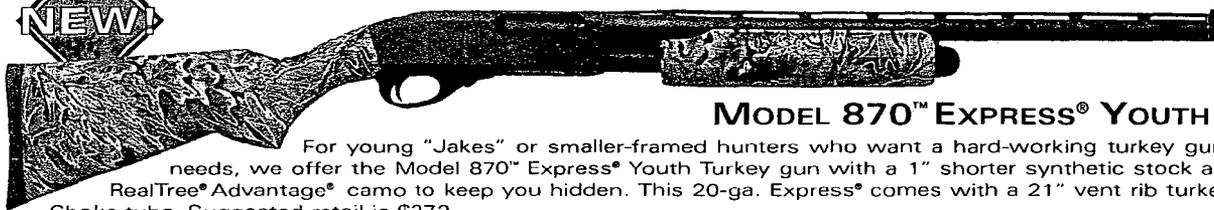

MODEL 870™ EXPRESS® YOUTH TURKEY CAMO

For young "Jakes" or smaller-framed hunters who want a hard-working turkey gun tailored just for their needs, we offer the Model 870™ Express® Youth Turkey gun with a 1" shorter synthetic stock and fore-end covered in RealTree® Advantage® camo to keep you hidden. This 20-ga. Express® comes with a 21" vent rib turkey barrel and Full Rem™ Choke tube. Suggested retail is \$372.

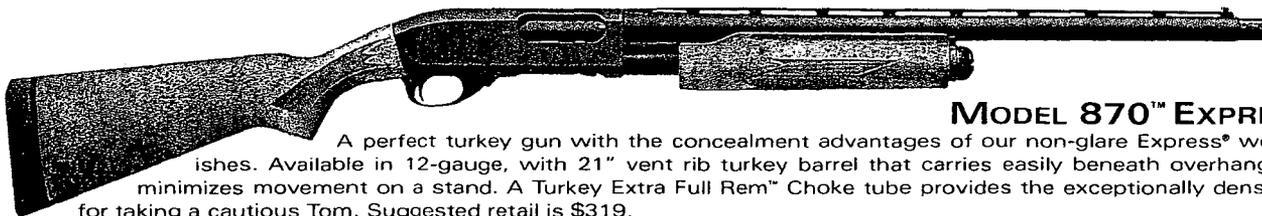


MODEL 870™ EXPRESS® TURKEY

A perfect turkey gun with the concealment advantages of our non-glare Express® wood and metal finishes. Available in 12-gauge, with 21" vent rib turkey barrel that carries easily beneath overhanging branches and minimizes movement on a stand. A Turkey Extra Full Rem™ Choke tube provides the exceptionally dense patterns needed for taking a cautious Tom. Suggested retail is \$319.


MODEL 870™ EXPRESS®

You can't buy a better shotgun than a Model 870™ Express®, because it's built on the action of the best-selling, most tested shotgun ever made — the legendary Model 870™ Wingmaster®. Just as strong, just as reliable, and just as durable — with an action that cycles just as smoothly. Offered with a wide selection of barrel configurations, a Rem™ Choke system, and in 12-, 20-, 28-ga. and .410 bore. All wood and metal surfaces have a nonreflective, non-revealing finish. The 12-ga., shown here, is offered with your choice of 26" or 28" barrel with Mod. Rem™ Choke. Suggested retail is from \$305.

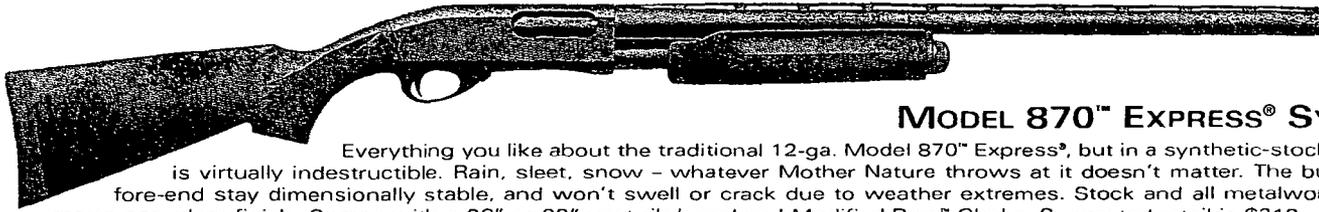


MODEL 870™ EXPRESS® SYNTHETIC

Everything you like about the traditional 12-ga. Model 870™ Express®, but in a synthetic-stock version that is virtually indestructible. Rain, sleet, snow – whatever Mother Nature throws at it doesn't matter. The butt stock and fore-end stay dimensionally stable, and won't swell or crack due to weather extremes. Stock and all metalwork have black matte non-glare finish. Comes with a 26" or 28" vent rib barrel and Modified Rem™ Choke. Suggested retail is \$312.

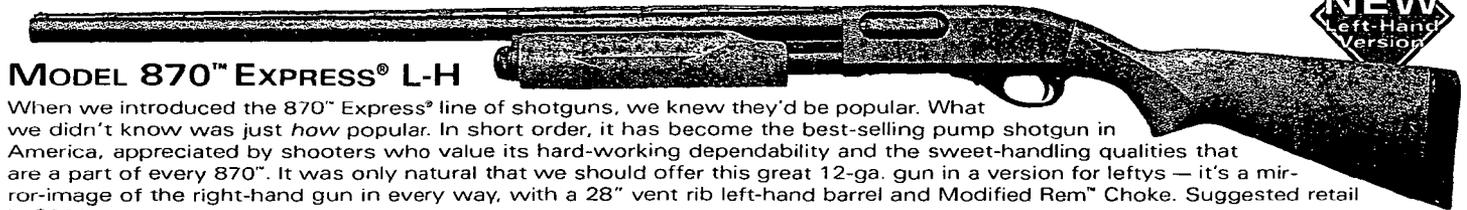


MODEL 870™ EXPRESS® L-H

When we introduced the 870™ Express® line of shotguns, we knew they'd be popular. What we didn't know was just how popular. In short order, it has become the best-selling pump shotgun in America, appreciated by shooters who value its hard-working dependability and the sweet-handling qualities that are a part of every 870™. It was only natural that we should offer this great 12-ga. gun in a version for leftys – it's a mirror-image of the right-hand gun in every way, with a 28" vent rib left-hand barrel and Modified Rem™ Choke. Suggested retail is \$332.

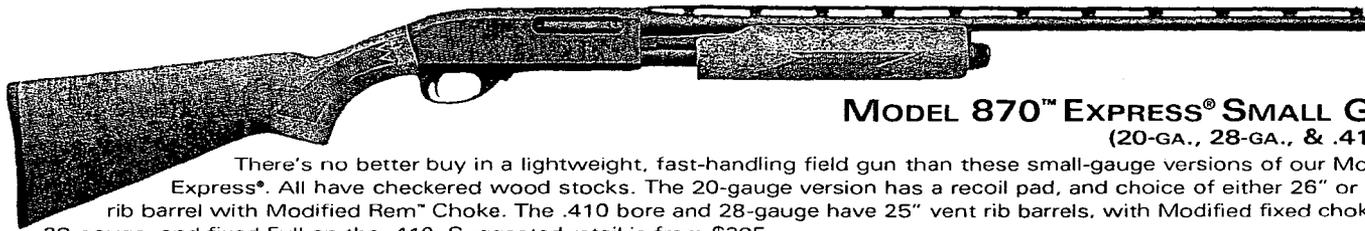


MODEL 870™ EXPRESS® SMALL GAUGE (20-GA., 28-GA., & .410 BORE)

There's no better buy in a lightweight, fast-handling field gun than these small-gauge versions of our Model 870™ Express®. All have checkered wood stocks. The 20-gauge version has a recoil pad, and choice of either 26" or 28" vent rib barrel with Modified Rem™ Choke. The .410 bore and 28-gauge have 25" vent rib barrels, with Modified fixed choke on the 28-gauge, and fixed Full on the .410. Suggested retail is from \$305.

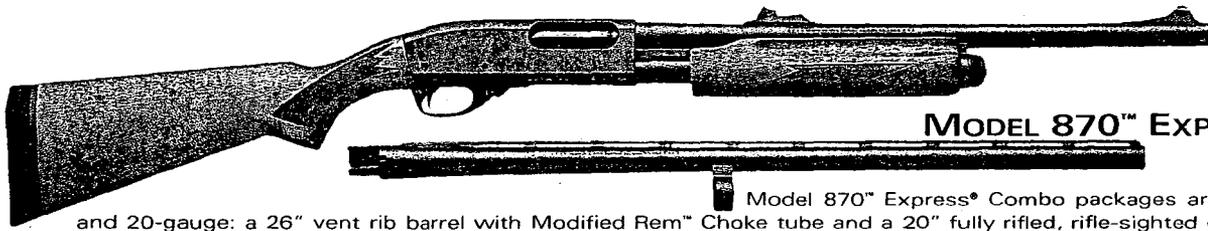


MODEL 870™ EXPRESS® COMBOS (IN 12- AND 20-GA.)

Model 870™ Express® Combo packages are available in both 12- and 20-gauge: a 26" vent rib barrel with Modified Rem™ Choke tube and a 20" fully rifled, rifle-sighted deer barrel. In addition, 12- and 20-ga. combos are available with a 28" vent rib Mod. Rem™ Choke field barrel and 20" rifle-sighted fixed Improved Cylinder deer barrel. Suggested retail is from \$399.

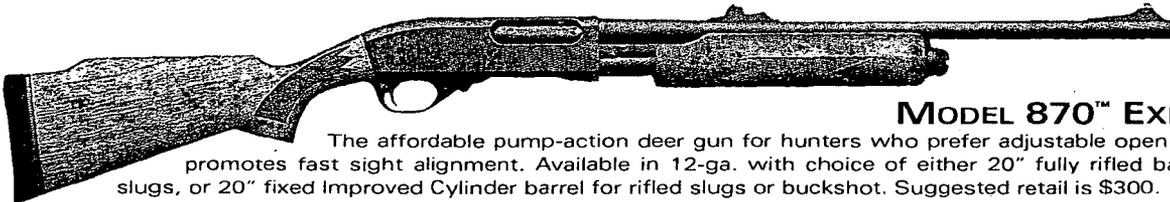


MODEL 870™ EXPRESS® DEER GUN

The affordable pump-action deer gun for hunters who prefer adjustable open sights. Monte Carlo stock promotes fast sight alignment. Available in 12-ga. with choice of either 20" fully rifled barrel for sabot or standard slugs, or 20" fixed Improved Cylinder barrel for rifled slugs or buckshot. Suggested retail is \$300.

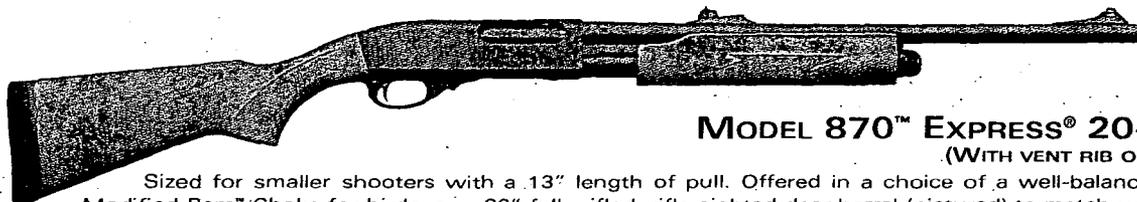

MODEL 870™ EXPRESS® 20-GAUGE YOUTH GUN (WITH VENT RIB OR RIFLE-SIGHTED DEER BARREL)

Sized for smaller shooters with a 13" length of pull. Offered in a choice of a well-balanced 21" vent rib barrel with a Modified Rem™ Choke for birds, or a 20" fully rifled, rifle-sighted deer barrel (pictured) to match up with the accuracy of our 20-gauge Copper Solid™ sabot slugs. It features a handsome hardwood stock with checkering, low-luster finish, and recoil pad. Suggested retail is from \$305.

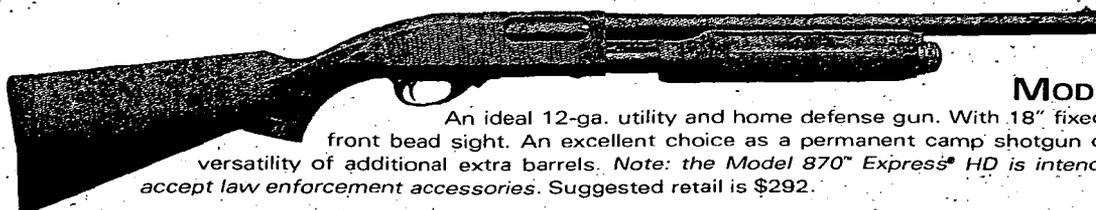


MODEL 870™ EXPRESS® HD

An ideal 12-ga. utility and home defense gun. With 18" fixed Cylinder choke barrel and single front bead sight. An excellent choice as a permanent camp shotgun or as a foundation for adding the versatility of additional extra barrels. Note: the Model 870™ Express® HD is intended for personal use and will not accept law enforcement accessories. Suggested retail is \$292.


The Model 870™ Wingmaster® — The Field-Proven Favorite That's Still Ahead of Its Time.

If the Model 870™ Wingmaster® were introduced today, it would be hailed as a major advance in pump-action shotgun design — the ultimate in strength, durability, silky-smooth bind-free action, and sleek classical lines. Yet this remarkable shotgun has been around for almost half a century, and has become the best-selling shotgun of any action type in history, with over six million made. Most of these are one-owner guns. That should tell you something.

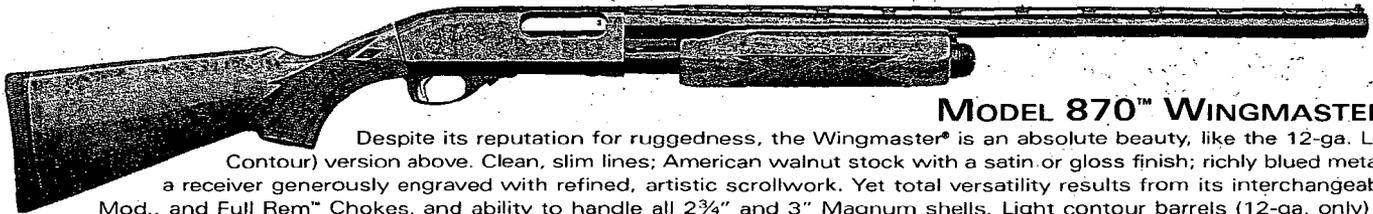


MODEL 870™ WINGMASTER® LC

Despite its reputation for ruggedness, the Wingmaster® is an absolute beauty, like the 12-ga. LC (Light Contour) version above. Clean, slim lines; American walnut stock with a satin or gloss finish; richly blued metal luster; a receiver generously engraved with refined, artistic scrollwork. Yet total versatility results from its interchangeable I. C., Mod., and Full Rem™ Chokes, and ability to handle all 2¾" and 3" Magnum shells. Light contour barrels (12-ga. only) make it swing like a magic wand. Choose from 12-ga. barrel lengths of 26", 28", and 30", and 20-ga. with barrel lengths of 26" or 28". Suggested retail is \$519.

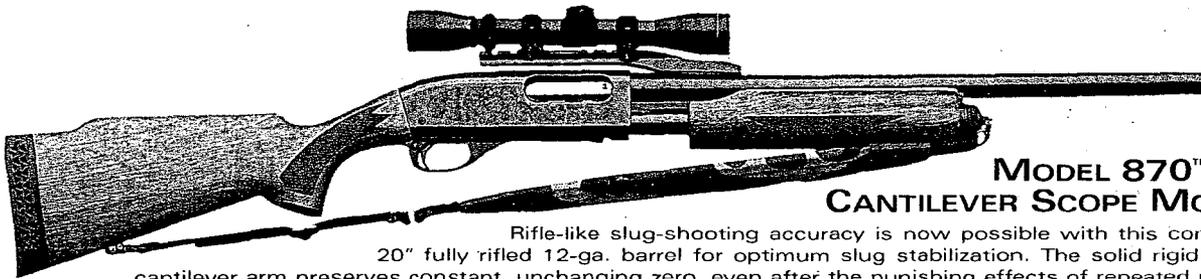

MODEL 870™ WINGMASTER® CANTILEVER SCOPE MOUNT DEER GUN

Rifle-like slug-shooting accuracy is now possible with this combination of optics and 20" fully rifled 12-ga. barrel for optimum slug stabilization. The solid rigidity of our scope mount cantilever arm preserves constant, unchanging zero, even after the punishing effects of repeated recoil. Yet a quick barrel change converts it to a standard field gun. The receiver is attractively engraved with scrollwork on the right face and whitetail deer on the left face. Sling swivel studs and camo sling are included. *Note: Scope and rings not included.* Suggested retail is \$599.



NEW
Engraving

Fine-Line Engraving Now on 20-ga. Guns

Gun Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
12-ga. Wingmaster® LC	30"	50½"	7½	14"	1½"	2½"
	28"	48½"	7	14"	1½"	2½"
	26"	46½"	6½	14"	1½"	2½"
12-ga. Fully Rifled Cantilever Deer	20"	40½"	8	14½"	1½"	1½"
★ 20-ga. Wingmaster®	28"	48½"	6½	14"	1½"	2½"
	26"	46½"	6½	14"	1½"	2½"


★ New For 1998

MODEL 870™ WINGMASTER®

REMINGTON® PEERLESS®

The Remington® Peerless® — The American-Made Over & Under Like No Other.


The Peerless® is everything a great 12-ga. over & under should be — a break-action shotgun whose classic beauty is matched with design features you won't find in over & under field guns costing twice as much. These include superb handling qualities based on modest weight and perfect, over-the-hinge-pins balance. Add to that the aesthetics of shooter-inspired design with clean, flowing lines from its sleek pistol grip to the lean receiver and comfortable fore-end. Barrels have an 8mm-wide vent rib with target-style twin bead sights, and elongated forcing cones, and are furnished with Improved Cylinder, Modified, and Full Rem™ Chokes.

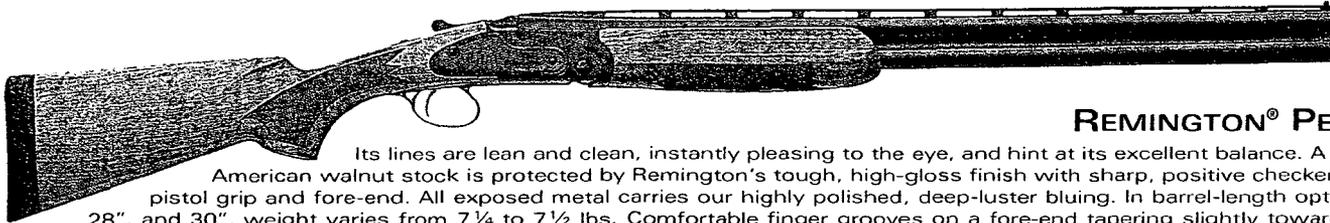

REMINGTON® PEERLESS®


Its lines are lean and clean, instantly pleasing to the eye, and hint at its excellent balance. A richly toned American walnut stock is protected by Remington's tough, high-gloss finish with sharp, positive checkering on both pistol grip and fore-end. All exposed metal carries our highly polished, deep-luster bluing. In barrel-length options of 26", 28", and 30", weight varies from 7¼ to 7½ lbs. Comfortable finger grooves on a fore-end tapering slightly towards the front provides enhanced appearance and fast handling. A gold-plated single selective mechanical trigger guarantees fast follow-up shots. Suggested retail is \$1,172.

Remington® Peerless® Design Features

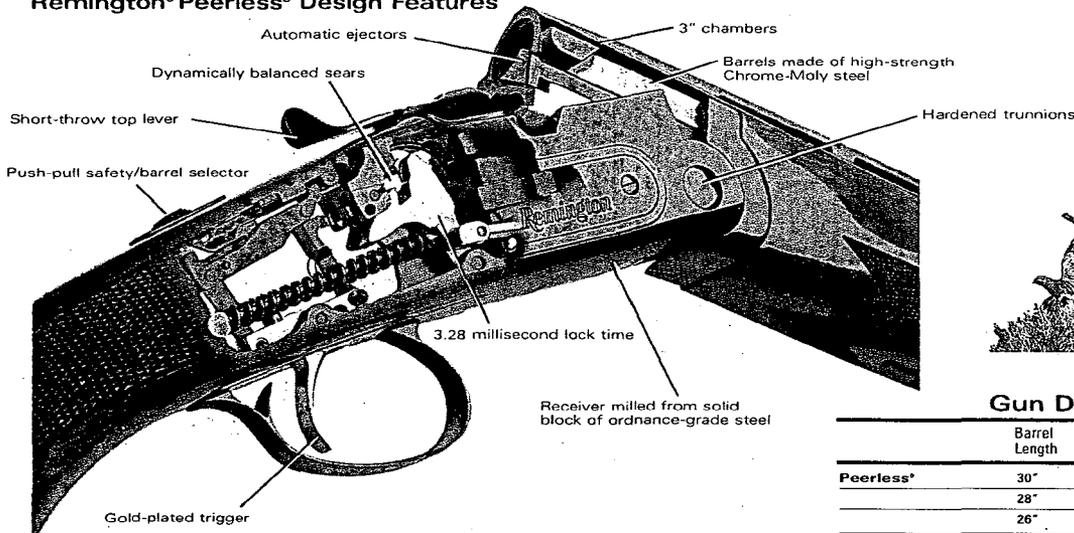

Gun Dimensions / Average Weights



	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
Peerless®	30"	47"	7½	14¾"	1½"	2½"
	28"	45"	7¼	14¼"	1½"	2½"
	26"	43"	7¼	14¼"	1½"	2½"

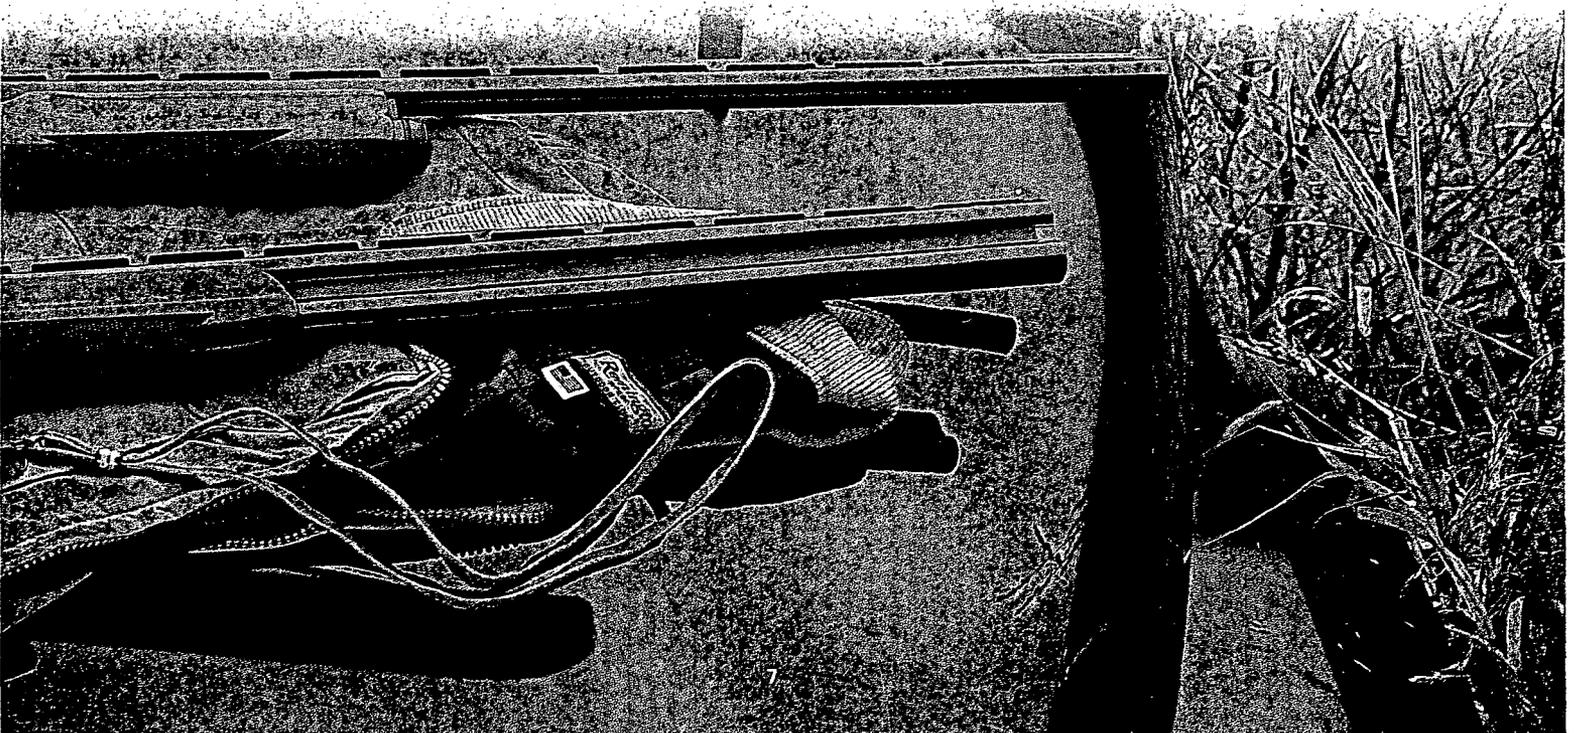

The Model 11-87™ Premier® — The Standard by Which All Other 12-ga. Autoloaders Are Measured.


The Model 11-87™ Premier® has everything that a shotgunner could want in a 12-ga. autoloader: strength, versatility, durability, reliable performance, and superb handling. It gives nothing away in looks either: slim, graceful stock lines and the elegance of a richly figured American walnut stock and fore-end.

Model 11-87™ / 11-96™ Gas Operating System

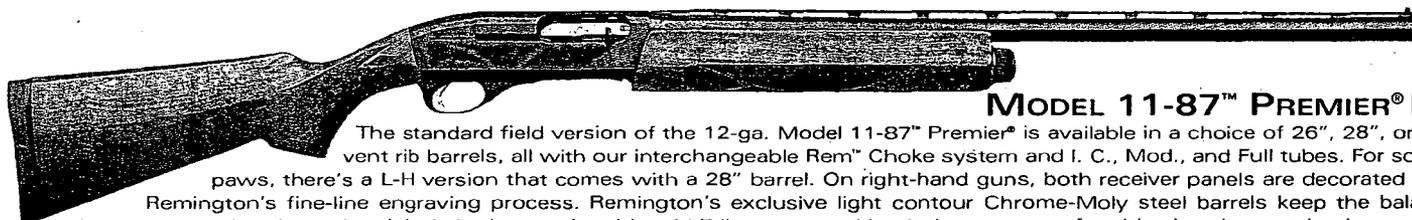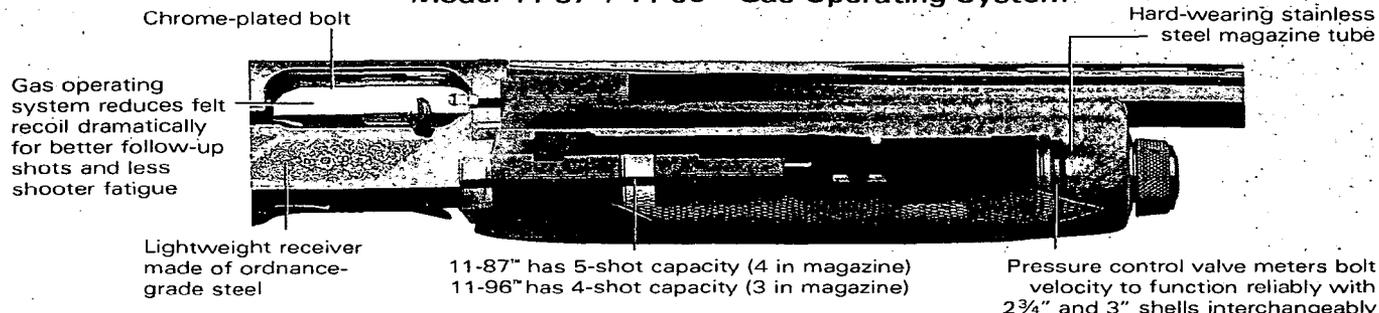

MODEL 11-87™ PREMIER® LC

The standard field version of the 12-ga. Model 11-87™ Premier® is available in a choice of 26", 28", or 30" vent rib barrels, all with our interchangeable Rem™ Choke system and I. C., Mod., and Full tubes. For south-paws, there's a L-H version that comes with a 28" barrel. On right-hand guns, both receiver panels are decorated with Remington's fine-line engraving process. Remington's exclusive light contour Chrome-Moly steel barrels keep the balance between your hands, and weight is in the comfortable mid-7 lb. range, making it the most comfortable-shooting autoloader you can shoulder. Suggested retail is from \$692.

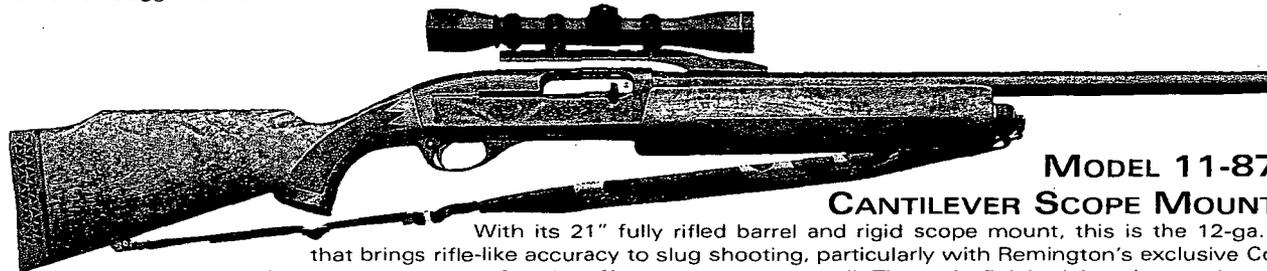


MODEL 11-87™ PREMIER® CANTILEVER SCOPE MOUNT DEER GUN

With its 21" fully rifled barrel and rigid scope mount, this is the 12-ga. deer gun system that brings rifle-like accuracy to slug shooting, particularly with Remington's exclusive Copper Solid™ sabot slugs. And it won't change zero even after the effects of repeated recoil. The satin-finished American walnut stock comes with integral sling swivel studs and padded camo Cordura® sling. *Note: Scope and rings not included.* Suggested retail is \$759.

The Model 11-96™ Euro Lightweight — Voted 1997 Shotgun of the Year!

Shooting Industry Magazine's Academy of Excellence awarded the 11-96™ Euro Lightweight "Shotgun of the Year" in 1997. Its lightning-fast pointability and great balance make it the wingshooter's choice!

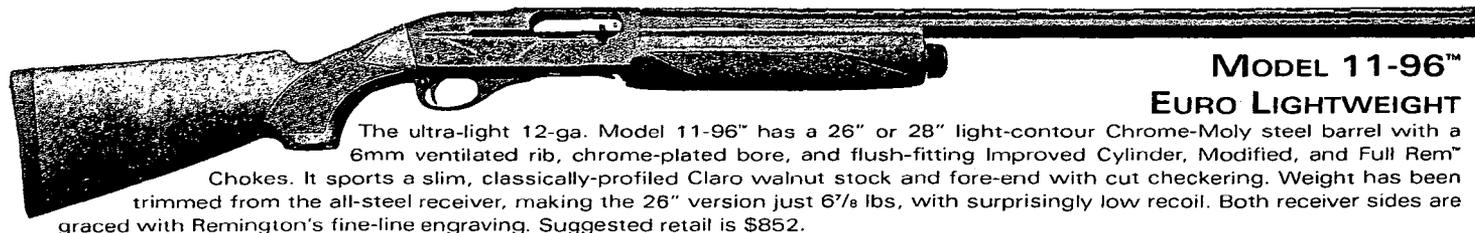

MODEL 11-96™ EURO LIGHTWEIGHT

The ultra-light 12-ga. Model 11-96™ has a 26" or 28" light-contour Chrome-Moly steel barrel with a 6mm ventilated rib, chrome-plated bore, and flush-fitting Improved Cylinder, Modified, and Full Rem™ Chokes. It sports a slim, classically-profiled Claro walnut stock and fore-end with cut checkering. Weight has been trimmed from the all-steel receiver, making the 26" version just 6⅞ lbs, with surprisingly low recoil. Both receiver sides are graced with Remington's fine-line engraving. Suggested retail is \$852.




Gun Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs)	Length of Pull	Drop (Comb)	Drop (Heel)
11-87™ Premier® LC	30"	50½"	7½	14"	1½"	2½"
	28"	48½"	7½	14"	1½"	2½"
	26"	46"	7½	14"	1½"	2½"
11-87™ Premier® Deer	21"	41½"	8	14½"	1½"	1½"
11-96™ Euro Lightweight	28"	48½"	7	14"	1½"	2½"
	26"	46"	6½	14"	1½"	2½"


The Remington® Model 1100™ — The All-Time, All-Around Autoloading Favorite.

The Model 1100™ defined the rules for how autoloaders should perform in terms of looks, weight, handling qualities, and reliability. It combines the slim, trim lines of classic doubles, the repeat-shot reliability of the best pump guns, and the light-recoiling performance of a modern gas-operated action. It's no wonder, then, that millions of hunters have made it the best-selling autoloader of all time.

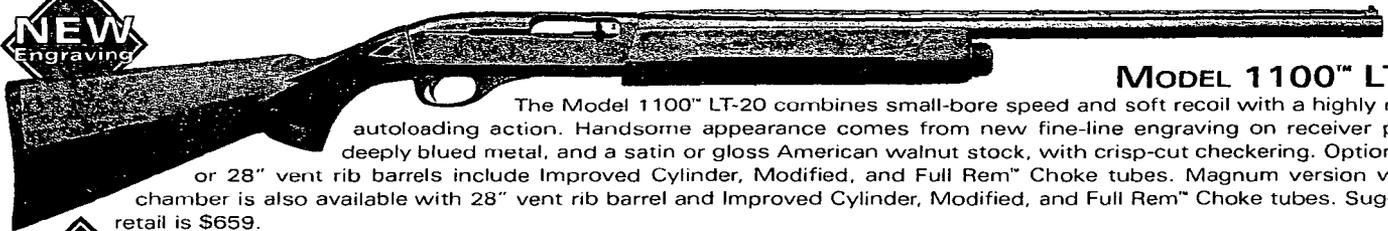


MODEL 1100™ LT-20

The Model 1100™ LT-20 combines small-bore speed and soft recoil with a highly reliable autoloading action. Handsome appearance comes from new fine-line engraving on receiver panels, deeply blued metal, and a satin or gloss American walnut stock, with crisp-cut checkering. Optional 26" or 28" vent rib barrels include Improved Cylinder, Modified, and Full Rem™ Choke tubes. Magnum version with 3" chamber is also available with 28" vent rib barrel and Improved Cylinder, Modified, and Full Rem™ Choke tubes. Suggested retail is \$659.

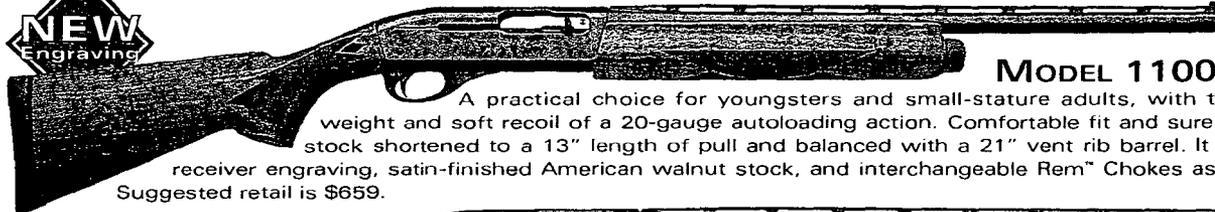


MODEL 1100™ LT-20 YOUTH

A practical choice for youngsters and small-stature adults, with the easy-carrying light weight and soft recoil of a 20-gauge autoloading action. Comfortable fit and sure handling come from a stock shortened to a 13" length of pull and balanced with a 21" vent rib barrel. It has the same fine-line receiver engraving, satin-finished American walnut stock, and interchangeable Rem™ Chokes as its full-sized brothers. Suggested retail is \$659.

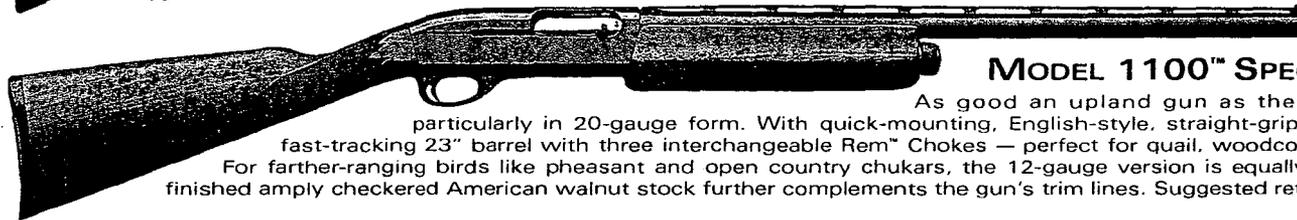


MODEL 1100™ SPECIAL FIELD

As good an upland gun as there is today — particularly in 20-gauge form. With quick-mounting, English-style, straight-gripped stock and fast-tracking 23" barrel with three interchangeable Rem™ Chokes — perfect for quail, woodcock and grouse. For farther-ranging birds like pheasant and open country chukars, the 12-gauge version is equally fast. A satin-finished amply checkered American walnut stock further complements the gun's trim lines. Suggested retail is \$659.

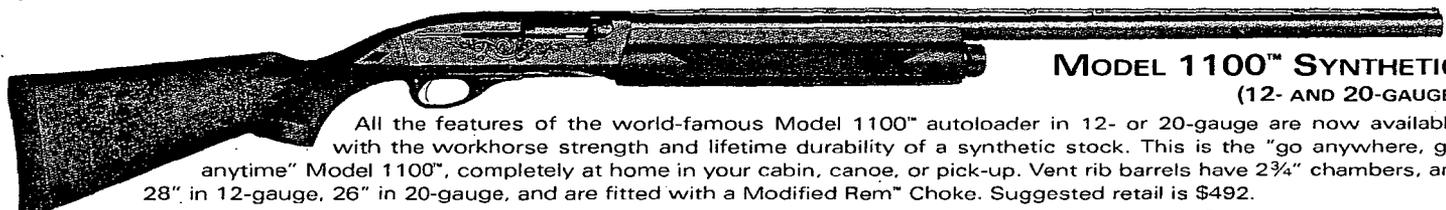


MODEL 1100™ SYNTHETIC (12- AND 20-GAUGE)

All the features of the world-famous Model 1100™ autoloader in 12- or 20-gauge are now available with the workhorse strength and lifetime durability of a synthetic stock. This is the "go anywhere, go anytime" Model 1100™, completely at home in your cabin, canoe, or pick-up. Vent rib barrels have 2¾" chambers, are 28" in 12-gauge, 26" in 20-gauge, and are fitted with a Modified Rem™ Choke. Suggested retail is \$492.

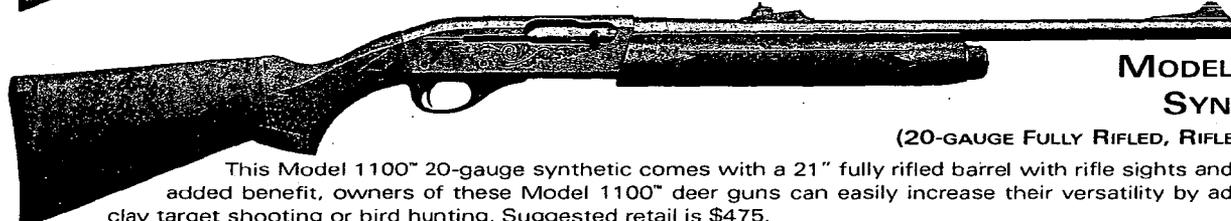

MODEL 1100™ LT-20 SYNTHETIC FR RS (20-GAUGE FULLY RIFLED, RIFLE-SIGHTED DEER GUN)

This Model 1100™ 20-gauge synthetic comes with a 21" fully rifled barrel with rifle sights and 2¾" chamber. As an added benefit, owners of these Model 1100™ deer guns can easily increase their versatility by adding extra barrels for clay target shooting or bird hunting. Suggested retail is \$475.

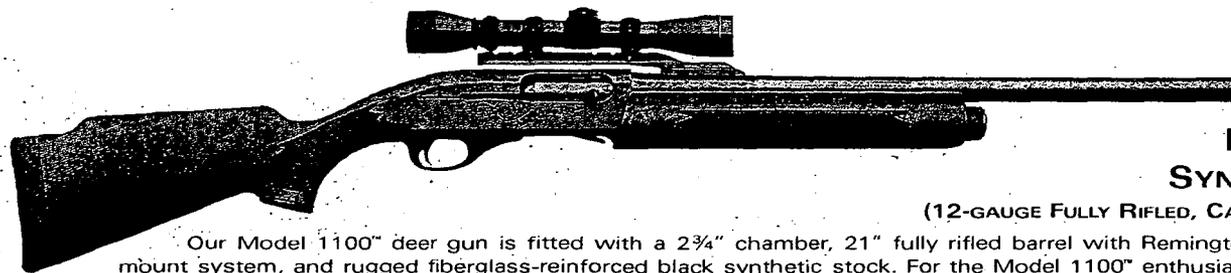

MODEL 1100™ SYNTHETIC FR CL (12-GAUGE FULLY RIFLED, CANTILEVER DEER GUN)

Our Model 1100™ deer gun is fitted with a 2¾" chamber, 21" fully rifled barrel with Remington's cantilever scope mount system, and rugged fiberglass-reinforced black synthetic stock. For the Model 1100™ enthusiast, this is the perfect opportunity to take advantage of exceptional slug accuracy with the combination of fully rifled barrels and modern slugs such as Remington's Copper Solid™. *Note: Scope and rings not included.* Suggested retail is \$585.

Gun Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
★ 1100™ LT-20	28"	48"	7	14"	1½"	2½"
	26"	46"	6½	14"	1½"	2½"
★ 1100™ LT-20 Youth	21"	40½"	6½	13"	1½"	2½"
1100™ Special Field(12-ga.)	23"	43½"	7½	14"	1½"	2½"
	(20-ga.)	23"	43½"	6½	14"	1½"


Gun Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
1100™ Synthetic	(12-ga.) 28"	48"	7½	14"	1½"	2½"
	(20-ga.) 26"	46"	7	14"	1½"	2½"
1100™ Synthetic FR RS	(20-ga.) 21"	41"	7	14"	1½"	2½"
1100™ Synthetic FR CL	(12-ga.) 21"	41½"	7½	14"	1½"	2½"
★ 1100™ LT-20 Magnum	28"	48"	7	14"	1½"	2½"




Special Purpose Turkey Guns — The Ultimate in Camouflaged Shotgunning.

We think of our Special Purpose Turkey guns as the "stealth guns" of our line. And they are — with their traditional toughness and dependable performance, and the addition of Mossy Oak® Break-Up camo on some models to keep the guns concealed. Rugged stocks, nonreflective surfaces, sling swivel studs and a padded Cordura® sling are standard on all Special Purpose Turkey guns. And this year, we're saluting the 25th Anniversary of the National Wild Turkey Federation to bring you a family of the hardest-hunting turkey guns this side of heaven. Each gun sold includes a special membership offer for you from the NWTF, and a contribution to the NWTF from Remington®. So if you want to "talk turkey" this season, go talk to your Remington dealer.

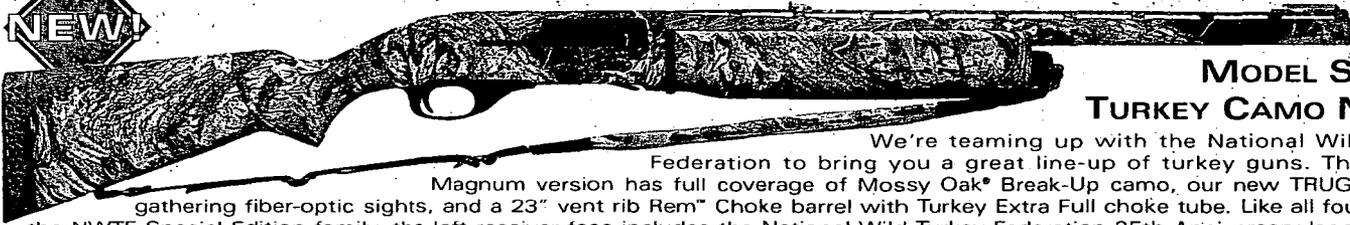


**MODEL SP-10™
TURKEY CAMO NWTF**

We're teaming up with the National Wild Turkey Federation to bring you a great line-up of turkey guns. The SP-10™ Magnum version has full coverage of Mossy Oak® Break-Up camo, our new TRUGLO® light-gathering fiber-optic sights, and a 23" vent rib Rem™ Choke barrel with Turkey Extra Full choke tube. Like all four guns in the NWTF Special Edition family, the left receiver face includes the National Wild Turkey Federation 25th Anniversary logo, and, for each gun sold, Remington will make a contribution to the NWTF. Suggested retail is \$1,225.

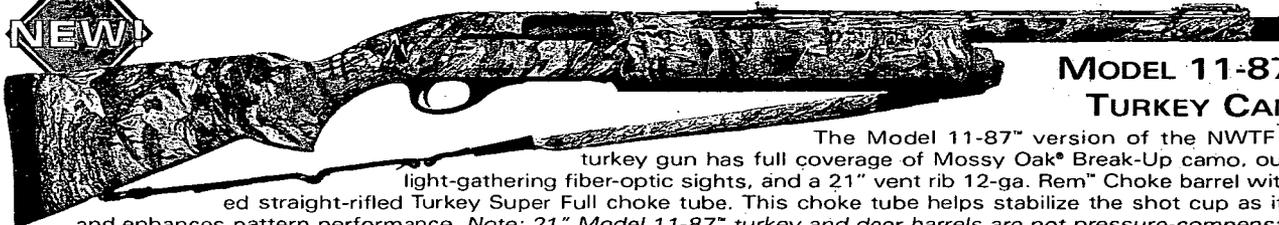


**MODEL 11-87™ SPS-T™
TURKEY CAMO NWTF**

The Model 11-87™ version of the NWTF Special Edition turkey gun has full coverage of Mossy Oak® Break-Up camo, our new TRUGLO® light-gathering fiber-optic sights, and a 21" vent rib 12-ga. Rem™ Choke barrel with a new extended straight-rifled Turkey Super Full choke tube. This choke tube helps stabilize the shot cup as it exits the barrel and enhances pattern performance. Note: 21" Model 11-87" turkey and deer barrels are not pressure-compensated. Not for use with target or light field loads. Suggested retail is \$832.

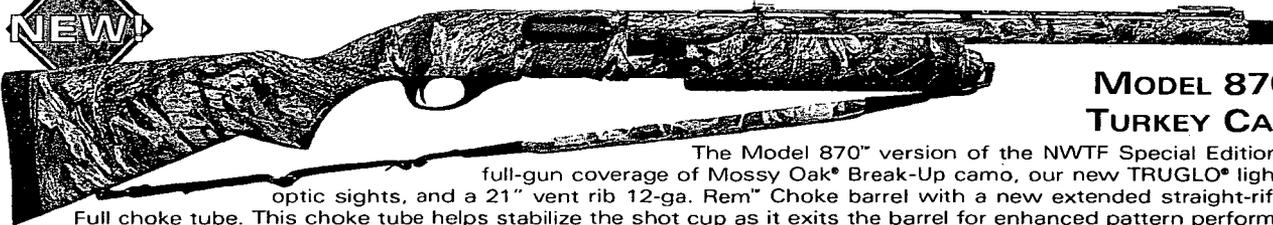

**MODEL 870™ SPS-T™
TURKEY CAMO NWTF**

The Model 870™ version of the NWTF Special Edition turkey gun has full-gun coverage of Mossy Oak® Break-Up camo, our new TRUGLO® light-gathering fiber-optic sights, and a 21" vent rib 12-ga. Rem™ Choke barrel with a new extended straight-rifled Turkey Super Full choke tube. This choke tube helps stabilize the shot cup as it exits the barrel for enhanced pattern performance. Suggested retail is \$565.


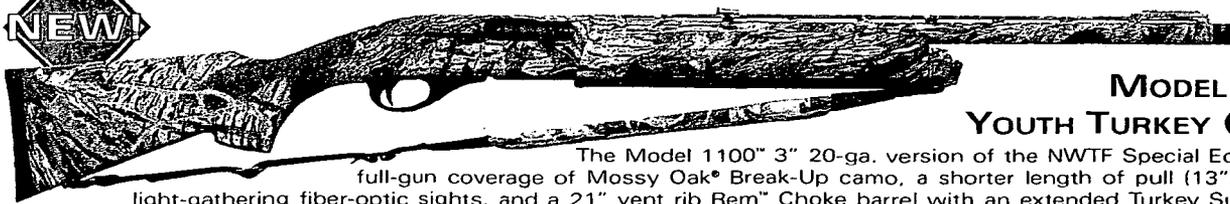


**MODEL 1100™ LT-20
YOUTH TURKEY CAMO NWTF**

The Model 1100™ 3" 20-ga. version of the NWTF Special Edition turkey gun has full-gun coverage of Mossy Oak® Break-Up camo, a shorter length of pull (13"), our new TRUGLO® light-gathering fiber-optic sights, and a 21" vent rib Rem™ Choke barrel with an extended Turkey Super Full choke tube. Suggested retail is \$652.


TRUGLO® Light-Gathering Fiber-Optic Sighting System

For those early morning stands when the light is low and the gobblers are picking their way towards you, our new TRUGLO® light-gathering fiber-optic sighting system is designed to give you the clearest sight picture possible for lining up on those bobbing heads. Just center the orange dot between the two green dots (left), and you're precisely on target.

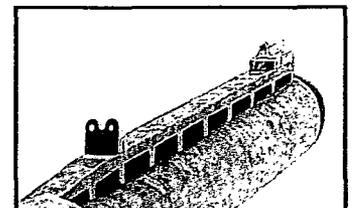

Model SP-10™ Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
★ SP-10™ Magnum Camo NWTF	23"	44½"	10½"	14"	1½"	2½"
SP-10™ Magnum	26"	47½"	10½"	14"	1½"	2½"
	30"	51½"	11"	14"	1½"	2½"
★ SP-10™ Magnum Camo	26"	47½"	10½"	14"	1½"	2½"

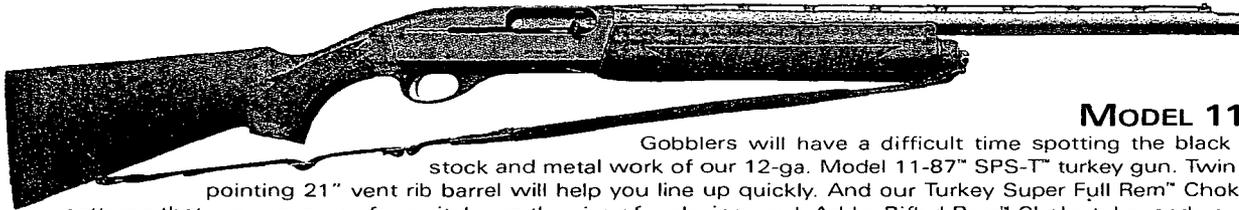

MODEL 11-87™ SPS-T™

Gobblers will have a difficult time spotting the black matte finish on the stock and metal work of our 12-ga. Model 11-87™ SPS-T™ turkey gun. Twin beads on the quick-pointing 21" vent rib barrel will help you line up quickly. And our Turkey Super Full Rem™ Choke delivers the dense patterns that are necessary for a vital area the size of a playing card. Add a Rifled Rem™ Choke tube, and you can turn this turkey gun into a deer gun as well. Includes sling swivel studs and padded Cordura® sling. *Note: 21" Model 11-87™ turkey and deer barrels are not pressure-compensated. Not for use with target or light field loads.* Suggested retail is \$692.



MODEL 870™ SPS-T™

The totally nonreflective black matte finish on the stock and metal of our 12-ga. Model 870™ SPS-T™ turkey gun makes it look like just another tree branch. Twin beads on the fast-pointing 21" vent rib barrel will help you line up quickly on a long-bearded Tom. And our Turkey Super Full Rem™ Choke delivers the dense patterns that will ensure a Thanksgiving dinner. Add a Rifled Rem™ Choke tube, and you can turn this rugged, synthetic-stocked shotgun into a sharp-shooting deer gun as well. Includes sling swivel studs and padded Cordura® sling. Suggested retail is \$425.

Model 11-87™ / Model 870™ Special Purpose Synthetic — All Black Matte Finish

	Gauge	Barrel Type/Length	Rem™ Choke(s) Supplied	Finish
11-87™ SPS™	12	Vent Rib / 26" or 28"	I.C., Mod., & Full	All Black Matte
11-87™ / 870™ SPS™ Deer	12	Rifle Sighted / 21" 11-87™, 20" 870™	Fully Rifled barrel, no choke tube	All Black Matte
11-87™ / 870™ SPS™ T™	12	Vent Rib / 21"	I.C. & Turkey Super Full	All Black Matte
11-87™ / 870™ SPS™ Cantilever Deer	12	Cantilever Scope mount / 21" 11-87™, 20" 870™	Fully Rifled barrel, no choke tube	All Black Matte

Note: 21" Model 11-87™ turkey and deer barrels are not pressure-compensated. Not for use with target or light field loads.

Model SP-10™ & Model 11-87™ / Model 870™ Special Purpose Synthetic — Camo Finishes

	Gauge	Barrel Type/Length	Rem™ Choke(s) Supplied	Camo Pattern
SP-10™ Magnum Camo	10	Vent Rib / 26"	Mod., & Full	Mossy Oak® Break-Up
SP-10™ Turkey Camo (NWTF)	10	Vent Rib / 23"	Turkey Extra Full	Mossy Oak® Break-Up
11-87™ / 870™ SPS™ Camo	12	Vent Rib / 26"	I.C., Mod., & Full	Mossy Oak® Break-Up
11-87™ / 870™ SPS™ T™ Camo (NWTF)	12	Vent Rib / 21"	Ext. Straight-Rifled Turkey Super Full	Mossy Oak® Break-Up

Note: 21" Model 11-87™ turkey and deer barrels are not pressure-compensated. Not for use with target or light field loads.

Model SP-10™ & Model 11-87™ Special Purpose — Wood Stocks

	Gauge	Barrel Type/Length	Rem™ Choke(s) Supplied	Finish
SP-10™ Magnum	10	Vent Rib / 26"	Mod., & Full	Satin wood/matte metal
11-87™ SP™	12	Vent Rib / 26" or 28"	I.C., Mod., & Full	Satin wood/matte metal
11-87™ SP™ Deer	12	Vent Rib / 21"	Rifled & I.C.	Satin wood/matte metal

Note: 21" Model 11-87™ turkey and deer barrels are not pressure-compensated. Not for use with target or light field loads.

Model 11-87™ Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
★ 11-87™ SPS™ T™ Camo NWTF	21"	41"	8"	14"	1½"	2½"
11-87™ SPS™ T™	21"	41"	8"	14"	1½"	2½"
11-87™ SPS™	26"	46"	8½"	14"	1½"	2½"
	28"	48½"	8½"	14"	1½"	2½"
11-87™ SPS™ Camo	26"	46"	8½"	14"	1½"	2½"
11-87™ SP™	26"	46"	8½"	14"	1½"	2½"
	28"	48½"	8½"	14"	1½"	2½"
11-87™ SPS™ Cant. Deer	21"	41½"	8½"	14½"	1½"	1½"
11-87™ SPS™ Deer	21"	41"	8"	14"	1½"	2½"
11-87™ SP™ Deer	21"	41"	8"	14"	1½"	2½"

Note: 21" Model 11-87™ turkey and deer barrels are not pressure-compensated. Not for use with target or light field loads.


Model 870™ Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
★ 870™ SPS™ T™ Camo NWTF	21"	41½"	7"	14"	1½"	2½"
870™ SPS™ T™	21"	41½"	7"	14"	1½"	2½"
870™ SPS™ Camo	26"	46½"	7½"	14"	1½"	2½"
870™ SPS™ Deer	20"	40"	7"	14"	1½"	2½"
870™ SPS™ Cant. Deer	20"	40½"	8"	14½"	1½"	1½"
870™ Marine Magnum	18"	38½"	7½"	14"	1½"	2½"
★ 1100™ Youth Turkey Camo NWTF	21"	40½"	6½"	13"	1½"	2½"

★ New For 1998


Special Purpose Waterfowlers — The Toughest Shotguns We Make.

Our Special Purpose shotguns are the toughest shotguns we make, for some of the toughest hunting challenges you can face. Whether your passion is mallards in Maryland, or sea ducks off the Maine coast, these guns will get the job done. From the awesome power of the Model SP-10™ Magnum, to the camo, wood and synthetic versions of the Model 11-87™ and 870™ Special Purpose, there's a game-getting hunting partner that's tailored to the task.

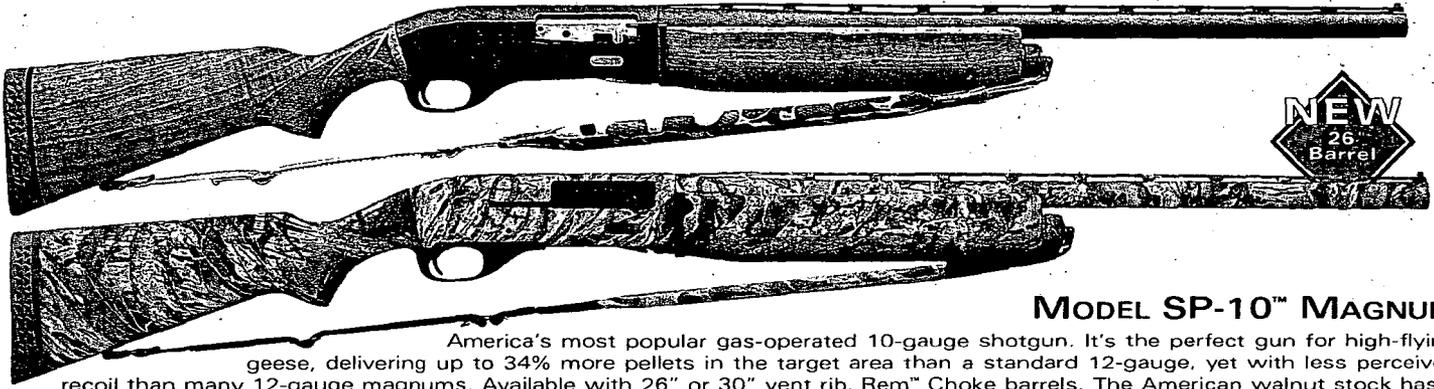

MODEL SP-10™ MAGNUM

America's most popular gas-operated 10-gauge shotgun. It's the perfect gun for high-flying geese, delivering up to 34% more pellets in the target area than a standard 12-gauge, yet with less perceived recoil than many 12-gauge magnums. Available with 26" or 30" vent rib, Rem™ Choke barrels. The American walnut stock has a satin finish, and all exposed metal has a nonreflective matte finish. Also available is the SP-10™ Magnum Camo with a new fast-pointing 26" vent rib barrel covered in Mossy Oak® Break-Up camouflage. Includes interchangeable Rem™ Chokes in Full and Modified. Supplied with sling swivel studs and padded Cordura® sling. Suggested retail is from \$1,085.

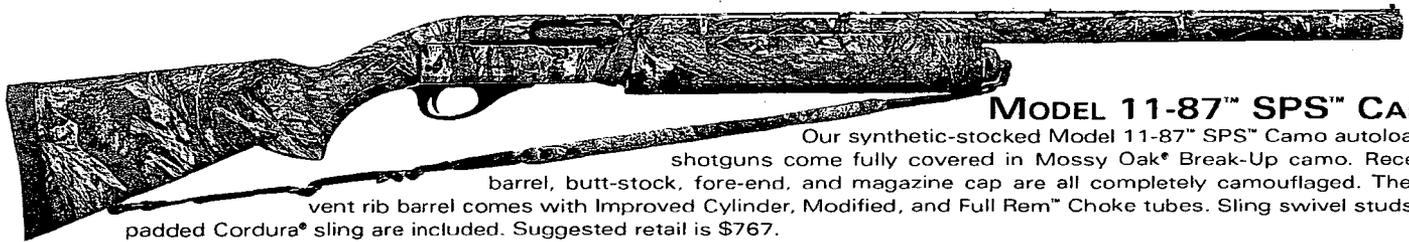


MODEL 11-87™ SPS™ CAMO

Our synthetic-stocked Model 11-87™ SPS™ Camo autoloading shotguns come fully covered in Mossy Oak® Break-Up camo. Receiver, barrel, butt-stock, fore-end, and magazine cap are all completely camouflaged. The 26" vent rib barrel comes with Improved Cylinder, Modified, and Full Rem™ Choke tubes. Sling swivel studs and padded Cordura® sling are included. Suggested retail is \$767.



MODEL 870™ SPS™ CAMO

The Model 870™ SPS™ Camo pump action shotguns come fully-covered in Mossy Oak® Break-Up camo. Receiver, barrel, synthetic butt-stock and fore-end and magazine cap are camouflaged, as is the exposed magazine tube. It comes with a 26" vent rib barrel, and Improved Cylinder, Modified, and Full Rem™ Choke tubes. Sling swivel studs and padded Cordura® sling are standard. Suggested retail is \$496.

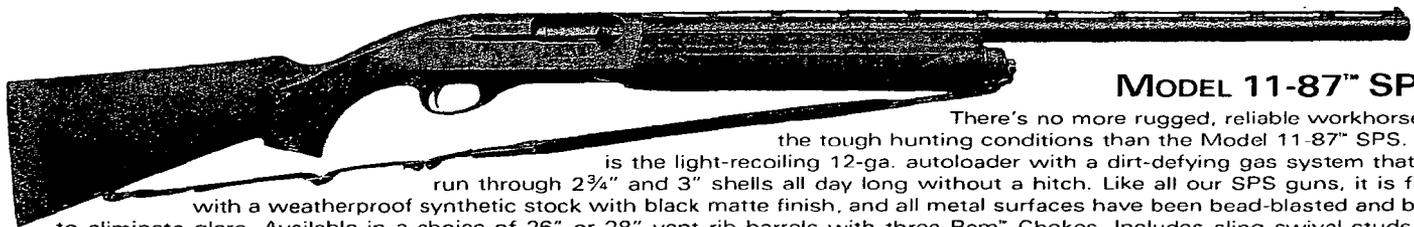

MODEL 11-87™ SPS™

There's no more rugged, reliable workhorse for the tough hunting conditions than the Model 11-87™ SPS. This is the light-recoiling 12-ga. autoloader with a dirt-defying gas system that will run through 2¾" and 3" shells all day long without a hitch. Like all our SPS guns, it is fitted with a weatherproof synthetic stock with black matte finish, and all metal surfaces have been bead-blasted and blued to eliminate glare. Available in a choice of 26" or 28" vent rib barrels with three Rem™ Chokes. Includes sling swivel studs and padded Cordura® sling. Suggested retail is \$679.



MODEL 11-87™ SP™ (WALNUT STOCK)

The Special Purpose autoloader with traditional American walnut stock and positive cut checkering. There's not a hint of reflection from the satin wood finish or the black matte surface of exposed metal. Supplied with either 26" or 28" vent rib barrels, each with twin beads and interchangeable Improved Cylinder, Modified, and Full Rem™ Choke tubes. Add an extra rifle-sighted deer barrel or rifled Rem™ Choke tube to convert it to a slug gun. Includes sling swivel studs and padded Cordura® sling. Suggested retail is \$679.


Special Purpose Deer Guns — For Slugs or Buck, and Stalking or Standing.

Deer hunting is a way of life for many hunters, and Remington® understands. That's why we've developed the most comprehensive line of Special Purpose deer guns on the market today, including fully rifled scope mount versions, and wood and synthetic stock models with traditional big-game iron sights.




**MODEL 11-87™ SPS™
CANTILEVER DEER**

If you need a slug gun that can respond with lightning-fast reflexes, then check out the Model 12-ga. 11-87™ Special Purpose deer gun with cantilever scope mount. The fully rifled barrel provides unwavering accuracy with high performance sabot slugs like our long-range Copper Solid™. Rugged Monte Carlo synthetic stock provides a lifetime of service, and like all our Special Purpose deer guns, all metal work has a non-glare finish. Includes sling swivel studs and padded Cordura® sling. *Note: 21" Model 11-87™ deer barrels are not pressure-compensated. Not for use with target or light field loads. Scope and rings not included.* Suggested retail is \$765.

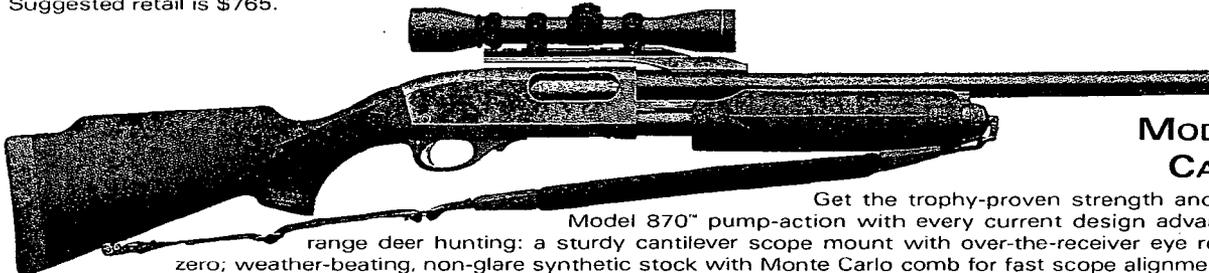

**MODEL 870™ SPS™
CANTILEVER DEER**

Get the trophy-proven strength and reliability of a 12-ga. Model 870™ pump-action with every current design advance for successful all-range deer hunting: a sturdy cantilever scope mount with over-the-receiver eye relief and non-changing zero; weather-beating, non-glare synthetic stock with Monte Carlo comb for fast scope alignment; and the superb slug accuracy of a 20" fully rifled barrel. Includes sling swivel studs and padded Cordura® sling. *Note: Scope and rings not included.* Suggested retail is \$496.

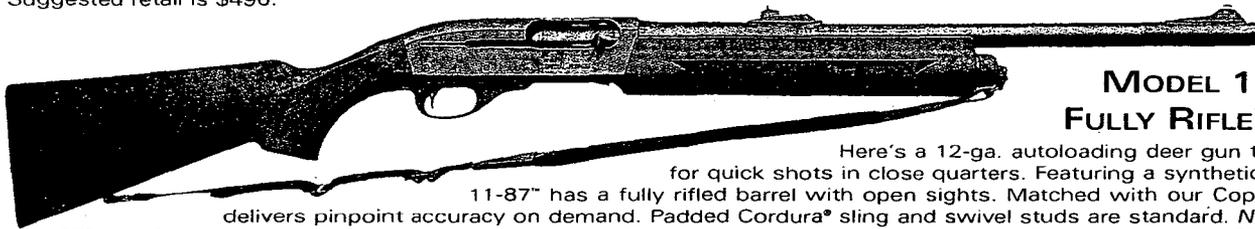


**MODEL 11-87™ SPS™
FULLY RIFLED DEER GUN**

Here's a 12-ga. autoloading deer gun that comes up fast for quick shots in close quarters. Featuring a synthetic stock, this Model 11-87™ has a fully rifled barrel with open sights. Matched with our Copper Solid™ slugs, it delivers pinpoint accuracy on demand. Padded Cordura® sling and swivel studs are standard. *Note: 21" Model 11-87™ deer barrels are not pressure-compensated. Not for use with target or light field loads.* Suggested retail is \$703.




**MODEL 870™ SPS™
FULLY RIFLED DEER GUN**

The 12-ga. Model 870™ SPS™ deer gun combines quick-pointing open sights with the modern advantages of a synthetic stock and the accuracy potential of fully rifled barrels. Its short barrel length is maneuverable in close quarters, while its ever-reliable pump action makes fast follow-up shots a breeze. Includes sling swivel studs and padded Cordura® sling. Suggested retail is \$436.

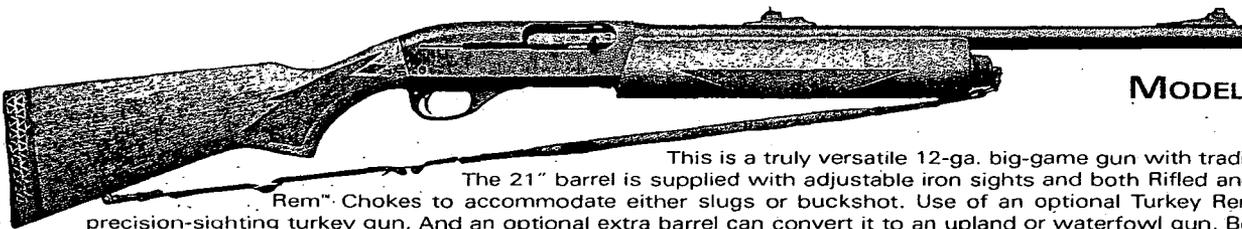

**MODEL 11-87™ SP™
DEER GUN**

This is a truly versatile 12-ga. big-game gun with traditional walnut stock. The 21" barrel is supplied with adjustable iron sights and both Rifled and Improved Cylinder Rem™ Chokes to accommodate either slugs or buckshot. Use of an optional Turkey Rem™ Choke creates a precision-sighting turkey gun. And an optional extra barrel can convert it to an upland or waterfowl gun. Both wood and metal have nonreflective finishes. Includes sling swivel studs and padded Cordura® sling. *Note: 21" Model 11-87™ deer barrels are not pressure-compensated. Not for use with target or light field loads.* Suggested retail is \$659.

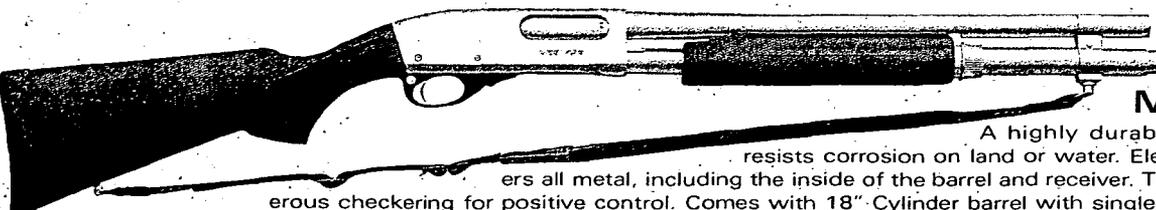


**MODEL 870™
MARINE MAGNUM™**

A highly durable 12-ga. utility gun that resists corrosion on land or water. Electroless nickel plating covers all metal, including the inside of the barrel and receiver. The synthetic stock has generous checkering for positive control. Comes with 18" Cylinder barrel with single-bead front sight, six-round magazine, padded Cordura® sling, and swivel studs. Suggested retail is \$500.

Remington® Competition Shotguns — Smoking Targets and Taking Trophies for Almost a Century.

Within two years of the first national trapshoot, Remington had its first trap gun, the Model 1900 side-by-side modified specifically for the sport. And three decades later, Remington developed the legendary Model 32™, the first American-made over & under skeet gun. Since then, we've been providing clay target shooters the best balanced, sweetest swinging, and most reliable clay target guns on the field.

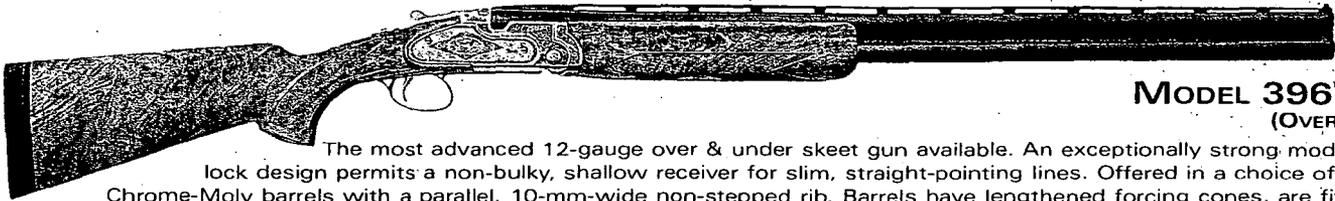


**MODEL 396™ SKEET
(OVER & UNDER)**

The most advanced 12-gauge over & under skeet gun available. An exceptionally strong modified under-lock design permits a non-bulky, shallow receiver for slim, straight-pointing lines. Offered in a choice of 28" or 30" Chrome-Moly barrels with a parallel, 10-mm-wide non-stepped rib. Barrels have lengthened forcing cones, are fitted for the interchangeable Rem™ Choke system, and are supplied with two Skeet tubes. For precise feel, the stock includes a wider target-style fore-end, larger-radius comb, and universal palm swell on the pistol grip. Stock dimensions are 1 1/2" drop at the comb, 2 1/4" drop at the heel, and 14 3/16" length of pull. Average weight is 7 1/2 lbs. Suggested retail is \$1,993.




MODEL 11-87™ PREMIER® SKEET

The 12-ga. Model 11-87™ Premier® Skeet brings autoloading reliability to clay target competition. Like all our target guns, it has a beautifully figured American walnut stock and crisp-cut checkering for good control. The 26" Chrome-Moly vent rib barrel includes our interchangeable Rem™ Choke system for optional use on sporting clays. And both receiver panels are decorated with Remington's fine-line engraving process. *Note: The Model 11-87™ Premier® Skeet has a 2 3/4" chamber, is not pressure-compensated, and is set up to handle target and light field loads only.* Suggested retail is \$765.

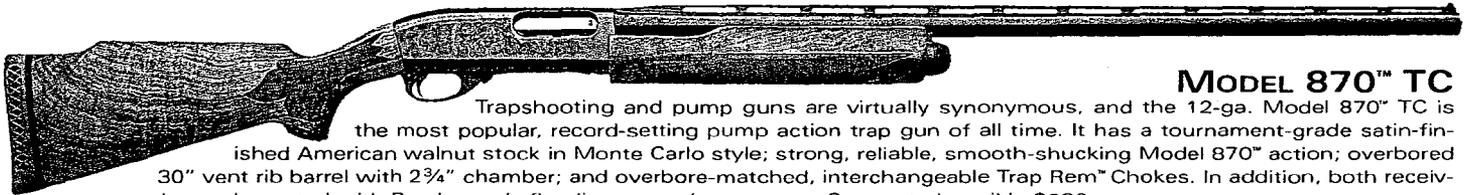


MODEL 870™ TC

Trapshooting and pump guns are virtually synonymous, and the 12-ga. Model 870™ TC is the most popular, record-setting pump action trap gun of all time. It has a tournament-grade satin-finished American walnut stock in Monte Carlo style; strong, reliable, smooth-shucking Model 870™ action; overbored 30" vent rib barrel with 2 3/4" chamber; and overbore-matched, interchangeable Trap Rem™ Chokes. In addition, both receiver panels are decorated with Remington's fine-line engraving process. Suggested retail is \$680.

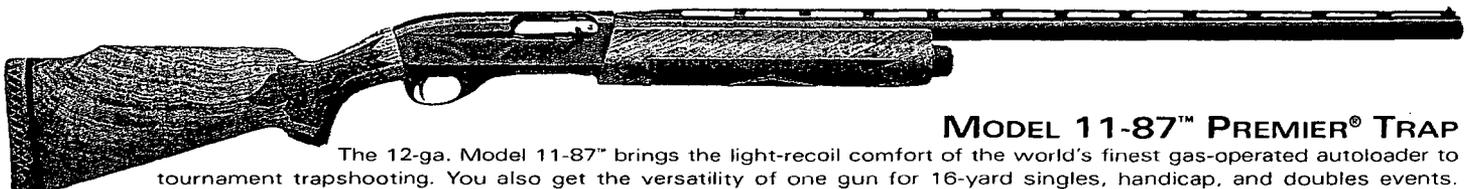


MODEL 11-87™ PREMIER® TRAP

The 12-ga. Model 11-87™ brings the light-recoil comfort of the world's finest gas-operated autoloader to tournament trapshooting. You also get the versatility of one gun for 16-yard singles, handicap, and doubles events. Supplied with tournament-grade satin-finished American walnut Monte Carlo stock, 30" vent rib overbored barrel, and three Rem™ Choke Trap tubes. In addition, both receiver panels are decorated with Remington's fine-line engraving process. *Note: All Model 11-87™ Premier® target guns have 2 3/4" chambers, are not pressure-compensated, and are set up to handle target and light field loads only.* Suggested retail is \$788.

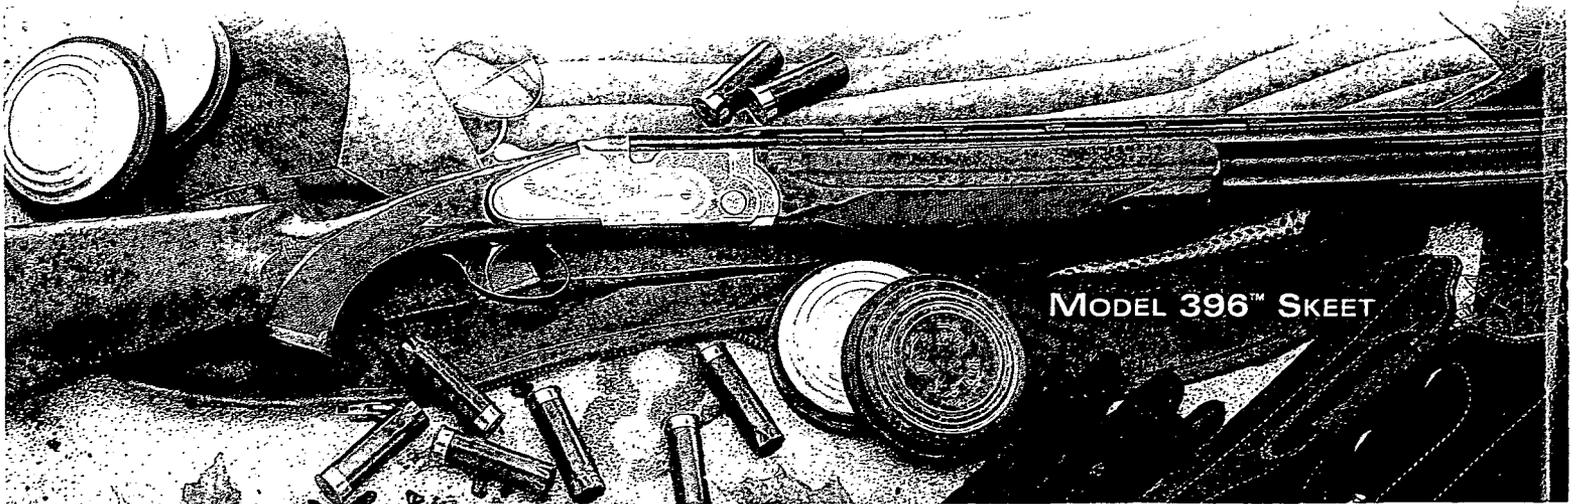


MODEL 396™ SKEET

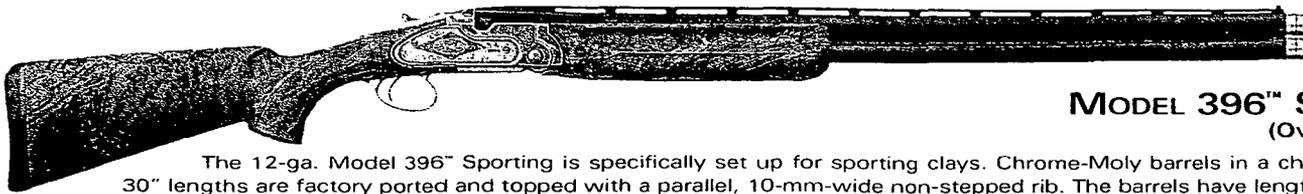


MODEL 396™ SPORTING
(OVER & UNDER)

The 12-ga. Model 396™ Sporting is specifically set up for sporting clays. Chrome-Moly barrels in a choice of 28" or 30" lengths are factory ported and topped with a parallel, 10-mm-wide non-stepped rib. The barrels have lengthened forcing cones, and include the choke-changing versatility of our Rem™ Choke system in Skeet, Improved Cylinder, Light Modified, and Modified constrictions. Gun handling is aided by a smooth-surface sporting recoil pad with rounded toe and radiused heel, wider, hand-filling fore-end, larger-radius comb, and a universal palm swell in the pistol grip. Stock dimensions are the same as the Model 396™ Skeet, and average weight is 7½ lbs. Select satin-finished American walnut and extensive fine-line engraving add a bonus of truly good looks. Suggested retail is \$2,126.

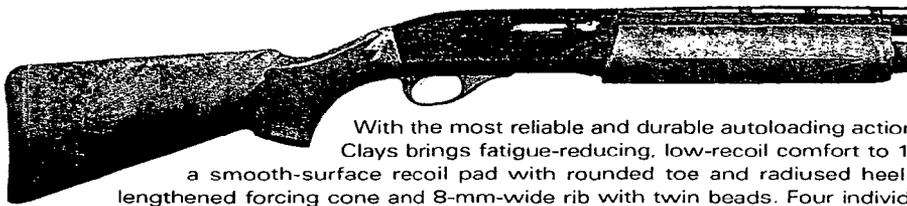


MODEL 11-87™ PREMIER® SC
(SPORTING CLAYS)

With the most reliable and durable autoloading action ever designed, the Model 11-87™ Premier® Sporting Clays brings fatigue-reducing, low-recoil comfort to 12-gauge competition. Swift mounting is assured by a smooth-surface recoil pad with rounded toe and radiused heel. The satin-finished light contour barrel includes a lengthened forcing cone and 8-mm-wide rib with twin beads. Four individual Rem™ Chokes in Skeet, Improved Cylinder, Light Modified, and Modified have constrictions clearly marked on their fast-change knurled extensions. Dimensions of the satin-finished tournament-grade American walnut stock are specially adapted to sporting clays. *Note: The Model 11-87™ Premier® Sporting Clays has a 2¾" chamber, is not pressure-compensated, and is set up for target and light field loads only.* Suggested retail is \$779.

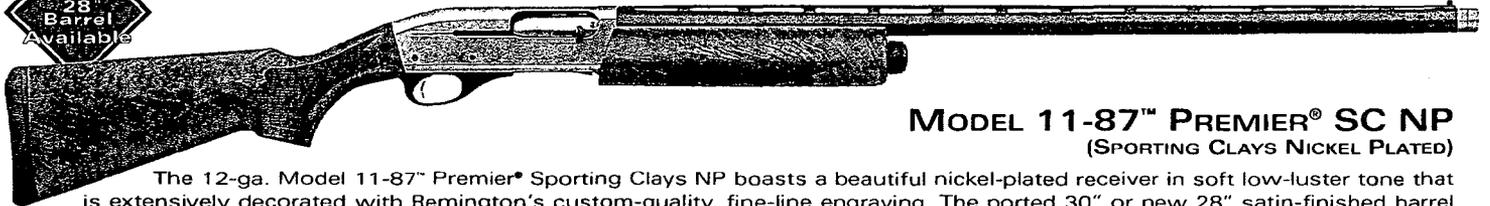


MODEL 11-87™ PREMIER® SC NP
(SPORTING CLAYS NICKEL PLATED)

The 12-ga. Model 11-87™ Premier® Sporting Clays NP boasts a beautiful nickel-plated receiver in soft low-luster tone that is extensively decorated with Remington's custom-quality, fine-line engraving. The ported 30" or new 28" satin-finished barrel reduces recoil sensation as well as barrel jump on repeat shots. The satin-finished tournament-grade American walnut stock carries a sporting recoil pad. The Model 11-87™ Premier® Sporting NP is supplied with four sporting clays choke tubes in Skeet, Improved Cylinder, Light Modified, and Modified, that include knurled extensions for fast and easy interchangeability. *Note: The Model 11-87™ Premier® Sporting Clays NP has a 2¾" chamber, is not pressure-compensated, and is set up for target and light field loads only.* Suggested retail is \$827.

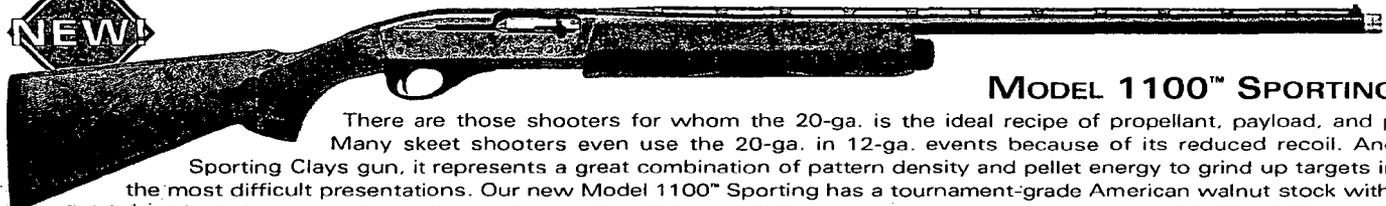

MODEL 1100™ SPORTING 20

There are those shooters for whom the 20-ga. is the ideal recipe of propellant, payload, and power. Many skeet shooters even use the 20-ga. in 12-ga. events because of its reduced recoil. And as a Sporting Clays gun, it represents a great combination of pattern density and pellet energy to grind up targets in even the most difficult presentations. Our new Model 1100™ Sporting has a tournament-grade American walnut stock with gloss finish and includes a sporting-style recoil pad. The 28" vent rib barrel comes with four interchangeable Rem™ Choke tubes in Skeet, Improved Cylinder, Light Modified and Modified. Suggested retail is \$781..

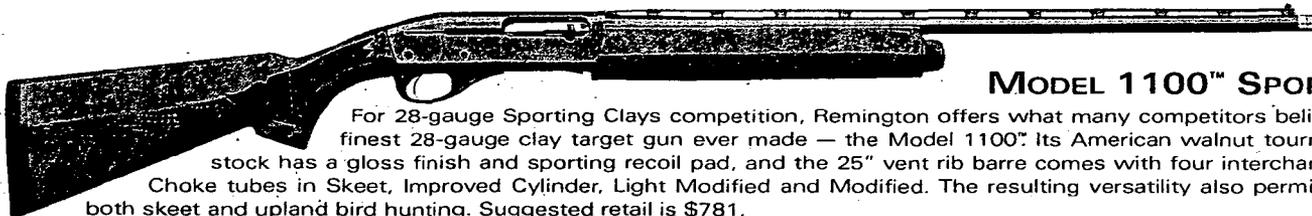

MODEL 1100™ SPORTING 28

For 28-gauge Sporting Clays competition, Remington offers what many competitors believe to be the finest 28-gauge clay target gun ever made — the Model 1100™. Its American walnut tournament-grade stock has a gloss finish and sporting recoil pad, and the 25" vent rib barre comes with four interchangeable Rem™ Choke tubes in Skeet, Improved Cylinder, Light Modified and Modified. The resulting versatility also permits its use for both skeet and upland bird hunting. Suggested retail is \$781.

Gun Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
396™ Skeet	30"	47"	7½	14¾"	1½"	2½"
	28"	45"	7½	14¾"	1½"	2½"
11-87™ Premier® Skeet	26"	46"	8½	14"	1½"	2½"
870™ TC	30"	51"	8	14¾"	1½"	1½"
11-87™ Premier® Trap	30"	51"	8½	14¾"	1½"	1½"


Gun Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
396™ Sporting	30"	47"	7½	14¾"	1½"	2½"
	28"	45"	7½	14¾"	1½"	2½"
11-87™ SC	28"	48½"	7½	14¾"	1½"	2½"
11-87™ SC NP	30"	50½"	7½	14¾"	1½"	2½"
	28"	48½"	7½	14¾"	1½"	2½"
★ 1100™ Sporting 20	28"	48"	7	14"	1½"	2½"
1100™ Sporting 28	25"	45"	6½	14"	1½"	2½"

★ New For 1998


M597™ Rifles — Rimfire with a Centerfire Attitude™

Imagine a .22 autoloader with perfect balance, its weight anchored solidly between your hands. Picture an innovative action design that features a rugged, nickel-plated bolt with two steel guide rails for strength and flawless functioning. These are the kind of traits normally found in expensive centerfire rifles. But with all the design innovations we've incorporated in the M597™, including its unique barrel attachment system and patented dual stack detachable box magazine, we've created a family of rimfire autoloaders with the looks, feel, handling, and performance of centerfire rifles. In .22 LR and .22 Win. Mag versions. M597™ Autoloaders — rimfire the way it ought to be.

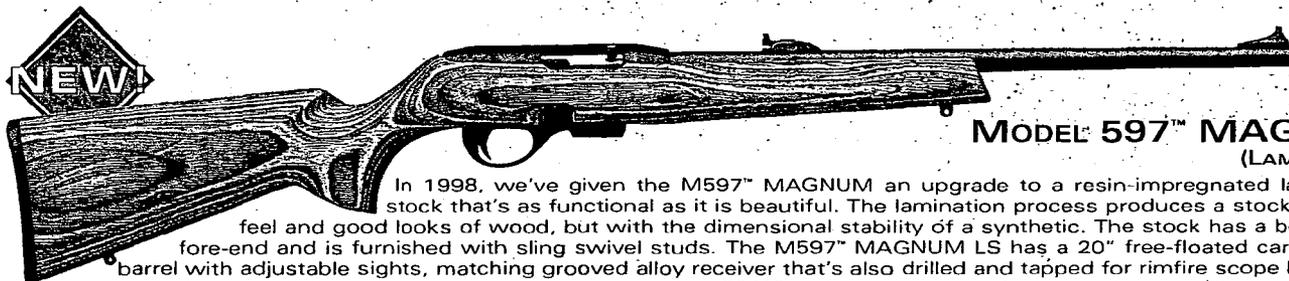


MODEL 597™ MAGNUM LS
(LAMINATED STOCK)

In 1998, we've given the M597™ MAGNUM an upgrade to a resin-impregnated laminated wood stock that's as functional as it is beautiful. The lamination process produces a stock with the warm feel and good looks of wood, but with the dimensional stability of a synthetic. The stock has a beaver tail shape fore-end and is furnished with sling swivel studs. The M597™ MAGNUM LS has a 20" free-floated carbon-steel blued barrel with adjustable sights, matching grooved alloy receiver that's also drilled and tapped for rimfire scope bases, a special magnum bolt, and a dual stack box magazine that holds nine .22 Win. Mag. cartridges. Suggested retail is \$359.

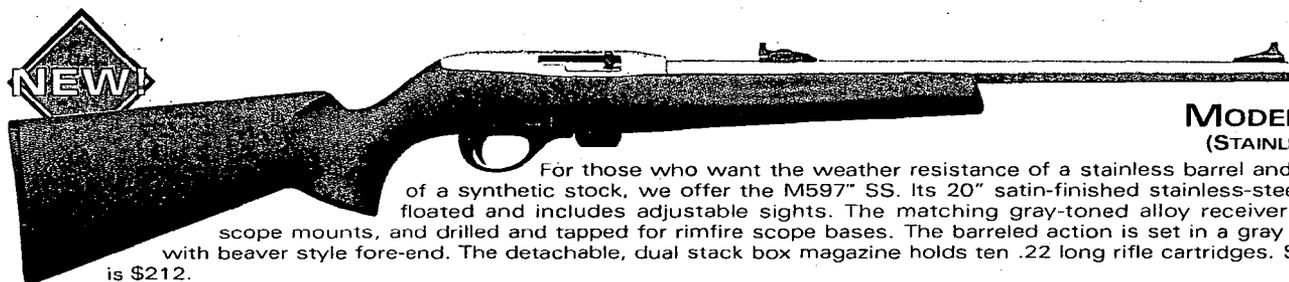

MODEL 597™ SS
(STAINLESS SYNTHETIC)

For those who want the weather resistance of a stainless barrel and the toughness of a synthetic stock, we offer the M597™ SS. Its 20" satin-finished stainless-steel barrel is free-floated and includes adjustable sights. The matching gray-toned alloy receiver is grooved for scope mounts, and drilled and tapped for rimfire scope bases. The barreled action is set in a gray synthetic stock with beaver style fore-end. The detachable, dual stack box magazine holds ten .22 long rifle cartridges. Suggested retail is \$212.

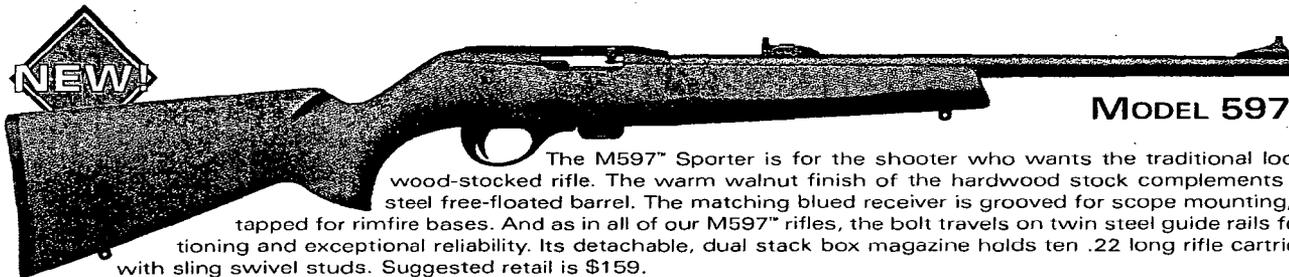

MODEL 597™ SPORTER
(WOOD STOCK)


The M597™ Sporter is for the shooter who wants the traditional look and feel of a wood-stocked rifle. The warm walnut finish of the hardwood stock complements its 20" carbon-steel free-floated barrel. The matching blued receiver is grooved for scope mounting, and drilled and tapped for rimfire bases. And as in all of our M597™ rifles, the bolt travels on twin steel guide rails for smooth functioning and exceptional reliability. Its detachable, dual stack box magazine holds ten .22 long rifle cartridges. Furnished with sling swivel studs. Suggested retail is \$159.



REMINGTON® M597™ DESIGN FEATURES

M597™ bolt travels on twin steel guide rails for flawless functioning

Grooved receivers are drilled and tapped for special scope base available from Remington. All M597s supplied with iron sights



Continuous linkage trigger mechanism eliminates pre-play for crisp, consistently smooth trigger pull

Patented drop-out style, staggered box magazine assures reliable feeding and fast, easy reloading

Unique attachment system rigidly joins barrel to receiver for perfect alignment and enhanced accuracy

Gun Dimensions / Average Weights


	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
★ Model 597™ Magnum LS	20"	40"	6	14"	1½"	2½"
★ Model 597™ SS	20"	40"	5½	14"	1½"	2½"
★ Model 597™ Sporter	20"	40"	5½	14"	1½"	2½"
Model 597™ Magnum	20"	40"	6	14"	1½"	2½"
Model 597™ LSS	20"	40"	5½	14"	1½"	2½"
Model 597™	20"	40"	5½	14"	1½"	2½"

★ New For 1998



MODEL 597™ MAGNUM


The M597™ MAGNUM is a serious rimfire autoloader with a level of performance approaching small-bore centerfire rifles. The M597™ MAGNUM has a 20" free-floating carbon-steel blued barrel with adjustable sights, and a matching grooved alloy receiver that's also drilled and tapped for rimfire scope bases. The special alloy magnum bolt travels on twin steel guide rails for silky-smooth functioning and lifetime reliability. The black synthetic stock is impervious to moisture and temperature extremes. The fore-end of the stock has a beaver tail shape and is furnished with sling swivel studs. A dual stack box magazine holds nine .22 Win. Mag. cartridges. Suggested retail is \$305.

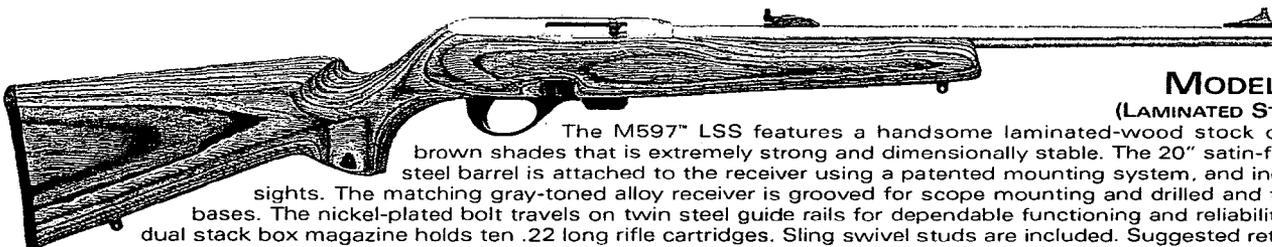

MODEL 597™ LSS


(LAMINATED STOCK, STAINLESS)

The M597™ LSS features a handsome laminated-wood stock of light and dark brown shades that is extremely strong and dimensionally stable. The 20" satin-finished stainless-steel barrel is attached to the receiver using a patented mounting system, and includes adjustable sights. The matching gray-toned alloy receiver is grooved for scope mounting and drilled and tapped for rimfire bases. The nickel-plated bolt travels on twin steel guide rails for dependable functioning and reliability. Its detachable, dual stack box magazine holds ten .22 long rifle cartridges. Sling swivel studs are included. Suggested retail is \$265.

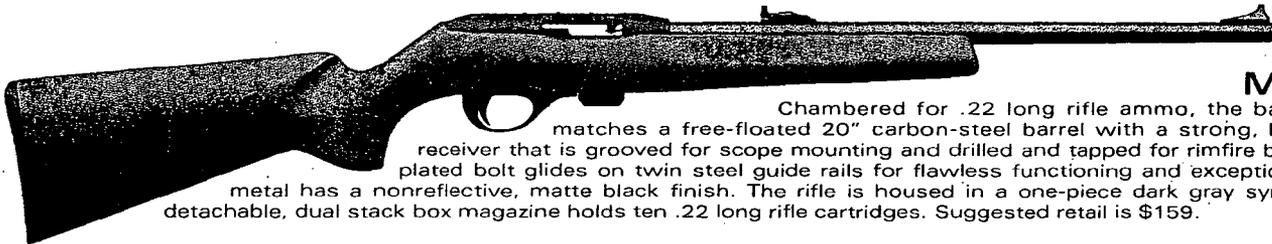


MODEL 597™

Chambered for .22 long rifle ammo, the basic Model 597™ matches a free-floating 20" carbon-steel barrel with a strong, lightweight alloy receiver that is grooved for scope mounting and drilled and tapped for rimfire bases. The nickel-plated bolt glides on twin steel guide rails for flawless functioning and exceptional reliability. All metal has a nonreflective, matte black finish. The rifle is housed in a one-piece dark gray synthetic stock. Its detachable, dual stack box magazine holds ten .22 long rifle cartridges. Suggested retail is \$159.

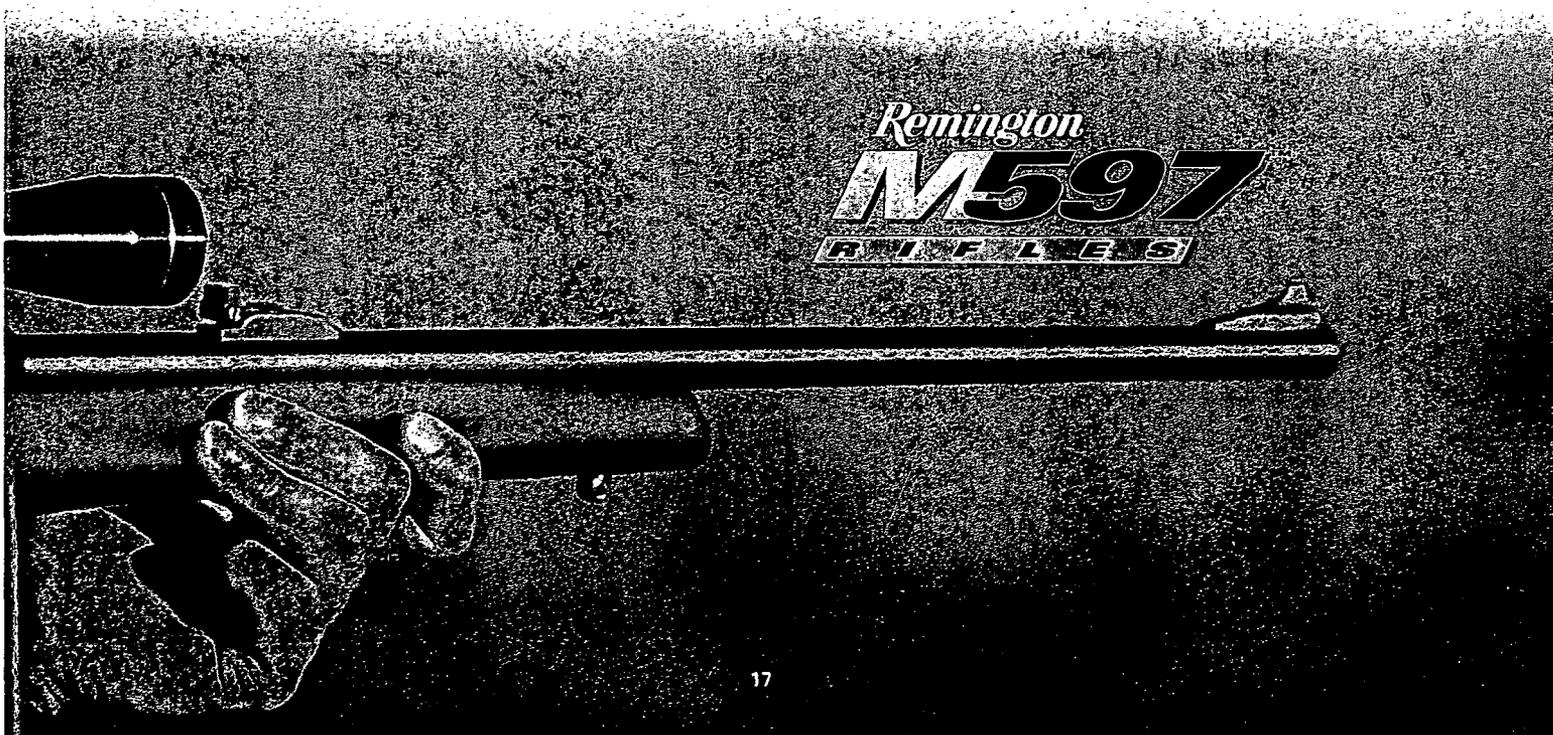


Remington® Rimfire Rifles — Bolt Action Precision, Pump Action Simplicity, and Autoloading Reliability

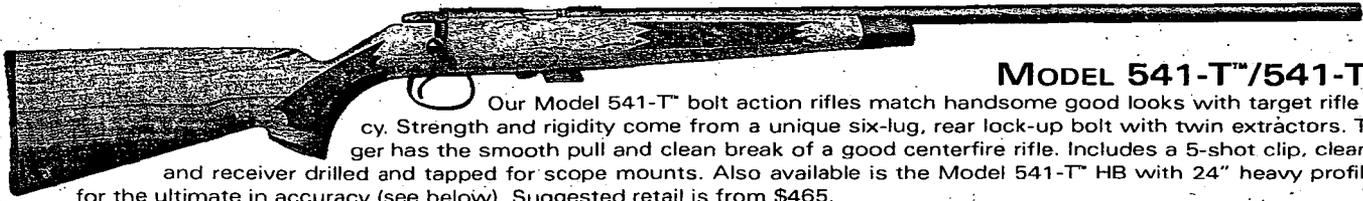


MODEL 541-T™/541-T™ HB

Our Model 541-T™ bolt action rifles match handsome good looks with target rifle accuracy. Strength and rigidity come from a unique six-lug, rear lock-up bolt with twin extractors. The trigger has the smooth pull and clean break of a good centerfire rifle. Includes a 5-shot clip, clean barrel, and receiver drilled and tapped for scope mounts. Also available is the Model 541-T™ HB with 24" heavy profile barrel for the ultimate in accuracy (see below). Suggested retail is from \$465.

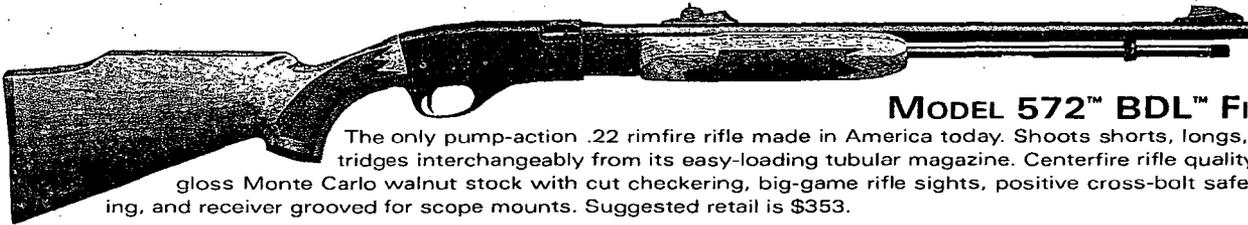


MODEL 572™ BDL™ FIELDMASTER®

The only pump-action .22 rimfire rifle made in America today. Shoots shorts, longs, and long rifle cartridges interchangeably from its easy-loading tubular magazine. Centerfire rifle quality, including a high-gloss Monte Carlo walnut stock with cut checkering, big-game rifle sights, positive cross-bolt safety, high-luster bluing, and receiver grooved for scope mounts. Suggested retail is \$353.

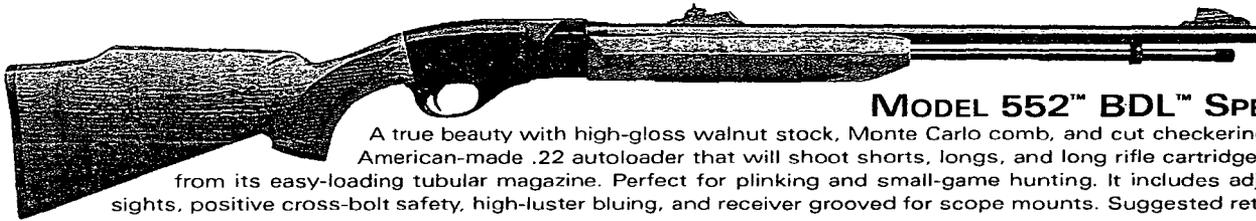


MODEL 552™ BDL™ SPEEDMASTER®

A true beauty with high-gloss walnut stock, Monte Carlo comb, and cut checkering. This is the only American-made .22 autoloader that will shoot shorts, longs, and long rifle cartridges interchangeably from its easy-loading tubular magazine. Perfect for plinking and small-game hunting. It includes adjustable big-game sights, positive cross-bolt safety, high-luster bluing, and receiver grooved for scope mounts. Suggested retail is \$340.

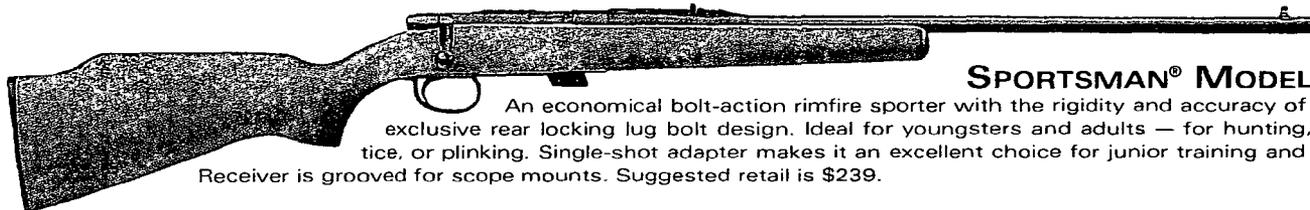

SPORTSMAN® MODEL 581-S™

An economical bolt-action rimfire sporter with the rigidity and accuracy of Remington's exclusive rear locking lug bolt design. Ideal for youngsters and adults — for hunting, target practice, or plinking. Single-shot adapter makes it an excellent choice for junior training and competition. Receiver is grooved for scope mounts. Suggested retail is \$239.

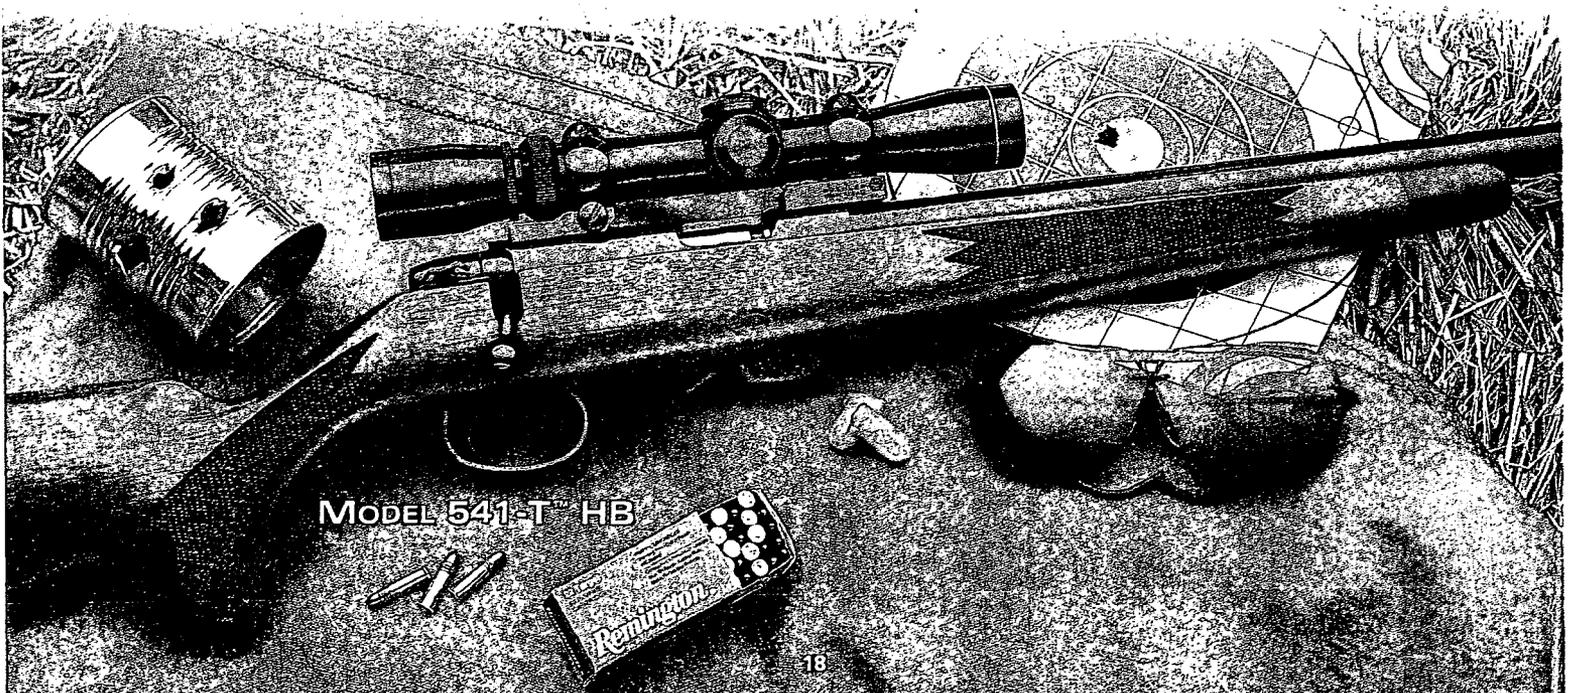


MODEL 541-T™ HB

FOLLOWING IN A TRADITION OF OUTDOOR PERFORMANCE— THE REMINGTON VISA® CREDIT CARD.

Benefits worthy of the Remington name.

- No Annual Fee
- 5.9% Fixed Introductory Annual Percentage Rate (APR)† for cash advance checks and balance transfers
- Credit line increase decisions in 30 minutes or less

5.9% APR

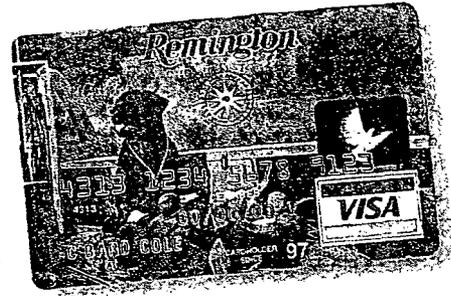

Earn rebates on the things you need to enjoy Remington Country.††

- \$10 Remington Rebate Certificate the first time you use your card
- Additional Remington Rebate Certificates every time you accumulate \$1,000 in new purchases
- Up to \$150 a year in rebates on Remington firearms, ammunition, knives, gun care products—even Stren® fishing products



Remington®

APPLY TODAY! The Remington® Visa Credit Card.

Remington Visa FC 743ZM



Print your name as you would like it to appear on card. *Please print clearly in black or blue ink.*

Address _____

City _____ State _____ ZIP _____

Social Security # _____ Birth date ____/____/____

Mother's maiden name _____

Monthly housing payment \$ _____

Home phone (____) _____ (for security purposes)

Business phone (____) _____

Employer _____
(If self-employed, please state the nature of your business.)

Your annual salary	\$ _____
Other income †	+ \$ _____
Total household income	\$ _____

Position _____ Years there _____ Source of other income † _____

†Alimony, child support, or separate maintenance income need not be revealed if you do not wish it considered as a basis for repayment.

Please send an additional card at no extra cost for:

5.9% OPTIONAL BALANCE TRANSFER APR[†] Immediate Savings*[‡]

Exact transfer amount \$ _____

Make transfer check payable to _____

Exact transfer amount \$ _____

Make transfer check payable to _____

Please complete only if you have moved or changed employers in the last three years.

Previous address _____

City _____ State _____ ZIP _____

Previous school or employer _____ Years there _____

†—MORE APR INFORMATION—

The current promotional Annual Percentage Rate (APR) offer for cash advance checks and balance transfers is 5.9% through your first five statement closing dates, commencing the month after your account is opened. When your minimum monthly payment is not received by the close of the first complete billing cycle following its Payment Due Date, or when the promotional offer expires, whichever occurs first, your APR for both new and outstanding cash advance balances (consisting of cash advance check and balance transfer transactions) will be calculated using the Variable-Rate Information disclosed at left. The current indexed APR for cash advance checks and balance transfers is 18.4%, which may vary.

*—BALANCE TRANSFER INFORMATION—

The total value of balance transfers cannot be more than your available credit line. We will send you checks valued up to the available credit line. The checks may include full or partial payment of the sums you indicated above. Allow 2-4 weeks from application approval for receipt of checks. You should continue making minimum monthly payments to your creditors until you have received and forwarded the checks to them. Cash advances and balance transfers may not be used to pay off or pay down any MBNA® account. MBNA may allocate your monthly payments to your promotional APR balance(s) before your nonpromotional APR balance(s).

—CONDITIONS—

I have read this application, and everything I have stated in it is true. I authorize MBNA America Bank, N.A. (MBNA) to check my credit, employment history, or any other information and to report to others such information and credit experience with me. I understand that the acceptance or use of any card issued will be subject to the terms of this application and the Credit Card Agreement that will be sent with the card, and I agree to be responsible for all charges incurred according to such terms. Unless I write to MBNA at P.O. Box 15342, Wilmington, DE 19850, I agree that MBNA and its affiliates may share information about me or my account for marketing and administrative purposes. I am at least 18 years of age. I consent to and authorize MBNA and its affiliates to monitor and/or record my telephone conversations with any of their representatives to better ensure quality service. I accept that MBNA may, at its discretion, periodically consider my account for automatic upgrade. The information in this application is accurate as of 10/97. The information may have changed after that date. For more current information, please call MBNA at 1-800-847-7378. TTY users, please call 1-800-833-6262.

Relationship: _____

X _____ Date ____/____/____
MY SIGNATURE MEANS THAT I AGREE TO THE CONDITIONS APPEARING ON THIS FORM.

Annual fee	None.
† Annual Percentage Rate (APR)	18.4% for purchases, which may vary.
Variable-Rate Information	Your APR may vary. The rate is determined by adding a margin to the highest U.S. Prime Rate as published in <i>The Wall Street Journal</i> on the 15th of March, June, September, and December. The margin is 9.9 percentage points. On September 15, 1997, the U.S. Prime Rate was 8.5%.
Grace period for repayment of balance for purchases	At least 25 days, if each month, we receive payment in full of your New Balance Total by the Payment Due Date.
Method of computing the balance for purchases	Average Daily Balance (including new transactions).
Transaction fees for cash advances and fees for paying late or exceeding the credit limit	Transaction fee for Bank and ATM cash advances: 2% of each cash advance (minimum \$2). Transaction fee for credit card cash advance checks: 1% of each cash advance (minimum \$2, maximum \$10). Late-payment fee: \$25. Over-the-credit-limit fee: \$25.
Transaction fee for purchases	Transaction fee for the purchase of wire transfers, money orders, bets, lottery tickets, and casino gaming chips: 2% of each such purchase (minimum \$2).

MBNA and MBNA America® are federally registered service marks of MBNA America Bank, N.A. Visa is a federally registered service mark of Visa U.S.A. Inc., used pursuant to license. ©1997 MBNA America Bank, N.A.


411100791077 ■

Remove card at perforations, fold in half and tape closed.

†† Use your Remington Arms Visa account for at least one purchase or cash advance transaction and you will receive one (1) bonus \$10 Remington Rebate Certificate good for up to 50% off the price of any Remington firearm, ammunition, knife or Stren fishing line. Please allow 8-10 weeks from your statement date for delivery of the bonus Certificate. You'll also earn one (1) \$10 Remington Rebate Certificate for every \$1,000 in net retail purchases (purchases less returns, credits and adjustments) charged to the card by you and your authorized user(s), if any. Cash advances, balance transfers, and the purchase of money orders, wire transfers, bets, lottery tickets, and casino gaming chips do not qualify. Certificates may be combined, subject to the 50% limit described above, when you purchase Remington or Stren fishing line product(s) during a single transaction. To obtain your rebate, send unexpired Certificate(s) to Remington Arms along with the original register receipt and UPC code(s). Your rebate check will arrive within 8-10 weeks. Each account is subject to maximum annual rebate check total of \$150. This is a partial description of the program; complete information about the program will accompany the bonus Certificate.

The terms of the reward program are subject to change by the sponsor, Remington Arms Company, Inc. the Remington Arms Rebate Certificate Program is the responsibility of Remington Arms Company, Inc. Remington and Stren are trademarks registered in the U.S. Patent and Trademark Office by Remington Arms Company, Inc.

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES



BUSINESS REPLY MAIL
FIRST-CLASS MAIL PERMIT NO. 317 WILMINGTON, DE


POSTAGE WILL BE PAID BY ADDRESSEE.

MBNA AMERICA
PO BOX 15464
WILMINGTON DE 19885-5464




A TRADITION
IN OUTDOOR
PERFORMANCE.

—
THE
REMINGTON
VISA® CREDIT
CARD.

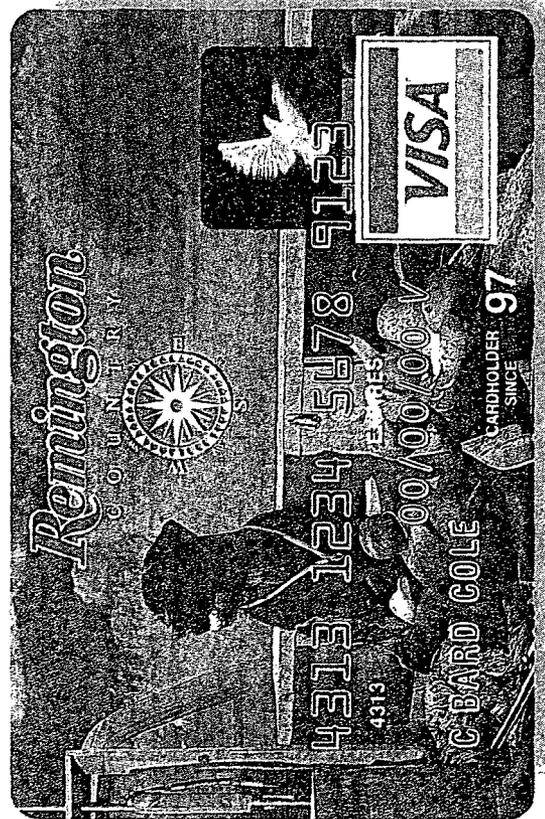


Remington® Muzzleloaders — Model 700™ Strength, Accuracy, and Reliability.

Take away the ramrod and you barely know they're muzzleloaders. These black powder rifles are crafted on the same trophy-proven bolt-action centerfire design of the most popular bolt-action rifle ever produced: the Remington Model 700™. The same cocking action. The same trigger mechanism. The same lock time. The same legendary out-of-the-box accuracy. The differences? A modified bolt, ignition system, and of course, the method of loading from the muzzle. Remington Model 700™ black powder rifles. Muzzleloading made simple.

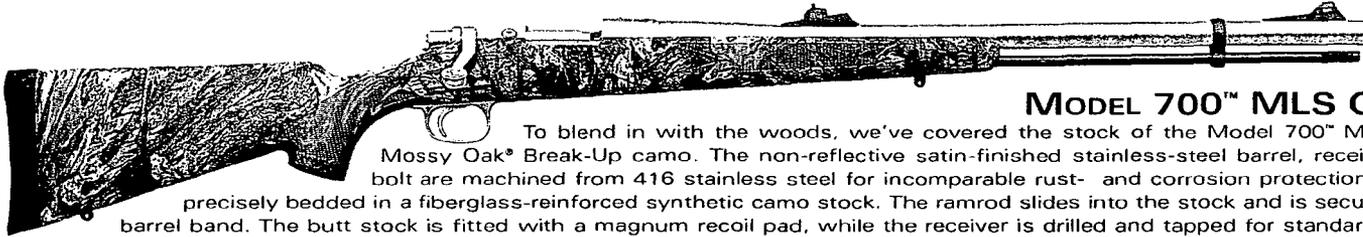


MODEL 700™ MLS CAMO

To blend in with the woods, we've covered the stock of the Model 700™ MLS with Mossy Oak® Break-Up camo. The non-reflective satin-finished stainless-steel barrel, receiver, and bolt are machined from 416 stainless steel for incomparable rust- and corrosion protection — then precisely bedded in a fiberglass-reinforced synthetic camo stock. The ramrod slides into the stock and is secured by a barrel band. The butt stock is fitted with a magnum recoil pad, while the receiver is drilled and tapped for standard Model 700™ short-action scope mounts. Available in .50 caliber. Suggested retail is \$503.

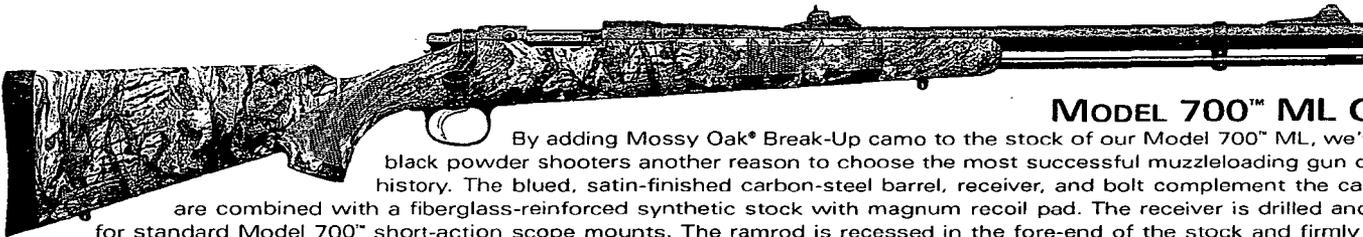


MODEL 700™ ML CAMO

By adding Mossy Oak® Break-Up camo to the stock of our Model 700™ ML, we've given black powder shooters another reason to choose the most successful muzzleloading gun design in history. The blued, satin-finished carbon-steel barrel, receiver, and bolt complement the camo, and are combined with a fiberglass-reinforced synthetic stock with magnum recoil pad. The receiver is drilled and tapped for standard Model 700™ short-action scope mounts. The ramrod is recessed in the fore-end of the stock and firmly secured by a barrel band. Available in .50 caliber. Suggested retail is \$405.

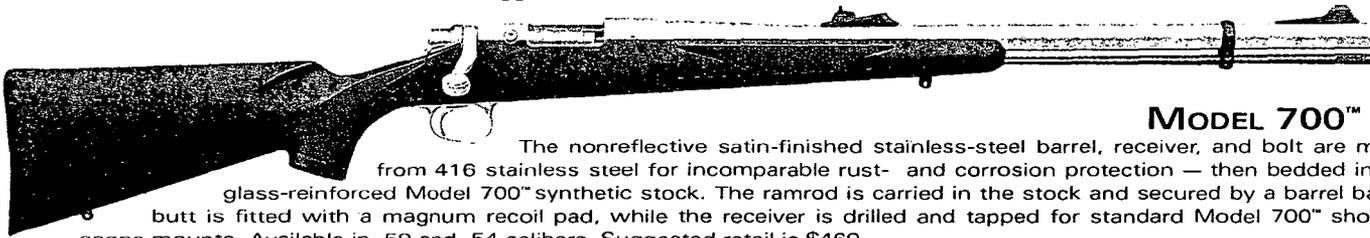


MODEL 700™ MLS

The nonreflective satin-finished stainless-steel barrel, receiver, and bolt are machined from 416 stainless steel for incomparable rust- and corrosion protection — then bedded in a fiberglass-reinforced Model 700™ synthetic stock. The ramrod is carried in the stock and secured by a barrel band. The butt is fitted with a magnum recoil pad, while the receiver is drilled and tapped for standard Model 700™ short-action scope mounts. Available in .50 and .54 calibers. Suggested retail is \$469.

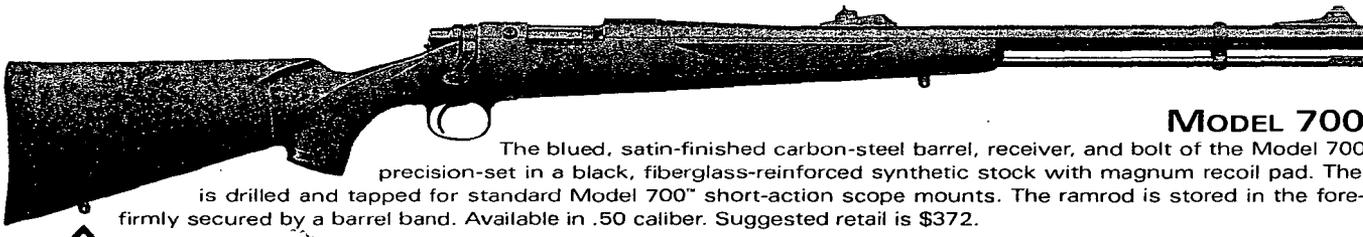

MODEL 700™ ML

The blued, satin-finished carbon-steel barrel, receiver, and bolt of the Model 700™ ML are precision-set in a black, fiberglass-reinforced synthetic stock with magnum recoil pad. The receiver is drilled and tapped for standard Model 700™ short-action scope mounts. The ramrod is stored in the fore-end and firmly secured by a barrel band. Available in .50 caliber. Suggested retail is \$372.

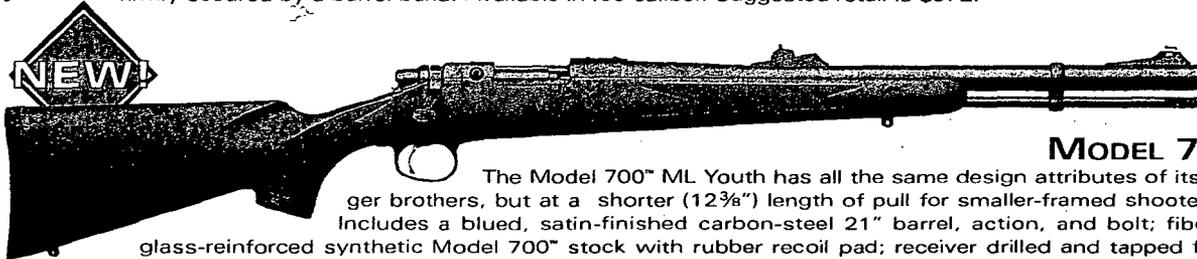

MODEL 700™ ML YOUTH


NEW!

The Model 700™ ML Youth has all the same design attributes of its bigger brothers, but at a shorter (12 $\frac{3}{8}$ ") length of pull for smaller-framed shooters. Includes a blued, satin-finished carbon-steel 21" barrel, action, and bolt; fiberglass-reinforced synthetic Model 700™ stock with rubber recoil pad; receiver drilled and tapped for standard Model 700™ short-action scope mounts; and ramrod stored in the fore-end, firmly secured by a barrel band. Available in .50 caliber. Suggested retail is \$372.

Gun Dimensions / Average Weights


	Barrel Type	Barrel Length	Overall Length	Avg. Wt. (lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
700™ MLS Camo	Stainless	24"	42 $\frac{1}{2}$ "	7 $\frac{1}{2}$	13 $\frac{1}{2}$ "	$\frac{1}{2}$ "	$\frac{1}{2}$ "
700™ ML Camo	Carbon	24"	42 $\frac{1}{2}$ "	7 $\frac{1}{2}$	13 $\frac{1}{2}$ "	$\frac{1}{2}$ "	$\frac{1}{2}$ "
700™ MLS	Stainless	24"	42 $\frac{1}{2}$ "	7 $\frac{1}{2}$	13 $\frac{1}{2}$ "	$\frac{1}{2}$ "	$\frac{1}{2}$ "
700™ ML	Carbon	24"	42 $\frac{1}{2}$ "	7 $\frac{1}{2}$	13 $\frac{1}{2}$ "	$\frac{1}{2}$ "	$\frac{1}{2}$ "
★ 700™ ML Youth	Carbon	21"	38 $\frac{1}{2}$ "	7 $\frac{1}{2}$	12 $\frac{3}{8}$ "	$\frac{1}{2}$ "	$\frac{1}{2}$ "

★ New For 1998

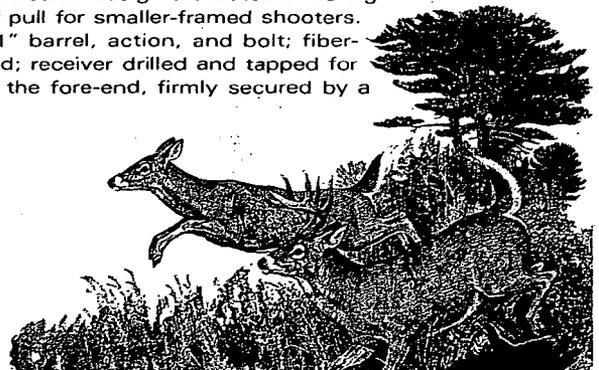


The Model 700™ — Accuracy and Dependability That Makes Our Competitors Green with Envy.

No production hunting rifle beats the Model 700™'s out-of-the-box accuracy and trophy-claiming dependability. Its action design has become the standard in long-range rifle competition, and its crisp, clean-breaking trigger function is legendary. At least, that's what a lot of Model 700™ owners tell us. We can't say it any better, and as for the Model 700™ — let's just say that its action speaks louder than words.

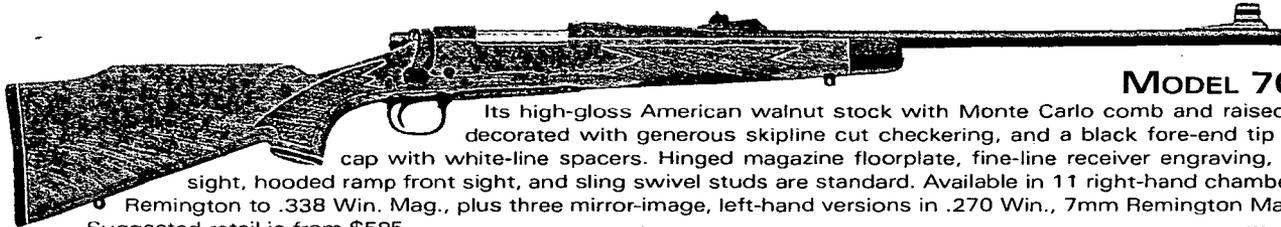


MODEL 700™ BDL™

Its high-gloss American walnut stock with Monte Carlo comb and raised cheekpiece is decorated with generous skipline cut checkering, and a black fore-end tip and pistol grip cap with white-line spacers. Hinged magazine floorplate, fine-line receiver engraving, adjustable rear sight, hooded ramp front sight, and sling swivel studs are standard. Available in 11 right-hand chamberings from .17 Remington to .338 Win. Mag., plus three mirror-image, left-hand versions in .270 Win., 7mm Remington Mag., and .30-06. Suggested retail is from \$585.

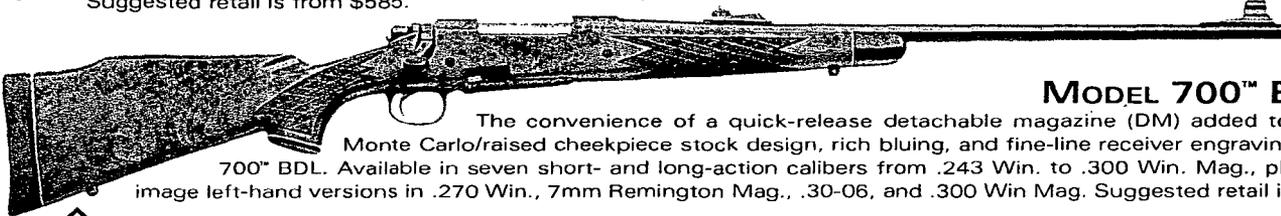

MODEL 700™ BDL™ DM


The convenience of a quick-release detachable magazine (DM) added to the beautiful Monte Carlo/raised cheekpiece stock design, rich bluing, and fine-line receiver engraving of the Model 700™ BDL. Available in seven short- and long-action calibers from .243 Win. to .300 Win. Mag., plus four mirror-image left-hand versions in .270 Win., 7mm Remington Mag., .30-06, and .300 Win. Mag. Suggested retail is from \$639.

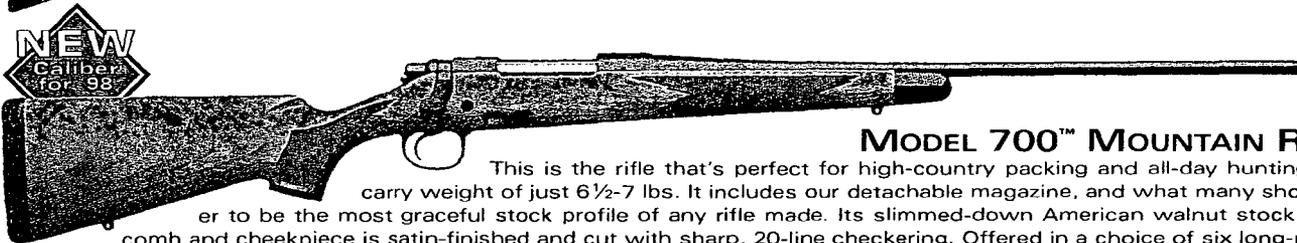

NEW
Caliber
for '98

MODEL 700™ MOUNTAIN RIFLE DM

This is the rifle that's perfect for high-country packing and all-day hunting at an easy-carry weight of just 6½-7 lbs. It includes our detachable magazine, and what many shooters consider to be the most graceful stock profile of any rifle made. Its slimmed-down American walnut stock with straight comb and cheekpiece is satin-finished and cut with sharp, 20-line checkering. Offered in a choice of six long-range calibers from .25-06 Remington to .30-06. New for 1998 is a chambering in .260 Remington. Suggested retail is \$639.

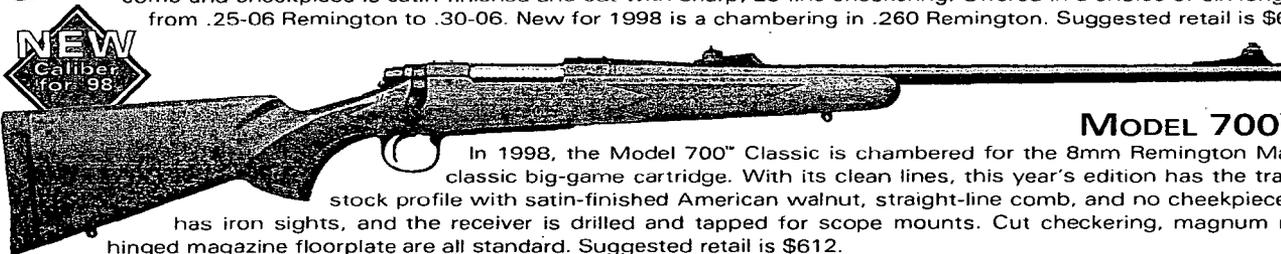


NEW
Caliber
for '98

MODEL 700™ CLASSIC


In 1998, the Model 700™ Classic is chambered for the 8mm Remington Magnum — a true classic big-game cartridge. With its clean lines, this year's edition has the traditional classic stock profile with satin-finished American walnut, straight-line comb, and no cheekpiece. Its 24" barrel has iron sights, and the receiver is drilled and tapped for scope mounts. Cut checkering, magnum recoil pad, and hinged magazine floorplate are all standard. Suggested retail is \$612.



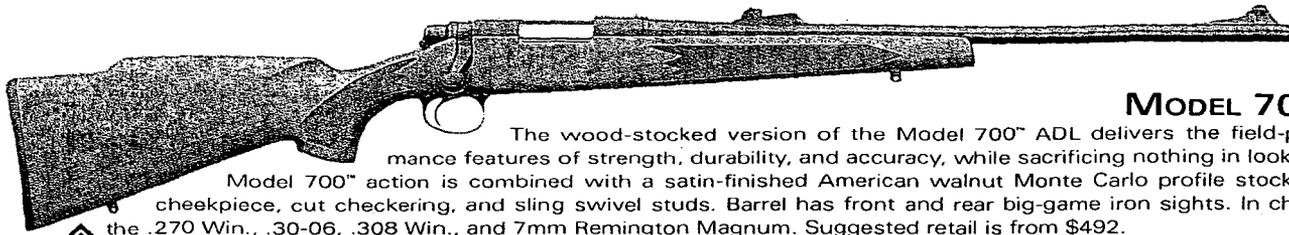


MODEL 700™ ADL™

The wood-stocked version of the Model 700™ ADL delivers the field-proven performance features of strength, durability, and accuracy, while sacrificing nothing in looks. The famous Model 700™ action is combined with a satin-finished American walnut Monte Carlo profile stock that includes cheekpiece, cut checkering, and sling swivel studs. Barrel has front and rear big-game iron sights. In chamberings for the .270 Win., .30-06, .308 Win., and 7mm Remington Magnum. Suggested retail is from \$492.

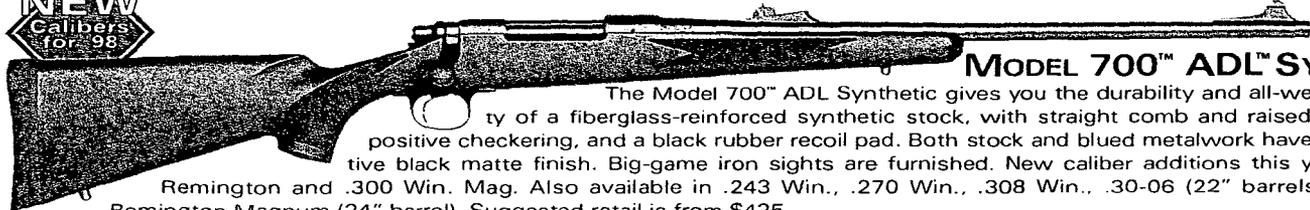


MODEL 700™ ADL™ SYNTHETIC

The Model 700™ ADL Synthetic gives you the durability and all-weather stability of a fiberglass-reinforced synthetic stock, with straight comb and raised cheekpiece, positive checkering, and a black rubber recoil pad. Both stock and blued metalwork have a nonreflective black matte finish. Big-game iron sights are furnished. New caliber additions this year are .223 Remington and .300 Win. Mag. Also available in .243 Win., .270 Win., .308 Win., .30-06 (22" barrels), and 7mm Remington Magnum (24" barrel). Suggested retail is from \$425.

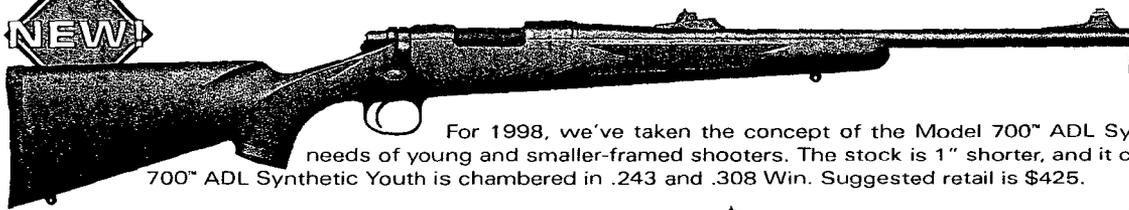


MODEL 700™ ADL™ SYNTHETIC YOUTH

For 1998, we've taken the concept of the Model 700™ ADL Synthetic and adapted it to the needs of young and smaller-framed shooters. The stock is 1" shorter, and it carries a 20" barrel. The Model 700™ ADL Synthetic Youth is chambered in .243 and .308 Win. Suggested retail is \$425.

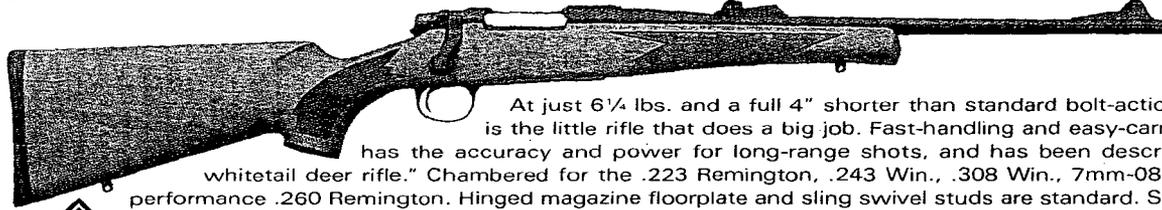

MODEL SEVEN™

At just 6¼ lbs. and a full 4" shorter than standard bolt-action rifles, the Model Seven™ is the little rifle that does a big job. Fast-handling and easy-carrying in dense cover, it still has the accuracy and power for long-range shots, and has been described as "the world's best whitetail deer rifle." Chambered for the .223 Remington, .243 Win., .308 Win., 7mm-08 Remington, and the high-performance .260 Remington. Hinged magazine floorplate and sling swivel studs are standard. Suggested retail is \$585.

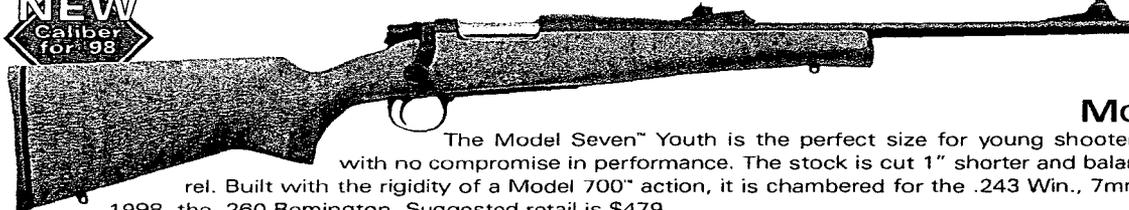

MODEL SEVEN™ YOUTH

The Model Seven™ Youth is the perfect size for young shooters and smaller-framed adults, with no compromise in performance. The stock is cut 1" shorter and balances nicely with its 18½" barrel. Built with the rigidity of a Model 700™ action, it is chambered for the .243 Win., 7mm-08 Remington, and new for 1998, the .260 Remington. Suggested retail is \$479.



MODEL 700™ BDL™

Gun Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)	
700™ BDL™	Magnum	24"	44½"	7½"	13¾"	½"	1½"
	Long Action	22"¹	42½"	7½"	13¾"	½"	1½"
	Short Action	22"¹	41½"	7½"	13¾"	½"	1½"
700™ BDL™ DM	Magnum	24"	44½"	7½"	13¾"	½"	1½"
	Long Action	22"²	42½"	7½"	13¾"	½"	1½"
	Short Action	22"	41½"	7½"	13¾"	½"	1½"
700™ Mtn DM	Long Action	22"	42½"	6½"	13¾"	½"	¾"
	Short Action	22"	41½"	6½"	13¾"	½"	¾"
700™ Classic	Magnum	24"	44½"	7½"	13¾"	½"	1½"

¹ 24" Barrel in .17, .222, .22-250, and .25-06 Remington; .30-06 (Adds 2" to overall length for these calibers).
² 24" Barrel in .25-06 Remington (Adds 2" to overall length).

Gun Dimensions / Average Weights


	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)	
700™ ADL™	Magnum	24"	44½"	7½"	13¾"	½"	1½"
	Long Action	22"	42½"	7½"	13¾"	½"	1½"
	Short Action	22"	41½"	7½"	13¾"	½"	1½"
700™ ADL™ Syn.	Magnum	24"	44½"	7½"	13¾"	½"	¾"
	Long Action	22"	42½"	7½"	13¾"	½"	¾"
	Short Action	22"	41½"	7½"	13¾"	½"	¾"
★ 700™ ADL™ Syn. Youth S. A.		20"	39½"	6½"	13¾"	½"	¾"
Seven™	Short Action	18½"	37½"	6½"	13¾"	½"	¾"
Seven™ Youth	Short Action	18½"	36½"	6½"	13¾"	½"	¾"

★ New For 1998

Remington® Stainless and Long-Range Rifles — Where "High Performance" Means a Higher Standard.

Hunters and mailmen have something in common — weather can't keep them from what they do. That's why Remington stainless rifles are built to provide the ultimate in accuracy, strength, and corrosion resistance. And when you need an ultra-accurate long-range hunting rifle, no other guns can match the benchrest accuracy performance of Remington's Sendero™ and Varmint rifles.


NEW
Left-hand
Calibers
for '98

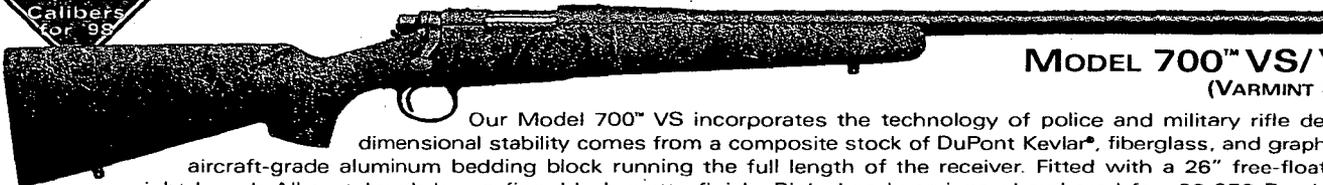

MODEL 700™ VS/V S-L-H
(VARMINT SYNTHETIC)

Our Model 700™ VS incorporates the technology of police and military rifle design. Great dimensional stability comes from a composite stock of DuPont Kevlar®, fiberglass, and graphite, with an aircraft-grade aluminum bedding block running the full length of the receiver. Fitted with a 26" free-floating, heavy-weight barrel. All metalwork has a fine, black matte finish. Right-hand versions chambered for .22-250 Remington, .223 Remington, .243 Win., and .308 Win. New for 1998 are 3 left-hand specs in .22-250 Remington, .223 Remington, and .308 Win. Suggested retail is from \$705.


NEW
Stock and
Calibers
for '98

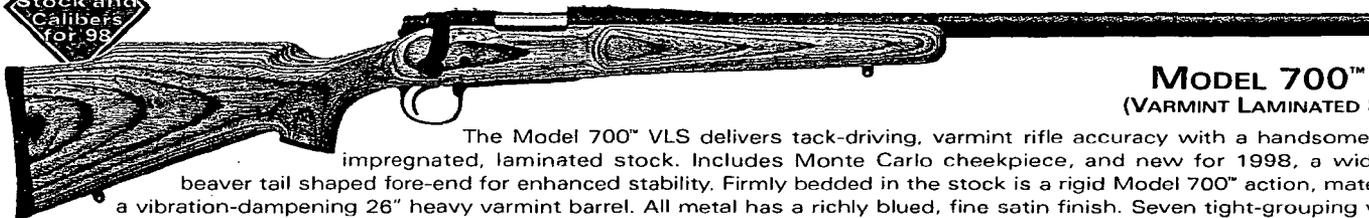

MODEL 700™ VLS
(VARMINT LAMINATED STOCK)

The Model 700™ VLS delivers tack-driving, varmint rifle accuracy with a handsome, resin-impregnated, laminated stock. Includes Monte Carlo cheekpiece, and new for 1998, a wide, flat, beaver tail shaped fore-end for enhanced stability. Firmly bedded in the stock is a rigid Model 700™ action, mated with a vibration-dampening 26" heavy varmint barrel. All metal has a richly blued, fine satin finish. Seven tight-grouping varmint calibers include .22-250 Remington, .223 Remington, .243 Win., 7mm-08 Remington, and .308 Win. And new for 1998, 6mm Remington, and .260 Remington. Suggested retail is \$625.

NEW
Muzzle
Porting
for '98

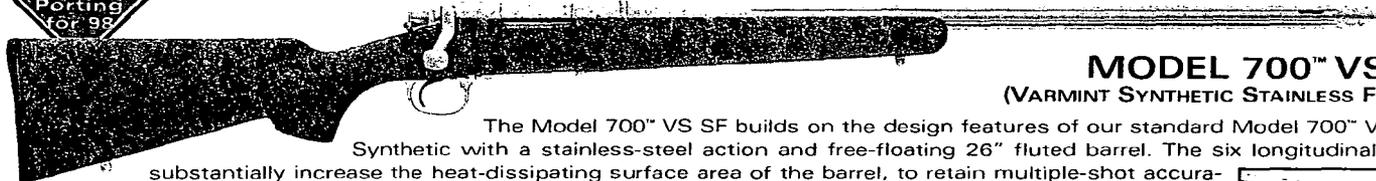


MODEL 700™ VS-SF
(VARMINT SYNTHETIC STAINLESS FLUTED)

The Model 700™ VS SF builds on the design features of our standard Model 700™ Varmint Synthetic with a stainless-steel action and free-floating 26" fluted barrel. The six longitudinal flutes substantially increase the heat-dissipating surface area of the barrel, to retain multiple-shot accuracy and extend barrel life. New this year is the addition of two symmetrical barrel ports to dampen muzzle jump for an uninterrupted sight picture. Available in four flat-shooting calibers: .220 Swift, .22-250 Remington, .223 Remington, and .308 Win. Porting on Model 700™ VS SF-P in .220 Swift, .22-250 Remington, and .308 Win. Suggested retail is from \$852.




MODEL 700™ VS-L-H

NEW

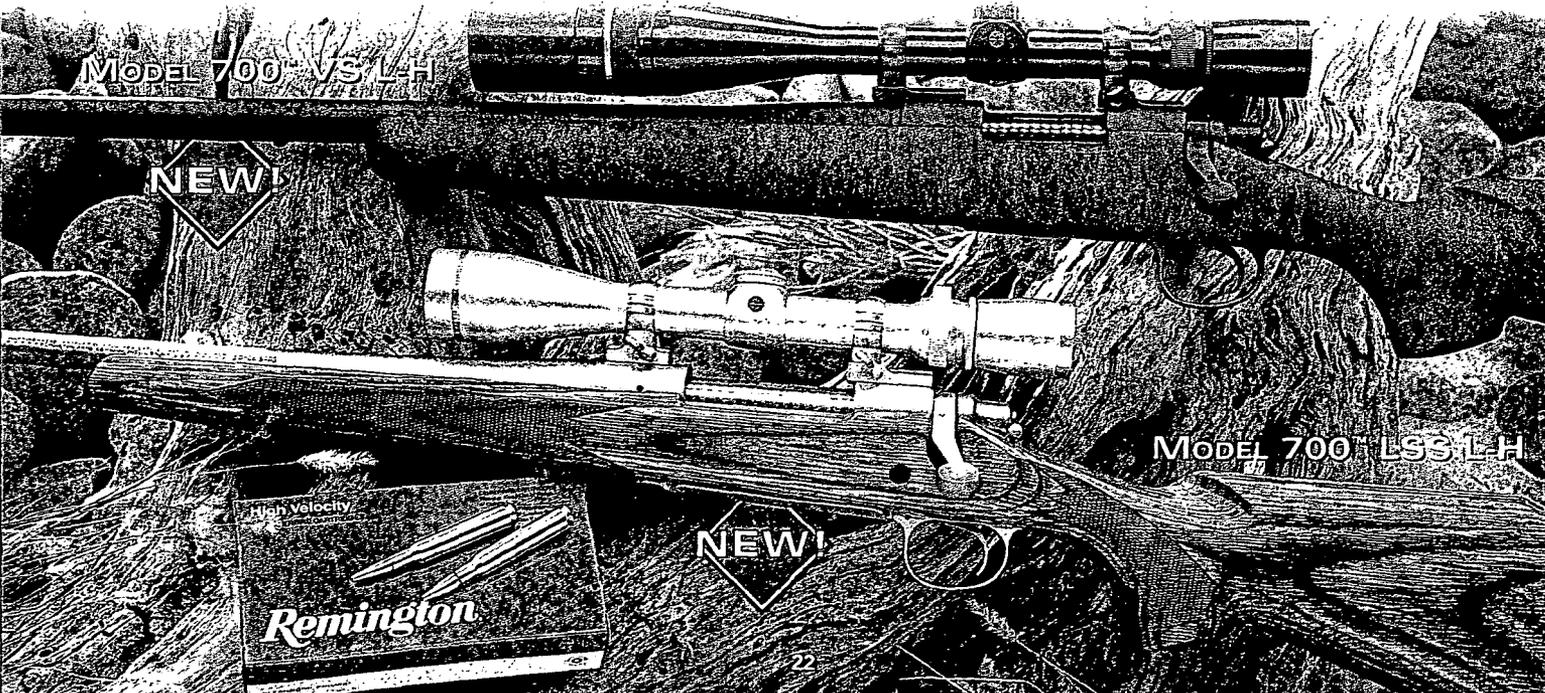


MODEL 700™ LSS-L-H

NEW

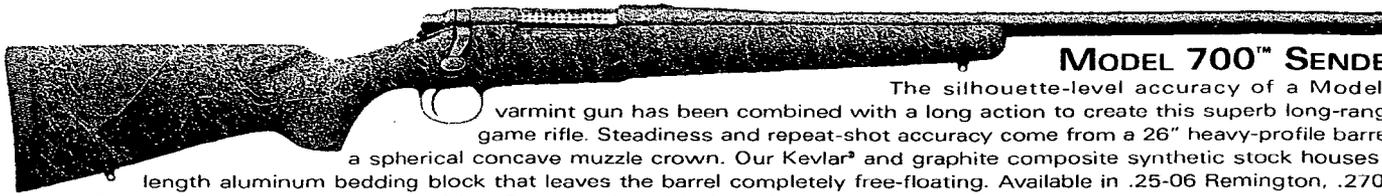


MODEL 700™ SENDERO™

The silhouette-level accuracy of a Model 700™ varmint gun has been combined with a long action to create this superb long-range big-game rifle. Steadiness and repeat-shot accuracy come from a 26" heavy-profile barrel with a spherical concave muzzle crown. Our Kevlar® and graphite composite synthetic stock houses a full-length aluminum bedding block that leaves the barrel completely free-floating. Available in .25-06 Remington, .270 Win., 7mm Remington Mag., and .300 Win. Mag. Suggested retail is from \$705.

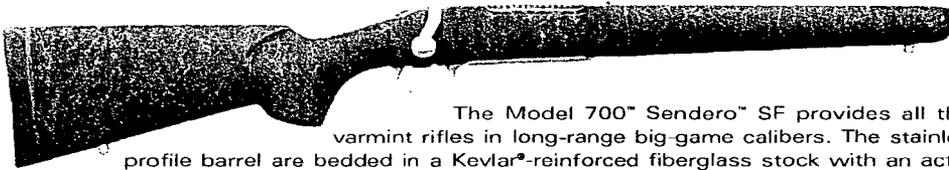


MODEL 700™ SENDERO™ SF (STAINLESS FLUTED)

The Model 700™ Sendero™ SF provides all the elements of Remington's most advanced varmint rifles in long-range big-game calibers. The stainless-steel action and free-floating 26" varmint-profile barrel are bedded in a Kevlar®-reinforced fiberglass stock with an action-long bedding block. The fluted barrel provides maximum rigidity while shaving a half-pound in weight. Perfectly designed for measured, long-range shooting, it's chambered in .25-06 Remington, 7mm Remington Magnum, 7mm STW, .300 Win. Mag., and .300 Wby. Mag. Suggested retail is from \$852.

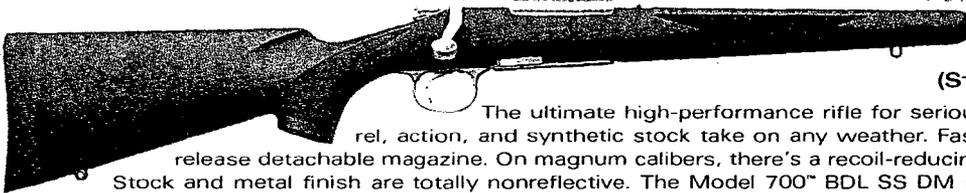


MODEL 700™ BDL™ SS DM (STAINLESS SYNTHETIC DETACHABLE MAGAZINE)

The ultimate high-performance rifle for serious big-game hunters. The stainless-steel barrel, action, and synthetic stock take on any weather. Fast, convenient loading comes with the quick-release detachable magazine. On magnum calibers, there's a recoil-reducing muzzle brake option (Model 700™ SS DM-B). Stock and metal finish are totally nonreflective. The Model 700™ BDL SS DM is available in 10 caliber choices from .25-06 Remington to .300 Win. Mag. The Model 700™ SS DM-B is available in 3 big-game magnum calibers. Suggested retail is from \$702.

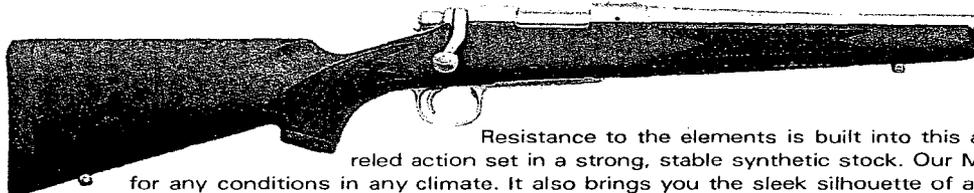


MODEL 700™ BDL™ SS (STAINLESS SYNTHETIC)

Resistance to the elements is built into this all-weather package of a stainless-steel barreled action set in a strong, stable synthetic stock. Our Model 700™ BDL SS is a world traveler, ready for any conditions in any climate. It also brings you the sleek silhouette of a classic stock profile, with hinged magazine floorplate and sling swivel studs. A 24" barrel delivers maximum ballistic performance from caliber choices of .270 Win., .30-06, 7mm Remington Mag., .300 Win. Mag., .338 Win. Mag. and .375 H&H. Suggested retail is from \$641.

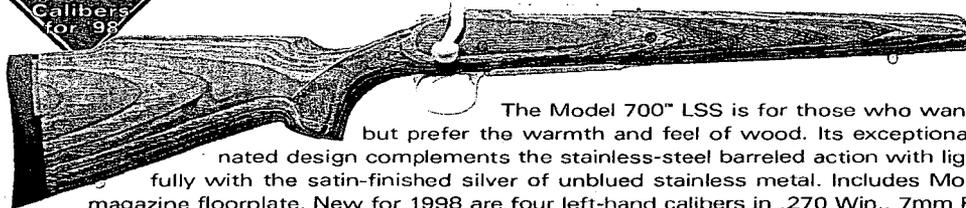

MODEL 700™ LSS/LSS L-H (LAMINATED STOCK STAINLESS)

The Model 700™ LSS is for those who want all-weather stock stability and performance, but prefer the warmth and feel of wood. Its exceptionally strong and stable resin-impregnated laminated design complements the stainless-steel barreled action with light and dark gray tones, which blends beautifully with the satin-finished silver of unblued stainless metal. Includes Monte Carlo comb with cheekpiece, and hinged magazine floorplate. New for 1998 are four left-hand calibers in .270 Win., 7mm Remington Mag., .30-06, and .300 Win. Mag., in addition to right-hand chamberings in 7mm Remington Mag and .300 Win. Mag. Suggested retail is from \$715.

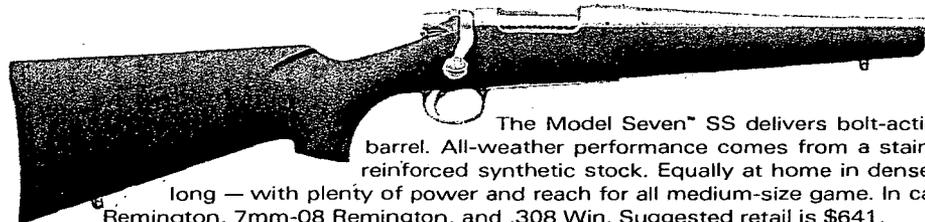

MODEL SEVEN™ SS (STAINLESS SYNTHETIC)

The Model Seven™ SS delivers bolt-action carbine portability at just 6¼ lbs. with a 20" barrel. All-weather performance comes from a stainless-steel barreled action and rugged fiberglass-reinforced synthetic stock. Equally at home in dense cover or open ranges, and a joy to carry all day long — with plenty of power and reach for all medium-size game. In caliber choices of .223 Remington, .243 Win., .260 Remington, 7mm-08 Remington, and .308 Win. Suggested retail is \$641.

Gun Dimensions / Average Weights

		Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
	700™ VS	Short Action	26"	45½"	9	13½"	½"
★	700™ VLS	Short Action	26"	45½"	9½	13½"	¾"
	700™ VS SF	Short Action	26"	45½"	8½	13½"	½"
★	700™ VS SF-P	Short Action	26"	45½"	8½	13½"	½"
	700™ Sendero™	Magnum	26"	46½"	9	13½"	½"
		Long Action	26"	46½"	9	13½"	½"
	700™ Sendero™ SF	Magnum	26"	46½"	8½	13½"	½"
		Long Action	26"	46½"	8½	13½"	½"

Gun Dimensions / Average Weights


		Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
	700™ BDL™ SS DM™ Magnum	24"	44½"	7½	13½"	½"	¾"
		Long Action	24"	44½"	7½	13½"	¾"
		Short Action	24"	43½"	7½	13½"	¾"
	700™ BDL™ SS	Magnum	24"	44½"	7½	13½"	¾"
		Long Action	24"	44½"	7½	13½"	¾"
	700™ LSS	Magnum	24"	44½"	7½	13½"	1½"
		Long Action	22"	42½"	7½	13½"	1½"
	Seven™ SS	Short Action	20"	39½"	6½	13½"	¾"

* Model 700™ SS DM-B rifles with muzzle brake option have 25" overall barrel length

★ New For 1998


The Model 7400™ and 7600™ — Deer Rifles Built For Just One Speed: Fast.

When you want fast loading, fast handling, and fast shooting, the Remington® Models 7400™ and 7600™ are the guns to rely on. With its heritage from the legendary Remington Model 8™, the Model 7400™ has a gas system that makes it the industry's most reliable centerfire autoloader. And the Model 7600™ stands alone as the fastest pump-action big-game rifle available. Now, with the addition of synthetic stocks and fore-ends, these great woods rifles have truly earned their reputation as "the whitetail hunter's favorites."

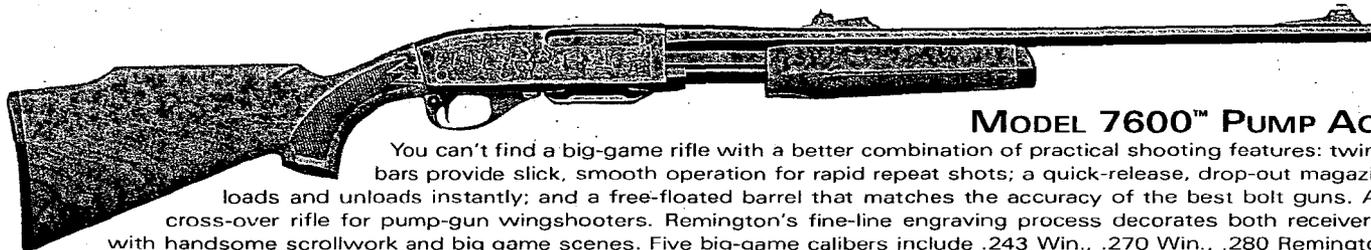


MODEL 7600™ PUMP ACTION

You can't find a big-game rifle with a better combination of practical shooting features: twin action bars provide slick, smooth operation for rapid repeat shots; a quick-release, drop-out magazine that loads and unloads instantly; and a free-floated barrel that matches the accuracy of the best bolt guns. An ideal cross-over rifle for pump-gun wingshooters. Remington's fine-line engraving process decorates both receiver panels with handsome scrollwork and big game scenes. Five big-game calibers include .243 Win., .270 Win., .280 Remington, .30-06 (also available with 18½" carbine barrel), and .308 Win. The Monte Carlo walnut stock with a satin finish is standard. High-gloss finish available in .30-06 and .270 Win. Suggested retail is \$540.

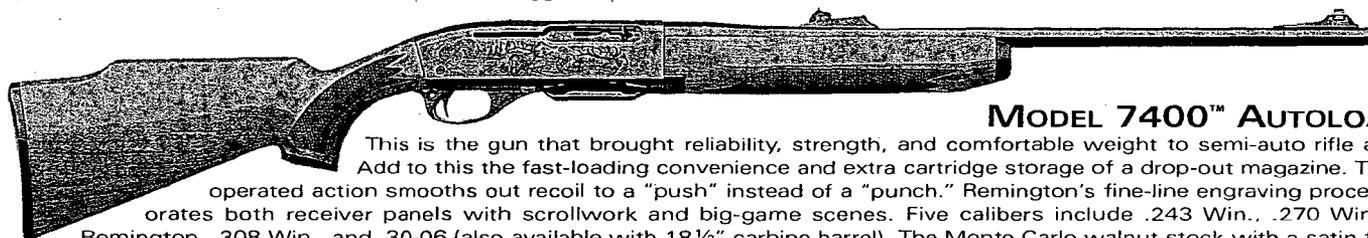


MODEL 7400™ AUTOLOADER

This is the gun that brought reliability, strength, and comfortable weight to semi-auto rifle actions. Add to this the fast-loading convenience and extra cartridge storage of a drop-out magazine. The gas-operated action smooths out recoil to a "push" instead of a "punch." Remington's fine-line engraving process decorates both receiver panels with scrollwork and big-game scenes. Five calibers include .243 Win., .270 Win., .280 Remington, .308 Win., and .30-06 (also available with 18½" carbine barrel). The Monte Carlo walnut stock with a satin finish is standard. High-gloss finish available in .30-06 and .270 Win. Suggested retail is \$573.

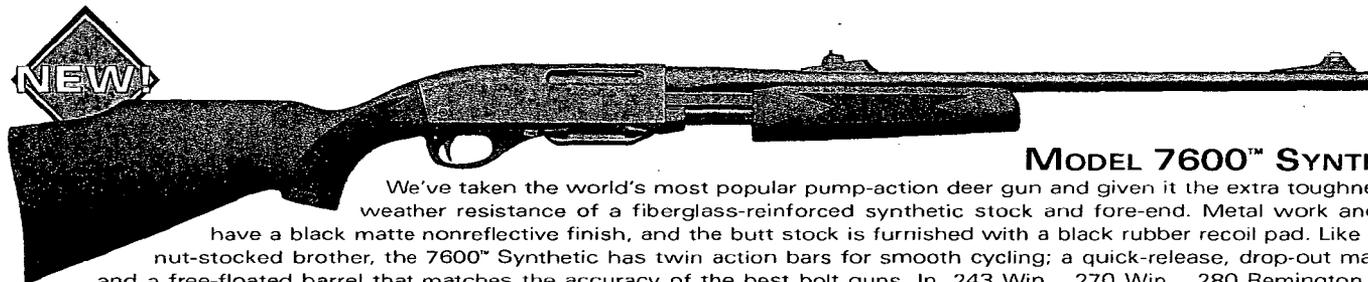

MODEL 7600™ SYNTHETIC

We've taken the world's most popular pump-action deer gun and given it the extra toughness and weather resistance of a fiberglass-reinforced synthetic stock and fore-end. Metal work and stock have a black matte nonreflective finish, and the butt stock is furnished with a black rubber recoil pad. Like its walnut-stocked brother, the 7600™ Synthetic has twin action bars for smooth cycling; a quick-release, drop-out magazine; and a free-floated barrel that matches the accuracy of the best bolt guns. In .243 Win., .270 Win., .280 Remington, .30-06 Sprfld., .308 Win., and a carbine with 18½" barrel in .30-06 as well. Suggested retail is \$440.

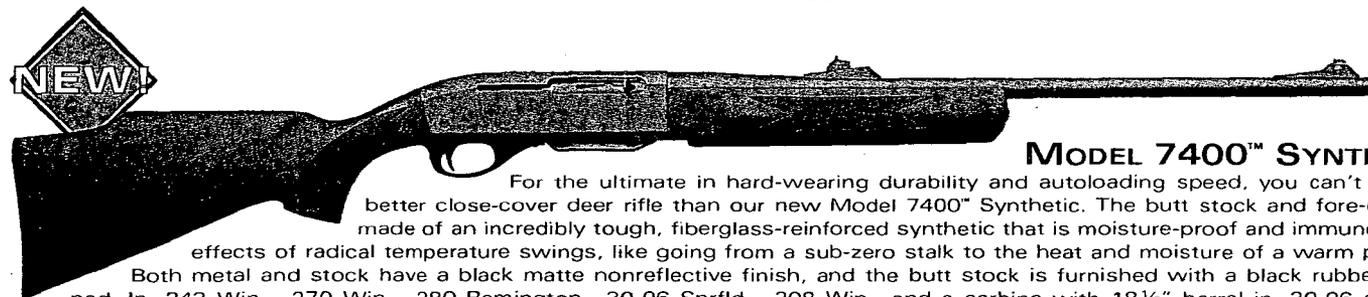

MODEL 7400™ SYNTHETIC

For the ultimate in hard-wearing durability and autoloading speed, you can't carry a better close-cover deer rifle than our new Model 7400™ Synthetic. The butt stock and fore-end are made of an incredibly tough, fiberglass-reinforced synthetic that is moisture-proof and immune to the effects of radical temperature swings, like going from a sub-zero stalk to the heat and moisture of a warm pick-up. Both metal and stock have a black matte nonreflective finish, and the butt stock is furnished with a black rubber recoil pad. In .243 Win., .270 Win., .280 Remington, .30-06 Sprfld., .308 Win., and a carbine with 18½" barrel in .30-06 as well. Suggested retail is \$473.




Gun Dimensions / Average Weights

	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
7600™	22"	42½"	7½	13¾"	1¾"	2¼"
7400™	22"	42½"	7½	13¾"	1¾"	2¼"
* 7600™ Synthetic	22"	42½"	7½	13¾"	1¾"	2¼"
* 7400™ Synthetic	22"	42½"	7½	13¾"	1¾"	2¼"
7600™ Carbine	18½"	39¾"	7½	13¾"	1¾"	2¼"
7400™ Carbine	18½"	39¾"	7½	13¾"	1¾"	2¼"

* New For 1998

The No. 1 Rolling Block Mid-Range Sporter — Remington Makes History...Again.

With the popularity of the re-introduction of the No. 1 Rolling Block Creedmoor Rifle in 1997, we have decided to bring back another version of the rolling block rifle for 1998 – the Mid-Range Sporter. It combines a 30-inch round barrel with a pistol-gripped sporter stock of American walnut with sharp-cut checkering on both fore-end and butt-stock. Both barrel and receiver have a polished, blued finish. The barrel is fitted with an adjustable, center-notch buckhorn rear sight and a front blade sight with a white bead. The Mid-Range Sporter Rolling Block is chambered for three currently produced smokeless powder cartridges: .30-30 Win., .444 Marlin and .45-70 Government. Standard barrel twists are used for all four calibers. This latest page from our history creates over-the-counter availability of a genuine Remington Rolling Block rifle for collectors and tradition-minded hunters and shooters. Suggested retail is \$1,278.

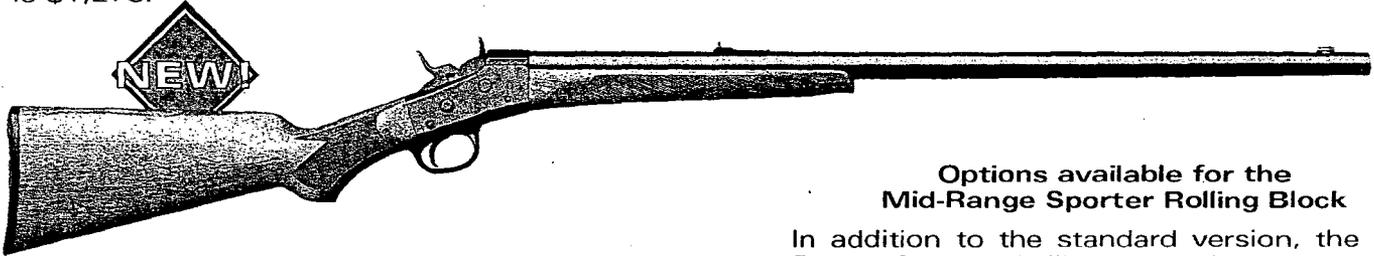

Options available for the Mid-Range Sporter Rolling Block

In addition to the standard version, the Mid-Range Sporter Rolling Block is also available with a number of traditional options. These include a half-round, half-octagonal barrel; original Remington rear tang-mounted vernier sights and front globe sight with spirit level; single set trigger; semi-fancy American walnut stock with steel Schnabel fore-end tip and steel butt plate; and case-colored receiver.

Gun Dimensions / Average Weight

Mid-Range Rolling Block	Barrel Length	Overall Length	Avg. Wt.(lbs.)	Length of Pull	Drop (Comb)	Drop (Heel)
★ .30-30 Win.	30"	46½"	8½	14½"	2½"	2"
★ .444 Marlin	30"	46½"	8½	14½"	2½"	2"
★ .45-70 Government	30"	46½"	8½	14½"	2½"	2"


Model XP-100R™ — The Ultimate Long-Range Pistol.

For 1998, we're bringing back one of the most popular versions of the Model XP-100™ – the repeater version – and we're making it available as a standard production gun. The rear grip fiberglass composite stock is fitted with a top-load blind magazine. The 14½" barrel is furnished clean, but drilled and tapped for sights, and the receiver is drilled and tapped for scope mounts. Suggested retail is \$665.

Gun Dimensions / Average Weight

Model XP-100R™	Magazine Capacity	Barrel Length	Avg. Wt.(lbs.)	Twist – R-H, 1 Turn in:
★ .22-250 Remington	4	14½"	4½	14"
★ .223 Remington	5	14½"	4½	12"
★ .260 Remington	4	14½"	4½	9"
★ .35 Remington	4	14½"	4½	16"

★ New For 1998

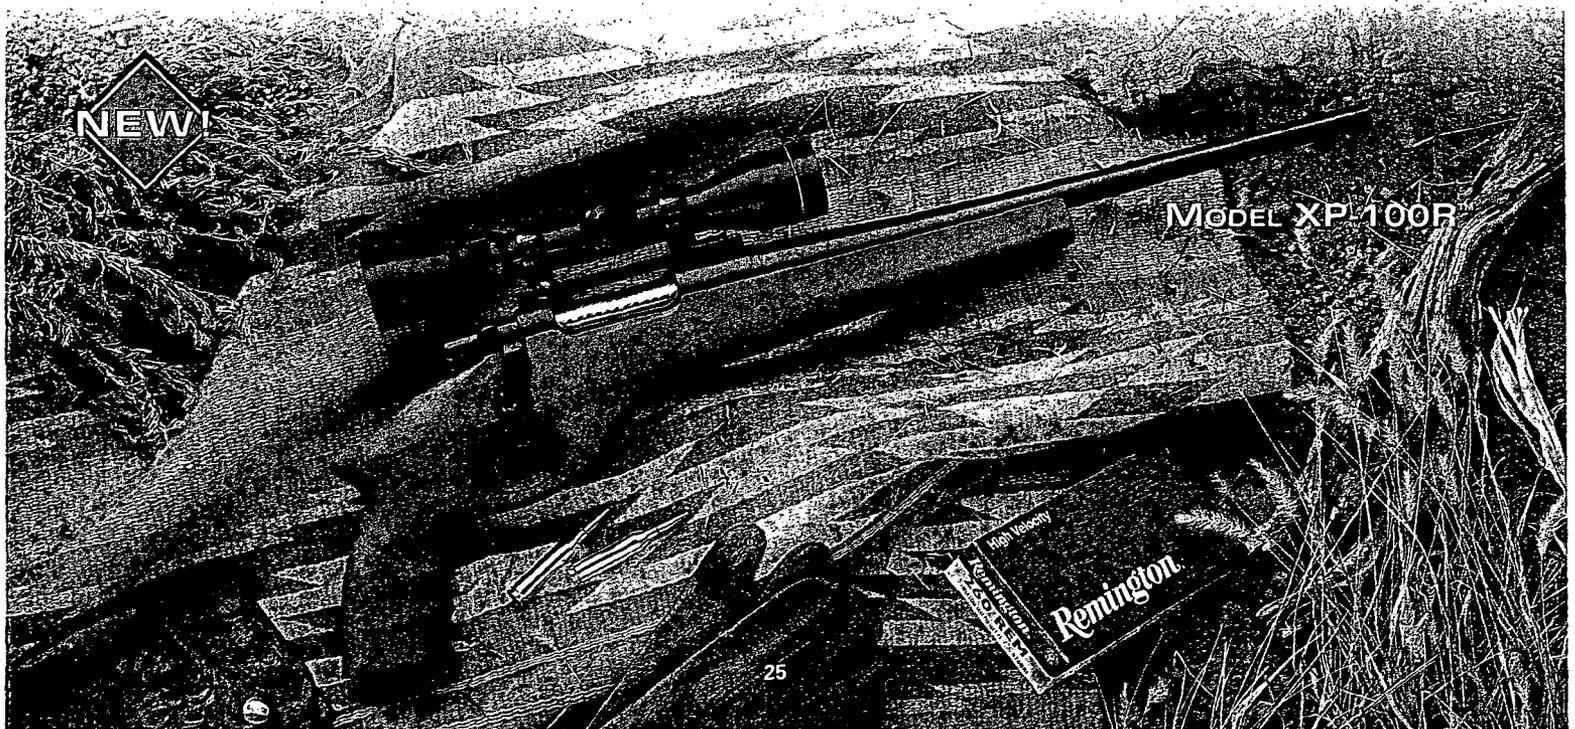


One-of-a-Kind Craftsmanship for the Discerning Sportsman.




Because there will always be sportsmen who love personally hand-crafted, meticulously built rifles and shotguns, there will always be the Remington® Custom Shop. There, 182 years of experience and tradition are in the hands of modern-day masters with continually refined skills in metalwork, rifling, stockmaking, engraving, inlaying, and meticulous hand-fitting and assembly. Returning to the Remington Custom Shop today, Eliphalet Remington would be proud to see guns individually hand-crafted the way he made the first one in 1816. And though he might be amazed at today's advanced designs, he'd also be proud that Remingtons continue to be the best of their day, and ahead of their time.

Whether it's for a true one-of-a-kind investment, production guns that demand extra refinement, or an upgrade to existing guns, the Custom Shop is ready to build your dream gun — and at a price that's affordable. You can call the Remington Custom Shop directly at 1 (315) 895-3288, or reach them through the Remington Consumer Information Center at 1 (800) 243-9700.

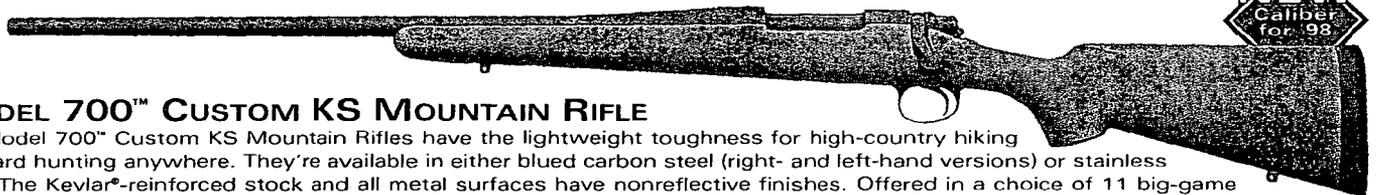


MODEL 700™ CUSTOM KS MOUNTAIN RIFLE

Our Model 700™ Custom KS Mountain Rifles have the lightweight toughness for high-country hiking and hard hunting anywhere. They're available in either blued carbon steel (right- and left-hand versions) or stainless steel. The Kevlar®-reinforced stock and all metal surfaces have nonreflective finishes. Offered in a choice of 11 big-game calibers from .270 Win. to .375 H&H Mag., and new for 1998, the flat-shooting 7mm STW. Suggested retail is from \$1,136.

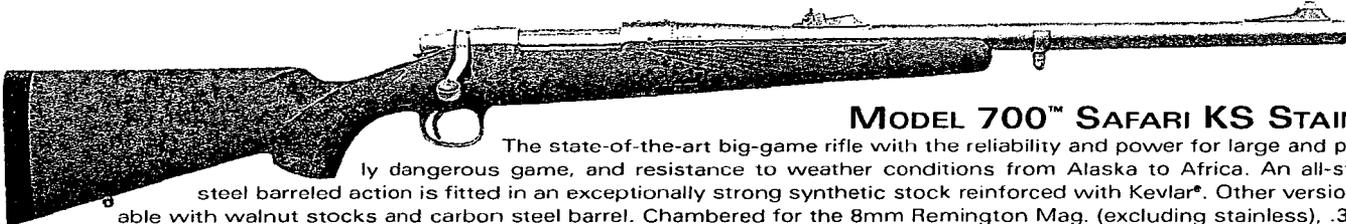


MODEL 700™ SAFARI KS STAINLESS

The state-of-the-art big-game rifle with the reliability and power for large and potentially dangerous game, and resistance to weather conditions from Alaska to Africa. An all-stainless-steel barreled action is fitted in an exceptionally strong synthetic stock reinforced with Kevlar®. Other versions available with walnut stocks and carbon steel barrel. Chambered for the 8mm Remington Mag. (excluding stainless), .375 H&H Mag., .416 Remington Mag., and .458 Win. Mag. Suggested retail from \$1,140.

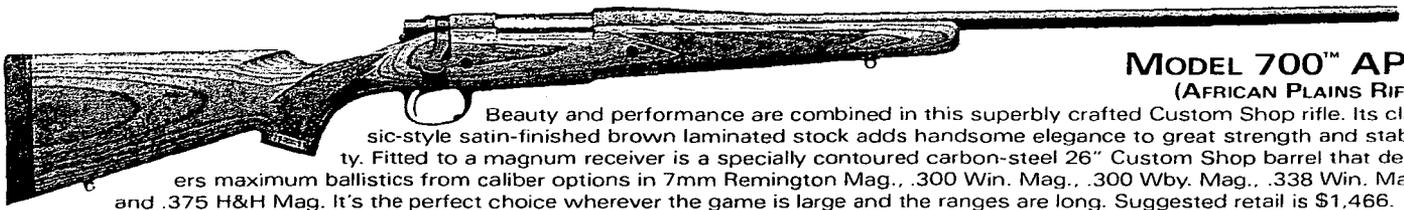

MODEL 700™ APR (AFRICAN PLAINS RIFLE)


Beauty and performance are combined in this superbly crafted Custom Shop rifle. Its classic-style satin-finished brown laminated stock adds handsome elegance to great strength and stability. Fitted to a magnum receiver is a specially contoured carbon-steel 26" Custom Shop barrel that delivers maximum ballistics from caliber options in 7mm Remington Mag., .300 Win. Mag., .300 Wby. Mag., .338 Win. Mag., and .375 H&H Mag. It's the perfect choice wherever the game is large and the ranges are long. Suggested retail is \$1,466.

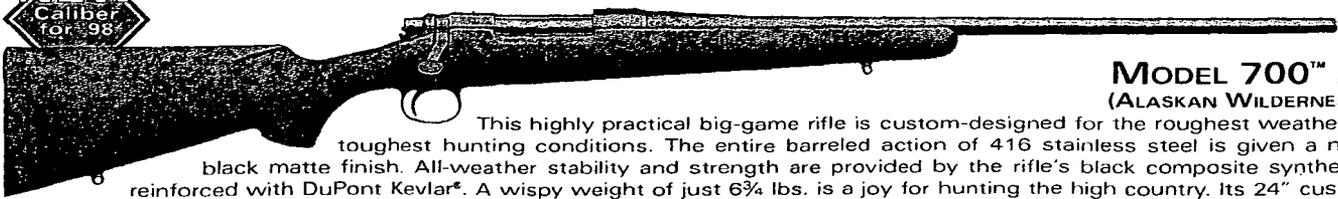

MODEL 700™ AWR (ALASKAN WILDERNESS RIFLE)

This highly practical big-game rifle is custom-designed for the roughest weather and the toughest hunting conditions. The entire barreled action of 416 stainless steel is given a non-glare, black matte finish. All-weather stability and strength are provided by the rifle's black composite synthetic stock reinforced with DuPont Kevlar®. A wispy weight of just 6¾ lbs. is a joy for hunting the high country. Its 24" custom-contoured barrel wrings maximum performance out of six potent calibers in 7mm Remington Mag., .300 Win. Mag., .300 Wby. Mag., .338 Win. Mag., and .375 H&H Mag., and new for 1998, the sizzling 7mm STW. Suggested retail is \$1,376.


NEW

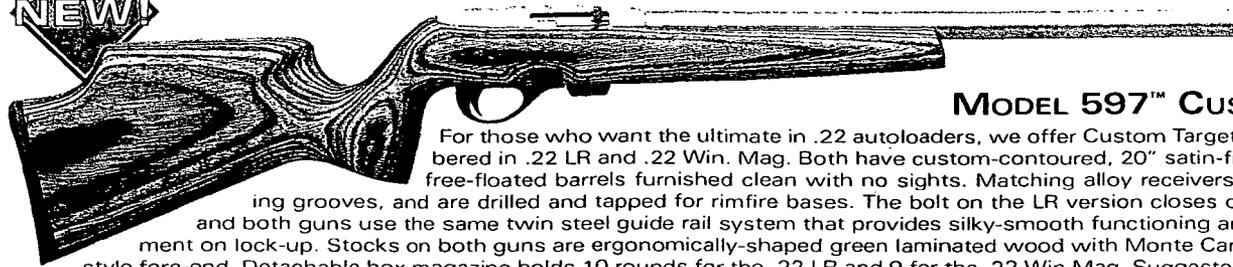

MODEL 597™ CUSTOM TARGET


For those who want the ultimate in .22 autoloaders, we offer Custom Target M597™ rifles chambered in .22 LR and .22 Win. Mag. Both have custom-contoured, 20" satin-finish heavy stainless free-floated barrels furnished clean with no sights. Matching alloy receivers have scope mounting grooves, and are drilled and tapped for rimfire bases. The bolt on the LR version closes on a match chamber, and both guns use the same twin steel guide rail system that provides silky-smooth functioning and perfect bolt alignment on lock-up. Stocks on both guns are ergonomically-shaped green laminated wood with Monte Carlo profile and beaver style fore-end. Detachable box magazine holds 10 rounds for the .22 LR and 9 for the .22 Win Mag. Suggested retail is from \$599.

NEW
Stock Options

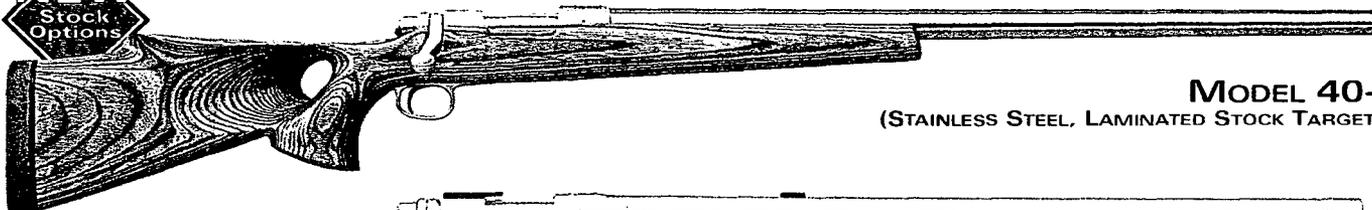

MODEL 40-XB™

(STAINLESS STEEL, LAMINATED STOCK TARGET RIFLE)

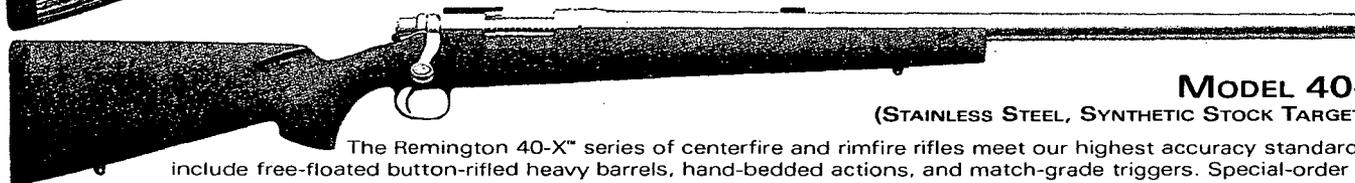


MODEL 40-XB™

(STAINLESS STEEL, SYNTHETIC STOCK TARGET RIFLE)

The Remington 40-X™ series of centerfire and rimfire rifles meet our highest accuracy standards. They include free-floated button-rifled heavy barrels, hand-bedded actions, and match-grade triggers. Special-order options on certain models include single-shot or repeater versions, walnut or Kevlar®-reinforced synthetic stocks, new attractively styled resin-impregnated laminated thumbhole stocks in green, brown, and desert coloring, stainless-steel barreled actions, left-hand actions, and 2-oz. triggers. The line also includes centerfire (40-XBBR™ KS) and rimfire (40-XRBR™ KS) benchrest rifles, a National Match Course version (40-XC™ KS), a rimfire position rifle (40-XR™), and the Model 40-XR™ KS rimfire sporter. Suggested retail is from \$1,390. Suggested retail for the new thumbhole stock version is from \$1,569.

NEW
Caliber for '98

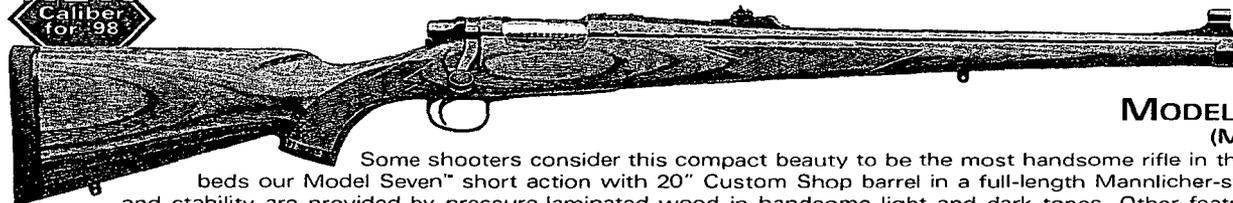


MODEL SEVEN™ MS

(MANNLICHER STOCK)


Some shooters consider this compact beauty to be the most handsome rifle in the Remington line. It beds our Model Seven™ short action with 20" Custom Shop barrel in a full-length Mannlicher-style stock. Strength and stability are provided by pressure-laminated wood in handsome light and dark tones. Other features include a butt-stock with straight comb, raised cheekpiece, black rubber recoil pad, and a fore-end cap/barrel band. In a wide choice of 12 calibers from .222 Remington to .350 Remington Magnum, and new for 1998, the great new .260 Remington. Suggested retail is \$1,140.

NEW
Caliber for '98

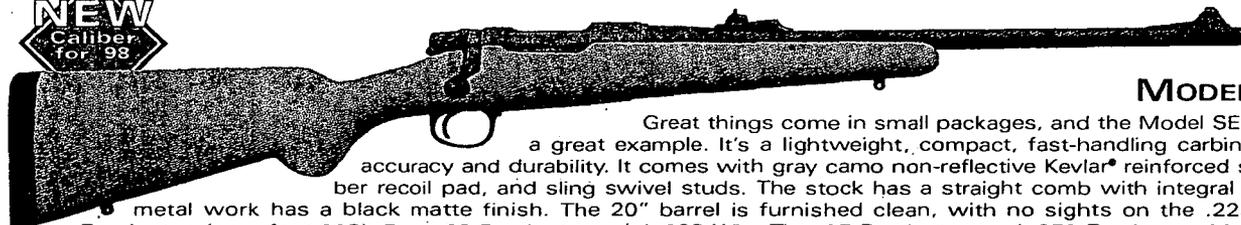

MODEL SEVEN™ KS

Great things come in small packages, and the Model SEVEN™ Custom KS is a great example. It's a lightweight, compact, fast-handling carbine with outstanding accuracy and durability. It comes with gray camo non-reflective Kevlar® reinforced stock, 1" black rubber recoil pad, and sling swivel studs. The stock has a straight comb with integral cheekpiece, and all metal work has a black matte finish. The 20" barrel is furnished clean, with no sights on the .223 Remington, .260 Remington (new for 1998), 7mm-08 Remington, and .308 Win. The .35 Remington and .350 Remington Mag. have iron sights. Suggested retail is \$1,136.

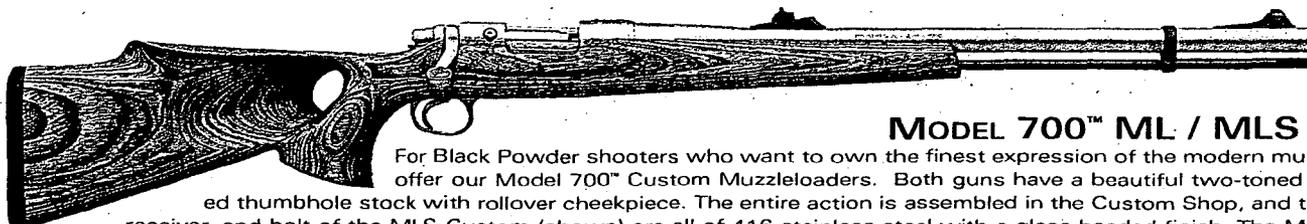

MODEL 700™ ML / MLS CUSTOM

For Black Powder shooters who want to own the finest expression of the modern muzzleloader we offer our Model 700™ Custom Muzzleloaders. Both guns have a beautiful two-toned gray laminated thumbhole stock with rollover cheekpiece. The entire action is assembled in the Custom Shop, and the 24" barrel, receiver, and bolt of the MLS Custom (shown) are all of 416 stainless steel with a glass-beaded finish. The Model 700™ ML Custom is fitted with a satin-finished carbon-steel 24" barrel and gray laminated thumbhole stock. Suggested retail is from \$817.

Shotgun Specifications

Remington Peerless® O/U

Gauge	Description	Barrel Length and Choke	Order No./Price*
12	Peerless® O/U	30" Rem™ Choke	4813/\$1,172.
		28" Rem™ Choke	4814/\$1,172.
		26" Rem™ Choke	4815/\$1,172.

Supplied with one Imp. Cyl., one Mod., and one Full Rem™ Choke tube. 3" chambers. *Manufacturers Suggested Retail Price.

Model 396™ O/U Target Shotguns

Gauge	Description	Barrel Length and Choke	Order No./Price*
12	396™ Skeet O/U	30" Rem™ Choke	4816/\$1,993.
		28" Rem™ Choke	4817/\$1,993.
12	396™ Sporting O/U	30" Rem™ Choke	4818/\$2,126.
		28" Rem™ Choke	4819/\$2,126.

Model 396™ Skeet supplied with two Skeet Rem™ Choke tubes. Model 396™ Sporting supplied with Skeet, Imp. Cyl., Light Modified, and Modified extended Rem™ Choke tubes. *Manufacturers Suggested Retail Price.

Model 11-87™, 1100™, & 870™ Target Shotguns

Gauge/Description	Barrel Length and Choke	Order No./Price*
12	11-87™ Premier® Sporting Clays ¹	28" Rem™ Choke LC 5277/\$779.
	11-87™ Premier® Sporting Clays NP	30" Rem™ Choke LC 5263/\$827.
	11-87™ Premier® Sporting Clays NP	28" Rem™ Choke LC 5259/\$827.★
	11-87™ Premier® Trap ¹ (Monte Carlo)	30" Rem™ Choke ¹ 9888/\$788.
	11-87™ Premier® Skeet ¹	26" Rem™ Choke 9882/\$765.
	870™ TC Trap (Monte Carlo)	30" Rem™ Choke ² 6979/\$680.
20	1100™ Sporting 20	28" Rem™ Choke 5399/\$781.★
28	1100™ Sporting 28	25" Rem™ Choke 5407/\$781.

¹Model 11-87™ Target barrels are not equipped with a pressure-compensating gas system and are intended for use with target ammunition only (3/4 dr. powder, 1 1/2 oz. lead shot — max.). Use of heavier field loads will damage the gun, unless a Model 11-87™ Premier® Field Grade extra barrel is installed. ²All Remington Rem™ Choke Trap Barrels are overbored. These guns are supplied with special Rem™ Chokes that will not perform satisfactorily in standard bore barrels. Model 11-87™ barrels are not interchangeable with Model 1100™ barrels. See below for information on extra barrels. LC = Light Contour. *Manufacturers Suggested Retail Price.

Genuine Remington® Factory Extra Shotgun Barrels

Model 11-87™ Extra Barrels - 3" Chambers

Length & Choke	Order No./Price* 12-ga.
Deer Barrel¹, Cantilever Scope Mount	
21" Fully Rifled	9615/\$269.
Deer Barrel¹, Rifle Sights	
21" Fully Rifled	9606/\$219.
21" Rem™ Choke ²	9623/\$177.
21" Rem™ Choke (L-H) ²	9625/\$197.
SP™ Deer Barrel, Cantilever Scope Mount	
21" Fully Rifled	4645/\$269.
21" Rem™ Choke ¹	4647/\$227.
SP™ Deer Barrel, Rifle Sights	
21" Rem™ Choke ²	9627/\$177.
21" Fully Rifled	9609/\$219.
SP™ Magnum, Vent Rib	
30" Rem™ Choke	4638/\$204.
28" Rem™ Choke	9611/\$204.
26" Rem™ Choke	4640/\$204.
Premier®, Vent Rib	
30" Rem™ Choke, Light Contour	9600/\$224.
30" Rem™ Choke	4642/\$204.
28" Rem™ Choke, Light Contour	9602/\$224.
28" Rem™ Choke	4644/\$204.
26" Rem™ Choke, Light Contour	9604/\$224.
26" Rem™ Choke	4646/\$204.
Premier® Skeet Barrel (2 1/2" chamber only)	
26" Rem™ Choke	4624/\$223.
Premier® Trap Barrel (2 1/2" chamber only)	
30" Rem™ Choke	4626/\$232.

¹ Cantilever Rem™ Choke Deer Barrels supplied with Imp. Cyl. and new Extended Rifled Choke tubes.

² Rifle sighted Rem™ Choke Deer Barrels supplied with Rifled and Imp. Cyl. Choke tubes. *Manufacturers Suggested Retail Price.

Fitting Standard Barrels on Light Contour Shotguns - The fore-ends on our new Light Contour Model 11-87™ shotguns are shaped to follow the curve of the slimmer-profiled LC barrel, which means that a standard vent rib or deer barrel cannot be fitted to your gun unless you do one of two things: have your LC fore-end wood opened up by a competent gunsmith or stockmaker; or purchase a standard profile fore-end from our Arms Service Division by writing to: Arms Service Division, Remington Arms Co., P.O. Box 700 Madison, NC 27025-0700

Model SP-10™ Magnum

Gauge	Barrel Length and Choke	Order No./Price*
10	30" Rem™ Choke ¹	4808/\$1,085.
	26" Rem™ Choke ¹	4812/\$1,085.
	26" Rem™ Choke ¹ Mossy Oak® Break-Up Camo	4809/\$1,179.★
	23" Rem™ Choke ² Turkey Camo NWTF 25™ Anniversary.	4821/\$1,225.★

¹These Model SP-10™ guns supplied with Full and Mod Rem™ Choke tubes. ²The 23" NWTF Model SP-10™ is supplied with Turkey Extra Full Rem™ Choke tube only. Important Note: Critical components — including the barrel, bolt assembly and trigger plate assembly of the Remington Model SP-10™ and other manufacturers' 10-gauge shotguns — are not interchangeable. *Manufacturers Suggested Retail Price.

Model 11-87™ Premier®

Gauge	Barrel Length and Choke	Order No./Price*	
		Satin Wood	Gloss Wood
12	30" Rem™ Choke LC (Light Contour)	—	5287/\$692.
	28" Rem™ Choke LC	9873/\$692.	5289/\$692.
	28" Rem™ Choke Left-Hand, LC	9911/\$743.	—
	26" Rem™ Choke LC	—	5291/\$692.
	21" Fully Rifled Cantilever Deer Barrel	9831/\$759.	—

Model 11-87™ deer barrels are not equipped with a pressure-compensating gas system, and will not function with target or light field loads. LC = Light Contour. *Manufacturers Suggested Retail Price.

Model 11-87™ Special Purpose

Gauge	Barrel Length and Choke	Order No./Price*	
		Wood	Synthetic
12	28" Rem™ Choke	9905/\$679.	5269/\$679.
	26" Rem™ Choke	9906/\$679.	5271/\$679.
	26" Rem™ Choke Mossy Oak® Break-Up Camo	—	9662/\$767.
	21" Rem™ Choke Turkey Camo NWTF 25™ Anniversary	—	5251/\$832.★
	21" Rem™ Choke Turkey gun (all black) ¹	—	9674/\$692.
	21" Fully Rifled Cantilever Deer Barrel (all black) ¹	—	9819/\$765.
	21" Fully Rifled Deer Barrel w/rifle sights (all black) ¹	—	9676/\$703.
	21" Rem™ Choke Deer Barrel w/rifle sights ¹	9837/\$659.	—

¹Rifle-sighted Rem™ Choke deer shotguns supplied with a Rifled Choke tube and Improved Cylinder tube. ²Model 11-87™ turkey and deer barrels are not equipped with a pressure-compensating gas system, and will not function with target or light field loads. Note: SPS turkey guns supplied with Turkey Super Full and Improved Cylinder Choke tubes. NWTF special edition turkey gun supplied with new Straight Rifled Turkey Super Full Rem™ Choke tube. *Manufacturers Suggested Retail Price.

Model 1100™ Extra Barrels - 2 1/4" Chambers

Length & Choke	Order No./Price* 12-ga.	Order No./Price* 20-ga. LT-20
Field Grade, Cantilever Scope Mount		
21" Fully Rifled	6595/\$267.	—
Field Grade, Deer, Rifle Sights		
21" Fully Rifled	9570/\$219.	—
21" Rem™ Choke ²	9565/\$177.	—
21" Rem™ Choke (L-H) ²	9567/\$193.	—
21" Imp. Cyl.	—	4438/\$145.
SP™ Deer, Rifle Sights		
21" Rem™ Choke ²	9571/\$177.	—
Steel Shot Barrel, 12-gauge (See Note Below.)		
30" Rem™ Choke	9505/\$211.	—
26" Rem™ Choke	9509/\$211.	—
Field Grade, Vent Rib		
30" Rem™ Choke	4488/\$204.	—
28" Rem™ Choke	4464/\$204.	4484/\$204.
26" Rem™ Choke	4466/\$204.	4486/\$204.
Trap, Vent Rib		
30" Rem™ Choke	4492/\$232.	—
Skeet, Vent Rib		
26" Rem™ Choke	4490/\$223.	—

D & F Grades (engraved): Special Order

NOTE: LT-20, 20-gauge Lightweight barrels (4400 Series) will not fit pre-1977 20-gauge Lightweight or standard 20-gauge Model 1100™ shotguns. (Refer to parts list for pre-1977 barrels.)

¹ Cantilever Rem™ Choke Deer Barrels supplied with Imp. Cyl. and new Extended Rifled Choke tubes.

² Rifle sighted Rem™ Choke Deer Barrels supplied with Rifled and Imp. Cyl. Choke tubes. *Manufacturers Suggested Retail Price.

PLEASE NOTE THE FOLLOWING AMMUNITION RECOMMENDATIONS FOR USE WITH THE MODEL 1100™ STEEL SHOT BARREL.

When used with Model 1100™ Magnum shotguns:
 - Use 2 3/4" Magnum or 3" Magnum steel shotshells.
 - Use 2 3/4" Magnum or 3" Magnum lead shotshells.

When used with Model 1100™ non-Magnum shotguns:
 - Use 2 3/4" Magnum or 3" Magnum steel shotshells.
 - Use 2 3/4" Magnum lead shotshells. Do not use 3" Magnum lead shotshells in non-Magnum Model 1100™ shotguns, as this will cause extra wear and decrease the life of the gun.

Model 11-96™ Euro Lightweight

Gauge	Barrel Length and Choke	Order No./Price*
12	28" Rem™ Choke	9863/\$852.
	26" Rem™ Choke	9869/\$852.

Supplied with Imp. Cyl., Mod., and Full Rem™ Chokes. *Manufacturers Suggested Retail Price.

Model 1100™

Gauge	Barrel Length and Choke	Order No./Price*		
		Satin Wood	Gloss Wood	Synthetic
12	23" Rem™ Choke (Special Field)	5335/\$659.	—	—
	28" Rem™ Choke (Mod. Only)	—	—	5369/\$492.
	21" Fully Rifled Cantilever Deer Barrel	—	—	5363/\$585.
	28" Rem™ Choke	9601/\$659.★	—	—
20	26" Rem™ Choke	—	5397/\$625.★	5371/\$492.
	28" Rem™ Choke (3" Magnum)	9603/\$659.★	—	—
	23" Rem™ Choke (Special Field)	5381/\$659.	—	—
	21" Rem™ Choke (Youth Turkey Camo NWTF)	—	—	5373/\$652.★
	21" Rem™ Choke (Youth Gun)	5377/\$659.★	—	—
	21" Fully Rifled Deer Barrel w/ rifle sights	—	—	5365/\$475.
	28" Rem™ Choke	—	—	—

NOTE: 3" magnum is set up to handle heavy 20-ga. shotshells and will not function satisfactorily with target and light field loads. *Manufacturers Suggested Retail Price.

Model 870™ Wingmaster®

Gauge	Barrel Length and Choke	Order No./Price*	
		Satin Wood	Gloss Wood
12	30" Rem™ Choke LC (Light Contour)	—	5053/\$519.
	28" Rem™ Choke LC	5063/\$519.	5055/\$519.
	26" Rem™ Choke LC	—	5057/\$519.
	20" Fully Rifled Cantilever Deer Barrel	5515/\$599.	—
20	28" Rem™ Choke	5073/\$519.★	—
	26" Rem™ Choke	—	5075/\$519.★

NOTE: All Model 870™ shotguns have 5-shot capacity and come furnished with a 3-shot plug. All 3" chambers handle 2 3/4" shells. LC = Light Contour. *Manufacturers Suggested Retail Price.

Model 870™ Special Purpose

Gauge	Barrel Length and Choke	Order No./Price*
12	26" Rem™ Choke Mossy Oak® Break-Up Camo	5096/\$496.
	21" Rem™ Choke Turkey Gun (all black)	4984/\$425.
	20" Fully Rifled Cantilever Deer Barrel (all black)	5002/\$496.
	21" Rem™ Choke Turkey Camo NWTF 25th Anniversary	4944/\$565.★
	20" Fully Rifled Deer Barrel w/ rifle sights (all black)	4988/\$436.
	18" Marine Magnum™ (nickel) ¹	5012/\$500.

Note: Model 870™ shotguns with 3" chambers handle 2 3/4" shells. ¹Will not accept law enforcement accessories. Note: SPS turkey guns supplied with Turkey Super Full and Improved Cylinder Choke tubes. NWTF special edition turkey gun supplied with new Straight-Rifled Turkey Super Full Rem™ Choke tube. *Manufacturers Suggested Retail Price.

Model 870™ Extra Barrels - 3" Chambers

Length & Choke	Order No./Price*	Order No./Price*
	12-ga.	20-ga.**
Field Grade, Vent Rib, Wingmaster®		
30" Rem™ Choke, Light Contour	6215/\$221.	—
30" Rem™ Choke	4576/\$201.	—
28" Rem™ Choke, Light Contour	6217/\$221.	—
28" Rem™ Choke	4580/\$201.	4606/\$201.
26" Rem™ Choke, Light Contour	6219/\$221.	—
26" Rem™ Choke	4582/\$201.	4608/\$201.
Deer Barrel, Cantilever Scope Mount, Wingmaster®		
20" Fully Rifled	4557/\$264.	—
Deer Barrel, Rifle Sights		
20" Rem™ Choke ²	4545/\$175.	—
20" Rem™ Choke (L-H) ²	4547/\$191.	—
20" Fully Rifled	4558/\$216.	—
20" Imp. Cyl.	—	4578/\$136.
SP™ Deer Barrel, Cantilever Scope Mount		
20" Fully Rifled	6229/\$264.	—
20" Rem™ Choke ¹	6227/\$221.	—
SP™ Deer, Rifle Sights		
20" Rem™ Choke ²	4549/\$175.	—
Express™ Deer, Rifle Sights (20"), Imp. Cyl.	4622/\$124.	—
Express™ Deer, Fully Rifled, Rifle Sights (20")³	4611/\$164.	4609/\$164.★
SP™ Vent Rib		
30" Rem™ Choke	4590/\$193.	—
28" Rem™ Choke	6225/\$193.	—
26" Rem™ Choke	4592/\$193.	—
D&F Grades (hand-engraved) Special Order		

Model 870™ extra barrels with 3" chambers used on Super Magnum™ and Magnum receivers will handle both 2 3/4" and 3" shells. Use only 2 3/4" shells when these barrels are used on non-Magnum receivers. **20-gauge 870™ Lightweight barrels will not fit 20-gauge standard 870™ guns. ¹Cantilever Rem™ Choke Deer Barrels supplied with Imp. Cyl. and new Extended Rifled Choke tubes. ²Rifle sighted Rem™ Choke Deer Barrels supplied with Rifled and Imp. Cyl. Choke tubes. ³Express™ 20-ga. fully rifled deer barrel has 2 3/4" chamber. *Manufacturers Suggested Retail Price.

Model 870™ Express® Super Magnum™

Gauge	Barrel Length and Choke	Overall Length	Avg. Wt. (lbs.)	Order No./Price*
12	28" Rem™ Choke	48 1/2"	7 1/2	5100/\$332.★
	26" Rem™ Choke w/ black synthetic stock and fore-end	46 1/2"	7 1/2	5102/\$339.★
	23" Rem™ Choke Turkey Camo ¹	43 1/2"	7 1/2	5104/\$439.★
	Super Magnum™ Combo (12-ga.)	—	—	—
	26" Rem™ Choke vent rib, and	46"	7 1/2	5114/\$465.★
	20" Fully Rifled Deer Barrel w/ rifle sights	40"	7 1/2	—

Note: All Super Magnums have 3 1/2" chambers except deer barrel which has 3" chamber. Super Magnums can shoot 2 3/4", 3", and 3 1/2" shells interchangeably. ¹Full gun Advantage™ Camo. Nominal stock dimensions: 14" length of pull, 1 1/2" drop at comb, 2 1/2" drop at heel. *Manufacturers Suggested Retail Price.

Model 870™ Express®

Gauge	Barrel Length and Choke	Overall Length	Avg. Wt. (lbs.)	Order No./Price*
12	28" Rem™ Choke	48 1/2"	7 1/2	5568/\$305.
	26" Rem™ Choke	46 1/2"	7 1/2	5569/\$305.
	28" Rem™ Choke Left-Hand	48 1/2"	7 1/2	5577/\$332.★
	28" Rem™ Choke w/ black synthetic stock and fore-end	48 1/2"	7 1/2	5587/\$312.
	26" Rem™ Choke w/ black synthetic stock and fore-end	46 1/2"	7 1/2	5589/\$312.
	Express™ Combo (12-ga.)	—	—	—
	28" Rem™ Choke vent rib, and	48 1/2"	7 1/2	5571/\$399.
	20" I.C. Deer Barrel w/ rifle sights	40 1/2"	7 1/2	—
	Express™ Combo (12-ga.)	—	—	—
	26" Rem™ Choke vent rib, and	46 1/2"	7 1/2	5578/\$439.
	20" Fully Rifled Deer Barrel w/ rifle sights	40 1/2"	7 1/2	—
	21" Rem™ Choke Turkey	41 1/2"	7 1/2	5573/\$319.
21" Rem™ Choke Turkey Camo ¹	41 1/2"	7 1/2	5089/\$372.★	
20" Fully Rifled Deer Barrel w/ rifle sights	40 1/2"	7 1/2	5575/\$339.	
20" Imp. Cyl. Deer Barrel w/ rifle sights	40 1/2"	7 1/2	5565/\$300.	
Express™ HD 18" Plain Barrel w/ black synthetic stock and fore-end ²	38 1/2"	7 1/2	5549/\$292.	
20	Express™ Combo (20-ga.)	—	—	—
	28" Rem™ Choke vent rib, and	48 1/2"	6 1/2	5585/\$399.
	20" I.C. Deer Barrel w/ rifle sights	40 1/2"	—	—
	Express™ Combo (20-ga.)	—	—	—
	26" Rem™ Choke vent rib, and	46 1/2"	6 1/2	5597/\$439.
	20" Fully Rifled Deer Barrel w/ rifle sights	40 1/2"	6 1/2	—
	28" Rem™ Choke	48 1/2"	6 1/2	5583/\$305.
	26" Rem™ Choke	46 1/2"	6 1/2	5582/\$305.
	21" Rem™ Choke (Youth gun)	39"	6	5561/\$305.
	21" Rem™ Choke (Youth Turkey Camo) ¹	39"	6	5091/\$372.★
20" Fully Rifled Deer Barrel w/ rifle sights (Youth gun)	40 1/2"	6	5555/\$339.	
28	25" Vent Rib (Mod.)	45 1/2"	6	5599/\$332.
410	25" Vent Rib (Full)	45 1/2"	6	5601/\$332.

¹Stock and fore-end in Advantage™ Camo. Nominal stock dimensions: 14" length of pull (Youth gun - 13" length of pull), 1 1/2" drop at comb, 2 1/2" drop at heel. ²Will not accept law enforcement accessories. *Manufacturers Suggested Retail Price.

Model 870™ Extra Barrels - 2 1/4" Chambers

Type	Length & Choke	Order No./Price*
Trap	30" Rem™ Choke	4614/\$224.
Skeet	26" Rem™ Choke	4612/\$213.
D & F Grades (engraved): Special Order in all gauges		
Model 870™ extra barrels with 2 1/4" chambers will fit both Magnum and 2 3/4" receivers. Use only 2 3/4" shells in these barrels. Rem™ Choke target barrels have Trap Full, Extra Full and Super Full, or Skeet and Improved Skeet, plus wrench. *Manufacturers Suggested Retail Price.		

Genuine Factory Rem™ Choke Tubes

(Available at Remington Dealers Only)	12-ga.	Order No.	20-ga.
Turkey Super Full (lead shot only)	26450	18615	★
Turkey Extra Full (lead shot only)	26452	—	—
Turkey Extended Straight-Rifled	18579	★	—
Full (12-ga. steel or lead)	26451	—	—
Full (lead shot only)	26391	26461	—
Modified	26393	26463	—
Improved Cylinder	26395	26465	—
Sporting Clays SC1 - Skeet (steel or lead)	18616	★	18622
Sporting Clays SC2 - Imp. Cyl. (steel or lead)	18619	★	18625
Sporting Clays SC3 - Light Mod. (steel or lead)	18617	★	18623
Sporting Clays SC4 - Mod. (steel or lead)	18618	★	18624
Sporting Clays 4-Piece Combo set	18636	★	—
Skeet (steel or lead)	26397	26467	—
Improved Skeet (steel or lead)	26399	—	—
Trap Extra Full (lead shot only)	26403	—	—
Trap Full (lead shot only)	26401	—	—
Extended Rifled	18580	—	—
Rifled	26453	—	—
Choke Wrench	18631	18632	—

¹Specialty designed for use in Remington overbored trap barrels only. Will not produce satisfactory patterns in standard-bore barrels.

★ New For 1998

Rifle Specifications

Model 700™ Centerfire Rifles

Calibers	Magazine Capacity	Barrel Length	Twist — R-H, 1 Turn In:	Mtn Rifle (DM)	Sendero™	Sendero™ SF ¹	BDL™ Stainless			LSS	ADL™	ADL™		BDL™	Order No./Price*
							Synthetic DM	Synthetic DM-B	Synthetic			Synthetic	BDL™		
.17 Rem.	5	24"	9"	—	—	—	—	—	—	—	—	—	—	6037/\$612.	
.220 Swift	4	26"	14"	—	—	—	—	—	—	—	—	—	—	—	
.222 Rem.	5	24"	14"	—	—	—	—	—	—	—	—	—	—	6023/\$585.	
.22-250 Rem.	4	24"	14"	—	—	—	—	—	—	—	—	—	—	6025/\$585.	
.223 Rem.	5	24"	12"	—	—	—	—	—	—	—	—	7514/\$425.★	6027/\$585.	—	
.243 Win.	4	20"	9 1/2"	—	—	—	—	—	—	—	—	7518 (Youth)/\$425.★	—	—	
	4	22"	9 1/2"	—	—	—	—	—	—	—	—	7474/\$425.	6029/\$585.	—	
	4	24"	9 1/2"	—	—	—	—	—	—	—	—	—	—	—	
6mm Rem.	4	26"	9 1/2"	—	—	—	—	—	—	—	—	—	—	—	
.25-06 Rem.	4	24"	10"	—	9675/\$705.	6199/\$852.	6251/\$702.	—	—	—	—	—	—	6031/\$585.	
	4	22"	10"	5849/\$639.	—	—	—	—	—	—	—	—	—	—	
.260 Rem.	4	24"	9"	5845/\$639.★	—	—	6271/\$702.	—	—	—	—	—	—	—	
.270 Win.	4	22"	10"	5851/\$639.	—	—	—	—	—	5771/\$492.	7476/\$425.	6033/\$585.	—	—	
	4	22"	10"	—	—	—	—	—	—	—	—	—	—	5811**/\$612.	
	4	24"	10"	—	9677/\$705.	—	6253/\$702.	—	9709/\$641.	6293**/\$715.★	—	—	—	—	
.280 Rem.	4	22"	9 1/2"	5857/\$639.	—	—	—	—	—	—	—	—	—	—	
	4	24"	9 1/2"	—	—	—	6255/\$702.	—	—	—	—	—	—	—	
7mm-08 Rem.	4	22"	9 1/2"	5855/\$639.	—	—	—	—	—	—	—	—	—	—	
	4	24"	9 1/2"	—	—	—	6257/\$702.	—	—	—	—	—	—	—	
7mm Rem. Mag.	3	24"	9 1/2"	—	9679/\$732.	7506/\$879.	6263/\$729.	7537/\$789.	9692/\$668.	5933/\$715.	5777/\$519.	7480/\$452.	6039/\$612.	—	
	3	24"	9 1/2"	—	—	—	—	—	—	6297**/\$741.★	—	—	—	5815**/\$639.	
7mm STW	3	24"	9 1/2"	—	—	7502/\$879.	—	7544/\$789.	—	—	—	—	—	—	
.30-06	4	22"	10"	5859/\$639.	—	—	—	—	—	—	5773/\$492.	7478/\$425.	6035/\$585.	—	
	4	22"	10"	—	—	—	—	—	—	—	—	—	—	5813**/\$612.	
	4	24"	10"	—	—	—	6259/\$702.	—	9717/\$641.	6295**/\$715.★	—	—	—	—	
.308 Win.	4	20"	10"	—	—	—	—	—	—	—	—	7523 (Youth)/\$425.★	—	—	
	4	22"	10"	—	—	—	—	—	—	—	5775/\$492.	7516/\$425.	—	—	
	4	24"	12"	—	—	—	6261**/\$702.	—	—	—	—	—	—	—	
.300 Win. Mag.	3	24"	10"	—	9681/\$732.	7508/\$879.	6265/\$729.	—	9694/\$668.	5935/\$715.	—	7482/\$452.★	6041/\$612.	—	
	3	24"	10"	—	—	—	—	7539/\$789.	—	6299**/\$741.★	—	—	—	—	
.300 Wby. Mag.	3	24"	12"	—	—	7504/\$879.	6267/\$729.	—	—	—	—	—	—	—	
.338 Win. Mag.	3	24"	10"	—	—	—	—	—	9696/\$668.	—	—	—	—	6043/\$612.	
.375 H&H Mag.	3	24"	12"	—	—	—	—	—	9728/\$668.	—	—	—	—	—	

*Sendero™, Sendero™ SF, Varmint Laminated Stock, Varmint Synthetic Stainless Fluted, and Varmint Synthetic equipped with a 26" barrel only. LH = Left Hand. P = Ported. Y = Youth. Ported versions of Model 700™ VS SF are available in .220 Swift, .22-250 Remington, and .308 Win. Youth model of ADL Syn. has 1" shorter length of pull. All Model 700™ and Model Seven™ rifles come with sling swivel studs. The BDL, ADL, and Seven™ are furnished with sights. The BDL Stainless Synthetic, LSS, Mountain Rifle, Classic, Sendero and Varmint guns have clean barrels. All Remington centerfire rifles are drilled and tapped for scope mounts. **Twist rate for BDL SS DM in .308 is 1 in 10".

Custom Shop Products

	Description
Model 40-XB™ Target Rifle	Single shot or repeater target style rifle with 27 1/2" stainless heavy barrel in 15 centerfire caliber choices from .220 Swift to .300 Win Mag. Wood or Kevlar®
Model 40-XBBR™ Target Rifle	Single shot benchrest style rifle with 20" or 24" stainless heavy barrel in 7 caliber choices from .22 BR Remington to .308 Win. Kevlar® reinforced stock with
Model 40-XRBR™ Target Rifle	Single shot benchrest style rifle with 22" stainless heavy barrel in .22 LR only. Kevlar® reinforced stock with flat bottom benchrest fore-end.
Model 40-XR™ KS Target Rifle	Single shot position rifle with 24" stainless heavy barrel in .22 LR only. Kevlar® reinforced stock with palm rail.
Model 40-XC™ Target Rifle	Single shot position rifle with 24" stainless heavy barrel in .223 Remington and .308 Win. only. Kevlar® reinforced stock with palm rail.
Model 700™ KS Mountain Rifle	Kevlar®-stocked lightweight sporter with 22"/24" stainless or carbon mountain rifle profile barrel in 11 calibers from .270 Win. to .375 H&H Mag. L-H versions
Model 700™ Safari Rifle	Kevlar® or wood-stocked big-game rifle with 22"/24" stainless or carbon heavy magnum barrel in 8mm Rem. Mag., .375 H&H Mag., .416 Rem. Mag., and
Model SEVEN™ MS (Mannlicher Style) Rifle	Full-length Mannlicher-style laminated wood stock. 20" carbon-steel barrel chambered in 12 short-action calibers from .222 Rem. to .350 Remington Mag.
Model SEVEN™ KS Rifle	Kevlar®-stocked carbine with 20" carbon-steel barrel in five short-action chamberings of .223 Remington, 7mm-08 Remington, 308 Win., .35 Remington, and
Model 700™ APR (African Plains Rifle)	Laminated wood stock, magnum receiver, 26" custom profile carbon-steel barrel in five magnum calibers from 7mm Rem. Mag. to .375 H&H Mag.
Model 700™ AWR (Alaskan Wilderness Rifle)	Kevlar® stock, magnum receiver, 24" custom profile, black chrome-plated stainless-steel barrel in five magnum calibers from 7mm Remington Mag. to
Model 700™ MLS Custom	Laminated wood thumbhole stock with rollover cheekpiece. 24" stainless-steel heavy profile barrel. Available in .50 caliber only.
Model 700™ ML Custom	Laminated wood thumbhole stock with rollover cheekpiece. 24" carbon-steel heavy profile barrel. Available in .50 caliber only.
Model 700™ Custom	Three levels of custom grades for engraving, gold inlay, wood grade and finish, metal work finish, recoil pad/butt plate, and dimensions.
Model 7600™ & 7400™ Custom Grades	Three levels of custom grades for engraving, gold inlay, wood grade and finish, metal work finish, recoil pad/butt plate, and dimensions.
Model SP-10™ / 11-87™ / 1100™ / 870™ Custom Grades	Three levels of custom grades for engraving, gold inlay, wood grade and finish, metal work finish, recoil pad/butt plate, and dimensions.
Model 396™ / Peerless™ Custom Grades	Three levels of custom grades for engraving, gold inlay, wood grade and finish, metal work finish, recoil pad/butt plate, and dimensions.
Custom Shop Upgrades to New Guns	Numerous options including engraving/gold inlay, stock upgrades/custom dimensions and finishes, barrel porting (shotguns), and muzzle brakes.

Note: Call (800) 243-9700 for a catalog with additional detailed information about all our Custom Shop products and services.

★ Rolling Block Mid-Range Sporter Mid-Range Sporter Remington Rolling Block. American walnut stock; satin blue metal finish; buckhorn rear and blade front sight; 30", round carbon-steel barrel.

*Manufacturer's Suggested Retail Price

★ New For 1998

Model 7400™ and Model 7600™

Calibers	Barrel Length	Twist — R-H, 1 Turn In:	Average Weight (lbs.)	Order No./Price*					
				7400™ Satin	7400™ Gloss	7600™ Satin	7600™ Gloss		
.243 Win.	22"	91/8"	71/2	9755/\$573.	—	4653/\$540.	—	9793/\$473.★	5143/\$440.★
.270 Win.	22"	10"	71/2	9757/\$573.	9759/\$573.	4655/\$540.	4667/\$540.	9794/\$473.★	5145/\$440.★
.280 Remington	22"	91/4"	71/2	9761/\$573.	—	4663/\$540.	—	9795/\$473.★	5147/\$440.★
.30-06 Carbine	18 1/2"	10"	71/4	9769/\$573.	—	4661/\$540.	—	9783/\$473.★	5153/\$440.★
.30-06	22"	10"	71/2	9763/\$573.	9765/\$573.	4657/\$540.	4671/\$540.	9796/\$473.★	5149/\$440.★
.308 Win.	22"	10"	71/2	9767/\$573.	—	4659/\$540.	—	9797/\$473.★	5151/\$440.★

Rimfire Rifles

Model	Action	Barrel Length	Overall Length	Average Weight (lbs.)	Mag. Clip	Order No./ Price*
597™	Autoloading	20"	40"	5 1/2	10-shot clip	6550/\$159.
597™ Sporter (See note below)	Autoloading	20"	40"	5 1/2	10-shot clip	6564/\$199.★ ¹
597™ LSS	Autoloading	20"	40"	5 1/2	10-shot clip	6556/\$265.
597™ SS	Autoloading	20"	40"	5 1/2	10-shot clip	6565/\$212.★
597™ Magnum	Autoloading	20"	40"	6	9-shot clip	6560/\$305.
597™ Magnum LS	Autoloading	20"	40"	6	9-shot clip	6566/\$359.★
552™ BDL Deluxe Speedmaster*	Autoloading	21"	40"	5 1/2	15 Long Rifle	5594/\$340.
572™ BDL Deluxe Fieldmaster*	Pump	21"	40"	5 1/2	15 Long Rifle	5624/\$353.
541-T™	Bolt	24"	42 1/2"	5 1/2	5-shot clip†	9824/\$465.
541-T™ HB (Heavy Barrel)	Bolt	24"	42 1/2"	6 1/2	5-shot clip†	9822/\$492.
581-S™	Bolt	24"	42 1/2"	5 1/2	5-shot clip†	9848/\$239.

Nominal stock dimensions: (581-S™): 13 1/4" length of pull, 1 1/4" drop at comb, 2 1/4" drop at heel; (541-T™): 13 1/2" length of pull, 1 1/4" drop at comb, 1 1/4" drop at heel; (552™/572™): 13 3/4" length of pull, 1 1/4" drop at comb, 2 1/4" drop at heel; (597™): 14" length of pull, 1 1/2" drop at comb, 2 1/4" drop at heel. †Extra 5-shot or 10-shot clip available at extra cost from your Remington dealer. ¹ NOTE: Price shown on page 16 for M597™ Sporter is incorrect — Should be \$199.

Model Seven™

Calibers	Mag. Capacity	Barrel Length	Twist — R-H, 1 Turn In:	Order No./ Price*
.223 Remington	5	18 1/2"	12"	4720/\$585.
	5	20"	12"	4745 (Stainless)/\$641.
.243 Win.	4	18 1/2"	9 1/4"	4782/\$585.
	4	18 1/2"	9 1/4"	4774 (Youth)/\$479.
	4	20"	9 1/4"	4739 (Stainless)/\$641.
.260 Remington	4	18 1/2"	9"	4726/\$585.
	4	18 1/2"	9"	4785 (Youth)/\$479.★
	4	20"	9"	4751 (Stainless)/\$641.
7mm-08 Remington	4	18 1/2"	9 1/4"	4786/\$585.
	4	18 1/2"	9 1/4"	4778 (Youth)/\$479.
	4	20"	9 1/4"	4741 (Stainless)/\$641.
.308 Win.	4	18 1/2"	10"	4788/\$585.
	4	20"	10"	4743 (Stainless)/\$641.

NOTE: Model Seven™ Mannlicher and Model Seven™ KS versions are available from the Remington Custom Shop through your local dealer. A brochure can also be obtained by writing to: Custom Gun Shop, Remington Arms Company, P.O. Box 700 870 Remington Drive, Madison, NC 27025-0700.

Muzzleloading Rifles

Model 700™ ML/MLS In-Line Muzzleloading Rifles

Model	Calibers	Description	Barrel Length	Twist — R-H, 1 Turn In:	Order No./ Price*
(With Black Synthetic Stock)					
ML	.50	Carbon Steel	24"	28"	7572/\$372.
ML Youth	.50	Carbon Steel	21"	28"	7574/\$372.★
MLS	.50	Stainless	24"	28"	7580/\$469.
MLS	.54	Stainless	24"	28"	7582/\$469.

(With Mossy Oak® Break-Up Camo Stock)

ML Camo	.50	Carbon Steel	24"	28"	7586/\$405.
MLS Camo	.50	Stainless	24"	28"	7588/\$503.

Model 700™ Muzzleloaders are supplied with cleaning tube, combo breech plug and nipple wrench, ramrod handle, ramrod extension, weather shroud, allen wrench, and patch jag.

Long Range Pistol

Model XP-100R™ Long Range Pistol

Calibers	Magazine Capacity	Barrel Length	Average Weight (lbs.)	Twist — R-H, 1 Turn In:	Order No./ Price*
.22-250 Remington	4	14 1/2"	4 1/2	14"	5383/\$665.★
.223 Remington	5	14 1/2"	4 1/2	12"	5385/\$665.★
.260 Remington	4	14 1/2"	4 1/2	9"	5387/\$665.★
.35 Remington	4	14 1/2"	4 1/2	16"	5389/\$665.★

Limited Edition Classic

1998 Model 700™ Classic

(Straight Comb, Long Action, Iron Sights)

Caliber	Mag. Cap.	Barrel Length	Overall Length	Avg. Wt. (lbs.)	Twist — R-H, 1 Turn In:	Order No./ Price*
8mm Remington	3	24"	44 1/2"	7 1/2	10"	5876/\$612.★

*Manufacturer's Suggested Retail Price

★ New For 1998

	Average Weight (lbs.)	Price*
reinforced stock.	11 1/4 (wood) 10 1/4 (KS)	From \$1,569.
flat bottom benchrest fore-end.	From 9 1/2	\$1,548.
	9 1/4	\$1,548.
	10 1/2	\$1,441.
	11	\$1,548.
available.	From 6 1/2	From \$1,136.
.458 Win Mag. L-H versions available.	9	From \$1,140.
	6 1/2	\$1,140.
.350 Remington Mag.	5 1/4	\$1,136.
	7 1/4	\$1,466.
.375 H&H Mag.	6 1/4	\$1,376.
	7 1/4	\$916.
	7 1/2	\$817.
	From 7 3/4	
	From 7 1/2	
	From 7 1/4	

See page 25 for details and available options.

\$1278.


Premier® Centerfire. The Ultimate in Premier® Safari Grade

Whether it's whitetails with a .270, or Cape Buffalo with a .458, you want your first shot to do the job. That's why we load Safari Grade with the Swift A-Frame™ dual-core bullet. With its lead core bonded to the tapered pure copper jacket, 100% weight retention and controlled expansion of up to 2x caliber are assured. All Safari Grade components receive multiple inspections: primers are pre-inspected five times for ignition reliability; each round is receiver-gauged, and cases are nickel-plated for precision feeding and extraction. You can't buy better factory-loaded medium- to big-game ammunition.



SWIFT A-FRAME™ BULLET

Progressively thickening jacket controls mushrooming in a uniform and predictable manner for totally dependable on-game results

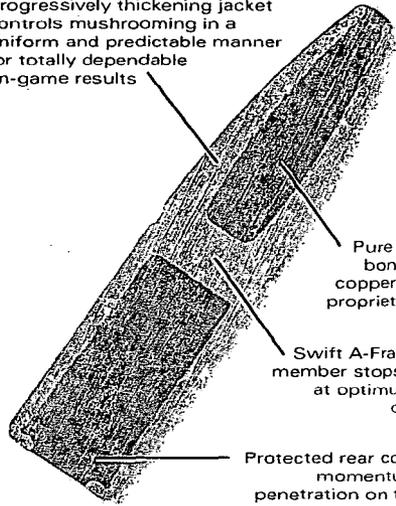


Pure lead core is bonded to pure copper jacket with proprietary process

Swift A-Frame™ cross-member stops expansion at optimum diameter of 2x caliber

Protected rear core provides momentum for deep penetration on tough game

8MM REMINGTON MAG.
200-GR. SWIFT A-FRAME™ PSP

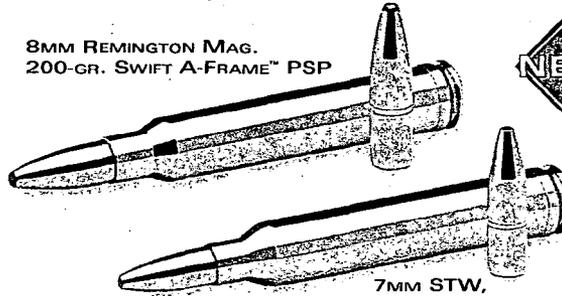


7MM STW,
140-GR. SWIFT A-FRAME™ PSP



The combination of Swift's A-Frame™ construction and proprietary bonding process produces extremely uniform, controlled expansion to 2X caliber

Premier® Safari Grade

Caliber	Bullet Wt. (grs.)	Bullet Type
.270 Win.	140	Swift A-Frame PSP
★ 7mm STW	140	Swift A-Frame PSP
7mm Remington Mag.	160	Swift A-Frame PSP
.30-06 Sprfld.	180	Swift A-Frame PSP
.300 Win. Mag.	200	Swift A-Frame PSP
.300 Wby. Mag.	200	Swift A-Frame PSP
★ 8mm Remington Mag.	200	Swift A-Frame PSP
.338 Win. Mag.	225	Swift A-Frame PSP
.375 H&H Mag.	300	Swift A-Frame PSP
.458 Win. Mag.	450	Swift A-Frame PSP

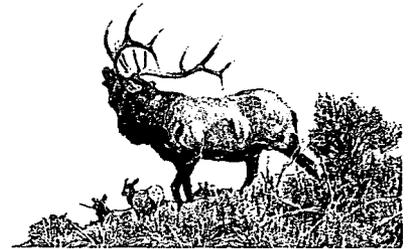

★ NEW FOR 1998


Premier® Varmint

Premier® Varmint centerfire ammunition provides an unsurpassed combination of accuracy, retained high velocity, flat trajectory, and explosive on-game break-up from its V-Max™ polycarbonate-tipped secant ogive boat tail bullet. The extremely high small-caliber ballistic coefficient produces tack-driving, long-range accuracy. The unique V-Max™ hollow core design allows its tip to build momentum before smashing into core for explosive fragmentation - even at extreme long range.



V-MAX™ BULLET DESIGN

Unique hollow core design keeps center of gravity at rear for greater stability

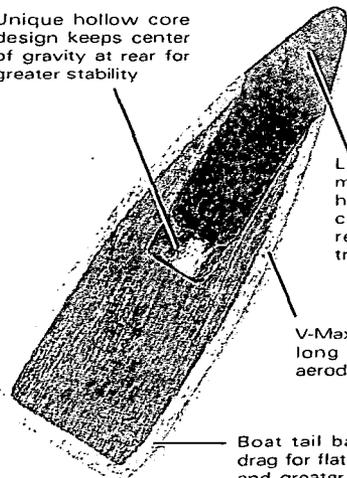


Lightweight polymer tip creates high ballistic coefficient for velocity retention and flat trajectory


V-Max™ design features long bullet length for aerodynamic stability

Boat tail base reduces drag for flatter trajectory and greater down-range energy

6MM REMINGTON,
75-GR. V-MAX™ BOAT TAIL

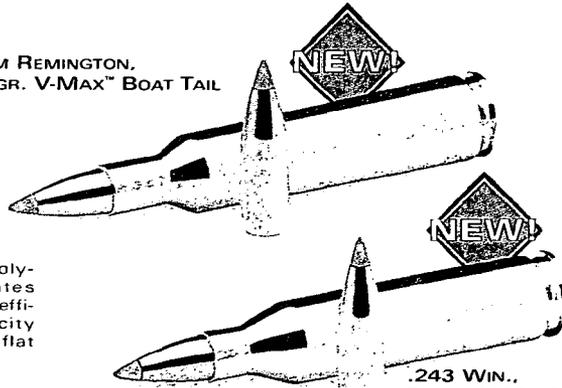

.243 WIN.,
75-GR. V-MAX™ BOAT TAIL



.243 Win., 75-gr.
Premier® Varmint V-Max™,
5 shots, .4", 100 yds.

Premier® Varmint

Caliber	Bullet Wt. (grs.)	Bullet Type
.220 Swift	50	V-Max Boat Tail
.222 Remington	50	V-Max Boat Tail
.223 Remington	50	V-Max Boat Tail
.22-250 Remington	50	V-Max Boat Tail
★ 6mm Remington	75	V-Max Boat Tail
★ .243 Win.	75	V-Max Boat Tail

★ NEW FOR 1998



Specialty Hunting Ammunition.


Premier® Ballistic Tip®



Two of the best names in the shooting industry have teamed up to bring you some of the best long-range hunting ammunition you can buy. Nosler® Ballistic Tip® bullets have a well-deserved reputation for the kind of accuracy that would make a benchrest shooter proud. And on game, the tapered jacket side walls and Solid Base® boat tail allow controlled expansion and reliable penetration. When you combine the superlatives of the Ballistic Tip™ bullet and Remington's superior manufacturing technology, you've got centerfire ammunition that offers the ultimate in extreme accuracy and flat trajectory.

BALLISTIC TIP® BULLET DESIGN



Precisely shaped polycarbonate tip gives bullet high ballistic coefficient, resists deformation in magazine, and initiates expansion on impact

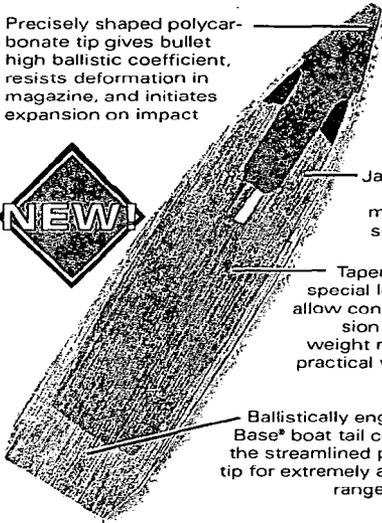

Jacket and core concentricity maximize gyroscopic stability

Tapered jacket and special lead alloy core allow controlled expansion and optimum weight retention at all practical velocity levels

Ballistically engineered Solid Base® boat tail combines with the streamlined polycarbonate tip for extremely accurate long-range performance

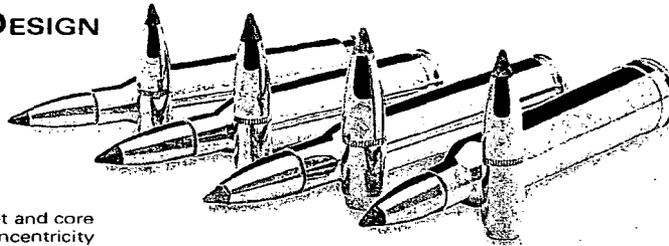

7mm Remington Mag., 150-gr. Premier® Ballistic Tip®, 5 shots, .6", 100 yds.

Premier® Ballistic Tip®

Caliber	Bullet Wt. (grs.)	Bullet Type
★ 243 Win.	90	Nosler Ballistic Tip
★ 260 Remington	120	Nosler Ballistic Tip
★ 270 Win.	140	Nosler Ballistic Tip
★ 280 Remington	140	Nosler Ballistic Tip
★ 7mm-08 Remington	140	Nosler Ballistic Tip
★ 7mm Remington Mag.	150	Nosler Ballistic Tip
★ 308 Win.	165	Nosler Ballistic Tip
★ 30-06 Sprfld.	150	Nosler Ballistic Tip
★ 30-06 Sprfld.	165	Nosler Ballistic Tip
★ 338 Win. Mag.	200	Nosler Ballistic Tip


★ NEW FOR 1998



For match-grade accuracy in big-game hunting, Premier® Boat Tail bullets (formerly Extended Range Boat Tails) are constructed with a proprietary manufacturing process that delivers near-perfect bullet concentricity and extremely uniform jacket wall thickness. Their secant ogive nose profile produces a high ballistic coefficient that helps retain greater down-range velocity and energy. For superior performance on game, the jacket design is precision-tailored to the velocity window of each caliber, creating the right balance of bullet toughness and expansion. Premier® Boat Tails represent a superb combination of accuracy, weight retention, and controlled expansion.

BOAT TAIL BULLET DESIGN


Precision manufacturing process provides extremely uniform concentricity for better in-flight stability

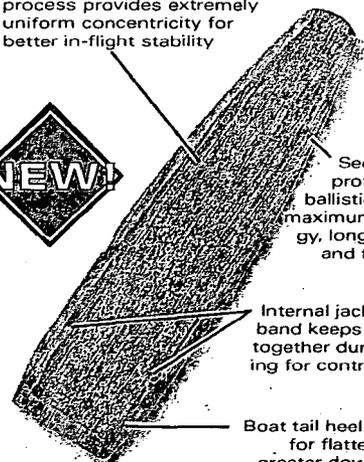


Secant ogive nose profile creates high ballistic coefficient for maximum retained energy, long-range velocity, and flatter trajectory

Internal jacket/core locking band keeps core and jacket together during mushrooming for controlled expansion

Boat tail heel minimizes drag for flatter trajectory and greater down-range energy

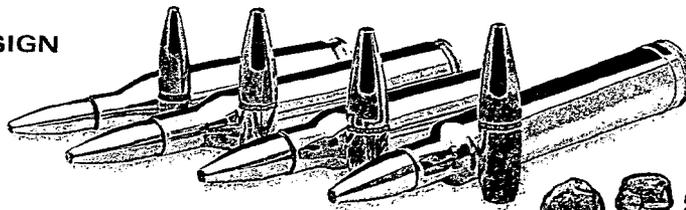

Premier® Boat Tail design produces fully developed, uniform mushrooms at wide range of terminal velocities



.30-06, 165-gr. Premier® Boat Tail, 5 shots, .7", 100 yds.

Premier® Boat Tail

Caliber	Bullet Wt. (grs.)	Bullet Type
★ 6mm Remington	100	Pointed Soft Point Boat Tail
★ 243 Win.	100	Pointed Soft Point Boat Tail
★ 270 Win.	140	Pointed Soft Point Boat Tail
★ 280 Remington	140	Pointed Soft Point Boat Tail
★ 7mm-08 Remington	140	Pointed Soft Point Boat Tail
★ 7mm Remington Mag.	140	Pointed Soft Point Boat Tail
★ 308 Win.	165	Pointed Soft Point Boat Tail
★ 30-06 Sprfld.	165	Pointed Soft Point Boat Tail
★ 300 Win.	190	Pointed Soft Point Boat Tail
★ 300 Wby. Mag.	190	Pointed Soft Point Boat Tail



★ NEW FOR 1998



Remington® Centerfire Rifle Ammunition — A History of Great Bullet Designs Continues.

Remington Core-Lokt® was the first and original controlled expansion bullet, and remains the standard of big-game bullet performance. Its level of reliability is only exceeded by the amount of game it has taken over the years. Today's insert-tip bullets are simply current versions of the original Remington® Bronze Point™. And our Power-Lokt® design is the first and only perfectly concentric, electrolytically plated varmint bullet. Remington has been the leading innovator in modern centerfire cartridges — not only the bullets, but also Kleanbore®, the first non-corrosive primers; the brass historically preferred by serious reloaders, and best blends of the finest powders available. We build the best ammunition because we make the best parts.



.30-06, 180-gr. SPCL,
.8", 100 yds.

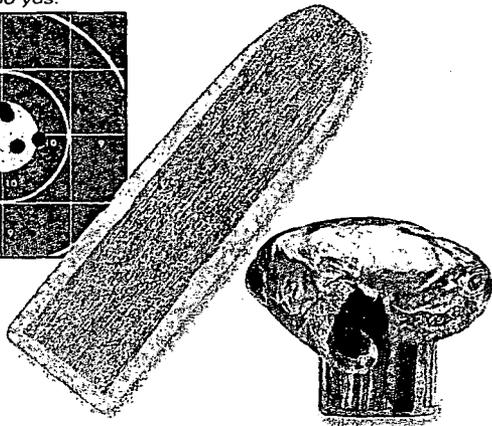

**CORE-LOKT®
SOFT POINT BULLET**

The original standard for dependable, controlled expansion against which all other big-game bullets have been measured for over 59 years — and still the most popular choice. The Core-Lokt® design locks the progressively heavier jacket mid-section to the lead core, preventing separation, yet allowing continued expansion to the optimum point for maximum energy transfer. The result is a bullet that stays together on impact, expands in a controlled manner, and mushrooms uniformly to nearly twice the original diameter.



.30-06, 150-gr. PSPCL,
.7", 100 yds.

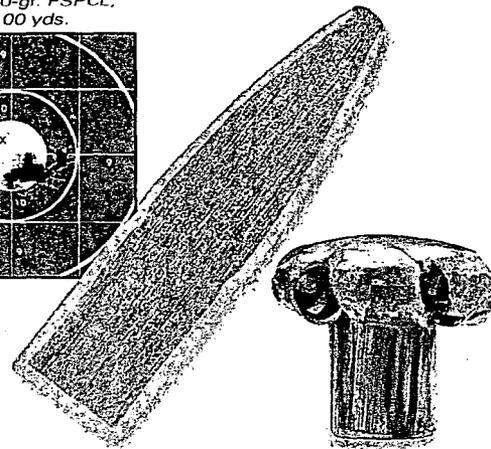

**CORE-LOKT®
POINTED SOFT POINT BULLET**

Unquestionably the best all-around choice for modern big-game hunting. By adding a sleeker nose profile and higher ballistic coefficient to the dependable, controlled expansion characteristics of our Core-Lokt® soft point, it combines exceptional bullet penetration and performance with flatter trajectory and higher down-range velocity and energy. The result is reliable expansion of almost 2x caliber diameter at virtually all ranges and practical velocities.



.30-06, 150 gr. BP,
.9", 100 yds.

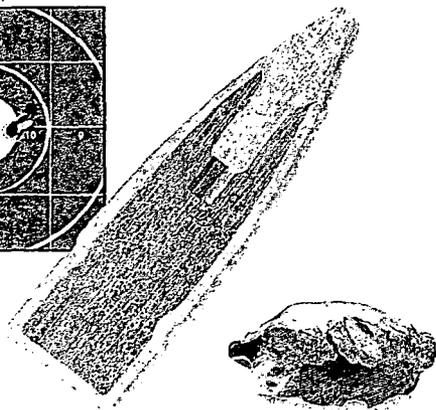

**BRONZE POINT™
EXPANDING BULLETS**

A superb choice for long-range medium game. The high ballistic coefficient of the bronze insert produces a flat trajectory and maintains high velocity and energy at extreme ranges. Yet on impact, the tip is driven backward to create rapid expansion that is controlled to optimum limits by the pre-grooved jacket, even on thin-skinned game. The tip also protects the bullet nose from being deformed by recoil while in the magazine.

.243 Win., 80-gr. HPPL,
.8", 100 yds.



**POWER-LOKT®
HOLLOW POINT BULLET**


Power-Lokt® is the revolutionary varmint and small-game bullet design that produces benchrest-type accuracy. The copper jacket is electrolytically bonded to the lead core, which produces near-perfect concentricity and gyroscopic balance once available only from custom-made match bullets. The result is exceptional, sub minute-of-angle accuracy for small game at extreme ranges.



Disintegrator™ Lead-Free Frangible Bullets — Instant and Complete Break-Up with No Ricochet or Lead Residue.




Disintegrator™ bullet made of compressed metal particles shaped into standard profile 9mm, .40 S&W, and .45 Auto specifications






Disintegrator™ core is completely protected with hard copper plate. Manufacturing process produces highly concentric core for excellent accuracy. Felt recoil and point of impact duplicate conventional ammunition


These new cartridges combine our reliable lead-free primers with proprietary bullet manufacturing technology to create a completely lead-free round for practice, competition and law enforcement training where airborne lead or spent lead recovery is an issue. Disintegrator™ frangible bullets are ideal for heavily used ranges to reduce operating expense from wear and damage to bullet traps and backstops. All that's left after impact are metal particles and harmless pieces of thin copper plating. Disintegrator™ bullet profiles are based on field proven Remington lead core bullet designs for reliable feed and function in a wide range of pistols. The lead-free priming compound provides clean, instantaneous ignition, while special powder blends enhance muzzle

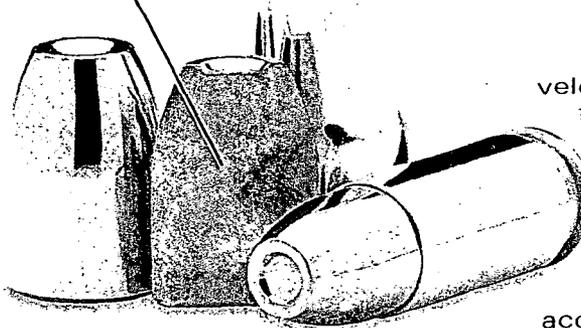

velocities to duplicate the felt recoil and point of impact of standard lead core bullets. A precise manufacturing and finishing process produces near perfect concentricity for superior accuracy. In close-quarter training, ricochet of high energy fragments is virtually eliminated – even when fired against angled surfaces, limiting the radius of dispersion from the impact point, and enhancing participant safety at minimal target distance. The unique performance characteristics of Disintegrator™ bullets against hard surfaces also creates potential use as service rounds in certain enclosed security situations.



Disintegrator™ frangible bullets feature a high strength compaction formed core, completely sealed in a jacket of electroplated copper. The metal powder core construction creates a bullet that easily withstands the forces and pressure of firing, while providing instant and complete frangibility against hard surfaces.

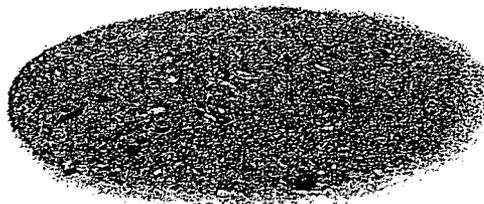

The copper plating on Disintegrator™ bullets provides a smooth, ductile jacket that enhances feed and function in all autoloading pistols, minimizes bore fouling, and virtually eliminates barrel erosion. Only .005" thick, it is enough for good rifling "bite", but too thin to ricochet.

Disintegrator™ Lead-Free Frangible Bullet Ammunition

Caliber	Order No.	Primer No.	Weight (grs.)	Velocity (ft./sec.)			Energy (ft.-lbs.)			Mid-range Trajectory	
				Muzzle	50 yds.	100 yds.	Muzzle	50 yds.	100 yds.	50 yds.	100 yds.
★ 9mm Luger	LF9MMA	1½	105	1100	1016	954	282	241	212	1.0"	4.3"
★ .40 S&W	LF40SWA	5¼	145	1085	1023	973	379	337	305	1.0"	4.1"
★ .45 ACP	LF45APA	2¼	175	1020	928	859	404	335	286	1.2"	5.1"

★ NEW FOR 1998

Remington® Pistol & Revolver Ammunition — Tailored for Your Specific Handgunning Needs.

Remington's exceptionally broad line of handgun ammunition covers a comprehensive range of calibers, bullet weights, and bullet styles. Why? Because in handgunning, there are more end-use applications than in any other category, and each loading is designed for a very specific purpose. Combine the quality of Remington components with Remington's superior performance, and it's easy to see why Remington is the first choice for so many handgunners.



JACKETED HOLLOW POINT BULLET

The full-length jacket and hollow-point construction provide controlled expansion with good penetration while assuring dependable function in autoloading pistols.



SEMI-JACKETED HOLLOW POINT BULLET

Features a unique scalloped jacket design engineered to combine optimum expansion with controlled penetration for maximum energy transfer.



SOFT POINT BULLET

Exposed lead soft point provides deeper penetration with less expansion than semi-jacketed hollow points.




LEAD ROUND NOSE BULLET

Our versatile, general-purpose bullet for all revolvers.

Powder blended for best velocity uniformity

Clean-shooting dependable Kleanbore® primer

70-30 cartridge brass case

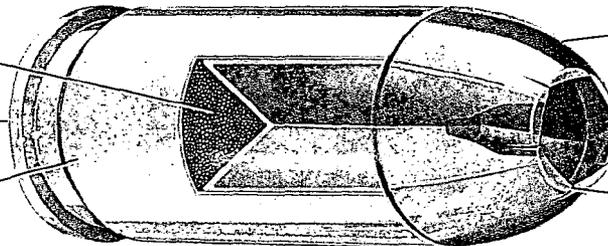

Nose profiles designed to function smoothly in semi-autos

Nose cuts designed for controlled mushrooming at wide range of velocities



FULL METAL CASE BULLET

A general-purpose bullet for all autoloading pistols — assures reliable feeding and function.



LEAD HOLLOW POINT BULLET

A fast-expanding lead bullet that's ideal for situations where barrier penetration is not a necessity.



SEMI-WADCUTTER LEAD BULLET

A hard-hitting lead bullet with clean wadcutter definition on paper targets.




WADCUTTER MATCH BULLET

For precise target shooting and easier scoring, our Targetmaster® wadcutter delivers great accuracy and precision paper-cutting performance.




Core-Lokt® — The Highest Level of Handgun Hunting Bullet Performance.

With a revolutionary advance in bullet design, Remington® gives the handgun hunter the same game-stopping performance found in our legendary Core-Lokt® centerfire rifle ammunition. This handgun ammo has it all: exceptional accuracy, rapid but controlled expansion, and deep penetration with near-total weight retention.



Primer and mouth are waterproofed for maximum reliability


Thick copper jacket controls expansion and maximizes weight retention for deep penetration

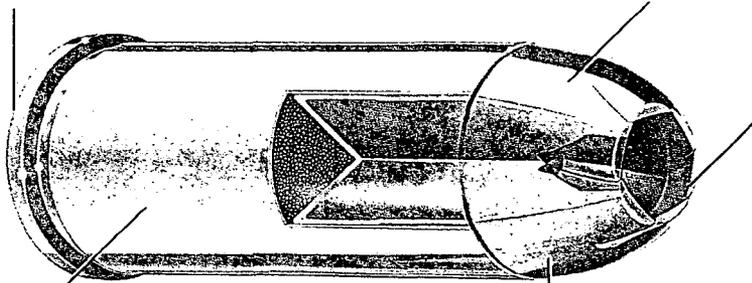

Nose cut completely through for fully developed mushrooms over wide range of velocities

Nickel-plated cases extract easily and function flawlessly

Precise bore alignment and match-grade accuracy achieved from reduced bullet nose diameter

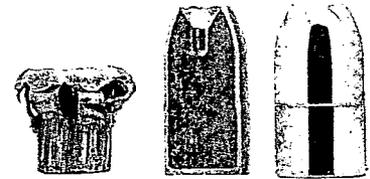

Core-Lokt® .44 Remington Mag. Bullet

CORE-LOKT® HIGH-PERFORMANCE P&R HUNTING AMMUNITION

Caliber	Order No.	Primer No.	Weight (grs.)	Velocity (ft./sec.)			Energy (ft.-lbs.)			Mid-range Trajectory	
				Muzzle	50 yds.	100 yds.	Muzzle	50 yds.	100 yds.	50 yds.	100 yds.
357 Magnum	RH357MA	5½	165	1290	1189	1108	610	518	450	0.7"	3.1"
44 Rem. Mag.	RH44MGA	2½	275	1235	1142	1070	931	797	699	0.8"	3.3"
			(Rifle Ballistics, 20" BBL)	1580	1427	1293	1524	1243	1020	0.5"	2.2"

Remington® Golden Saber™ HPJ — The Most Effective Handgun Ammo Ever.

Golden Saber™ High Performance Jacket (HPJ) handgun ammo showcases Remington's continuing advances in bullet technology. No other handgun cartridge offers so many high-performance features for home security and law enforcement applications.




Treated powders suppress muzzle flash

Cases nickel-plated for reliable feed and function in all types of pistols

Exclusive brass jacket controls mushroom and releases energy over longer distance

Primer and mouth waterproofing for long-term reliability

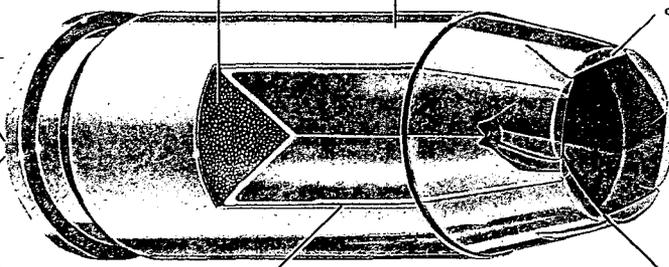

Primers are triple-inspected during manufacturing process

Reduced nose diameter allows precise bore alignment for enhanced accuracy


Nose cuts go completely through jacket for better mushroom initiation over widest range of practical velocities

MATCH ACCURACY, DEEP PENETRATION, AND MAXIMUM EXPANSION WITH VIRTUALLY 100% WEIGHT RETENTION.

.45 ACP BJHP (+P) 185-Gr.



Caliber	Weight (grs.)	Bullet Style
.357 Mag.	125	Golden Saber BJHP
9mm Luger	124	Golden Saber BJHP
9mm Luger (+P)	124	Golden Saber BJHP
9mm Luger	147	Golden Saber BJHP
.380 Auto	102	Golden Saber BJHP
.38 Special	125	Golden Saber BJHP
.40 S&W	165	Golden Saber BJHP
.40 S&W	180	Golden Saber BJHP
.45 Auto	185	Golden Saber BJHP
.45 Auto (+P)	185	Golden Saber BJHP
.45 Auto	230	Golden Saber BJHP



THE DRIVING BAND™ MAKES THE DIFFERENCE

The bullet diameter directly ahead of the Driving Band™ is reduced from groove to bore diameter, so the bullet is precisely aligned before the Driving Band™ engages the rifling. The result: match-grade accuracy and reduced barrel friction that conserves velocity. In addition, the Driving Band™ locks the jacket and core together for maximum weight retention and core/jacket integrity.

These tables were calculated by computer. A standard scientific technique was used to predict trajectories from the best available data for each round. Trajectories shown, typify the ammunition's performance at sea level, but note that they may vary due to atmospheric conditions and the equipment.

All velocity and energy figures in these charts have been derived by using test barrels of indicated lengths.

Ballistics shown are for 24" barrels, except those for .30 carbine and .44 Remington Magnum, which are for 20" barrels. These barrel lengths were chosen as representative, as it's impractical to show performance figures for all barrel lengths.

The muzzle velocities, muzzle energies, and trajectory data in these tables represent the approximate performance expected of each specified loading. Differences in barrel lengths, internal firearm dimensions, temperature, and test procedure can produce actual velocities that vary from those given here.

Centerfire Rifle Velocity vs. Barrel Length

Muzzle Velocity Approx. Change in Muzzle Velocity
Range (ft./sec.) per 1" Change in Barrel Length (ft./sec.)

2000-2500	10
2500-3000	20
3000-3500	30
3500-4000	40

1. Determine how much shorter, or longer, your barrel is than the test barrel.
2. In the left column of the above table, select the muzzle-velocity class of your cartridge.
3. To the right of that class, read the approximate change in velocity per inch of barrel length.
4. Multiply this number by the difference in the length of your barrel from that of the test barrel.
5. If your barrel is shorter than the test barrel, subtract this figure from the muzzle velocity shown for your cartridge.
6. If your barrel is longer, add this figure to the muzzle velocity shown.

The trajectory figures shown in these ballistic tables are the rise or drop, in inches, of the bullet from a direct line of sight at selected yardage. Sighting-in distances have been set at 100 to 250 yards.

The line of sight used is 1 1/2" above the axis of the bore. Since the rise or drop figures shown at the stated yardage are points of impact, you must hold low for positive figures, high for negative figures.

Many shooters who use the same cartridge often find it helpful to commit the rise and drop figures for that cartridge to memory, or tape them to their rifle stock. That way, they know instantly the right "hold" as soon as they estimate the target's range.

Specifications are nominal. Ballistics figures established in test barrels. Individual rifles may vary from test-barrel specifications.

* Inches above or below line of sight. Hold low for positive numbers, high for negative numbers.

† 280 Rem. and 7mm Express[®] Rem. are interchangeable.

‡ Interchangeable in 244 Rem.

¹ Bullet does not rise more than 1" above line of sight from muzzle to sighting-in range.

² Bullet does not rise more than 3" above line of sight from muzzle to sighting-in range.

NOTE: "zero" indicates yardage at which rifle was sighted in.

Centerfire Rifle Ballistics Tables

Caliber	Index/EDI Number	Wt. (grs.)	Bullet Style	Primer No.	Muzzle	Velocity (ft./sec.)				
						100 yds.	200 yds.	300 yds.	400 yds.	500 yds.
.17 Remington	R17REM	25	Hollow Point Power-Lok*	7 1/2	4040	3284	2644	2086	1606	1235
.22 Hornet	R22HN1	45	Pointed Soft Point	6 1/2	2690	2042	1502	1128	948	840
	R22HN2	45	Hollow Point	6 1/2	2690	2042	1502	1128	948	840
.220 Swift	R220S1	50	Pointed Soft Point	9 1/2	3780	3158	2617	2135	1710	1357
	PRV220SA	50	V-Max [®] , Boat Tail	9 1/2	3780	3321	2908	2532	2185	1866
.222 Remington	R222R1	50	Pointed Soft Point	7 1/2	3140	2602	2123	1700	1350	1107
	R222R3	50	Hollow Point Power-Lok*	7 1/2	3140	2635	2182	1777	1432	1172
	PRV222RA	50	V-Max [®] , Boat Tail	7 1/2	3140	2744	2380	2045	1740	1471
.223 Remington	PRV223RA	50	V-Max [®] , Boat Tail	7 1/2	3300	2889	2514	2168	1851	1568
	R223R1	55	Pointed Soft Point	7 1/2	3240	2747	2304	1905	1554	1270
	R223R2	55	Hollow Point Power-Lok*	7 1/2	3240	2773	2352	1969	1627	1341
	R223R3	55	Metal Case	7 1/2	3240	2759	2326	1933	1587	1301
	R223R6	62	Hollow Point Match	7 1/2	3025	2572	2162	1792	1471	1217
.22-250 Remington	R22501	55	Pointed Soft Point	9 1/2	3680	3137	2656	2222	1832	1493
	R22502	55	Hollow Point Power-Lok*	9 1/2	3680	3209	2785	2400	2046	1725
	PRV2250A	50	V-Max [®] , Boat Tail	9 1/2	3725	3272	2864	2491	2147	1832
.243 Win.	R243W1	80	Pointed Soft Point	9 1/2	3350	2955	2593	2259	1951	1670
	R243W2	80	Hollow Point Power-Lok*	9 1/2	3350	2955	2593	2259	1951	1670
	R243W3	100	Pointed Soft Point Core-Lok*	9 1/2	2960	2697	2449	2215	1993	1786
	PRV243WC	75	V-Max [®] , Boat Tail	9 1/2	3375	3065	2775	2504	2248	2008
	PRB243WA	100	Pointed Soft Point, Boat Tail	9 1/2	2960	2720	2492	2275	2069	1875
	PRT243WC	90	Pointed Soft Point, Ballistic Tip*	9 1/2	3120	2871	2635	2411	2199	1997
6mm Remington	R6MM4	100	Pointed Soft Point Core-Lok*	9 1/2	3100	2829	2573	2332	2104	1889
	PRV6MMRC	75	V-Max [®] , Boat Tail	9 1/2	3400	3088	2797	2524	2267	2026
	PRB6MMRA	100	Pointed Soft Point, Boat Tail	9 1/2	3100	2852	2617	2394	2183	1982
.25-20 Win.	R25202	86	Soft Point	6 1/2	1460	1194	1030	931	858	797
.250 Savage	R250S1	100	Pointed Soft Point	9 1/2	2820	2504	2210	1936	1684	1461
.257 Roberts	R257	117	Soft Point Core-Lok*	9 1/2	2650	2291	1961	1663	1404	1199
.25-06 Remington	R25062	100	Pointed Soft Point Core-Lok*	9 1/2	3230	2893	2580	2287	2014	1762
	R25063	120	Pointed Soft Point Core-Lok*	9 1/2	2990	2730	2484	2252	2032	1825
6.5x55 Swedish	R65SWE1	140	Pointed Soft Point Core-Lok*	9 1/2	2550	2353	2164	1984	1814	1654
.260 Remington	R260R1	140	Pointed Soft Point Core-Lok*	9 1/2	2750	2544	2347	2158	1979	1812
	PRT260RC	120	Pointed Soft Point, Ballistic Tip	9 1/2	2890	2688	2494	2309	2131	1962
.264 Win. Mag.	R264W2	140	Pointed Soft Point Core-Lok*	9 1/2 M	3030	2782	2548	2326	2114	1914
.270 Win.	R270W1	100	Pointed Soft Point	9 1/2	3320	2924	2561	2225	1916	1636
	R270W2	130	Pointed Soft Point Core-Lok*	9 1/2	3060	2776	2510	2259	2022	1801
	R270W3	130	Bronze Point™	9 1/2	3060	2802	2559	2329	2110	1904
	R270W4	150	Soft Point Core-Lok*	9 1/2	2850	2504	2183	1886	1618	1385
	RS270WA	140	Swift A-Frame™ PSP	9 1/2	2925	2652	2394	2152	1923	1711
	PRB270WA	140	Pointed Soft Point, Boat Tail	9 1/2	2960	2749	2548	2355	2171	1995
	PRT270WB	140	Pointed Soft Point, Ballistic Tip	9 1/2	2960	2754	2557	2368	2187	2014
7mm Mauser (7 x 57)	R7MSR1	140	Pointed Soft Point Core-Lok*	9 1/2	2660	2435	2221	2018	1827	1648
7mm-08 Remington	R7M081	140	Pointed Soft Point Core-Lok*	9 1/2	2860	2625	2402	2189	1988	1798
	R7M083	120	Hollow Point	9 1/2	3000	2725	2467	2223	1992	1778
	PRB7M08RA	140	Pointed Soft Point, Boat Tail	9 1/2	2860	2656	2460	2273	2094	1923
	PRT7M08RA	140	Pointed Soft Point, Ballistic Tip	9 1/2	2860	2670	2488	2313	2145	1984
.280 Remington	R280R3 †	140	Pointed Soft Point Core-Lok*	9 1/2	3000	2758	2528	2309	2102	1905
	R280R1 †	150	Pointed Soft Point Core-Lok*	9 1/2	2890	2624	2373	2135	1912	1705
	R280R2 †	165	Soft Point Core-Lok*	9 1/2	2820	2510	2220	1950	1701	1479
	PRB280RA	140	Pointed Soft Point, Boat Tail	9 1/2	3000	2789	2588	2395	2211	2035
	PRT280RA	140	Pointed Soft Point, Ballistic Tip	9 1/2	3000	2804	2616	2436	2263	2097
7mm Remington Mag.	R7MM2	150	Pointed Soft Point Core-Lok*	9 1/2 M	3110	2830	2568	2320	2085	1866
	R7MM3	175	Pointed Soft Point Core-Lok*	9 1/2 M	2860	2645	2440	2244	2057	1879
	R7MM4	140	Pointed Soft Point Core-Lok*	9 1/2 M	3175	2923	2684	2458	2243	2039
	RS7MMA	160	Swift A-Frame™ PSP	9 1/2 M	2900	2659	2430	2212	2006	1812
	PRB7MMRA	140	Pointed Soft Point, Boat Tail	9 1/2 M	3175	2956	2747	2547	2356	2174
	PRT7MMC	150	Pointed Soft Point, Ballistic Tip	9 1/2 M	3110	2912	2723	2542	2367	2200
7mm STW	R7MSTW1	140	Pointed Soft Point Core-Lok*	9 1/2 M	3325	3064	2818	2585	2364	2153
	RS7MSTWA	140	Swift A-Frame™ PSP	9 1/2 M	3325	3020	2735	2467	2215	1978
.30 Carbine	R30CAR	110	Soft Point	6 1/2	1990	1567	1236	1035	923	842
.30-30 Win. Accelerator [®]	R3030A	55	Soft Point	9 1/2	3400	2693	2085	1570	1187	986
.30-30 Win.	R30301	150	Soft Point Core-Lok*	9 1/2	2390	1973	1605	1303	1095	974
	R30302	170	Soft Point Core-Lok*	9 1/2	2200	1895	1619	1381	1191	1061
	R30303	170	Hollow Point Core-Lok*	9 1/2	2200	1895	1619	1381	1191	1061
.300 Savage	R30SV3	180	Soft Point Core-Lok*	9 1/2	2350	2025	1728	1467	1252	1098
	R30SV2	150	Pointed Soft Point Core-Lok*	9 1/2	2630	2354	2095	1853	1631	1432

★ NEW FOR 1998

☐ = Premier® Safari Grade ☐ = Premier® Varmint ☐ = Premier® Ballistic Tip® ☐ = Premier® Boat Tail

Muzzle	Energy (ft.-lbs.)					Short-range ¹ Trajectory*						Long-range ² Trajectory*						Barrel Length	
	100 yds.	200 yds.	300 yds.	400 yds.	500 yds.	50 yds.	100 yds.	150 yds.	200 yds.	250 yds.	300 yds.	100 yds.	150 yds.	200 yds.	250 yds.	300 yds.	400 yds.		500 yds.
906	599	388	242	143	85	-0.3	0.3	zero	-1.3	-3.8	-7.8	1.8	2.3	zero	-3.3	-16.6	-43.6	24"	
723	417	225	127	90	70	-0.1	zero	-2.1	-7.1	-16.0	-30.0	1.4	zero	-4.3	-12.4	-25.8	-74.2	-162.0	24"
723	417	225	127	90	70	-0.1	zero	-2.1	-7.1	-16.0	-30.0	1.4	zero	-4.3	-12.4	-25.8	-74.2	-162.0	24"
1586	1107	760	506	325	204	-0.2	0.3	zero	-1.4	-4.0	-8.2	0.4	1.0	zero	-2.3	-6.2	-20.1	-46.1	24"
1586	1224	939	711	530	387	-0.3	0.3	zero	-1.2	-3.3	-6.7	0.8	0.9	zero	-1.9	-5.0	-15.4	-33.2	24"
1094	752	500	321	202	136	0.1	0.7	zero	-2.3	-6.5	-13.1	1.9	1.7	zero	-3.6	-9.7	-31.7	-72.8	24"
1094	771	529	351	228	152	0.1	0.7	zero	-2.2	-6.2	-12.5	1.8	1.6	zero	-3.5	-9.2	-29.6	-67.1	24"
1094	836	629	464	336	240	0.1	0.6	zero	-1.9	-5.4	-10.7	1.6	1.5	zero	-3.0	-7.8	-23.9	-51.7	24"
1209	927	701	522	380	273	-0.1	0.5	zero	-1.7	-4.8	-9.4	0.1	1.3	zero	-2.6	-6.9	-21.2	-45.8	24"
1282	921	648	443	295	197	-0.1	0.6	zero	-2.0	-5.6	-11.2	1.6	1.5	zero	-3.1	-8.2	-26.2	-58.6	24"
1282	939	675	473	323	220	-0.1	0.6	zero	-1.9	-5.4	-10.7	1.5	1.4	zero	-3.0	-7.9	-24.8	-55.1	24"
1282	929	660	456	307	207	-0.1	0.6	zero	-1.9	-5.5	-11.0	1.6	1.5	zero	-3.1	-8.1	-25.5	-57.0	24"
1260	911	643	442	298	204	0.2	0.7	zero	-2.3	-6.5	-12.9	1.9	1.7	zero	-3.6	-9.4	-29.9	-66.4	24"
1654	1201	861	603	410	272	-0.2	0.3	zero	-1.4	-4.0	-8.1	1.9	2.4	1.8	zero	-3.3	-15.5	-38.3	24"
1654	1257	947	703	511	363	-0.2	0.3	zero	-1.3	-3.7	-7.4	1.8	2.2	1.7	zero	-3.0	-13.7	-32.8	24"
1540	1188	910	689	515	372	-0.3	0.3	zero	-1.2	-3.5	-7.0	1.7	2.1	1.6	zero	-2.8	-12.8	-30.4	24"
1993	1551	1194	906	676	495	-0.1	0.5	zero	-1.6	-4.5	-8.8	2.2	2.7	2.0	zero	-3.5	-15.8	-37.3	24"
1993	1551	1194	906	676	495	-0.1	0.5	zero	-1.6	-4.5	-8.8	2.2	2.7	2.0	zero	-3.5	-15.8	-37.3	24"
1945	1615	1332	1089	882	708	0.1	0.7	zero	-2.0	-5.4	-10.4	1.6	1.5	zero	-2.9	-7.5	-22.1	-45.4	24"
1897	1564	1282	1044	842	671	-0.1	0.4	zero	-1.4	-4.0	-7.8	2.0	2.4	1.8	zero	-3.0	-13.3	-30.6	24"
1945	1642	1378	1149	950	780	0.1	0.7	zero	-1.9	-5.3	-10.1	2.8	3.2	2.3	zero	-3.8	-16.6	-37.6	24"
1945	1647	1388	1162	966	797	-0.1	0.5	zero	-1.7	-4.5	-8.9	1.4	1.3	zero	-2.5	-6.4	-18.8	-38.3	24"
2133	1777	1470	1207	983	792	-0.1	0.6	zero	-1.8	-4.8	-9.3	1.4	1.3	zero	-2.6	-6.7	-19.8	-40.8	24"
1925	1587	1303	1061	856	683	-0.1	0.4	zero	-1.4	-4.0	-7.6	1.9	2.3	1.7	zero	-3.0	-13.1	-30.1	24"
2134	1806	1521	1273	1058	872	-0.1	0.5	zero	-1.7	-4.7	-9.0	1.4	1.3	zero	-2.6	-6.5	-19.1	-38.9	24"
407	272	203	165	141	121	zero	-3.5	-13.2	-30.0	-54.7	-89.1	zero	-7.9	-22.9	-45.8	-78.5	-173.0	-315.5	24"
1765	1392	1084	832	630	474	-0.1	zero	-1.3	-4.1	-8.7	-15.3	2.0	1.8	zero	-3.6	-9.2	-27.7	-58.6	24"
1824	1363	999	718	512	373	-0.1	zero	-1.6	-5.2	-10.5	-19.5	2.6	2.3	zero	-4.1	-11.7	-36.1	-78.2	24"
2316	1858	1478	1161	901	689	-0.1	0.5	zero	-1.7	-4.6	-9.1	1.3	1.3	zero	-2.6	-6.6	-19.8	-41.7	24"
2382	1985	1644	1351	1100	887	0.1	0.6	zero	-1.9	-5.2	-10.1	1.6	1.4	zero	-2.8	-7.2	-21.4	-44.1	24"
2021	1720	1456	1224	1023	850	-0.1	zero	-1.5	-4.8	-9.9	-17.0	2.4	2.1	zero	-3.9	-9.8	-27.0	-57.8	24"
2351	2011	1712	1448	1217	1021	0.3	0.8	zero	-2.3	-6.1	-11.7	1.9	1.7	zero	-3.3	-8.3	-24.0	-47.2	24"
2225	1924	1657	1420	1210	1025	0.2	0.7	zero	-2.0	-5.4	-10.2	1.7	1.5	zero	-2.9	-7.3	-21.1	-42.5	24"
2854	2406	2018	1682	1389	1139	0.1	0.6	zero	-1.8	-5.0	-9.6	1.5	1.4	zero	-2.7	-6.9	-20.2	-41.3	24"
2448	1998	1456	1099	815	594	-0.1	0.5	zero	-1.6	-4.6	-9.1	2.3	2.8	2.0	zero	-3.6	-16.2	-38.5	24"
2702	2225	1818	1472	1180	936	0.1	0.6	zero	-1.8	-5.1	-9.8	1.5	1.4	zero	-2.8	-7.0	-20.9	-43.3	24"
2702	2267	1890	1565	1285	1046	-0.1	0.6	zero	-1.8	-4.9	-9.5	1.5	1.3	zero	-2.7	-6.8	-20.0	-41.1	24"
2705	2087	1587	1185	872	639	0.3	0.8	zero	-2.4	-6.7	-13.0	2.0	1.8	zero	-3.6	-9.4	-28.6	-61.2	24"
2659	2186	1782	1439	1150	910	0.2	0.7	zero	-2.1	-5.6	-10.9	1.7	1.5	zero	-3.1	-7.8	-23.2	-48.0	24"
2723	2349	2018	1724	1465	1237	0.1	0.6	zero	-1.9	-5.1	-9.7	1.8	1.4	zero	-2.7	-6.9	-20.1	-40.7	24"
2724	2358	2032	1743	1487	1262	0.1	0.6	zero	-1.9	-5.0	-9.7	1.6	1.4	zero	-2.7	-6.9	-20.0	-40.3	24"
2199	1843	1533	1266	1037	844	-0.1	zero	-1.4	-4.4	-9.1	-15.8	2.2	1.9	zero	-3.6	-9.2	-27.4	-55.3	24"
2542	2142	1793	1490	1228	1005	0.2	0.7	zero	-2.1	-5.7	-11.0	1.8	1.6	zero	-3.1	-7.8	-22.9	-46.8	24"
2398	1979	1621	1316	1058	842	0.1	0.6	zero	-1.9	-5.3	-10.2	1.6	1.4	zero	-2.9	-7.3	-21.7	-44.9	24"
2542	2192	1881	1606	1363	1150	0.2	0.7	zero	-2.0	-5.5	-10.5	1.7	1.5	zero	-3.0	-7.5	-21.7	-43.9	24"
2543	2217	1925	1663	1431	1224	0.2	0.7	zero	-2.0	-5.4	-10.3	1.7	1.6	zero	-2.9	-7.3	-21.2	-42.6	24"
2797	2363	1986	1657	1373	1128	0.1	0.6	zero	-1.9	-5.1	-9.8	1.5	1.4	zero	-2.8	-7.0	-20.5	-42.0	24"
2781	2293	1875	1518	1217	968	0.2	0.7	zero	-2.1	-5.8	-11.2	1.8	1.6	zero	-3.1	-8.0	-23.6	-48.8	24"
2913	2308	1805	1393	1060	801	-0.1	zero	-1.3	-4.1	-8.6	-15.2	2.0	1.8	zero	-3.6	-9.1	-27.4	-57.8	24"
2797	2418	2081	1783	1519	1287	0.1	0.6	zero	-1.8	-5.0	-9.3	1.5	1.4	zero	-2.7	-6.7	-19.5	-39.4	24"
2799	2445	2128	1846	1593	1368	0.1	0.6	zero	-1.8	-4.8	-9.2	1.5	1.3	zero	-2.6	-6.6	-19.0	-38.2	24"
3221	2667	2196	1792	1448	1160	-0.1	0.5	zero	-1.6	-4.6	-9.0	1.3	1.2	zero	-2.5	-6.6	-20.2	-43.4	24"
3178	2718	2313	1956	1644	1372	0.2	0.7	zero	-2.1	-5.6	-10.7	1.7	1.5	zero	-3.0	-7.6	-22.1	-44.8	24"
3133	2655	2240	1878	1564	1292	-0.1	0.5	zero	-1.6	-4.4	-8.5	2.2	2.6	1.9	zero	-3.2	-14.2	-32.0	24"
2987	2511	2097	1739	1430	1166	0.2	0.7	zero	-2.0	-5.5	-10.7	1.7	1.5	zero	-3.0	-7.5	-22.1	-44.7	24"
3133	2715	2345	2017	1726	1469	-0.1	0.5	zero	-1.6	-4.2	-8.2	2.2	2.6	1.9	zero	-3.1	-13.4	-30.0	24"
3222	2825	2470	2152	1867	1612	-0.1	0.5	zero	-1.6	-4.3	-8.3	1.2	1.2	zero	-2.3	-5.9	-17.3	-34.8	24"
3436	2918	2468	2077	1737	1441	-0.1	0.4	zero	-1.4	-3.9	-7.6	2.0	2.4	1.7	zero	-2.9	-12.8	-28.8	24"
3436	2834	2324	1892	1525	1215	-0.1	0.4	zero	-1.5	-4.1	-8.0	2.0	2.5	1.8	zero	-3.1	-13.0	-31.5	24"
967	600	373	262	208	173	0.6	zero	-4.2	-12.9	-27.2	-48.6	zero	-4.2	-12.9	-27.2	-48.6	-116.6	-225.5	20"
1412	886	521	301	172	119	-0.1	0.6	zero	-2.2	-6.2	-13.2	1.7	1.6	zero	-3.5	-9.9	-34.3	-83.3	24"
1902	1296	858	565	399	316	0.2	zero	-2.4	-7.6	-16.1	-28.8	1.6	zero	-4.3	-12.1	-24.0	-64.2	-133.2	24"
1827	1355	989	720	535	425	0.3	zero	-2.7	-8.3	-17.1	-29.9	1.8	zero	-4.6	-12.6	-24.5	-62.6	-125.3	24"
1827	1355	989	720	535	425	0.3	zero	-2.7	-8.3	-17.1	-29.9	1.8	zero	-4.6	-12.6	-24.5	-62.6	-125.3	24"
2207	1639	1193	860	626	482	0.2	zero	-2.3	-7.1	-14.7	-25.9	1.5	zero	-4.0	-10.9	-21.3	-54.8	-110.3	24"
2303	1845	1462	1143	806	685	-0.1	zero	-1.5	-4.8	-10.1	-17.6	2.4	2.1	zero	-4.1	-10.4	-30.5	-64.6	24"

VENTED TEST-BARREL BALLISTICS

This Remington® patented, industry-accepted method provides data that more precisely reflect actual use of revolver ammunition. It considers cylinder gap, barrel length, powder position, and production tolerances. Although our final values differ from conventional figures, the ammunition is unchanged. Key elements of our patented procedure include: (a) horizontal powder orientation; (b) cylinder gap: .008"; (c) barrel length: 4".

INTERCHANGEABILITY CHART

Cartridges within groups shown are interchangeable. Other substitutions should not be made without specific recommendation of the firearms manufacturer since improper combinations could result in firearm damage or personal injury.

RIMFIRE

- .22 W.R.F.
- .22 Remington Special
- .22 Win. Model 1890 in a .22 Win. Mag. Rimfire but not conversely

CENTERFIRE

- .25-20 Remington
- .25-20 W.C.F.
- .25-20 Win.
- .25-20 Win. High Speed
- .25-20 Marlin
- .25 W.C.F.
- 6mm Rem. (80 & 90 grain)
- .244 Remington
- .25 Automatic
- .25 Auto. Colt Pistol (ACP)
- .25 (6.35mm) Automatic Pistol
- 6.35mm Browning
- 7mm Express® Remington
- .280 Remington
- .30-30 Sav.
- .30-30 Win.
- .30-30 Win. Accelerator* (SEE NOTE A)
- .30-30 Marlin
- .30-30 Win. High Speed
- .30 W.C.F.
- .32 Colt Automatic
- .32 Auto. Colt Pistol (ACP)
- .32 (7.65mm) Automatic Pistol
- 7.65mm Automatic Pistol
- 7.65mm Browning (not interchangeable with 7.65mm Luger)
- .32 Short Colt in .32 Long Colt but not conversely (SEE NOTE C)
- .32 S&W in .32 S.&W. Long but not conversely
- .32 S&W Long
- .32 Colt New Police
- .32 Colt Police Positive
- .32 W.C.F.* (SEE NOTE A)
- .32 Win.* (SEE NOTE A)
- .32-20 Win. High Speed* (SEE NOTE A)
- .32-20 Colt L.M.R.
- .32-20 W.C.F. (SEE NOTE G)
- .32-20 Win. and Marlin
- .38 S.&W.
- .38 Colt New Police
- .380 Webley
- .38 Colt Special
- .38 S&W Special
- .38 Special Targetmaster®
- .38 S&W Special Mid-Range (SEE NOTE D)
- .38 Special (+P) (SEE NOTE B)
- .38-44 Special (+P) (SEE NOTE B)
- .38 Special
- .38 Special Flat Point
- .38 Short Colt in .38 Long Colt but not conversely. Both can be used in .38 Special
- .38 Marlin
- .38 Win.* (SEE NOTE A)
- .38 Remington* (SEE NOTE A)
- .38-40 Win.
- .38 W.C.F.* (SEE NOTE A)
- .38 Automatic in .38 Super (+P) but not conversely
- .380 Automatic
- 9mm Browning Short (Corto Kurz)
- 9mm Luger (SEE NOTE E)
- 9mm Parabellum
- .44 S&W Special (SEE NOTE F)
- .44 Marlin
- .44 Win.
- .44 Remington
- .44-40 Win.
- .44 W.C.F.
- .45-70 Government
- .45-70 Marlin, Win.
- .45-70-405

Centerfire Rifle Ballistics Tables

Caliber	Index/EDI Number	Wt (grs.)	Bullet Style	Primer No.	Muzzle	Velocity (ft.-sec.)				
						100 yds.	200 yds.	300 yds.	400 yds.	500 yds.
.308 Win.	R308W1	150	Pointed Soft Point Core-Lokt*	9½	2820	2533	2263	2009	1774	1560
	R308W2	180	Soft Point Core-Lokt*	9½	2620	2274	1955	1666	1414	1212
	R308W3	180	Pointed Soft Point Core-Lokt*	9½	2620	2393	2178	1974	1782	1604
	R308W7	168	Boat Tail HP Match	9½	2680	2493	2314	2143	1979	1823
	PRB308WA	★ 165	Pointed Soft Point, Boat Tail	9½	2700	2497	2303	2117	1941	1773
	PRT308WT	★ 165	Pointed Soft Point, Ballistic Tip	9½	2700	2513	2333	2161	1996	1839
	.30-06 Springfield	R30061	125	Pointed Soft Point	9½	3140	2780	2447	2138	1853
.30-06 Springfield	R30062	150	Pointed Soft Point Core-Lokt*	9½	2910	2617	2342	2083	1843	1622
	R30063	150	Bronze Point™	9½	2910	2656	2416	2189	1974	1773
	R30068	165	Pointed Soft Point Core-Lokt*	9½	2800	2534	2283	2047	1825	1621
	R30064	180	Soft Point Core-Lokt*	9½	2700	2348	2023	1727	1466	1251
	R30065	180	Pointed Soft Point Core-Lokt*	9½	2700	2469	2250	2042	1846	1663
	R30067	220	Soft Point Core-Lokt*	9½	2410	2130	1870	1632	1422	1246
	RS3006A	★ 180	Swift A-Frame™ PSP	9½	2700	2485	2243	2032	1833	1648
PRB3006SA	★ 165	Pointed Soft Point, Boat Tail	9½	2800	2592	2394	2204	2023	1852	
PRT3006A	★ 150	Pointed Soft Point, Ballistic Tip*	9½	2910	2696	2492	2298	2112	1934	
PRT3006B	★ 165	Pointed Soft Point, Ballistic Tip*	9½	2800	2609	2425	2249	2080	1919	
300 Win. Mag.	R300W1	150	Pointed Soft Point Core-Lokt*	9½M	3290	2951	2636	2342	2068	1813
	R300W2	180	Pointed Soft Point Core-Lokt*	9½M	2960	2745	2540	2344	2157	1979
	RS300WA	200	Swift A-Frame™ PSP	9½M	2825	2595	2376	2167	1970	1783
PRB300WA	★ 190	Pointed Soft Point, Boat Tail	9½M	2885	2691	2506	2327	2156	1993	
300 Wby. Mag.	R300WB1	180	Pointed Soft Point Core-Lokt*	9½M	3120	2866	2627	2400	2184	1979
	RS300WBB	200	Swift A-Frame™ PSP	9½M	2925	2690	2467	2254	2052	1861
	PRB300WBA	★ 190	Pointed Soft Point, Boat Tail	9½M	3030	2830	2638	2455	2279	2110
.303 British	R303B1	180	Soft Point Core-Lokt*	9½	2460	2124	1817	1542	1311	1137
7.62 x 39mm	R762391	125	Pointed Soft Point	7½	2365	2062	1783	1533	1320	1154
.32-20 Win.	R32201	100	Lead	6½	1210	1021	913	834	769	712
.32 Win. Special	R32WS2	170	Soft Point Core-Lokt*	9½	2250	1921	1626	1372	1175	1044
8mm Remington Mag.	RS8MMRA	★ 200	Swift A-Frame™ PSP	9½M	2900	2623	2361	2115	1885	1672
8mm Mauser	R8MSR	170	Soft Point Core-Lokt*	9½	2360	1969	1622	1333	1123	997
.338 Win. Mag.	R338W1	225	Pointed Soft Point Core-Lokt*	9½M	2780	2572	2374	2184	2003	1832
	R338W2	250	Pointed Soft Point Core-Lokt*	9½M	2660	2456	2261	2075	1898	1731
	RS338WA	225	Swift A-Frame™ PSP	9½M	2785	2517	2266	2029	1808	1605
PRT338WB	★ 200	Pointed Soft Point, Ballistic Tip	9½M	2950	2724	2509	2303	2108	1922	
.35 Remington	R35R1	150	Pointed Soft Point Core-Lokt*	9½	2300	1874	1506	1218	1039	934
	R35R2	200	Soft Point Core-Lokt*	9½	2080	1698	1376	1140	1001	911
.35 Whelen	R35WH1	200	Pointed Soft Point	9½M	2675	2378	2100	1842	1606	1399
	R35WH3	250	Pointed Soft Point	9½M	2400	2197	2005	1823	1652	1496
.375 H&H Mag.	R375M1	270	Soft Point	9½M	2690	2420	2166	1928	1707	1507
	RS375MA	300	Swift A-Frame™ PSP	9½M	2530	2245	1979	1733	1512	1321
.416 Remington Mag.	R416R2	400	Swift A-Frame™ PSP	9½M	2400	2175	1962	1763	1579	1414
.44-40 Win.	R4440W	200	Soft Point	2½	1190	1006	900	822	756	699
.44 Remington Mag.	R44MG2	240	Soft Point	2½	1760	1380	1114	970	878	806
	R44MG3	240	Semi-Jacketed Hollow Point	2½	1760	1380	1114	970	878	806
	R44MG6	210	Semi-Jacketed Hollow Point	2½	1920	1477	1155	982	880	802
RH44MGA	275	JHP Core-Lokt*	2½	1580	1293	1093	976	896	832	
.444 Mar.	R444M	240	Soft Point	9½	2350	1815	1377	1087	941	846
.45-70 Government	R4570G	405	Soft Point	9½	1330	1168	1055	977	918	869
	R4570L	300	Jacketed Hollow Point	9½	1810	1497	1244	1073	969	895
.458 Win. Mag.	RS458WA	450	Swift A-Frame™ PSP	9½M	2150	1901	1671	1465	1289	1150

★ **NEW FOR 1998**

NOTE A: *High-speed cartridges must not be used in revolvers. They should be used only in rifles made especially for them.
 NOTE B: Ammunition with (+P) on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.
 NOTE C: Not for use in revolvers chambered for .32 S&W or .32 S&W Long.
 NOTE D: All .38 Special cartridges can be used in .357 Magnum revolvers but not conversely.
 NOTE E: 9mm sub-machine gun cartridges should not be used in handguns.
 NOTE F: .44 Russian and .44 S&W Special can be used in .44 Remington Magnum revolvers but not conversely.
 NOTE G: Not to be used in Win. M-66 and M-73.

(continued)

■ = Premier® Safari Grade □ = Premier® Ballistic Tip® □ = Premier® Boat Tail

Muzzle	Energy (ft.-lbs.)					Short-range ¹ Trajectory ⁴						Long-range ² Trajectory ⁴						Barrel Length	
	100 yds.	200 yds.	300 yds.	400 yds.	500 yds.	50 yds.	100 yds.	150 yds.	200 yds.	250 yds.	300 yds.	100 yds.	150 yds.	200 yds.	250 yds.	300 yds.	400 yds.		500 yds.
2648	2137	1705	1344	1048	810	-0.1	zero	-1.2	-3.9	-8.4	-14.7	2.0	1.7	zero	-3.4	-8.8	-26.2	-54.8	
2743	2066	1527	1109	799	587	-0.1	zero	-1.7	-5.3	-10.7	-19.7	2.6	2.3	zero	-4.1	-11.8	-36.3	-78.2	
2743	2288	1896	1557	1269	1028	-0.1	zero	-1.5	-4.6	-9.5	-16.5	2.3	2.0	zero	-3.8	-9.7	-28.3	-57.8	24"
2678	2318	1998	1713	1460	1239	-0.1	zero	-1.3	-4.1	-8.5	-14.7	2.1	1.8	zero	-3.4	-8.6	-24.7	-49.9	
2670	2284	1942	1642	1379	1152	-0.1	zero	-1.3	-4.1	-8.5	-14.8	2.0	1.8	zero	-3.4	-8.6	-25.0	-50.6	
2672	2314	1995	1711	1460	1239	0.1	zero	-1.3	-4.0	-8.4	-14.4	2.0	1.7	zero	-3.3	-8.4	-24.3	-48.9	
2736	2145	1662	1269	953	706	-0.1	0.6	zero	-1.9	-5.2	-10.1	1.5	1.4	zero	-2.8	-7.4	-22.4	-47.6	
2820	2281	1827	1445	1131	876	0.2	0.7	zero	-2.2	-5.9	-11.4	1.8	1.6	zero	-3.2	-8.2	-24.4	-50.9	
2820	2349	1944	1596	1298	1047	0.2	0.7	zero	-2.0	-5.6	-10.8	1.7	1.5	zero	-3.0	-7.7	-22.7	-46.6	
2872	2352	1909	1534	1220	963	0.3	0.8	zero	-2.3	-6.3	-12.1	2.0	1.7	zero	-3.4	-8.7	-25.9	-53.2	
2913	2203	1635	1192	859	625	-0.1	zero	-1.5	-4.9	-10.3	-18.3	2.4	2.1	zero	-4.3	-11.0	-33.8	-72.8	
2913	2436	2023	1666	1362	1105	-0.1	zero	-1.3	-4.2	-8.8	-15.4	2.1	1.8	zero	-3.5	-9.0	-26.3	-54.0	
2837	2216	1708	1301	988	758	0.1	zero	-2.0	-6.2	-12.9	-22.4	1.3	zero	-3.5	-9.5	-18.4	-46.4	-91.6	
2913	2429	2010	1650	1343	1085	0.1	zero	-1.3	-4.2	-8.9	-15.4	2.1	1.8	zero	-3.6	-9.1	-26.6	-54.4	
2872	2462	2100	1780	1500	1256	0.2	0.8	zero	-2.2	-5.8	-11.2	1.8	1.6	zero	-3.1	-7.9	-23.0	-46.6	
2821	2422	2070	1759	1485	1247	0.1	0.7	zero	-2.0	-5.3	-10.2	1.6	1.5	zero	-2.9	-7.3	-21.1	-42.8	
2873	2494	2155	1854	1588	1350	0.2	0.8	zero	-2.1	-5.7	-10.9	1.8	1.6	zero	-3.1	-7.7	-22.3	-45.0	24"
3605	2900	2314	1827	1424	1095	-0.1	0.5	zero	-1.6	-4.4	-8.7	2.2	2.6	1.9	zero	-3.4	-15.0	-34.4	
3501	3011	2578	2196	1859	1565	0.1	0.6	zero	-1.9	-5.1	-9.8	1.6	1.4	zero	-2.8	-7.0	-20.2	-41.0	24"
3544	2989	2506	2086	1722	1412	0.2	0.8	zero	-2.2	-5.9	-11.3	1.8	1.6	zero	-3.2	-8.0	-23.5	-47.9	
3511	3055	2648	2285	1961	1675	0.1	0.7	zero	-2.0	-5.3	-10.1	1.6	1.5	zero	-2.9	-7.2	-20.8	-41.9	
3890	3284	2758	2301	1905	1565	-0.1	0.5	zero	-1.7	-4.6	-8.9	2.4	2.8	2.0	zero	-3.4	-14.9	-33.6	
3799	3213	2701	2256	1870	1538	0.1	0.7	zero	-2.0	-5.4	-10.4	2.8	3.2	2.3	zero	-3.9	-17.0	-38.3	24"
3873	3378	2936	2542	2190	1878	-0.1	0.6	zero	-1.7	-4.7	-9.0	1.4	1.3	zero	-2.6	-6.4	-18.6	-37.6	
2418	1803	1319	950	687	517	0.1	zero	-2.0	-5.8	-13.2	-23.3	1.3	zero	-3.1	-9.9	-19.3	-49.9	-100.8	24"
1552	1180	882	652	483	370	0.1	zero	-2.2	-6.7	-14.0	-24.5	1.5	zero	-3.8	-10.4	-20.1	-51.3	-102.5	24"
325	231	185	154	131	113	zero	-5.9	-20.0	-43.3	-77.4	-122.4	zero	-11.1	-31.6	-62.6	-104.7	-226.7	-410.6	24"
1911	1393	998	710	521	411	0.3	zero	-2.6	-8.0	-16.7	-29.3	1.7	zero	-4.5	-12.4	-24.1	-62.1	-125.3	24"
3734	3054	2476	1987	1577	1241	0.2	0.7	zero	-2.1	-5.8	-11.2	1.8	1.6	zero	-3.1	-8.0	-23.9	-49.6	24"
2102	1463	993	671	476	375	0.2	zero	-2.4	-7.6	-16.1	-28.6	1.6	zero	-4.4	-12.0	-23.7	-62.8	-128.9	24"
3860	3305	2815	2383	2004	1676	-0.3	0.8	zero	-2.2	-5.9	-11.4	1.9	1.7	zero	-3.2	-8.1	-23.4	-47.5	
3927	3348	2837	2389	1999	1663	-0.1	zero	-1.4	-4.3	-8.9	-15.4	2.1	1.9	zero	-3.5	-8.9	-26.0	-52.7	24"
3871	3165	2565	2057	1633	1286	-0.1	zero	-1.3	-4.0	-8.5	-14.8	2.0	1.8	zero	-3.5	-8.8	-25.2	-54.1	
3866	3295	2795	2357	1973	1641	0.1	0.6	zero	-1.9	-5.2	-10.0	1.6	1.4	zero	-2.8	-7.1	-20.8	-42.4	
1762	1169	755	494	359	291	0.3	zero	-2.7	-8.6	-18.2	-32.6	1.8	zero	-4.9	-13.7	-27.1	-72.5	-150.4	24"
1921	1280	841	577	445	369	0.5	zero	-3.5	-10.7	-22.6	-40.1	2.3	zero	-6.1	-16.7	-33.0	-86.6	-174.8	
3177	2510	1958	1506	1145	869	-0.1	zero	-1.5	-4.7	-9.9	-17.3	2.3	2.0	zero	-4.0	-10.3	-30.8	-64.9	24"
3197	2680	2230	1844	1515	1242	0.1	zero	-1.9	-5.7	-11.8	-20.4	1.3	zero	-3.2	-8.6	-16.6	-40.0	-76.3	
4337	3510	2812	2228	1747	1361	-0.1	zero	-1.4	-4.5	-9.4	-16.4	2.2	1.9	zero	-3.8	-9.7	-28.7	-59.8	24"
4262	3357	2608	2001	1523	1163	0.1	zero	-1.7	-5.4	-11.4	-19.8	2.7	2.3	zero	-4.6	-11.7	-35.4	-73.9	
5115	4201	3419	2760	2214	1775	0.1	zero	-1.9	-5.9	-12.1	-20.8	1.3	zero	-3.3	-8.9	-17.0	-41.9	-80.8	24"
629	449	360	300	254	217	zero	-5.8	-20.0	-44.6	-78.6	-126.1	zero	-11.3	-33.1	-64.1	-108.7	-235.2	-422.3	24"
1650	1015	661	501	411	346	zero	-2.1	-8.7	-21.2	-40.6	-67.7	zero	-5.6	-17.0	-35.4	-61.4	-143.0	-269.9	
1650	1015	661	501	411	346	zero	-2.1	-8.7	-21.2	-40.6	-67.7	zero	-5.6	-17.0	-35.4	-61.4	-143.0	-269.9	20"
1719	1017	622	450	361	300	zero	-1.6	-7.1	-17.9	-35.1	-60.2	zero	-4.8	-14.7	-31.2	-55.5	-131.3	-253.7	
1524	1020	730	582	490	422	1.4	zero	-6.6	-19.4	-39.2	-67.5	zero	-6.6	-19.4	-39.2	-67.5	-210.8	-280.8	
2942	1755	1010	630	472	381	0.2	zero	-3.2	-9.7	-20.8	-37.8	2.2	zero	-5.4	-15.4	-31.4	-86.7	-180.0	24"
1590	1227	1001	858	758	679	zero	-4.0	-14.5	-32.0	-57.5	-90.6	zero	-8.5	-24.0	-47.4	-78.6	-169.4	-301.3	24"
2182	1492	1031	767	625	533	zero	-1.3	-6.6	-16.5	-32.0	-54.1	zero	-4.6	-13.8	-28.6	-50.1	-115.7	-219.1	
4818	3609	2789	2144	1689	1321	0.3	zero	-2.7	-8.2	-16.7	-29.3	1.8	zero	-4.6	-12.2	-23.4	-59.5	-114.7	24"

Specifications are nominal. Ballistics figures established in test barrels. Individual rifles may vary from test-barrel specifications.
¹Inches above or below line of sight. Hold low for positive numbers, high for negative numbers.
²Bullet does not rise more than 1" above line of sight from muzzle to sighting-in range.
³Bullet does not rise more than 3" above line of sight from muzzle to sighting-in range.
NOTE: "zero" indicates yardage at which rifle was sighted in.



Pistol and Revolver Ammunition Ballistics Golden Saber™ Core-Lokt® Hunting Disintegrator™ Frangible

Caliber	Order No.	Primer No.	Weight (grs.)	Bullet Style	Velocity (ft./sec.)			Energy (ft.-lbs.)			Mid-range Trajectory		
					Muzzle	50 yds.	100 yds.	Muzzle	50 yds.	100 yds.	50 yds.	100 yds.	B.L.
.25 (6.35mm) Auto. Pistol	R25AP	1 1/2	50	Metal Case	760	707	659	64	56	48	2.0"	8.7"	2"
6mm BR Rem.	R6MMBR	7 1/2	100	Pointed Soft Point	Refer to Remington CF Ballistics Charts								
7mm BR Rem.	R7MMBR	7 1/2	140	Pointed Soft Point	Refer to Remington CF Ballistics Charts								
.32 S&W	R32SW	1 1/2	88	Lead	680	645	610	90	81	73	2.5"	0.5"	3"
.32 S&W Long	R32SWL	1 1/2	98	Lead	705	670	635	115	98	88	2.3"	10.5"	4"
.32 (7.65mm) Auto. Pistol	R32AP	1 1/2	71	Metal Case	905	855	810	129	115	97	1.4"	5.8"	4"
.357 Mag. (Vented Barrel Ballistics)	R357M7	5 1/2	110	Semi-Jacketed Hollow Point	1295	1094	975	410	292	232	0.8"	3.5"	4"
	R357M1	5 1/2	125	Semi-Jacketed Hollow Point	1450	1240	1090	583	427	330	0.6"	2.8"	4"
	GS357MA	5 1/2	125	Brass-Jacketed Hollow Point	1220	1095	1009	413	333	283	0.8"	3.5"	4"
	RH357MA	5 1/2	165	JHP Core-Lokt®	1230	1183	1108	610	518	450	0.7"	3.1"	4 1/2"
	R357M2	5 1/2	158	Semi-Jacketed Hollow Point	1235	1104	1015	535	428	361	0.8"	3.5"	4"
	R357M3	5 1/2	158	Soft Point	1235	1104	1015	535	428	361	0.8"	3.5"	4"
	R357M5	5 1/2	158	Semi-Wadcutter	1235	1104	1015	535	428	361	0.8"	3.5"	4"
	R357M10	5 1/2	180	Semi-Jacketed Hollow Point	1145	1053	985	524	443	388	0.9"	3.9"	8 1/4"
9mm Luger Auto. Pistol	R9MM1	1 1/2	115	Jacketed Hollow Point	1155	1047	971	341	280	241	0.9"	3.9"	4"
	R9MM10	1 1/2	124	Jacketed Hollow Point	1120	1028	960	346	291	254	1.0"	4.1"	4"
	R9MM2	1 1/2	124	Metal Case	1110	1030	971	339	292	259	1.0"	4.1"	4"
	R9MM3	1 1/2	115	Metal Case	1135	1041	973	329	277	242	0.9"	4.0"	4"
	R9MM6	1 1/2	115	Jacketed Hollow Point (+P)‡	1250	1113	1019	399	316	265	0.8"	3.5"	4"
	R9MM8	1 1/2	147	Jacketed Hollow Point (Subsonic)	990	941	900	320	289	264	1.1"	4.9"	4"
	R9MM9	1 1/2	147	Metal Case (Match)	990	941	900	320	289	264	1.1"	4.9"	4"
	LF9MMA ★	1 1/2	106	Disintegrator™ Plated Frangible	1100	1016	954	282	241	212	1.0"	4.3"	4"
	GS9MMB	1 1/2	124	Brass-Jacketed Hollow Point	1125	1031	963	349	293	255	1.0"	4.0"	4"
	GS9MMC	1 1/2	147	Brass-Jacketed Hollow Point	990	941	900	320	289	264	1.1"	4.9"	4"
	GS9MMD	1 1/2	124	Brass-Jacketed Hollow Point (+P)‡	1180	1089	1021	384	327	287	0.8"	3.8"	4"
.380 Auto. Pistol	R380AP	1 1/2	95	Metal Case	955	865	785	190	160	130	1.4"	5.9"	4"
	R380A1	1 1/2	88	Jacketed Hollow Point	990	920	868	191	165	146	1.2"	5.1"	4"
	GS380B	1 1/2	102	Brass-Jacketed Hollow Point	940	901	866	200	184	170	1.2"	5.1"	4"
.38 S&W	R38SW	1 1/2	146	Lead	685	650	620	150	135	125	2.4"	10.0"	4"
.38 Special (Vented Barrel Ballistics)	R38S10	1 1/2	110	Semi-Jacketed Hollow Point (+P)‡	995	926	871	242	210	185	1.2"	5.1"	4"
	R38S16	1 1/2	110	Semi-Jacketed Hollow Point	950	890	840	220	194	172	1.4"	5.4"	4"
	R38S2	1 1/2	125	Semi-Jacketed Hollow Point (+P)‡	945	898	858	248	224	204	1.3"	5.4"	4"
	GS38SB	1 1/2	125	Brass-Jacketed Hollow Point (+P)‡	975	929	885	264	238	218	1.0"	5.2"	4"
	R38S3	1 1/2	148	Targetmaster® Lead WC Match	710	634	566	166	132	105	2.4"	10.8"	4"
	R38S5	1 1/2	158	Lead (Round Nose)	755	723	692	200	183	168	2.0"	8.3"	4"
	R38S14	1 1/2	158	Semi-Wadcutter (+P)‡	890	855	823	278	257	238	1.4"	6.0"	4"
	R38S6	1 1/2	158	Semi-Wadcutter	755	723	692	200	183	168	2.0"	8.3"	4"
	R38S12	1 1/2	158	Lead Hollow Point (+P)‡	890	855	823	278	257	238	1.4"	6.0"	4"
.38 Short Colt	R38SC	1 1/2	125	Lead	730	685	645	150	130	115	2.2"	9.4"	6"
.357 Sig.	R357S1	5 1/2	125	Jacketed Hollow Point	1350	1157	1032	506	372	296	0.7"	3.2"	4"
.40 S&W	R40SW1	5 1/2	155	Jacketed Hollow Point	1205	1095	1017	499	413	356	0.8"	3.6"	4"
	R40SW2	5 1/2	180	Jacketed Hollow Point	1015	960	914	412	368	334	1.3"	4.5"	4"
	LF40SWA ★	5 1/2	145	Disintegrator™ Plated Frangible	1085	1023	973	379	337	305	1.0"	4.1"	4"
	GS40SWA	5 1/2	165	Brass-Jacketed Hollow Point	1150	1040	964	485	396	340	1.0"	4.0"	4"
	GS40SWB	5 1/2	180	Brass-Jacketed Hollow Point	1015	960	914	412	368	334	1.3"	4.5"	4"
.41 Rem. Mag. (Vented Barrel Ballistics)	R41MG1	2 1/2	210	Soft Point	1300	1162	1062	788	630	526	0.7"	3.2"	4"
.44 Rem. Mag. (Vented Barrel Ballistics)	R44MG5	2 1/2	180	Semi-Jacketed Hollow Point	1610	1365	1175	1036	745	551	0.5"	2.3"	4"
	R44MG2	2 1/2	240	Soft Point	1180	1081	1010	741	623	543	0.9"	3.7"	4"
	R44MG3	2 1/2	240	Semi-Jacketed Hollow Point	1180	1081	1010	741	623	543	0.9"	3.7"	4"
	RH44MGA	2 1/2	275	JHP Core-Lokt®	1235	1142	1070	931	797	699	0.8"	3.3"	6 1/2"
.44 S&W Special	R44SW	2 1/2	246	Lead	755	725	695	310	285	265	2.0"	8.3"	6"
	R44SW1	2 1/2	200	Semi-Wadcutter	1035	938	866	476	391	333	1.1"	4.9"	6"
.45 Colt	R45C	2 1/2	250	Lead	860	820	780	410	375	340	1.6"	6.6"	5"
	R45C1	2 1/2	225	Semi-Wadcutter (Keith)	960	890	832	460	395	346	1.3"	5.5"	5"
.45 Auto.	R45AP2	2 1/2	185	Jacketed Hollow Point	1000	939	889	411	362	324	1.1"	4.9"	5"
	R45AP4	2 1/2	230	Metal Case	835	800	767	356	326	300	1.6"	6.8"	5"
	R45AP7	2 1/2	230	Jacketed Hollow Point (Subsonic)	835	800	767	356	326	300	1.6"	6.8"	5"
	LF45APA ★	2 1/2	175	Disintegrator™ Plated Frangible	1020	928	859	404	335	288	1.2"	5.1"	5"
	GS45APA	2 1/2	185	Brass-Jacketed Hollow Point	1015	951	899	423	372	332	1.1"	4.5"	5"
	GS45APB	2 1/2	230	Brass-Jacketed Hollow Point	875	833	795	391	355	323	1.5"	6.1"	5"
	GS45APC	2 1/2	185	Brass-Jacketed Hollow Point (+P)‡	1140	1042	971	534	446	388	1.0"	4.0"	5"

‡Ammunition with (+P) on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.



Remington® .22 Rimfire Ammo — Performance and Value To Spare.

FROM TIN CAN PLINKING TO ONE-HOLE PERFECTION...

Whether it's getting young shooters started, practice plinking, small-game hunting or keeping match shooters scoring, Remington's rimfire quality stands tall. As in our centerfire ammo, we put the maximum level of quality into our .22s so you can get the maximum performance out of them.



Premier® .22 Win. Mag.



.22 Win. Mag. JHP



.22 Win. Mag. PSP




Subsonic LR



Target LR



Golden™ Bullet LR
Golden™ Bullet LRHP



Golden™ Bullet Short



Yellow Jacket®
Hyper Velocity LR



Viper® Hyper
Velocity LR



Thunderbolt® LR



Cyclone™ LR

Cartridge Type	Order No.	Wt. (grs.)	Bullet Style	Velocity (ft./sec.)			Energy (ft.-lbs.)			Long-range Trajectory*		
				Muzzle	50 yds.	100 yds.	Muzzle	50 yds.	100 yds.	50 yds.	100 yds.	150 yds.
.22 Win. Mag.												
.22 Win. Mag. Premier®	PR22M1	33	V-Max™ Boat Tail	2000	1730	1495	293	219	164	0.6	0.0	-4.3
.22 Win. Mag.	R22M1	40	Jacketed Hollow Point	1910	1610	1350	324	230	162	0.9	0.0	-5.7
.22 Win. Mag.	R22M2	40	Pointed Soft Point	1910	1600	1340	324	227	159	1.0	0.0	-5.8
Cartridge Type	Order No.	Wt. (grs.)	Bullet Style	Velocity (ft./sec.)			Energy (ft.-lbs.)			Mid-range Trajectory		
.22 Cal. Rimfire												
Subsonic												
.22 Subsonic Long Rifle	Z2SSHP	38	Hollow Point	1050	965	901	93	79	69	4.7"		
Target												
.22 Long Rifle	6122/6100 +	40	Lead	1150	1048	976	117	98	85	4.0"		
High Velocity Golden™ Bullet												
.22 Long Rifle	1522/1500 +	40	Lead	1255	1113	1017	140	110	92	3.4"		
.22 Long Rifle	1622/1600 +	36	Hollow Point	1280	1117	1010	131	100	82	3.5"		
.22 Short	1022	29	Lead	1095	982	903	77	62	52	4.5"		
Hyper Velocity												
.22 Yellow Jacket® Long Rifle	1722	33	Truncated Cone H. Point	1500	1247	1075	165	114	85	2.8"		
.22 Viper® Long Rifle	1922	36	Truncated Cone Solid	1410	1198	1056	159	115	89	3.0"		
Hi-Speed												
.22 Thunderbolt® Long Rifle	TB 22A	40	Lead	1255	1113	1017	140	110	92	3.4"		
.22 Cyclone™ Long Rifle	CY 22HP	36	Hollow Point	1280	1117	1010	131	100	82	3.5"		


* These long rifle .22s available in slide-open plastic packs of 100.
* Note: Figures derived with sights 1.5" above axis of bore.



Our High Velocity Golden™ Bullet, & Target Standard, Velocity LR .22s are available in convenient 100-round plastic dispenser box with easy-to-use sliding cover.

Remington® Slugs and Buckshot — The Ultimate in Big-Game Shotgunning Accuracy and Power.

If you are a shotgunner with a passion for whitetails, we've got the most comprehensive line-up of slugs and buckshot you can chamber, from super-accurate Copper Solid™ sabot slugs and hard-hitting Slugger® rifled slugs, to tight-grouping Premier® and Express® buckshot. All made to exacting specifications for the kind of game-getting dependability you've come to expect from Remington.

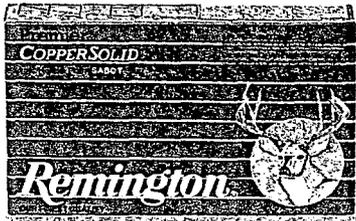

PREMIER® COPPER SOLID™ SABOT SLUGS

The slugs that deliver 2 1/2" groups at 100 yards from our fully rifled barrels. Precise nose cuts create four separate petals. On impact, they expand to over 2X slug diameter, then break off to form additional wound channels. The slug base continues to penetrate with devastating effects. Packed in 5-round boxes.

SLUGGER®

Always in the forefront of deer slug technology, we redesigned our 12-gauge Slugger® Rifled Slug for a 25% improvement in accuracy. Also, at 1760 fps muzzle velocity, our 3" 12-ga. Magnum slugs shoot 25% flatter than regular 12-ga. slugs. Packed in convenient, easy-carrying 5-round boxes. Also available in reduced recoil loading.

PREMIER® BUCKSHOT

Power Piston® wads in our 12-ga. Premier® Buckshot line provide protection against pellet deformation against pellet deformation on firing. All Premier® Buckshot is hardened with 3% antimony, nickel-plated for additional hardness, and buffered to cushion pellets. Patterns are 25% tighter than normal buckshot loads. All Premier® Buckshot is mouth-waterproofed, and packed in 5-round boxes.

EXPRESS® BUCKSHOT

Express® Buckshot is a great field-proven buckshot value. All loads contain granulated polymer buffering to cushion pellets and help produce dense, even patterns. Our 12-ga., 3 1/2" loading with 2.2 ounces (18 pellets) of 00 buck is the heaviest 12-ga. buck loading available. Packed in 5-round boxes.

Premier® Copper Solid™ Sabot Slugs

Index/EDI No.	Shell Gauge	Slug Length	Slug Wt. (oz.)	Velocity (ft./sec.)			Energy (ft.-lbs.)			Drop (in.)	
				Muz.	50 yds.	100 yds.	Muz.	50 yds.	100 yds.	50 yds.	100 yds.
PR12MRS	12	3"	1 1/4	1500	1307	1155	2498	1896	1481	0.0*	-4.2
PR12RS	12	2 1/2"	1	1450	1316	1203	1984	1634	1364	0.0*	-4.2
PR20RS	20	2 1/2"	1/2	1450	1262	1120	1480	1121	883	0.0*	-4.6

* 0.0 indicates yardage at which shotgun was sighted in.

Slugger® Rifled Slugs

Index/EDI No.	Shell Gauge	Shell Length	Slug Wt. (oz.)	Velocity (ft./sec.)			Energy (ft.-lbs.)		Drop (in.)
				Muz.	50 yds.	100 yds.	Muz.	100 yds.	
SP12RS-5PK	12	2 1/2"	1	1560	1175	977	2364		-10.7
SP12MRS	12	3"	1	1760	1345	1075	3009		-8.3
SP12SRS	12	2 1/2"	1	1680	1285	1045	2741		-9.0
SP16RS	16	2 1/2"	1/2	1600	1175	965	1989		-10.6
SP20RS	20	2 1/2"	1/2	1580	1240	1034	1515		-9.8
SP41RS	.410	2 1/2"	1/2	1830	1335	1040	651		-8.2

Reduced Recoil Rifled Slug

RR12RS	12	2 1/2"	1	1200	989	873	1398		-15.8
--------	----	--------	---	------	-----	-----	------	--	-------


Premier® Buckshot

Index/EDI No.	Gauge	Shell Length	Powder Dr. Eq.	Velocity (ft./sec. @ 3 ft.)	Buckshot Size	Pellet Count
12HN	12	3"	4	1210	00	15
12SN	12	2 1/2"	4	1290	00	12
12N	12	2 1/2"	3 1/2	1325	00	9
20N3	20	2 1/2"	2 1/2	1200	3	20


Express® Buckshot

Index/EDI No.	Gauge	Shell Length	Powder Dr. Eq.	Velocity (ft./sec. @ 3 ft.)	Buckshot Size	Pellet Count
1235B	12	3 1/2"	Max.	1125	00	18
12HB	12	3"	4	1225	000, 00, 4	10, 15, 41
12SB	12	2 1/2"	4	1290	00	12
12B	12	2 1/2"	3 1/2	1325	000, 00, 0, 1, 4	8, 9, 12, 16, 27
20B	20	2 1/2"	2 1/2	1200	3	20


PREMIER® COPPER SOLID™ SABOT SLUGS




SLUGGER® RIFLED SLUGS

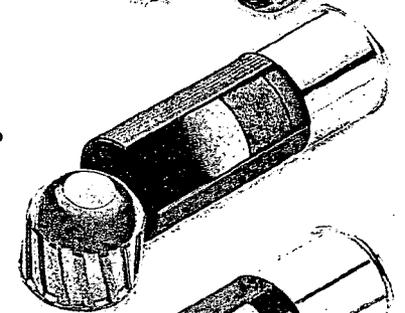

PREMIER® BUCKSHOT

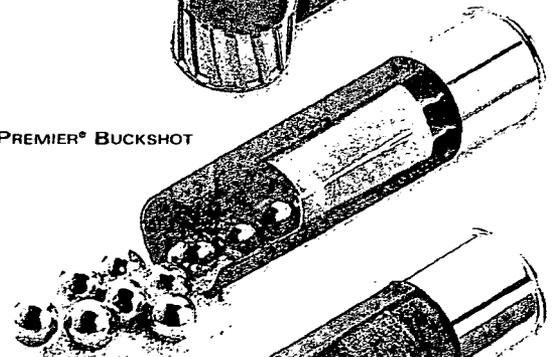


EXPRESS® BUCKSHOT

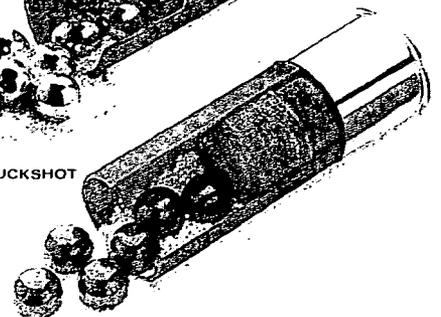

Nitro-Steel™ and Express-Steel™ — The Power and the Reach for Waterfowling's Toughest Challenges.



Make the most of your waterfowling opportunities — shoot Remington® steel with state-of-the-art design features that let you take your best shot every time. For the challenges of goose hunting or times when you need to reach out, Nitro-Steel™ Magnums are the shells of choice. For medium- to short-range waterfowl or upland hunting in "Steel Only" zones, our Express-Steel™ shells are the perfect answer.

Remington Steel shells are designed specifically for high performance in waterfowling environments: hulls permit high pellet capacity without sacrificing space for sufficient powder to deliver the payload at bird-folding velocities; powders are specifically selected to reduce unburned powder residue; and both primers and crimps have our exclusive Wetproof™ seals for protection from the elements.

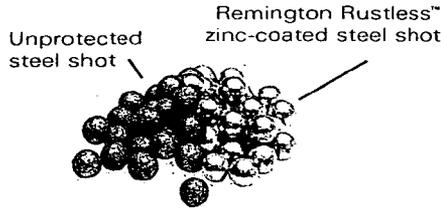

We zinc-galvanize our Rustless™ steel pellets (right, above) to prevent corrosion and "clumping" that can produce uneven patterns.

Wetproof™ primer and crimp seals totally protect powder, pellets, and ignition system from exposure to the elements

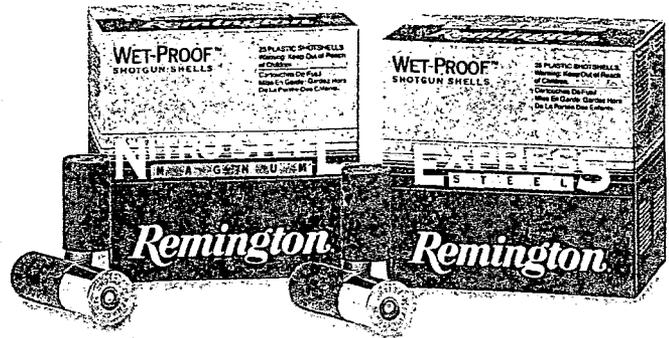


Nitro-Steel™ Magnum Shotshells

Index/EDI No.	Gauge	Shell Length	Powder Dr. Eq.	Velocity (ft./sec. @ 3 ft.)	Ounces Of Shot	Shot Sizes
NS10M	10	3½"	Magnum	1260	1¼	T, BBB, BB, 2
NS1235M	12	3½"	Magnum	1300	1¼	T, BBB, BB, 2
NS12HM	12	3"	Magnum	1265	1¼	T, BBB, BB, 1, 2, 3, 4
NS12M	12	3"	Magnum	1375	1¼	T, BBB, BB, 1, 2, 3, 4
NS12S	12	2½"	Magnum	1275	1¼	T, BBB, BB, 1, 2, 3, 4
NS20M	20	3"	Magnum	1330	1	2, 3, 4



Note: In "T" and "BBB" loads, shot charge is determined by pellet count rather than weight. Actual pellet counts are listed on the ammunition box.

Express-Steel™ Extra Long Range Shotshells

SSP12	12	2½"	Max.	1365	1¼	BB, 1, 2, 3, 4, 6
SSP12L	12	2½"	Max.	1375	1	2, 3, 4, 6
SSP16	16	2½"	Max.	1300	¾	2, 4
SSP20	20	2½"	Max.	1425	¾	2, 4, 6

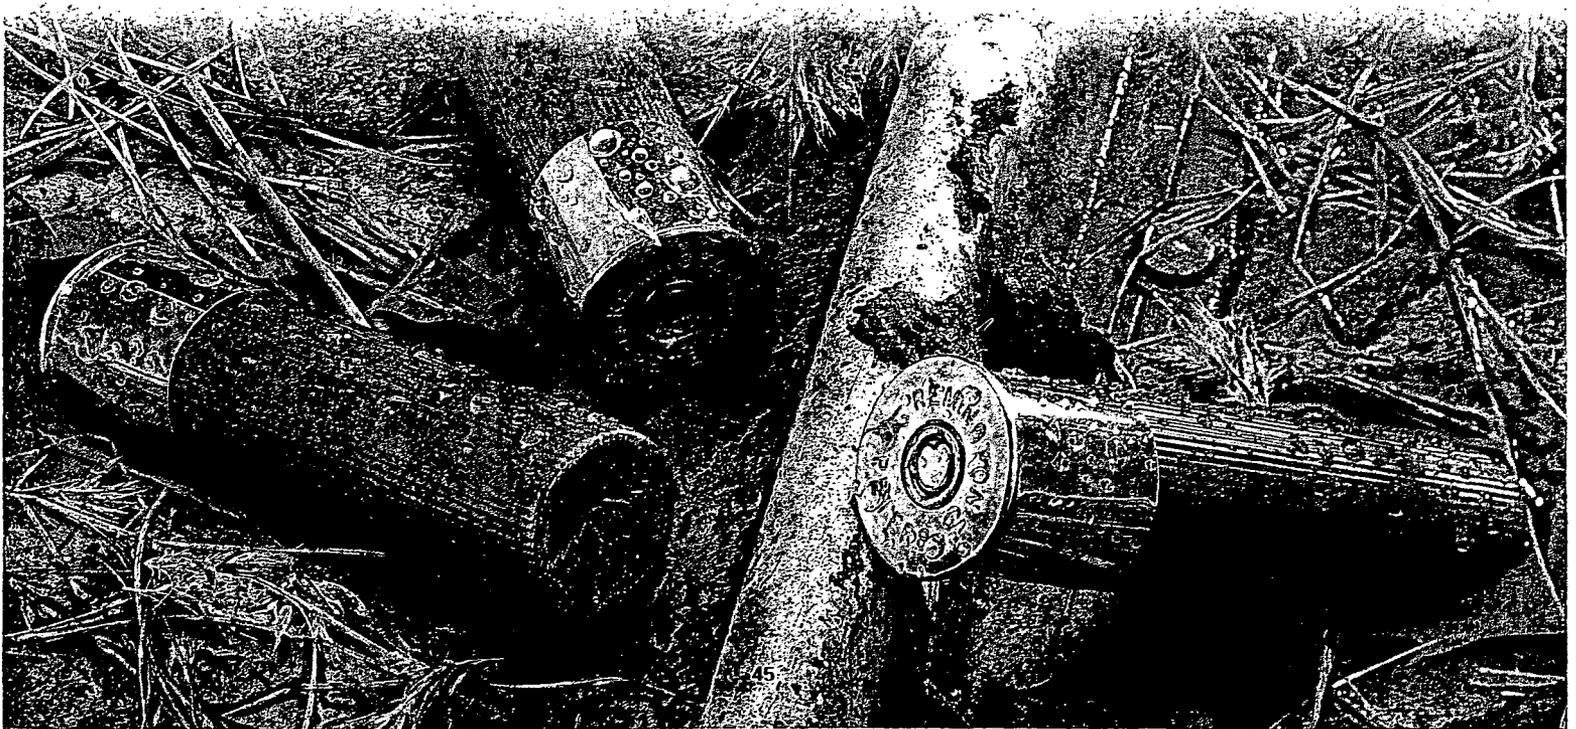

Remington® Magnum Shotshells — The Muscle and Payloads to Fill Your Patterns and Your Limits.

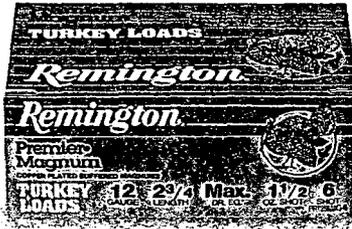

PREMIER® DUPLEX® MAGNUM SHOTSHELLS

Premier® Duplex® has No. 4 size shot carefully layered on top of No. 6 shot. When ranges vary, they combine retained energy and penetration from the larger pellets with pattern density from the smaller ones. Duplex® patterns are extremely well-balanced. If gobblers are your game, you'd better stock up on these copper-plated, buffered magnum shells early!

PREMIER® MAGNUM TURKEY LOADS

Remington Premier® Magnum Turkey Loads provide that extra edge to reach out with penetrating power and dense, concentrated patterns. Its magnum-grade, Copper-Lokt® shot is protected by our Power Piston® wad and cushioned with special polymer buffering. Available with some of the heaviest payloads of 4s, 5s, and 6s on the market.

NITRO MAG® BUFFERED MAGNUM SHOTSHELLS

The original buffered magnum shotshells from Remington. The shot charge is packed with a generous amount of shock-absorbing polymer buffering and surrounded by our patented Power Piston® wad to protect the specially hardened shot all the way down the barrel for dense, even patterns and uniform shot strings.

EXPRESS® EXTRA LONG RANGE SHOTSHELLS

The hunter's choice for a wide variety of game-bird applications, available in an exceptionally broad selection of loadings, from 12-gauge to .410 bore, with shot size options ranging from BBs all the way down to 9s — suitable for everything from quail to farm predators.

Premier® Duplex® Magnum Shotshells

Index/EDI No.	Gauge	Shell Length	Powder Dr. Eq.	Velocity (ft/sec. @ 3ft.)	Ounces of Shot	Shot Sizes
MP12H	12	3"	Max.	1210	1½	4X6
MP12S	12	2½"	Max.	1260	1½	4X6

Premier® Magnum Copper-Plated Turkey Loads

P10HM	10	3½"	Max.	1210	2½	4, 6
P1235M	12	3½"	Max.	1150	2½	4, 6
P12XHMM	12	3"	Max.	1175	2	4, 5, 6
P12SM	12	2½"	Max.	1260	1½	4, 5, 6
P20XHMM	20	3"	Max.	1185	1½	6

Nitro Mag® Buffered Magnums


NM10H	10	3½"	4½	1210	2½	4
NM12H	12	3"	Max.	1210	1½	2, 4, 6
NM12	12	3"	4	1280	1½	4, 6
NM12S	12	2½"	Max.	1260	1½	2, 4, 6
NM20H	20	3"	Max.	1185	1½	4, 6
NM20S	20	2½"	Max.	1175	1½	4, 6

Express® Extra Long Range Shotshells


SP12	12	2½"	3½	1330	1½	BB, 2, 4, 5, 6, 7½, 9
SP16	16	2½"	3½	1295	1½	4, 6, 7½
SP20	20	2½"	2½	1220	1	4, 5, 6, 7½, 9
SP28	28	2½"	2½	1295	¾	6, 7½
SP410	.410	2½"	Max.	1200	¾	4, 6, 7½
SP413	.410	3"	Max.	1135	¾	4, 6, 7½

* NEW FOR 1998

PREMIER® DUPLEX® MAGNUM SHOTSHELLS



PREMIER® MAGNUM TURKEY LOADS

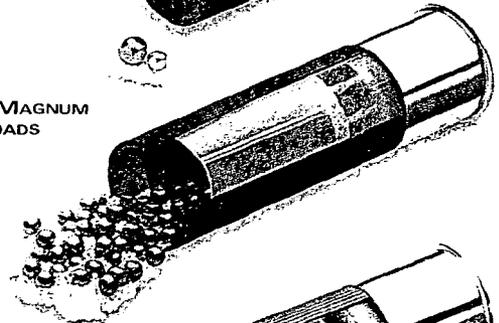

NITRO MAG® BUFFERED MAGNUM SHOTSHELLS



EXPRESS® EXTRA LONG RANGE SHOTSHELLS



Remington® Upland Shotshells — First in the Field.



PREMIER® FIELD LOADS

Remington Premier® Field Loads are our finest upland shells. Every component is the best we make: a mid-height brass-plated cap for strength, extra-hard lead shot with Copper-Lokt® plating for pattern perfection, and additional shot protection and tight gas sealing from our Power Piston® one-piece wad. Each load is designed with an optimum powder-to-shot-charge ratio.



SHURSHOT® HEAVY FIELD AND HEAVY DOVE LOADS

12-gauge ShurShot® Heavy Field Loads combine a 3¼-dram powder equivalent with a 1¼- or 1⅛-oz. payload — long considered to be the best-balanced, best-patterning upland field load. ShurShot® Heavy Dove Loads combine dense patterns with light recoil for high-volume, small-bird hunting.



LEAD AND STEEL GAME LOADS

These budget-stretching shells combine sufficient power and patterns to do the job well because they include the same quality components as our other Remington shotshells: all-plastic Unibody™ hulls and base wad, specially blended powders, Power Piston® one-piece wads, Kleanbore® priming, and top-quality lead or steel shot.



REMINGTON SPORT LOADS

In 12- and 20-gauge, these economical shells are versatile, multi-purpose utility loads for a variety of shotgunning. Loaded with No. 8 shot, they perform effectively at any time for skeet, trap and sporting clays, or quail, doves, and woodcock. They're the loads that should always be handy for whatever turns up at the moment.

Premier® Copper-Plated Field Loads

Index/EDI No.	Gauge	Shell Length	Powder Dr. Eq.	Velocity (ft./sec. @ 3ft.)	Ounces of Shot	Shot Sizes
PR12HF	12	2½"	3¼	1220	1¼	6, 7½, 8
PR12F	12	2½"	3¼	1255	1¼	7½, 8
PR20F	20	2½"	2¼	1165	1	6, 7½, 8

ShurShot® Heavy Field and Heavy Dove Loads

RP12H	12	2½"	3¼	1220	1¼	6, 7½, 8
R12HD	12	2½"	3¼	1255	1¼	6, 7½, 8
R20HD	20	2½"	2¼	1165	1	6, 7½, 8

Lead Game Loads

GL12	12	2½"	3¼	1290	1	6, 7½, 8
GL16	16	2½"	2¼	1200	1	6, 7½, 8
GL20	20	2½"	2¼	1225	¾	6, 7½, 8
GL410*	.410	2½"	Max.	1200	½	6
HGL12	12	2½"	3¼	1330	1¼	4, 6, 7½
HGL16	16	2½"	3¼	1295	1¼	6
HGL20	20	2½"	2¼	1220	1	4, 6, 7½

*GL410 packed 20 rounds per box


Steel Game Loads

GSTL12	12	2½"	3¼	1325	1	7
GSTL20	20	2½"	2¼	1200	¾	7


Sport Loads

R12SL	12	2½"	3¼	1290	1	8
R20SL	20	2½"	2¼	1225	¾	8

PREMIER® FIELD LOADS

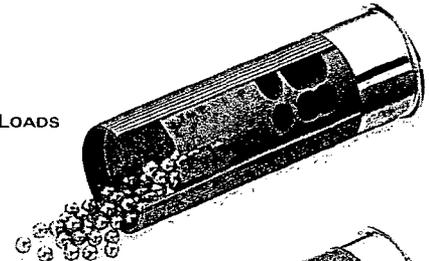

SHURSHOT® HEAVY FIELD AND HEAVY DOVE LOADS

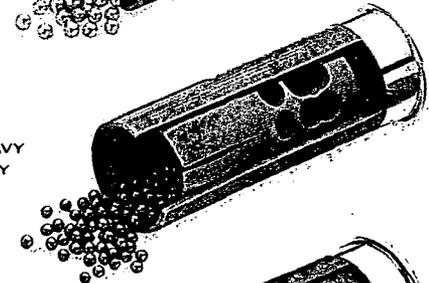

LEAD AND STEEL GAME LOADS



REMINGTON® SPORT LOADS



Remington® Premier® STS® & Nitro 27™ Shells Won Shooters More Trophies Than Any Other Brand at the 1997 Grand American. We're Not Surprised...



PREMIER® NITRO 27™ HANDICAP TRAP LOADS

Nitro 27™ is specially designed for handicap trap shooting and long-range sporting clays presentations. It is configured to provide maximum velocity and superbly dense patterns in a hull designed for easy reloading with our new deep mouth taper design.



PREMIER® STEEL TARGET LOADS

You can substitute our Premier® steel target loads for comparable lead skeet or sporting clays loads and never notice the difference — because they match them so closely in velocity, pattern density, and target-breaking impact. Available in 12- and 20-ga., they utilize a one-piece Unibody™ hull with a barrel-protecting, high-density polyethylene shot cup.



PREMIER® STS® TARGET LOADS

In 1997, Remington's new 12-ga. STS® Target Loads took shot-to-shot consistency to a new performance level, setting the standard at all major skeet, trap, and sporting clays shoots across the country, while providing handloaders with unmatched reloading ease and hull longevity. New for 1998 are 12-ga. pigeon loads, and small gauge clay target loadings in 20-ga., 28-ga., and .410 bore.



PREMIER® STS® SHELLS HELPED DEBBIE OHYE BECOME THE FIRST WOMAN TO ACHIEVE TRAPSHOOTING'S GRAND SLAM!

10-time ATA All-American and 1996 Ladies Team Captain Debbie Ohye has become the first woman shooter to claim one of trapshooting's greatest achievements — the Grand Slam: 200x200 singles, 100x100 27yd. handicap, and 100x100 doubles. Along the way, Premier® STS® shells did their part to help her do her best. Congratulations, Debbie!

Trap Loads

Index/EDI No.	Gauge/Bore	Load Type	Shell Length	Powder Dr. Eq.	Velocity (ft./sec. @ 3 ft.)	Ounces of Shot	Shot Sizes
STS121	12	Premier® STS™ Target	2 1/4"	2 1/2	1185	1	8, 8 1/2
STS12LR	12	Premier® STS™ Low Recoil	2 1/4"	2 1/2	1100	1 1/4	7 1/2, 8
STS12L	12	Premier® STS™ Light Target	2 1/4"	2 1/2	1145	1 1/4	7 1/2, 8, 8 1/2
STS12LH	12	Premier® STS™ Light Handicap	2 1/4"	3	1200	1 1/4	7 1/2, 8
STS12NH	12	Premier® Nitro 27™ Handicap	2 1/4"	HNDPCP	1200	1 1/4	7 1/2, 8
RIT12L	12	Premier® International	2 1/4"	—	1325	24 gm. (1 1/2 oz.)	7 1/2

Skeet Loads

STS121	12	Premier® STS™ Target	2 1/4"	2 1/2	1185	1	9
STS12L	12	Premier® STS™ Light Target	2 1/4"	2 1/2	1145	1 1/4	9
STS12H	12	Premier® STS™ Heavy Target	2 1/4"	3	1200	1 1/4	9
RIT12L	12	Premier® International	2 1/4"	—	1325	24 gm. (1 1/2 oz.)	9
★ STS20	20	Premier® STS Target	2 1/4"	2 1/2	1200	1 1/4	9
★ STS20M	20	Premier® STS Target	2 1/4"	—	1175	1	9
★ STS28	28	Premier® STS Target	2 1/4"	2	1200	1 1/4	9
★ STS410	.410	Tournament Skeet	2 1/4"	MAX	1200	1 1/4	9

Sporting Clays Loads

★ STS20SC	20	Premier® STS Sporting Clays	2 1/4"	2 1/2	1200	1 1/4	8
★ STS28SC	28	Premier® STS Sporting Clays	2 1/4"	2	1200	1 1/4	8
★ STS410SC	.410	Sporting Clays	2 1/4"	MAX	1200	1 1/4	8 1/2

Steel Target Loads

RSTL12L	12	Premier® Target	2 1/4"	2 1/2	1145	1 1/4	7, 8
RSTL12M	12	Premier® Target	2 1/4"	3	1200	1 1/4	6 1/2, 7
RST20	20	Premier® Target	2 1/4"	2 1/2	1200	1 1/4	8

Pigeon Loads

★ STS12P	12	Premier® STS Pigeon	2 1/4"	3 1/2	1220	1 1/4	7 1/2, 8
----------	----	---------------------	--------	-------	------	-------	----------


★ NEW FOR 1998

PREMIER® STS® 20-GA.

PREMIER® STS® 28-GA.

PREMIER® STS® .410 BORE

PREMIER® STS® 12-GA. PIGEON

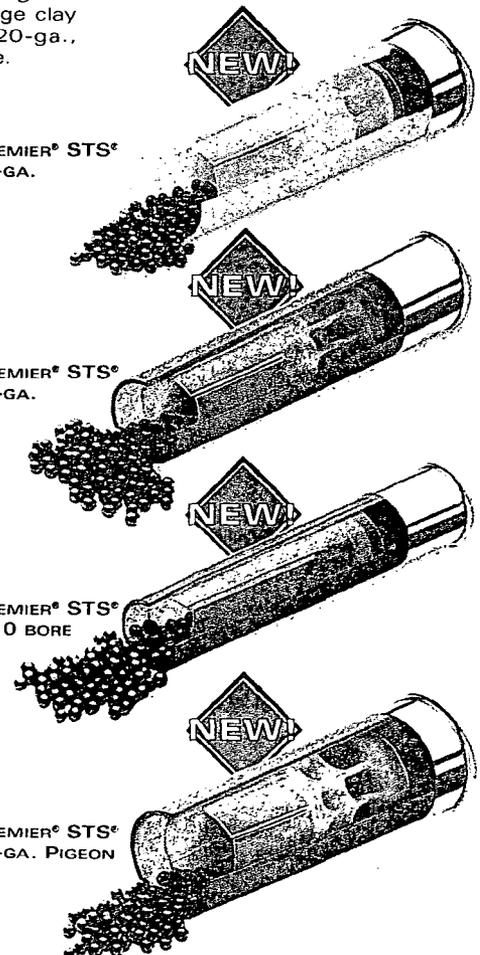


Remington® Metallic and Shotshell Components — The Best Parts in the Business.

There are no secret ingredients in the world's finest ammunition — just the world's finest components. They're all Remington®, and they're yours for the asking. Just save the highest-quality plastic hulls made, or the best brass in the business — ours. Then add the key remaining parts, like our precision-made Premier® shotshell or Kleanbore® centerfire primers, and our exclusive Power Piston® and Figure 8™ shotcup/wads. We don't mind if your ammunition is as good as ours. With our components, it should be.

KLEANBORE® CENTERFIRE PRIMERS


Within every Kleanbore® primer is a group of sub-components assembled to exceptionally precise tolerances. Primer cup dimensions are controlled to four decimal places. The priming mix is specially formulated for consistent ignition with a wide variety of powder types, and tested for reliability over a temperature range of -20°F to +150°F. Individual primer pellet weight is controlled to .01 grams. A unique tripod anvil design creates a larger "sweet spot" with maximum sensitivity — even with off-center firing pin strikes. And lastly, each lot is 100% visually inspected and subjected to critical ballistic tests. Rifle offered in 6½, 7½ small rifle, and 9½ large rifle and 9½M magnum rifle. Handgun available in 1½ small pistol, 2½ large pistol, 5½, and 7½ small rifle.

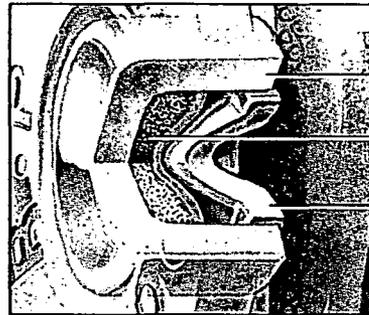

- Primer cup dimensions controlled to four decimal places
- Priming mix ignition reliability from -20°F to 150°F
- Unique, tripod-shaped anvil creates larger "sweet spot" — even with off-center firing pin strikes

209 PREMIER® PRIMERS


We make our 209 Premier® primers to exacting quality control standards from specially selected materials. Our primer mix delivers reliable, consistent ignition over a broad range of velocities and pressures. Use of specialized machinery permits battery cup manufacturing tolerances to three decimal points. Each anvil receives inspection during assembly, and primer cup sensitivity assures ignition even from off-center firing pin strikes. And the foil-covered flash hole prevents intrusion from any type of powder. The result is a primer you can use with complete confidence, so you can concentrate on the target. 209 Premier® for 12, 20, 28-gauge. .410 Premier® for target and field loads.

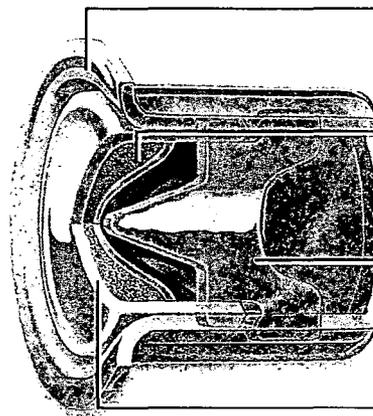

- Fit between battery cup and primer cup held to three decimal places
- Primer mix ensures consistent reload performance over wide range of pressures and velocities
- Foil-covered flash hole prevents powder intrusion
- Anvil made of cartridge brass for strength; 100% inspected during manufacture
- Primer cup provides large "sweet spot" — even from angled firing pin firearms

REMINGTON CARTRIDGE BRASS


As the toughest and most formable in the industry, our cartridge cases are carefully drawn from specially-alloyed brass to provide consistently exact internal volume and resistance to case stretching and brittleness. Primer pocket tolerances are held to .001". Finally, closely monitored case neck annealing assures easier re-sizing and longer reloading life.

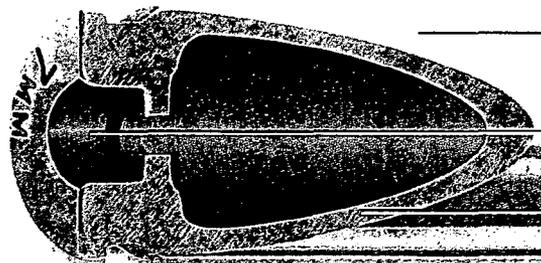

- Cases drawn from specially alloyed brass for consistent internal volumes
- Primer pocket tolerances held to .001"
- Closely-monitored annealing assures easier resizing and longer reloading life

SHOTSHELL COMPONENT WADS

Our one-piece shot cup/wad columns remain the unmatched choice for everything from heavy, 10-gauge magnums to the lightest small-bore target loads — including the .410. And for critical 12-gauge clay target loads, our exclusive Figure 8™ wad belongs on every reloading bench. For 1-oz. 12-gauge loads, use our volume-calibrated TGT-12 wad.

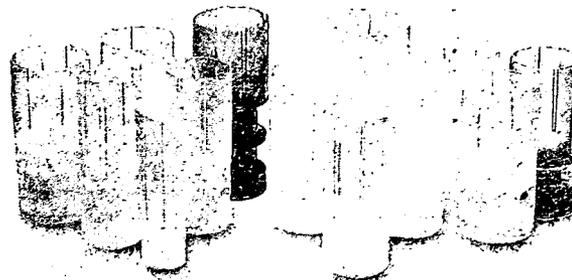

NOTE: Careless or incorrect hand-loading is dangerous. Improperly made handloads may cause the barrel or breech of any firearm to burst, which can result in serious personal injury. Safety Note: ALWAYS follow published reloading specifications.



UMC® Ammunition — All the Performance You Need, with the Value You Want.


For over a century, the Union Metallic Cartridge Company name has been synonymous with some of the finest ammunition made in the United States. Since its beginning in 1867, UMC has blazed a trail of innovation in cartridge-making excellence that continues to this day. UMC was the first ammunition company to produce centerfire ammunition, and was responsible for the development of the .44-40 — "The cartridge that won the West," the .22 Long Rifle cartridge, and super-accurate "Palma Match" target ammunition. All these milestones mean one thing: Experience — experience that translates into outstanding performance at a very attractive price.

At our UMC division, we make only first-quality product, in a limited line of popular specifications, so we can bring you the benefit of manufacturing efficiencies that keep costs low. We offer fourteen handgun loadings and six rifle specs.

The rifle and handgun ammunition we make today is the product of 131 years of design innovation and manufacturing excellence. So try UMC — and enjoy the experience.

UMC® Handgun Cartridges

Caliber	Order No.	Primer No.	Wt. (grs.)	Bullet Style	Velocity (ft./sec.)			Energy (ft.-lbs.)			Mid-range Trajectory	
					Muz.	50 yds.	100 yds.	Muz.	50 yds.	100 yds.	50 yds.	100 yds.
.25 Auto Pistol (6.35mm)	L25AP	1½	50	Metal Case	760	707	659	64	56	48	2.0"	8.7"
.32 Auto	L32AP	1½	71	Metal Case	905	855	810	129	115	97	1.4"	5.8"
.357 Magnum	L357M12	5½	125	JSP	1450	1240	1090	583	427	330	0.6"	2.8"
9mm Luger	L9MM3	1½	115	Metal Case	1135	1041	973	329	277	242	0.9"	4.0"
.380 Auto	L380AP	1½	95	Metal Case	955	865	785	190	160	130	1.4"	5.9"
.38 Super ACP	L38SUP	1½	130	Metal Case	1215	1099	1017	426	348	298	0.8"	3.6"
.38 Special	L38S5	1½	158	Lead Rnd Nose	755	723	692	200	183	168	2.0"	8.3"
.38 Special	L38S11	1½	130	Metal Case	950	913	879	261	240	223	1.2"	4.8"
.40 S&W	L40SW3	5½	180	Metal Case	985	936	893	388	350	319	1.4"	5.0"
.40 S&W	L40SW4	5½	165	Metal Case	1150	1040	964	485	396	340	1.0"	4.0"
.357 Sig.	L357S1	5½	125	Metal Case	1350	1146	1018	506	422	359	0.7"	3.3"
10mm Auto	L10MM6	2½	180	Metal Case	1150	1063	998	529	452	398	0.9"	3.7"
.44 Rem. Mag.	L44MG7	2½	180	JSP	1610	1365	1175	1036	745	551	0.5"	2.3"
.45 Auto	L45AP4	2½	230	Metal Case	835	800	767	356	326	300	1.6"	6.8"




UMC® Centerfire Rifle Cartridges

Caliber	Order No.	Primer No.	Wt. (grs.)	Bullet Style	Velocity (ft./sec.)			Energy (ft.-lbs.)			Short-range Trajectory					
					Muz.	50 yds.	100 yds.	Muz.	50 yds.	100 yds.	50 yds.	100 yds.	150 yds.	200 yds.	250 yds.	300 yds.
.223 Remington	L223R3	7½	55	MC	3240	2759	2326	1282	929	660	0.4	0.8	0.0	-2.1	-5.9	-11.6
7.62 X 39mm	L762391	7½	123	MC	2365	2060	1780	1527	1159	865	0.4	0.0	-2.5	-7.3	-15.0	-25.7
.30 Carbine	L30CRI	6½	110	MC	1990	1567	1236	1412	600	373	0.9	0.0	-4.5	-13.5	-28.3	-49.9
.308 Win.	L308W4	9½	150	MC	2820	2533	2263	2648	2137	1705	0.2	0.0	-1.5	-4.5	-9.3	-15.9
.30-06 Sprfld.	L30062	9½	150	MC	2910	2761	2617	2820	2539	2281	0.1	0.0	-1.4	-4.2	-8.6	-14.8
.303 British	L303B1	9½	174	MC	2475	2340	2209	2366	2115	1885	1.1	1.4	0.0	-3.4	-9.1	-17.4



FOLLOWING
IN A
TRADITION
OF OUTDOOR
PERFORMANCE.

—
THE
REMINGTON
VISA® CREDIT
CARD.

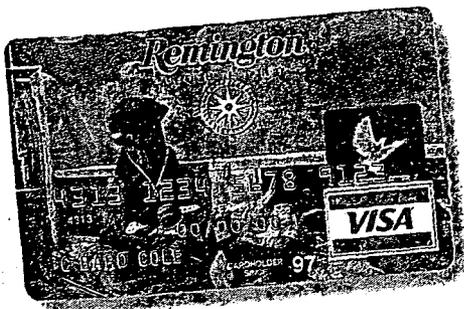

APPLY TODAY!



'Surf' the net to find new shooting 'turf' —

NSSF website

www.wheretoshoot.org

NSSF's "Where to Shoot" internet website offers information on more than 1,380 public shooting ranges, sportsman's clubs, and hunting preserves. Each listing includes travel directions, types of available ranges, information on instruction and tournaments, as well as a contact name and phone number. Special features such as equipment rental and handicapped access are also listed. The information is searchable by name of facility, state, area code, type of shooting, or type of facility. A tremendous service to all shooters, but particularly those who are just getting started or who would like to find shooting facilities when traveling or vacationing.

Introduce a newcomer to the out-of-doors—

Invite a friend, neighbor, your boss to . . . "Step Outside"

A major national effort, led by the National Shooting Sports Foundation (NSSF) and the Archery Manufacturers and Merchants Organization (AMO), will provide the structure and theme for organizations and individuals to sponsor hands-on outdoor experiences to introduce newcomers to the outdoor sports. For information on how you can participate, write to NSSF, 11 Mile Hill Road, Newtown, CT 06470.

Remington® Black Powder Ammo — The Best in the Business from the Oldest Company in the Business.

Remington and black powder go back to 1816. Since then, muzzleloading components have gone through a lot of changes, but some things haven't changed — the desire on the part of the hunter for a bullet that goes where it's aimed and drops game as it is supposed to. And the desire on Remington's part to provide muzzleloading bullets and components that do just that, with our state-of-the-art sabot-encased bullets, special alloy brass-plated round balls, and the hottest caps you can fire.



PREMIER® COPPER SOLID™ BULLETS WITH SABOTS

Encased in a .50-caliber sabot, the deep hollow point cavity and spiral nose cuts of the 289-gr. .45-caliber Copper Solid™ bullet deliver optimum penetration, virtually 100% weight retention, and nearly 2x caliber expansion. You can't get a better combination of accuracy and on-game performance. Packed with two 4-packs per blister card.



CORE-LOKT® BULLETS WITH SABOTS

We began with our Core-Lokt® jacketed hollow point handgun hunting bullet with deep-penetrating, controlled expansion characteristics that are exactly geared to muzzleloading velocities. Then we encased these bullets in our four-segment, one-piece sabot. The result is one of the most accurate and effective muzzleloading bullets ever developed. Offered in .357 to .44 caliber, with .45, .50, and .54 caliber sabots, in weights of 165-303 grains.




GAMEMASTER™ BULLETS

Remington isn't a newcomer to muzzleloader bullet production, but an experienced old hand returning with the most advanced technology. The design and performance of these lead bullets show the results. Each one is uniformly pre-lubed for cleaner handling, easier loading, and minimal barrel leading. They are sized for barrels of .45 to .58 caliber, in bullet weights from 285 to 535 grains.



PREMIER® GOLDEN™ LEAD ROUND BALLS

Remington has taken extra steps to assure the spherical concentricity and consistent uniformity of these round balls in both size and weight. They are cold-swaged with no sprues or voids. Special alloy adds hardness for deep penetration and maximum expansion. And brass plating allows cleaner handling and reduces barrel leading. They're available in eight caliber choices from .32 to .58.



CORE-LOKT® 20 PACK

Convenient, sturdy plastic box carries 20 Core-Lokt® Bullets with sabots. Each bullet and sabot assembly is held in its own compartment, and the lid snaps closed for secure toting.



GAMEMASTER™ 20 PACK

Convenient, sturdy plastic box carries 20 Gamemaster™ Bullets. Each bullet is held in its own compartment, and the lid snaps closed for secure toting.



PERCUSSION CAPS

Reliable in all weather conditions, these No. 10 and 11 percussion caps have been improved to generate up to 40% more flame volume. The #11 cap has been dimensionally shaped to fit more snugly on nipples, and both sizes feed reliably through Remington Capmaster™ and other standard cappers.



Linda Blackburn, of the Remington Press Office (left), and outdoor writer Monte Burch share a proud moment after a successful muzzleloader black bear hunt in Maine.

Remington® Black Powder Accessories — Muzzleloader Hunting Made Easy.

Remington has developed a broad selection of loading, shooting, cleaning, and maintenance items to meet the needs of percussion and in-line muzzleloader shooters, including three types of camo-pattern bags for easy field transport.

ALL-NATURAL WONDER LUBE®

BALL/BULLET STARTER

BRASS POWDER MEASURE



ALL-NATURAL BORE CLEANER

CLEANING ROD AND BRUSHES



"TRI-PURPOSE" T-HANDLE TOOL

This is a handy accessory that belongs in everyone's possible bag. Assembled, it functions as a 2-piece bullet starter; unscrew the handle, and thread it onto the end of a Model 700™ ML/MLS ramrod for better control.




BLACK ROUND BALL STARTER

We've colored the wood black on our bullet starter and given it a matte finish to keep light from reflecting off of the surface.



10" EXTENDED CLEANING TUBE


When you really want to scrub out your muzzleloader, this new extended cleaning tube keeps liquids and debris well away from the action, and allows easy access without having to take off scope. Simply remove breech plug and thread into receiver.

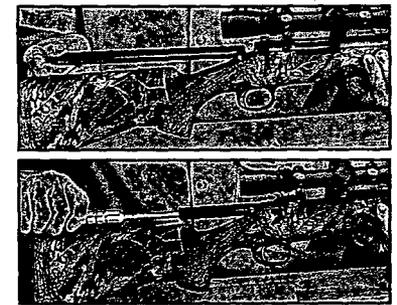


DELUXE STARTER KIT

Our new 70-piece Deluxe Starter Kit includes everything you need to get started in muzzleloading, including:


- Bullet starter with brass tips
- 3-in-1 tool
- Brass powder measure with grain scale
- Capmaster™ in-line capper
- Brass ball puller
- 50 pre-lubed patches
- Camouflaged belt bag
- All-Natural Wonder Lube®
- All-Natural Bore Cleaner
- Black-Out Cleaning system

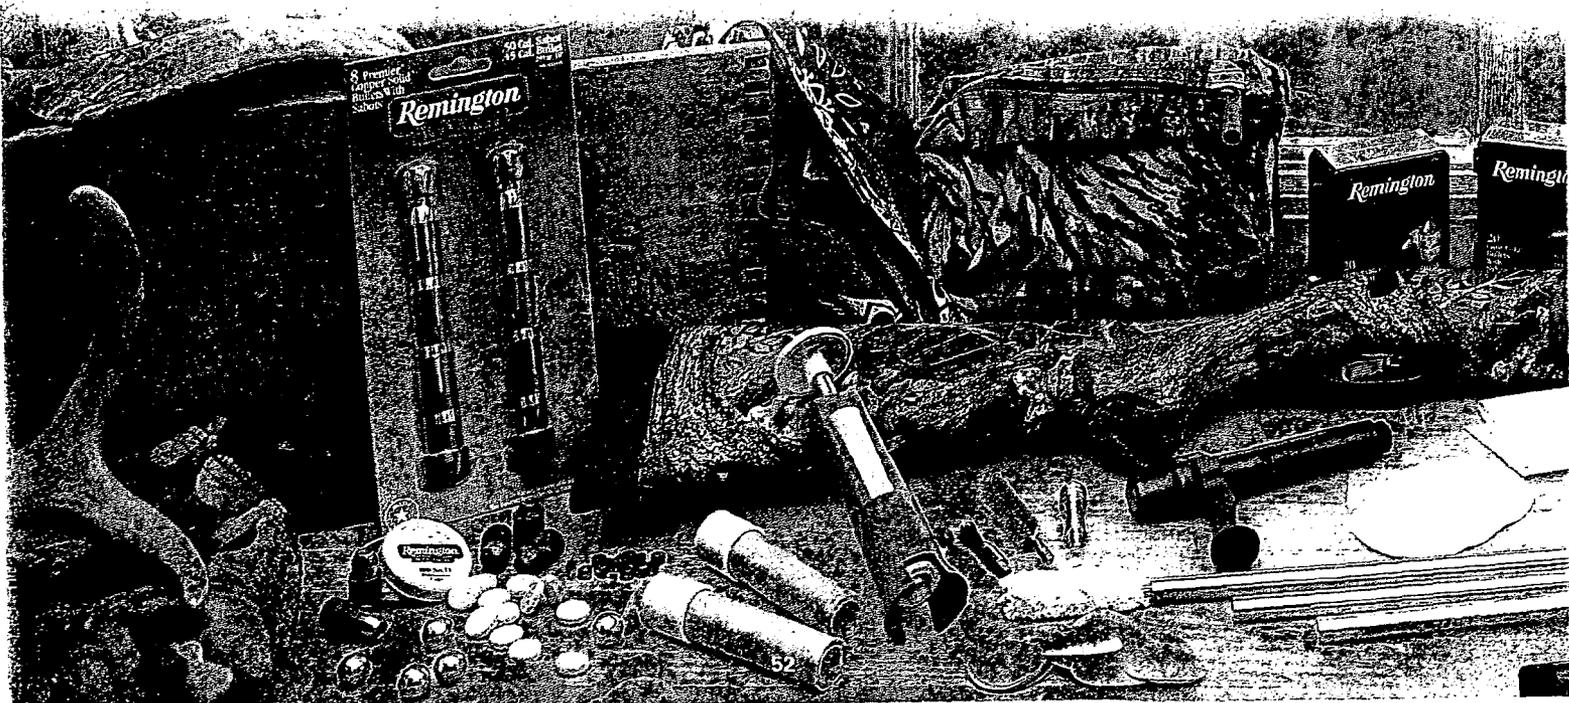

Everything You Need to Stay on Top of the Game.

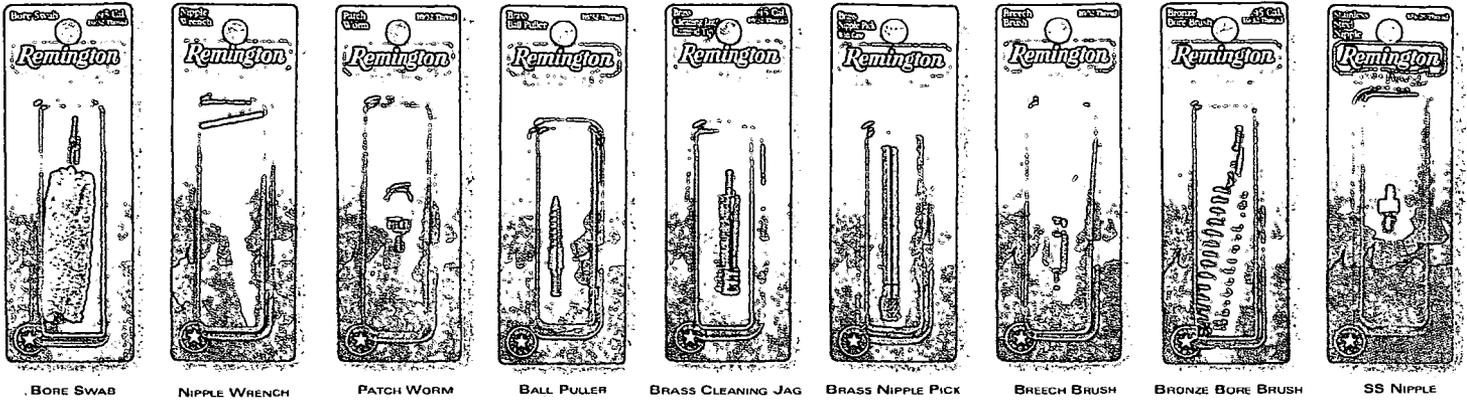


BORE SWAB NIPPLE WRENCH PATCH WORM BALL PULLER BRASS CLEANING JAG BRASS NIPPLE PICK BREECH BRUSH BRONZE BORE BRUSH SS NIPPLE


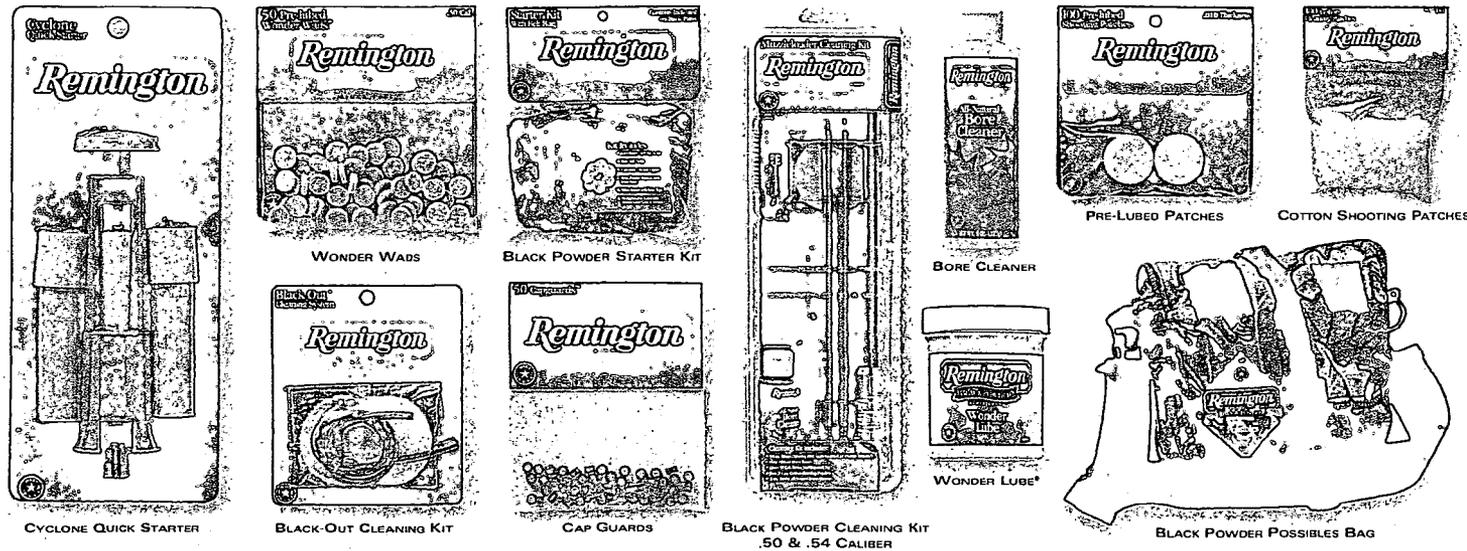


CYCLONE QUICK STARTER WONDER WADS BLACK POWDER STARTER KIT BORE CLEANER PRE-LUBED PATCHES COTTON SHOOTING PATCHES
 BLACK-OUT CLEANING KIT CAP GUARDS BLACK POWDER CLEANING KIT .50 & .54 CALIBER WONDER LUBE® BLACK POWDER POSSIBLES BAG

Look for other Remington Black Powder Accessories not shown above: Quick-Look™ Bore Reflectors, "3-in-1" Tool, Flow-View Flask, Brass Powder Measure, and Capmaster™ Capper.

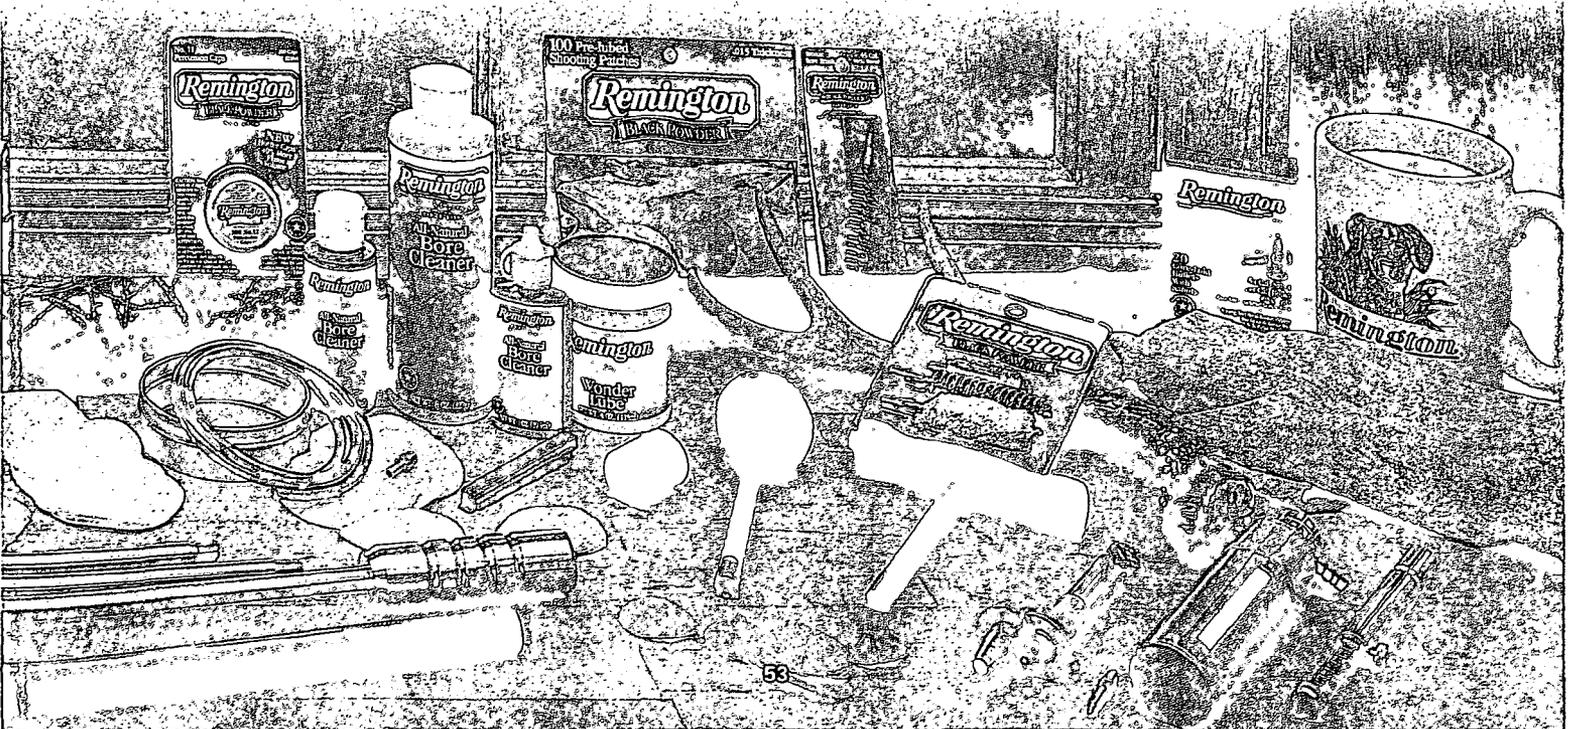



Premier™ Series Safes — Unmatched in Quality, Construction, and Appearance.

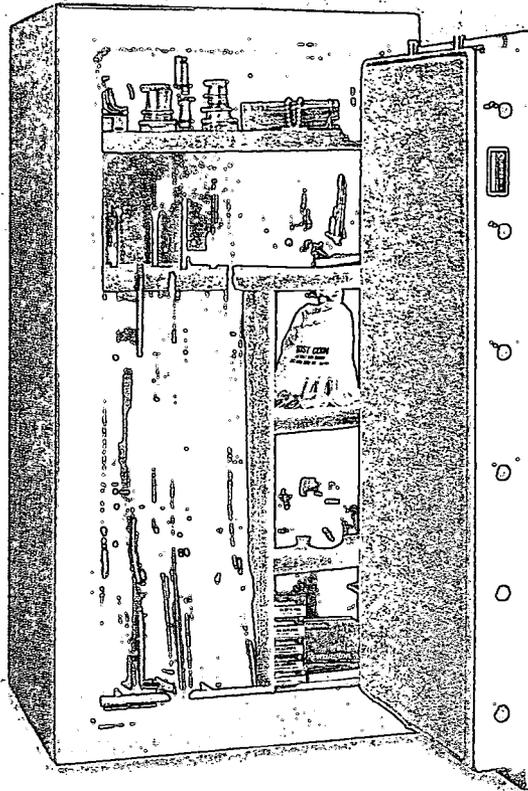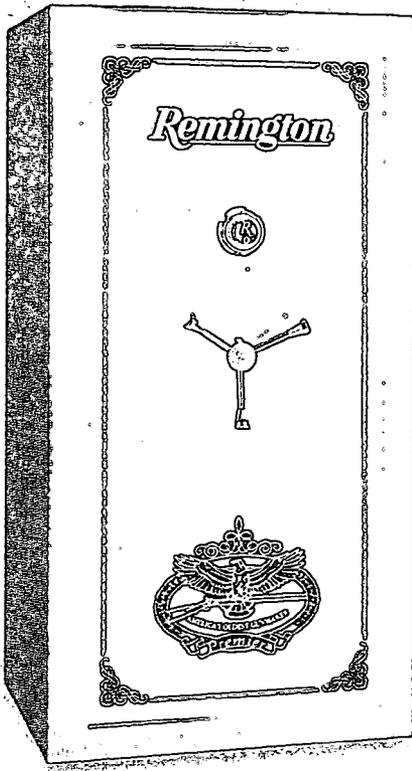

PREMIER™ SERIES

In terms of design, construction, and appearance, these are the finest safes in our line. All have double-wall construction, with a body of $\frac{3}{16}$ " steel. A fully recessed 1" door and internal ball-bearing hinges offer potent insurance against forced entry. Contents are fire-protected up to 1200°F. Additional fire protection on Quad-Wall-equipped versions is provided by our Palusol® fire-seal gasket. A Sargent & Greenleaf lock with 1" chrome-plated locking bolts secures the door. Backed by an extensive, drill-resistant hardplate, our fail-safe triple relocking system provides additional protection against torching, hammering, drilling, and punching. The three-spoked handle and dial are 14K gold-plated for both beauty and durability. Inside, mildew-resistant nylon carpeting or optional velour fabric add a handsome touch. See page 57 for full details.



Classic™ Series Safes — The Perfect Balance of Quality and Cost.

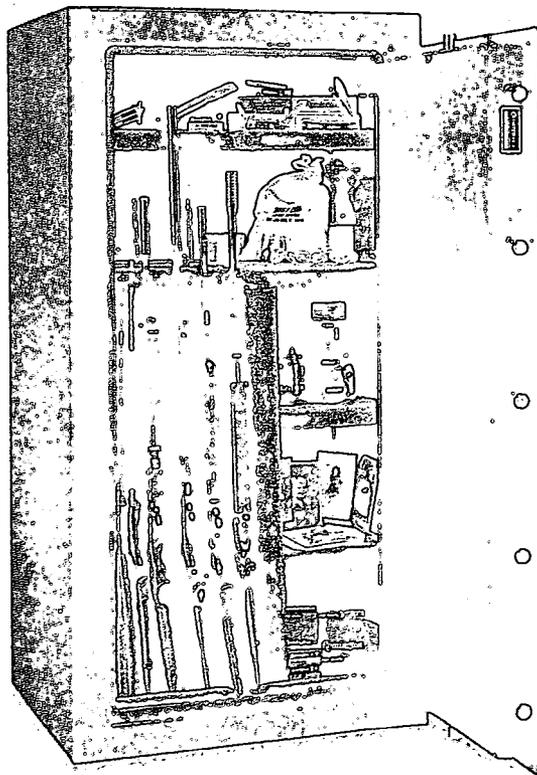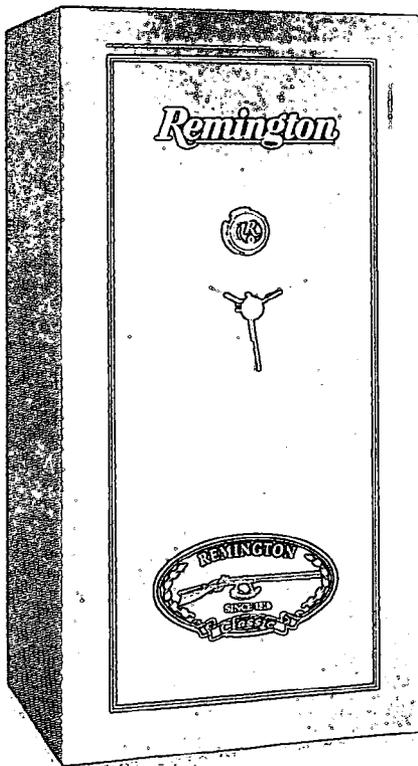

CLASSIC™ SERIES

Our Classic™ safes provide a perfect balance of quality and cost by incorporating many of the features found in our Premier™ safes at a moderate price. Features include: Sargent & Greenleaf combination locks; up to 14 active 1" diameter chrome-plated door bolts; three relocking devices; internal ball-bearing hinges; tight-fitting $\frac{1}{4}$ " recessed door; $\frac{1}{4}$ " hardplate behind the lock and door bolts. The safe body is constructed of 10-gauge steel. The attractive, 14K gold-plated 3-spoke handle and combination dial are equipped with a key lock. All Classic™ safes have our quiet, easy-retracting bolt guides. Interiors are fitted with plush, moisture-resistant carpet. Fire protection options include Double-, Triple-, and Quad-Wall construction with Palusol® fire-seal gasket. Each one is backed by a limited lifetime break-in warranty, and is available in a choice of four sizes to fit your specific needs and available space. See page 57 for full details.



"Trophy" Series Safes — Full-Size Capacity at a Moderate Price.

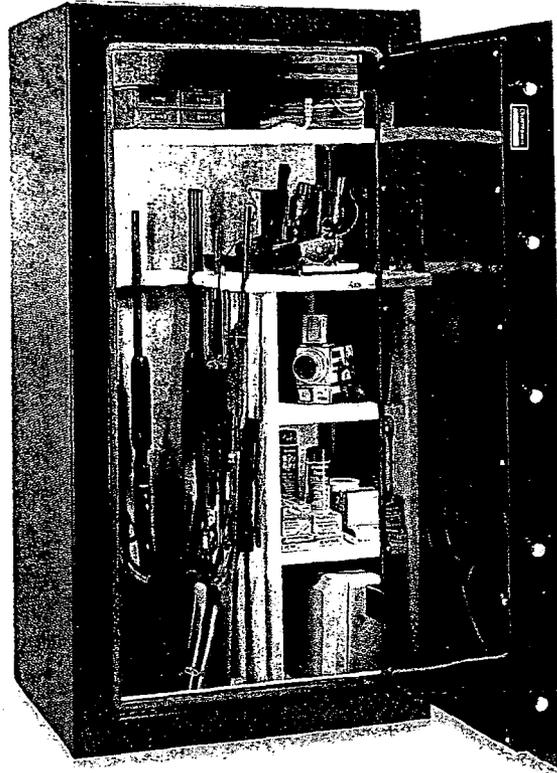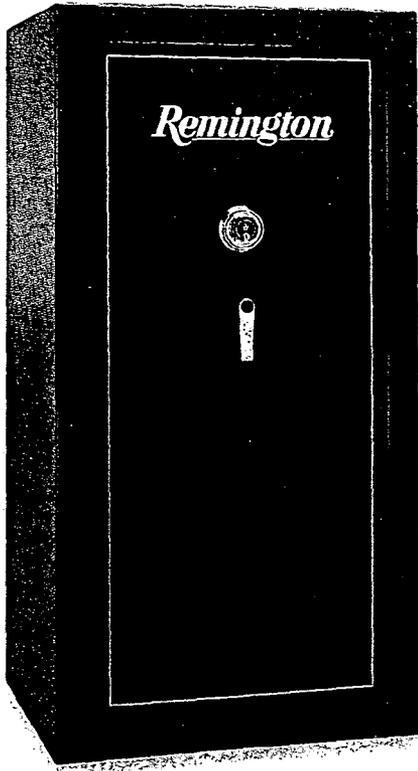

"TROPHY" SERIES

The full-size, moderately priced "Trophy" series comes in a choice of two different sizes to suit your individual requirements. The seamless body is constructed of 10-gauge steel. The close-fitting $\frac{3}{16}$ " recessed door has internal hinges and eight 1" locking bolts. Each safe is equipped with a reliable Sargent & Greenleaf combination lock. A 14K gold-plated dial with brass-plated handle and key lock is standard. Also available are many of the additional options offered with other Remington safes, including Double- or Triple-Wall fire protection, as well as four interior shelving arrangements and two color choices. The outer surface has a high-gloss paint finish in a choice of three colors, and is decorated with a single gold pinstripe and Remington logo. See page 57 for full details.

Sportsman™ Series Safes — Proven Protection at a Practical Price.

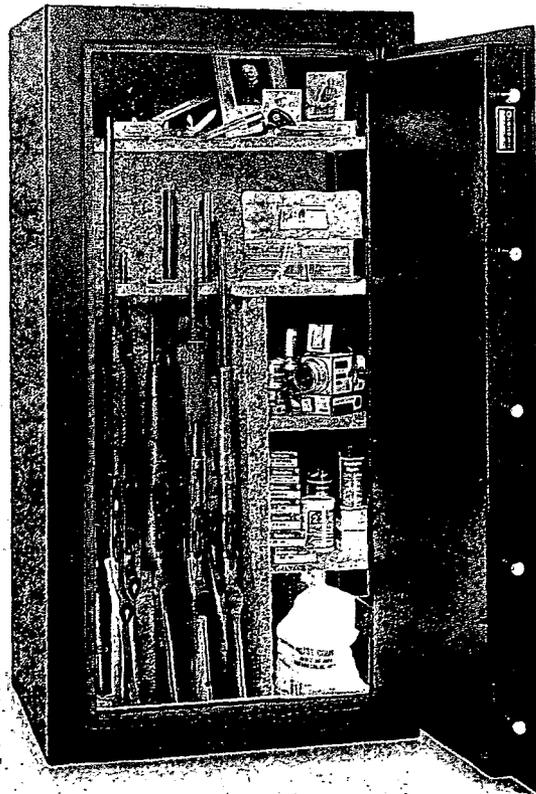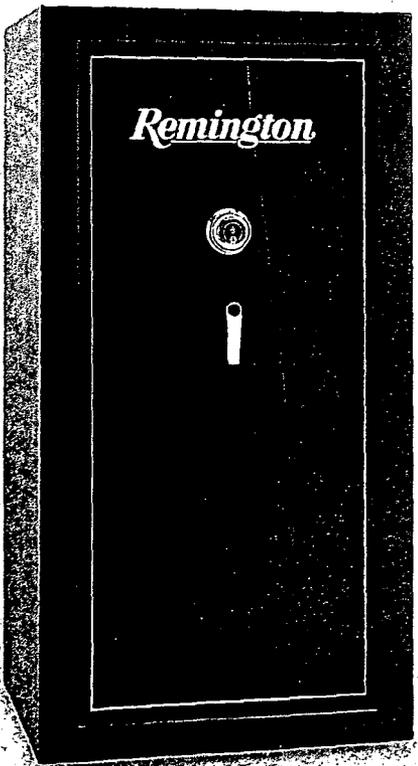

SPORTSMAN™ SERIES

At a practical, economical price, the Sportsman™ series has proven anti-entry devices that include a Sargent & Greenleaf combination lock, multiple relockers, internal ball-bearing hinges, generous hardplate backing, and a $\frac{3}{16}$ "-thick, snug-fitting recessed door. The seamless body is made from 10-gauge steel. Interiors come in a variety of optional arrangements to match your specific storage needs. The outside is finished in attractive, textured black enamel with single pinstripe and Remington logo. The door handle and key lock dial now have an attractive chrome finish. A choice of many optional features provides additional flexibility to further custom-tailor the Sportsman™ to your individual requirements, including a gray fabric interior and the option of Double-, Triple-, and Quad-Wall fire protection construction. See page 57 for full details.


Remington® Safes — U.L.-listed Burglarproof.



Today, the best safe-crackers in the business never steal a dime — they work for Underwriters' Laboratories' (U.L.). Since 1921, U.L. has tried to outsmart and overpower the most sophisticated security devices in America. Using state-of-the-art techniques, they test each safe to its limit by trying to knock the lock off, force the handle, and drill the bolt mechanism.

U.L. Certifies Remington

All Remington safes are U.L.-certified and have withstood U.L.'s rigorous drilling, hammering, chiseling, punching, prying and tampering tests. You can feel secure knowing that Remington safes exceed U.L.'s rigid standards in all tests and proudly bear the U.L. security certification.

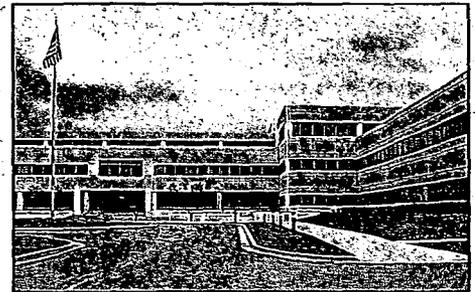


Certified Fire Protection by Omega Point Labs.

Our Quad-Wall fire protection package is one of the finest available, meeting Omega Point Laboratories' fire-rating certification for protecting fire-sensitive paper items. It consists of two continuous 1/2"-thick layers of U.L.-listed fire code "C" insulation sealed between the safe's inner and outer walls. The door is insulated with a 5/8"-thick U.L.-listed fire code "C" fireboard, and a 2 1/2" dead air space. And all Quad-Wall models are equipped with the added protection of a Palusol® fire-seal gasket. Abnormally high surface temperatures cause this unique sealant to expand and seal off all areas of the door jamb. When tested at 1200°F for 30 minutes, inside temperatures never reached 350°F — well below the 420°F at which paper begins to char.

Triple-Wall construction provides proven fire protection at a modest price. Now available on all Premier™, Classic™, "Trophy," and Sportsman™ safes. We install two continuous layers of U.L.-listed 5/8" insulation, and the Palusol® fire-seal gasket.


Double-Wall fire protection consists of a continuous 5/8"-thick layer of U.L.-listed fire code "C" insulation on all six interior surfaces, including the door. Contents are protected from up to 1200°F for 30 minutes — more than enough protection from most home fires. This type of protection is ideal for firearms, coins, and similar items.

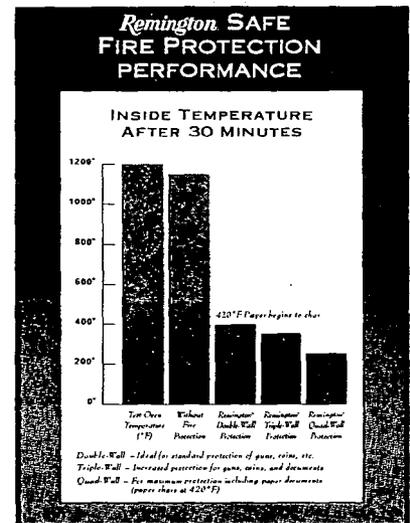


Options For Every Individual Preference and Need.




REMINGTON SAFE PRINTS



BRASS LAMP



GUN LOCK




SHelf PISTOL RACK (4 & 8 GUN)



ELECTRONIC DIGITAL LOCK



INTERIOR DUPLEX OUTLET



PALLET COVER



TRIGGER BLOCK



ELECTRIC DEHUMIDIFIER



KEY LOCKING DIAL




DOOR-MOUNTED PISTOL RACK

INTERIOR AND EXTERIOR FINISH CHOICES

On all Remington safes, you can choose from a wide variety of options for additional convenience and storage flexibility.

Carpet Colors — Premier™ and Classic™ Series feature your choice of silver, beige, or Remington green moisture- and mildew-resistant plush carpeting. "Trophy" available with green and silver interior only. Sportsman™ Series comes with gray fabric only.




Green Beige Silver
Optional Green, Beige, or Silver Velour (Premier™ series only) Sportsman™ Gray Fabric

Finish Colors — Every Premier™ and Classic™ safe receives multiple coats of rust-resistant primer with three coats of high-gloss polyurethane enamel for a lustrous, durable finish. "Trophy" available in green, burgundy, or black only. Sportsman™ Series safes are finished with rust-resistant primer and rugged semi-gloss textured black enamel.



Classic Black Metallic Burgundy Arctic White
Midnight Blue Metallic Brown Forest Green


A COMPREHENSIVE SELECTION OF INTERIOR SHELF CONFIGURATIONS



UNIVERSAL


P-50: 24, 32, 36 GUN
P-40: 24, 32, 36 GUN
P-25: 24, 32, 36 GUN

*Premier 25 has only one top shelf



EASY-OUT

P-50: 17 GUN
P-40: 17 GUN
P-25: 13 GUN



COLLECTOR

P-50: 56 GUN
P-40: 17 GUN
P-25: 30 GUN




EXECUTIVE

P-50: 5 SHELVES
P-40: 5 SHELVES
P-25: 4 SHELVES

Premier™ Series Specifications

Safe Model	Dimensions (WxHxD)	Depth Overall	Volume (Cubic ft.)	Approx. Weight	Weight with Triple-/Quad-Wall	Active Bolts	Door Thickness	Body Thickness	Gun capacity, number of shelves			
									Universal	Easy-Out	Collector	Executive
P-50	40 1/2" x 72 1/2" x 28"	29 1/2"	48	1380 lbs.	1480 / 1550 lbs.	22-1"	1"	3/4"	24, 32, 36	17	56	5 Shelves
P-40	36 1/2" x 66 1/2" x 28"	29 1/2"	40	1090 lbs.	1160 / 1220 lbs.	18-1"	1"	3/4"	24, 32, 36	17	48	5 Shelves
P-25	30 1/2" x 60 1/2" x 25"	27 1/2"	25	885 lbs.	920 / 975 lbs.	16-1"	1"	3/4"	9, 18	13	30	4 Shelves


All Premier™ safes feature: U.L. security rating, "Uni-Body" door, laboratory-tested double fire protection, optional velour interior, internal hinges, 1" locking bolts, S&G bank-type locks, drill-resistant hardplate, "Auto-Fire" relockers, shielded bolts, Remington logo, and a limited lifetime break-in warranty.



UNIVERSAL


C-45/35: 24, 32, 36 GUN
C-25: 9, 18 GUN
C-15: 11 GUN

*Classic 15 has no center divider




EASY-OUT

C-45/35: 17 GUN
C-25: 13 GUN
C-15: 8 GUN



COLLECTOR

C-45/35: 48 GUN
C-25: 30 GUN
C-15: 20 GUN




EXECUTIVE

C-45: 5 SHELVES
C-35/25: 4 SHELVES
C-15: 4 SHELVES

Classic™ Series Specifications

Safe Model	Dimensions (WxHxD)	Depth Overall	Volume (Cubic ft.)	Approx. Weight	Weight with Double-/Triple-/Quad-Wall	Active Bolts	Door Thickness	Body Thickness	Gun capacity, number of shelves			
									Universal	Easy-Out	Collector	Executive
C-45	36 1/2" x 72 1/2" x 28"	29 1/2"	42	800 lbs.	980 / 1070 / 1110 lbs.	14-1"	3/4"	10 GA	24, 32, 36	17	48	5 shelves
C-35	36 1/2" x 60 1/2" x 28"	29 1/2"	36	670 lbs.	800 / 860 / 900 lbs.	12-1"	3/4"	10 GA	24, 32, 36	17	48	4 shelves
C-25	30 1/2" x 60 1/2" x 25"	27 1/2"	25	580 lbs.	665 / 705 / 745 lbs.	12-1"	3/4"	10 GA	9, 18	13	30	4 shelves
C-15	24 1/2" x 60 1/2" x 20"	22 1/2"	16	420 lbs.	500 / 520 / 560 lbs.	10-1"	3/4"	10 GA	11	8	20	4 shelves


All Classic™ safes feature: U.L. security rating, "Uni-Body" door, laboratory-tested fire protection options, internal hinges, 1" locking bolts, S&G bank-type locks, drill-resistant hardplate, "Auto-Fire" relockers, shielded bolts, Remington logo, and a limited lifetime break-in warranty.



UNIVERSAL


T-25: 9, 18 GUN
T-15: 11 GUN

*Trophy 15 has no center divider




EASY-OUT

T-25: 13 GUN
T-15: 8 GUN



COLLECTOR

T-25: 30 GUN
T-15: 20 GUN




EXECUTIVE

T-25: 4 SHELVES
T-15: 4 SHELVES

"Trophy" Series Specifications


Safe Model	Dimensions (WxHxD)	Depth Overall	Volume (Cubic ft.)	Approx. Weight	Weight with Double-/Triple-Wall†	Active Bolts	Door Thickness	Body Thickness	Gun capacity, number of shelves			
									Universal	Easy-Out	Collector	Executive
T-25	30 1/2" x 60 1/2" x 25"	27 1/2"	25	580 lbs.	665 / 705 lbs.	12-1"	3/4"	11 GA	9, 18	13	30	4 shelves
T-15	24 1/2" x 60 1/2" x 20"	22 1/2"	16	420 lbs.	500 / 520 lbs.	10-1"	3/4"	11 GA	11	8	20	4 shelves

All "Trophy" safes feature: U.L. security rating, "Uni-Body" door, laboratory-tested fire protection options, internal hinges, 1" locking bolts, S&G bank-type locks, drill-resistant hardplate, "Auto-Fire" relockers, shielded bolts, Remington logo, and a limited lifetime break-in warranty. *T-15 Universal interior has no center divider. †Quad-Wall construction not available in "Trophy Series."




UNIVERSAL

S-25: 18 GUN
S-15: 11 GUN
S-10: 11 GUN



EASY-OUT

S-25: 13 GUN
S-15: 8 GUN
S-10: N/A



COLLECTOR

S-25: 30 GUN
S-15: 20 GUN
S-10: 17 GUN



EXECUTIVE

S-25: 4 SHELVES
S-15: 4 SHELVES
S-10: 4 SHELVES

Sportsman™ Series Specifications

Safe Model	Dimensions (WxHxD)	Depth Overall	Volume (Cubic ft.)	Approx. Weight	Weight with Double-/Triple-/Quad-Wall	Active Bolts	Door Thickness	Body Thickness	Gun capacity, number of shelves			
									Universal	Easy-Out	Collector	Executive
S-25	30 1/2" x 60 1/2" x 25"	26 1/2"	25	485 lbs.	565 / 630 / 645 lbs.	10-1"	3/4"	11 GA	18	13	30	4 shelves
S-15	24 1/2" x 60 1/2" x 20"	21 1/2"	16	360 lbs.	430 / 470 / 490 lbs.	8-1"	3/4"	11 GA	11	8	20	4 shelves
S-10	22 1/2" x 60 1/2" x 18"	19 1/2"	12	310 lbs.	370 / 390 / N/A	4-1"	3/4"	11 GA	11	—	17	4 shelves


All Sportsman™ safes feature: U.L. security rating, "Uni-Body" door, laboratory-tested fire protection options, internal hinges, 1" locking bolts, S&G bank-type locks, drill-resistant hardplate, "Auto-Fire" relockers, shielded bolts, Remington logo, and a limited lifetime break-in warranty.

Remington® "One-Handers" — Easy-Open Lockbacks.

We've all been there — a line to cut, or a piece of fabric to trim, but one of your hands is occupied — you can't let go and use both hands to open your knife. With our new One-Hander lockbacks, a simple push with your thumb on the specially-shaped oval thumbhole opener and you're good to go. In two models: single blade serrated drop point, and a patented double lockback two-blade Law Enforcement (LE) version with serrated drop point and a tactical serrated seatbelt cutter with "freedom hook".


SINGLE BLADE ONE-HANDER

- Fiberglass-reinforced nylon handles with mark-side checkered surface
- 4 7/8" drop point blade of 440A stainless with 50-50 serrated and straight cutting edge
- 5" closed length; 9 1/4" overall
- Patented 410A stainless spring frame
- Lanyard hole with stainless ferrule
- Remington blade etch



TWO-BLADE LE ONE-HANDER

- Fiberglass-reinforced nylon handles with checkered surface and LE logo on mark side
- 4 7/8" drop point blade of 440A stainless with 50-50 serrated and straight cutting edge
- 3 3/4" patented serrated seat belt cutting tool with "freedom hook"
- 5" closed length; 9 1/4" overall
- Patented 410A stainless spring frame
- Lanyard hole with stainless ferrule
- Remington blade etch



Remington® ATS Knives — Now Available with Beautiful Wood Handles.

ATS 34 Steel is a tool steel so tough it's normally used by custom knife makers. It stays sharper and holds an edge longer than other stainless or carbon steels. Our high-performance ATS knives have 3 7/8" hollow ground blades, a Scotchbrite finish, thumb serrations on the rear blade top, and a choice of Kevlar®-impregnated nylon or laminated wood handles.


LAMINATED WOOD HANDLE ATS KNIVES

- Multi-colored laminated wood handle with Remington logo
- ATS 34 steel clip/drop point blade versions
- Thumb notch on top edge of blade
- Rem-34-ATS engraved blades
- Lanyard hole



KEVLAR® HANDLE ATS KNIVES

- Kevlar®-impregnated nylon handles with Remington logo
- ATS 34 steel clip/drop point blade versions
- Thumb notch on top edge of blade
- Rem-34-ATS engraved blades
- Lanyard hole

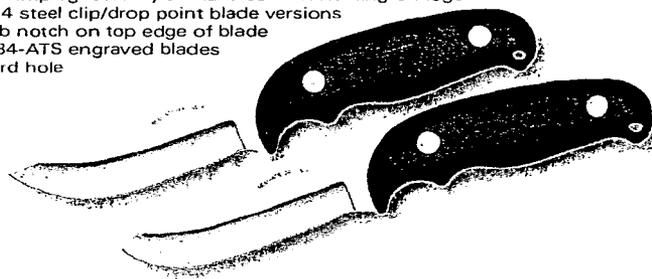


Remington® Bandit™ Knives — With These Great Features and Value Pricing, They're a Steal!

Smooth black synthetic handles, gold logo, and quality construction married with a collection of the most useful blades you could ever want in an economy-priced knife make these a "must have" for anyone who appreciates value in a pocket knife. Buy 'em to carry, give them as gifts, or collect the whole set!


2-BLADE BARLOW

- 3 3/8" closed length
- 2 1/4" clip blade
- 1 1/2" pen blade
- 440A stainless blades
- Handle made with Delrin®




4-BLADE CAMP

- 3 3/4" closed length
- 2 1/2" spear blade
- Punch, can opener, and combination cap lifter & screwdriver
- 440A stainless blade and tools
- Stainless lanyard shackle
- Handle made with Delrin®

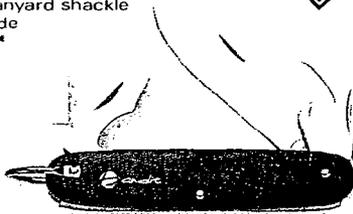


6-BLADE CAMP

- 3 3/8" closed length
- 2 3/8" spear blade
- 2" clip blade
- Corkscrew, leather punch, one-piece can opener and combination cap lifter/screwdriver
- 440A stainless blade and tools
- Stainless lanyard shackle
- Handle made with Delrin®

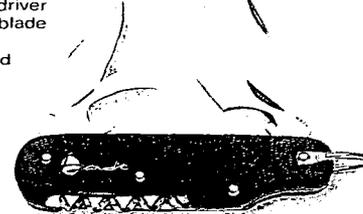


PEANUT

- 2 3/4" closed length
- 2" clip blade
- 440A stainless blade
- Handle made with Delrin®



TRAPPER

- 3 7/8" closed length
- 3 1/2" clip blade
- Liner blade lock
- 440A stainless clip blade
- Stainless lanyard shackle
- Handle made with Delrin®

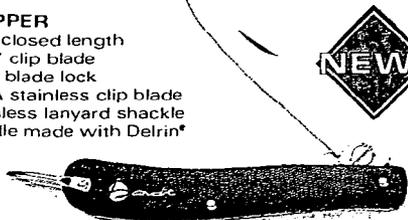


Remington® Grizzly™ Lockbacks — Our "Magnum" Folding Knives.

It's hard to find a tougher, more versatile knife than our Grizzly™. Though compact, it opens up and locks to the size and strength of a large fixed-blade knife. Rugged RemGrip™ handles provide a non-slip grip for tough outdoor jobs. All two-bladed knives in the series feature an individual locking system for each blade.


- SERRATED EDGE SINGLE LOCKBACK**
- 5" closed length
 - Single blade design
 - 3 1/2" serrated clip blade




- STRAIGHT EDGE SINGLE LOCKBACK**
- 5" closed length
 - Single blade design
 - 3 1/2" clip blade




- SINGLE-BLADE LOCKBACK WITH GUT HOOK**
- 5" closed length
 - 3 1/2" drop point blade
 - Gut hook on blade top



- SERRATED EDGE DOUBLE LOCKBACK**
- 5" closed length
 - Unique double lockback design
 - 3 1/2" serrated clip blade
 - 3 1/2" bone saw & gut hook




- STRAIGHT EDGE DOUBLE LOCKBACK**
- 5" closed length
 - Unique double lockback design
 - 3 1/2" clip blade
 - 3 1/2" bone saw & gut hook




Sportsman™ Knives — Valuable Accessories for Farm, Home, and Hunting.

These fixed-blade knives feature blades of 440A stainless steel, set in a variety of handle designs and colors to meet any need. (Note: All Sportsman™ fixed-blade knives available in box or clampack packaging.)


- SPORTSMAN™ CLIP BLADE — ORANGE HANDLE**
- 9 7/8" overall length
 - 4 1/4" blade length
 - Orange RemGrip handle
 - Black leather sheath



- SPORTSMAN™ DROP POINT BLADE WITH GUT HOOK**
- 9 7/8" overall length
 - 4 7/8" drop point blade
 - Gut hook blade end
 - Black RemGrip handle
 - Black leather sheath



- BOOT KNIFE**
- 7" overall length
 - 3 3/4" blade
 - Nickel-silver handle rivets
 - Hardwood handle resin-impregnated
 - Leather sheath with clip



- BIRD AND TROUT KNIFE**
- 8 1/8" overall length
 - 3 3/16" clip blade
 - Black RemGrip handle
 - Leather sheath with plastic liner
 - Available in attractive clampack or display box



- SPORTSMAN™ DROP BLADE — BLACK HANDLE**
- 9 3/4" overall length
 - 4 7/8" blade length
 - Black RemGrip handle
 - Black leather sheath



- SPORTSMAN™ CLIP BLADE — BLACK HANDLE**
- 9 7/8" overall length
 - 4 1/4" blade length
 - Black RemGrip handle
 - Black leather sheath



Stren® Fillet Knives and Game Shears — Get Your Catch Ready for the Table Quickly.

- REMINGTON® GAME SHEARS**
- 8 1/2" overall length
 - Fully chrome-plated
 - Come apart for cleaning
 - Other uses:
 - Fish scaling
 - Screwdriver
 - Jar opener
 - Tack driver
 - Nut cracker




FIXED BLADE STREN® FILLET KNIVES

Available in 4", 6", 7 1/2", and 9" lengths. Corrosion-resistant 440A steel and contoured handles of durable, non-slip RemGrip™. Comes with black plastic sheath.



STREN® FOLDING FILLET

Single-blade, folding lockback is 7 1/4" long when closed, but its Scotchbrite-finished 5 1/4" stainless steel blade fillets with finesse. Secure grip comes from checkered Zytel® nylon handle. Extra corrosion resistance is provided by nickel-silver pins and a brass liner for the lanyard hole.




Delrin® and Laminated-Wood Folding Knives — Built-In Remington® Toughness and Utility.

A first pocket knife has been a traditional "rite of passage" for youngsters into the world of the outdoors. Shapes and styles have changed over the years, and Remington folders reflect the most enduring of them, both in popularity and quality of materials that will last a lifetime.



- CANOE**
- 3 $\frac{3}{8}$ " closed length
 - 2 $\frac{3}{4}$ " spear blade
 - 1 $\frac{1}{2}$ " pen blade
 - Remington shield on handle

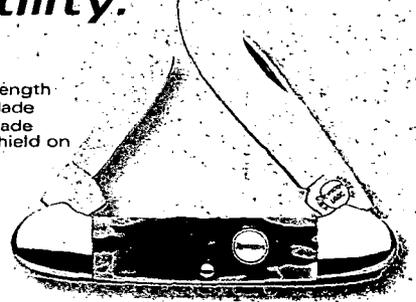


Delrin® Handles


- TUXEDO KNIFE**
- 3" closed length
 - 1 $\frac{5}{8}$ " spear blade
 - 1 $\frac{3}{8}$ " pen blade




- PEN**
- 2 $\frac{1}{16}$ " closed length
 - 1 $\frac{1}{4}$ " pen blade
 - 1 $\frac{1}{16}$ " clip blade




- GENTLEMAN'S**
- 3" closed length
 - 2 $\frac{1}{2}$ " hollow-ground clip blade
 - Lockback design
 - Remington shield on handle




- WHITTLES**
- 3 $\frac{5}{8}$ " closed length
 - 2 $\frac{3}{8}$ " clip blade
 - 1 $\frac{1}{2}$ " pen blade
 - 1 $\frac{1}{2}$ " coping blade
 - Remington shield on handle




- UPLAND**
- 3 $\frac{7}{8}$ " closed length
 - 2 $\frac{3}{8}$ " clip blade
 - 12/20-gauge choke tool/screwdriver
 - Gut hook
 - Remington shield on handle




- TRAPPER**
- 4 $\frac{1}{8}$ " closed length
 - 3" clip blade
 - 3" spey blade
 - Remington shield on handle




- WATERFOWL**
- 4 $\frac{1}{4}$ " closed length
 - 3" clip blade
 - 2 $\frac{1}{8}$ " serrated bone/cartilage blade
 - 12/20-gauge choke tool/screwdriver
 - Pin punch
 - Remington shield on handle



- 3-BLADE STOCKMAN**
- 3 $\frac{7}{8}$ " closed length
 - 2 $\frac{7}{8}$ " clip blade
 - 1 $\frac{3}{4}$ " spey blade
 - 1" sheepfoot blade
 - Remington shield on handle



- BIG-GAME**
- 5" closed length
 - 3 $\frac{3}{8}$ " hollow-ground clip blade
 - 3 $\frac{3}{8}$ " self-cleaning bone saw & paunch hook
 - Remington shield on handle
 - Includes leather sheath
 - Patented double lockback design

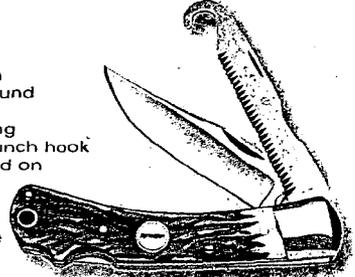


Multi-Color Laminated-Wood Handles


- PEANUT**
- 2 $\frac{3}{4}$ " closed length
 - 2 $\frac{1}{8}$ " clip blade




- 2-BLADE CONGRESS**
- 3" closed length
 - 1 $\frac{7}{8}$ " sheepfoot blade
 - 1 $\frac{1}{8}$ " pen blade
 - Remington shield on handle




- 4-BLADE CONGRESS**
- 3 $\frac{3}{8}$ " closed length
 - Two 2" sheepfoot blades
 - Two 1 $\frac{5}{8}$ " pen blades
 - Remington shield on handle




- GENTLEMAN'S**
- 3" closed length
 - 2 $\frac{1}{2}$ " hollow-ground clip blade
 - Lockback design
 - Remington shield on handle



- 3-BLADE STOCKMAN**
- 3 $\frac{7}{8}$ " closed length
 - 2 $\frac{7}{8}$ " clip blade
 - 1 $\frac{3}{4}$ " spey blade
 - 1" sheepfoot blade
 - Remington shield on handle




- WHITTLES**
- 3 $\frac{5}{8}$ " closed length
 - 2 $\frac{3}{8}$ " clip blade
 - 1 $\frac{1}{2}$ " pen blade
 - 1 $\frac{1}{2}$ " coping blade
 - Remington shield on handle



REMINGTON® FOLDING KNIFE FEATURES

- Nickel-silver bolsters
- Brass liners
- 440A stainless-steel blades
- Scotchbrite blade finish
- "Remington U.S.A." tang stamp
- Full lifetime warranty
- Includes display box or clampack

- TRAPPER**
- 4 $\frac{1}{8}$ " closed length
 - 3" clip blade
 - 3" spey blade
 - Remington shield on handle




Genuine Stag Handle Knives — For a Lifetime of Beauty and Service.

All three of these beautiful folding knives are constructed of the highest-quality materials, including stainless-steel blades with brass liners, nickel-silver bolsters and pins, complemented by genuine stag handles.


BARLOW

- 3 1/2" closed length
- 2 3/16" Turkish clip blade
- Remington shield on handle




LOCKBACK

- 4" closed length
- 3 3/16" hollow-ground Turkish clip blade
- Remington shield on handle
- Leather sheath included



TRAPPER

- 4" closed length
- 3 3/8" spey blade
- 3 1/2" clip blade
- Remington shield on handle




Remington® 9500™ Series — The Enduring Tradition of Carbon Steel.

The Remington 9500™ Series features polished carbon-steel blades, sawcut Delrin® handles with nickel-silver Remington shield, brass liners, nickel-silver bolsters, "Remington U.S.A." tang stamp, lifetime warranty, and attractive display box or clampack.


MINI-STOCKMAN

- 2 3/4" closed length
- 1 1/2" clip blade
- 1 1/4" coping blade
- 1 1/8" pen blade
- Remington shield on handle




JACK KNIFE

- 3 1/4" closed length
- 2 7/16" clip blade
- 1 3/4" pen blade
- Remington shield on handle




CLASSIC BARLOW

- 3 3/8" closed length
- Distinctive long nickel-silver bolster
- 2 1/4" clip blade
- 1 1/2" pen blade
- Remington shield on handle




2-BLADE SKINNER

- 3 3/8" closed length
- 2 3/4" clip blade
- 2 1/2" spey blade
- Remington shield on handle




UPLAND

- 4" closed length
- 3 1/16" clip blade
- Gut hook
- 12/20-ga. choke tool/screwdriver
- Remington shield on handle




WATERFOWL

- 4 1/4" closed length
- 3 3/8" clip blade
- 2 1/2" sheepfoot blade
- 12/20-ga. choke tool/screwdriver
- Pin punch
- Remington shield on handle




TRAPPER

- 4" closed length
- 2 7/8" clip blade
- 2 7/8" spey blade
- Remington shield on handle



STOCKMAN

- 4 1/4" closed length
- 2 1/8" sheepfoot blade
- 2 7/8" clip blade
- 1 7/8" spey blade
- Remington shield on handle




Remington® Executive Knives — Gifts in Good Taste.

The Remington gift line provides an exceptional combination of handsome appearance, refined high quality, and useful practicality. They make appropriate, highly appreciated gifts for any occasion and reflect well on your own good taste.


PEARL TUXEDO KNIFE

- 3" closed length
- 440A stainless-steel blades
- Mother-of-pearl handles
- 1 5/8" spear blade
- 1 3/8" pen blade




MONEY CLIPS

- 2 1/8" closed length
- 440A stainless-steel blades
- 1 1/4" pen blade
- 1 1/4" nail file
- Stainless-steel liners
- Choice of handles:
 - Stainless steel with Remington logo
 - Malachite and pearl




PEARL PEN KNIFE

- 3 1/4" closed length
- 440A stainless-steel blades
- Mother-of-pearl handles
- 1 3/8" pen blade
- 1 3/4" spear blade
- Remington nickel-silver logo shield



PEARL CONGRESS

- 3" closed length
- 440A stainless-steel blades
- Mother-of-pearl handles
- 1 7/8" sheepfoot blade
- 1 1/8" pen blade
- Remington nickel-silver logo shield



PEARL LETTER OPENER

- 9 1/2" overall length
- Mother-of-pearl & malachite combination handles
- 5 1/2" stainless-steel blade
- Remington logo blade etching
- Special Remington gift box



Genuine Remington® Parts and Accessories — Keep Your Firearm Factory-New for Generations.



STRAIGHT-RIFLED TURKEY CHOKE & TRUGLO® FIBER OPTIC SIGHTS

- New Extended Straight-Rifled Turkey Super Full Rem™ Choke enhances patterns by stabilizing shot cup/wad as it exits barrel
- Light-gathering TRUGLO® Magnum "Gobble Dot" sights use fiber optic technology to "amplify" available light for precise sight picture




MODEL 700™ BOLT DISASSEMBLY TOOL

- Aids safe removal of firing pin/spring assembly
- Black synthetic material won't scratch bolt bluing
- Simple, two-hand operation


REMINGTON® FACTORY-FIT SYNTHETIC STOCKS/FORE-ENDS




MODEL 1100™ & 11-87™ (12-GA ONLY)



Line-Up



Bend



Twist

Model	Long Action	Short Action	Magnum Action	Shotgun (12-gauge)
Model 700™				
ADL	•	•	•	
BDL	•	•	•	
Mtn. Rifle	•	•		
Model Seven™		•		
Model 11-87™				•
Model 870™				•
Model 1100™				•




Rem™ Choke Tubes

	12-ga.	20-ga.
Turkey Super Full (lead shot only)	•	• ★
Turkey Extra Full (lead shot only)	•	
★ Turkey Extended Straight Rifled	•	
Full (12-ga. steel or lead, 20-ga. lead only)	•	•
Modified (steel or lead)	•	•
Improved Cylinder (steel or lead)	•	•
★ Sporting Clays SC1 - Skeet (steel or lead)	•	•
★ Sporting Clays SC2 - Imp. Cyl. (steel or lead)	•	•
★ Sporting Clays SC3 - Light Mod. (steel or lead)	•	•
★ Sporting Clays SC4 - Mod. (steel or lead)	•	•
★ Sporting Clays 4-Piece Combo set	•	•
Skeet (steel or lead)	•	•
Improved Skeet (steel or lead)	•	•
Trap Full' (lead shot only)	•	•
Trap Extra Full' (lead shot only)	•	•
Trap Super Full' (lead shot only)	•	•
Extended Rifled	•	•
Rifled	•	•
Wrench	•	•

*Specially designed for use in Remington overbored trap barrels only. Will not produce satisfactory patterns in standard bore barrels.

★ New For 1998



SHOTGUN SCOPE RIB MOUNT SYSTEM


- Permits scope mounting on Remington 12-ga. vent ribs
- Cantilever design allows normal scope eye relief
- Converts vent rib field barrel for big-game & turkey hunting
- Takes advantage of improved slug accuracy
- Fast, easy installation

MODEL 597™ RIFLE CLIPS



Rimfire Rifle Magazine Clips

	Model 597™	Model 522™ Viper®	Model 581™, 541™	Nylon 77™
5-shot	•	•	•	•
9-shot	•	• (Magnum)	•	•
10-shot	•	•	•	•

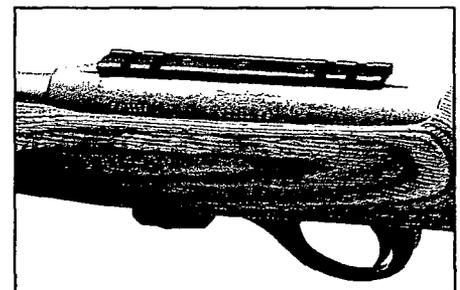


MODEL 597™ SCOPE MOUNTING RAIL

Centerfire Magazine Clips


Caliber	.22-250	.222	.223	6mm	.243	.25-06	.257	Roberts	.270	7 x 64	.280	7mm-08	.30-06	.308	.35	Whelen	7 mm	.300	Rem. Mag. Win. Mag.	.300	Wby. Mag. Win. Mag.	.338	
Model 700™ BDL (DM) Blued																							
Model 700™ BDL (DM) Blued w/Engraving																							
Model 700™ BDL SS (DM) Satin Stainless																							
Model 700™ Mtn. Rifle (DM) Satin Blued																							
Models Four™, 7400™, 742™, 740™, 74™																							
Models Six™, 7600™, 760™, 76™																							
Model 788™																							

Remington® Shooting Accessories — The Best Offerings In Hunting and Shooting Sports.

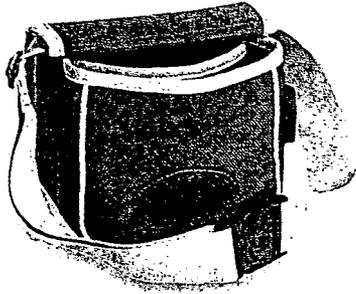


DIVIDED SHELL POUCH

- Two pockets to separate fired from unfired shells
- Available in Remington Green or tan Propex nylon
- Web carrying strap
- Distinctive leather "Remington" patch



SHOOTER'S BAG

- Large compartments with protective flaps and velcro closures
- Available in Remington Green or tan Propex nylon
- Web carrying strap
- Distinctive leather "Remington" patch

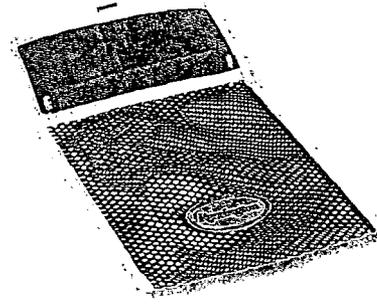


MESH SHELL BAG

- Large-capacity empty shell bag with spring-loaded mouth opener
- Available in Remington Green or tan Propex nylon
- Chrome belt clip
- Distinctive leather "Remington" patch






RELOADER'S SHELL BAG

- Pocket for full box of ammo and bottom-zip shell bag
- Available in Remington Green or tan Propex nylon
- Twin belt loops
- Distinctive leather "Remington" patch

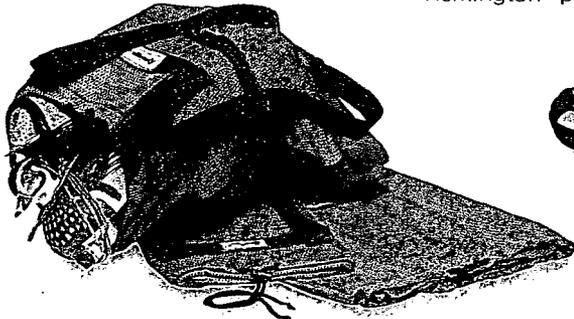

DECOY CARRY BAGS

Our decoy bags are constructed of strong, weatherproof nylon mesh with sturdy shoulder straps to leave hands free for carrying your gun. Sizes include a small backpack version (18" x 24"), and two larger bags for bigger rigs (36" x 48" & 36" x 55").



REMINGTON GUN SOCK


Protect your firearms during transport with one of our gun socks. Eliminates imprints from hard case foam interiors.

SHOTGUN AND RIFLE SLINGS

- Durable Cordura® material, reinforced with nylon stitching
- Non-slip tachiner inside surface
- 2 1/2" x 16" pads and adjustable 1" nylon straps
- Color options: Mossy Oak® Treestand® camo, brown camo, Advantage® camo, and black

REMINGTON® PAPER TARGETS

Includes a full array of targets used for competition, practice, and sighting-in. In 27 centerfire, rimfire, and air-gun versions.

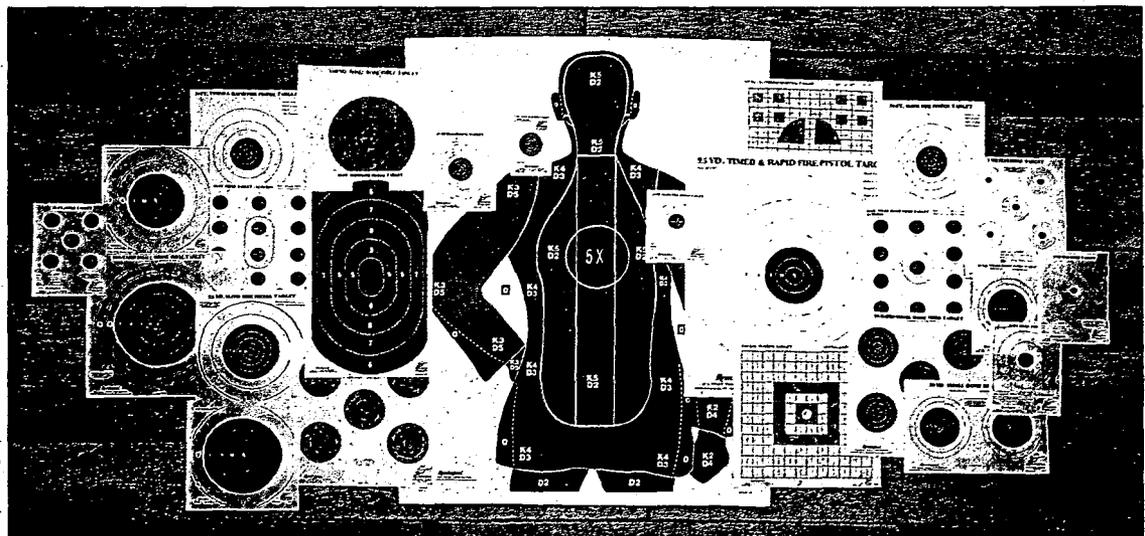

Sportsman™ Cleaning Kits and Accessories — Complete Firearms Care at a Modest Cost.


To keep your firearms performing with factory-new performance, make a small investment in factory-designed cleaning equipment. Offered for use with rifles, shotguns, pistols, and universal use, our four Sportsman™ kits contain everything you need for complete firearm care, including our rugged, all-metal cleaning rods. They're complemented by a wide selection of separately packaged bore brushes and swabs, aluminum slotted tips, and various-sized cleaning patches in cotton and cotton "G.I." material.

UNIVERSAL

SHOTGUN

RIFLE

PISTOL

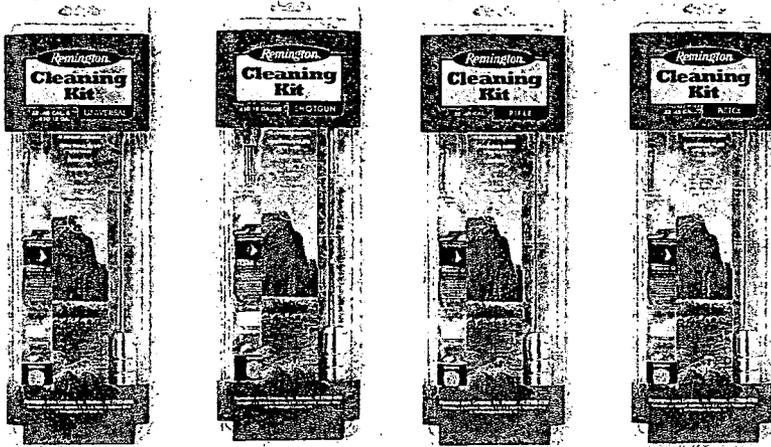

ADAPTER/SLOTTED TIPS



Rifle-to-Shotgun Adapter



Pistol / Rifle (packed with kit)



Shotgun (packed with kit)

PHOSPHOR BRONZE BORE BRUSHES

RIFLE
.22 TO .45 CAL.

SHOTGUN
.410 TO 10-GA.


PISTOL
.22 TO .45 CAL.



100% COTTON BORE SWABS


SPORTSMAN™ CLEANING RODS

Aluminum construction for a long life of hard use. Furnished with slotted tip for patch pulling.



**CLEANING PATCHES
IN 100% COTTON
& COTTON "G.I."**

.17 to .45 and
.410 to 12-ga.



REM™ OIL

Rem™ Oil displaces and repels moisture, leaving a thin but effective barrier against rust and corrosion. 1-oz. bottle packed with all Sportsman™ Cleaning Kits.



BRITE BORE™

SOLVENT/CLEANER
Remington Bright Bore™ is a versatile cleaner for barrels, choke tubes, and actions. 2-oz. bottle packed with all Sportsman™ Cleaning Kits.

UTILITY BRUSHES

Available with either nylon or phosphor bronze bristles.





Remington® Cleaners and Lubricants — What We Use on Our Own Guns.

REM™ OIL
The most versatile gun oil you can buy. It cleans dirt and grime from exposed metal surfaces, displaces non-visible moisture from metal pores, and protects internal and external metal parts from rust and corrosion. Its exclusive Teflon® formula provides a tough, thin, long-lasting lubricating film that keeps actions working smoothly by reducing metal-to-metal wear. Comes in 1-oz. squeeze bottle for field use and 4-oz. and 10-oz. aerosol.



WONDERLUBE™
Teflon® formula provides a slick, long-lasting lubricating film. Removes moisture from metal pores, creating a barrier to wetness and hand-deposited body salts. Low-viscosity formula frees up rusted bolts and threads, and digs beneath adhesives and tape for easy separation. Permits fast wipe-off removal of grit, grease, and grime from metal surfaces. Available in 9-oz. and 12-oz. CFC-free spray cans.



REM™ ACTION CLEANER
Spray-cleans dirt, powder residue, and caked lubricants from disassembled actions and fire-control mechanisms with ease. Dries quickly and leaves no residue. CFC-free formula comes in 10.5 oz. can with jet-spray extension tube.



REM DRILUBE™
Teflon® base provides a tough, non-congealing film without the residue of dry graphite lubes. Keeps firearms functioning dependably to -40°F. Available in 4-oz. aerosol can.



REMINGTON® BORE CLEANER
Removes carbon, lead, copper, and plastic wad fouling by mechanical action. Non-acidic, non-corrosive, completely natural elements won't damage bores or bore brushes. Comes in 4-oz. squeeze bottle.



BRITE BORE™ SOLVENT / CLEANER
Works effectively to clean powder residue and grime from actions; remove copper and lead fouling from rifle barrels as well as plastic wad residue from shotgun barrels; and soak off lead and powder deposits from choke tubes. CFC-free 6-oz. can with jet-spray extension tube.



REMINGTON® NITRO CLP™
This full mil spec cleaner, lubricant, and protector is the most advanced breakthrough in synthetic oil formulas. Cleans corrosion, grime, grease, and dirt from metal, and prevents deposits from attaching to the surface. Lubricates and prevents wear on moving metal parts, even under high-speed, high-friction conditions.



Remington® Hearing Protection — A Critical Part of Your Safety Equipment.

All shooters should use some form of hearing protection, so that's why we've developed a line of ear muffs and insert plugs that combine convenience, comfort and rated effectiveness. Remington hearing protection — because it's really hard to shoot with your fingers in your ears.



RANGEMASTER™ EYE AND HEARING PROTECTION SYSTEM

Never forget eye protection again! "UVEX" goggle folds into place and flips up and down easily. Will fit over most prescription glasses. Comfortable, foam-padded muffs have a NRR of 26.



M-29 EAR MUFFS

A high level of sound protection and long-wearing comfort features. Deep, foam-lined cups provide total coverage without compressing the outer ear. Oversized foam cushions and a padded headband make these muffs extremely comfortable. NRR of 29.



M-28 EAR MUFFS

Our highest rated, super-compact folding muffs store easily when not in use. Soft foam construction and light weight make them ideal for extended wear. Furnished with convenient belt clip for easy toting. NRR of 28.



M-24 EAR MUFFS

These muffs can be worn in three positions to suit individual shooter preference. Comfortable vinyl cushions make a highly effective seal around the ear, and are easily removed for washing or replacement. NRR of 24.



PC-27 INSERT PLUGS

For those shooters who prefer to have their ear plugs more easily available, our PC-27 plugs come with an attached cord that hangs around the neck when not in use. NRR of 27.




P-27 INSERT PLUGS

Designed for repeated use, they're constructed of soft, sound-attenuating material around a pocket of air that effectively fractures air waves and reduces sound intensity. NRR of 27.



P-30 INSERT PLUGS

These convenient, always-ready plugs are made of comfortable, self-adjusting foam. Their smooth tapered surface allows quick, easy insertion and comfortable wear. NRR of 30.

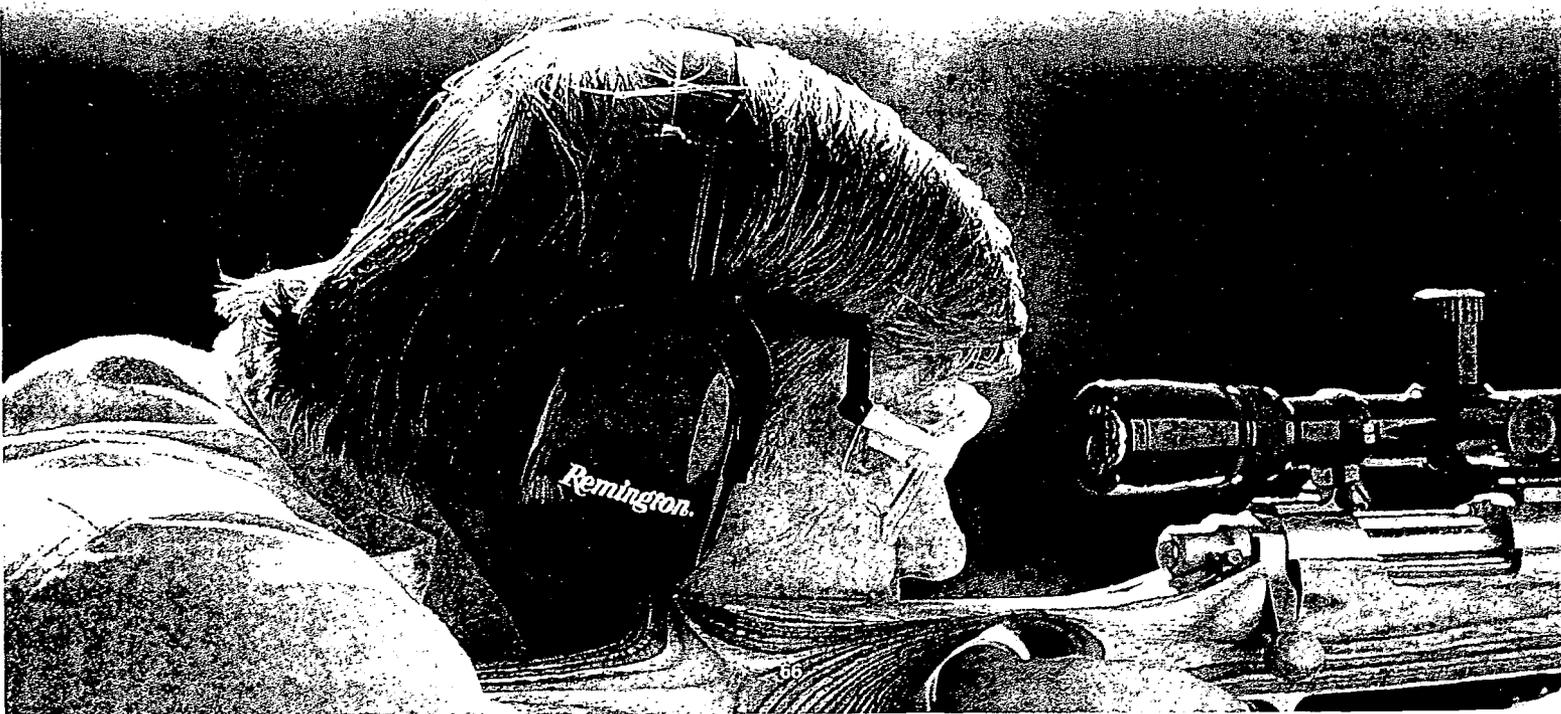



The Remington Shooting School® — Where You Will Become a Better Shooter.

There are no secrets to being a top shotgunner, just proven techniques that work if someone shows them to you. That's the purpose of the Remington Shooting School. Our unique **REM** method of instruction provides shooters with solid recall of what they learn...*Reading the target, Eye contact and Movement.* Whether your interest is trap, skeet, sporting clays or wingshooting, the Remington Shooting School will help you develop and perfect your own natural abilities while enjoying a top-flight program. The staff is made up of experienced NSCA-certified instructors and guest clay-target champions. A comprehensive 3-day agenda covers shooting techniques, proper gun fit, and choke selection, as well as other important factors such as proper eye focus and mental attitude. The school has locations in upstate New York and Orlando, Florida, and our new expanded program will take the Remington Shooting School on the road. The 3-day all-inclusive, value-packed instructional program offers you fun, fine food, first-class accommodations, and unlimited targets and ammo. Classes are limited and filling fast, so call us soon for additional information, locations and dates: 1 (800) 742-7053.



Stren® — The Most Dependable Fishing Lines in the World.

SENSOR™ — WHEN A LINE IS THIS REVOLUTIONARY, IT'S SURE TO CATCH ON WITH FISHERMEN

Introducing Stren Sensor™, the lowest-stretch monofilament line in the world. It's made with an exclusive co-extrusion process that delivers the sensitivity of a "superline" with the superior knot strength and abrasion resistance of a monofilament. With Stren Sensor™, anglers will feel more strikes, set hooks faster, and land many fish that otherwise would have gotten away. Available in clear, in 4- to 20-lb. test.



ORIGINAL STREN®

- High tensile shock and knot strength
- High abrasion resistance
- Proper limpness and low memory for easy handling
- Controlled stretch
- Available in new clear, clear/blue, lo-vis green, & hi-vis gold
- A graduated range of 2- to 80-lb. test

EASY CAST™

- Superior strength
- Exceptional castability
- Patented construction
- Advanced filament technology
- Excellent abrasion resistance
- Available in new green, clear, & coffee
- A graduated range of 4- to 30-lb. test

STREN® SUPER TOUGH™


- Maximum abrasion resistance
- Superior knot strength
- Extra strength for large trophy angling
- Wide pound-test range, 2- to 40-lb.
- Clear & lo-vis green colors

STREN® MAGNATHIN®

- Low diameter, high strength
- Extremely limp & flexible
- Superior casting
- Maximum lure action
- More line capacity on reel
- From 2- to 130-lb. test, depending on color

STREN® MAGNUM 7/20™

- Unique oval design
- Maximum abrasion resistance for use in heavy cover
- Very quiet, accurate lure entry
- For use on revolving spool reels only
- Ratio of actual test diameter to rated test strength is 7/20 lbs.




HIGH IMPACT™ —
INDIVIDUALLY TAILORED SALT-WATER LINES & LEADERS



- Monofilament
- Tournament (IGFA Class)
- Braided Dacron-Line
- New Mono & Fluorocarbon Leaders
- Hard Mono Leader
- New Sleeves & Swager

Remington Racing™ — This Bullet Travels at 200mph!


Going racing is a natural fit for us — Remington Arms is America's oldest gun company, and NASCAR fans share our love of hunting, fishing and conservation. So join Rick Mast and the Remington team in the hunt for NASCAR Winston Cup Series wins with car #75. We'll see you in the winners' circle!

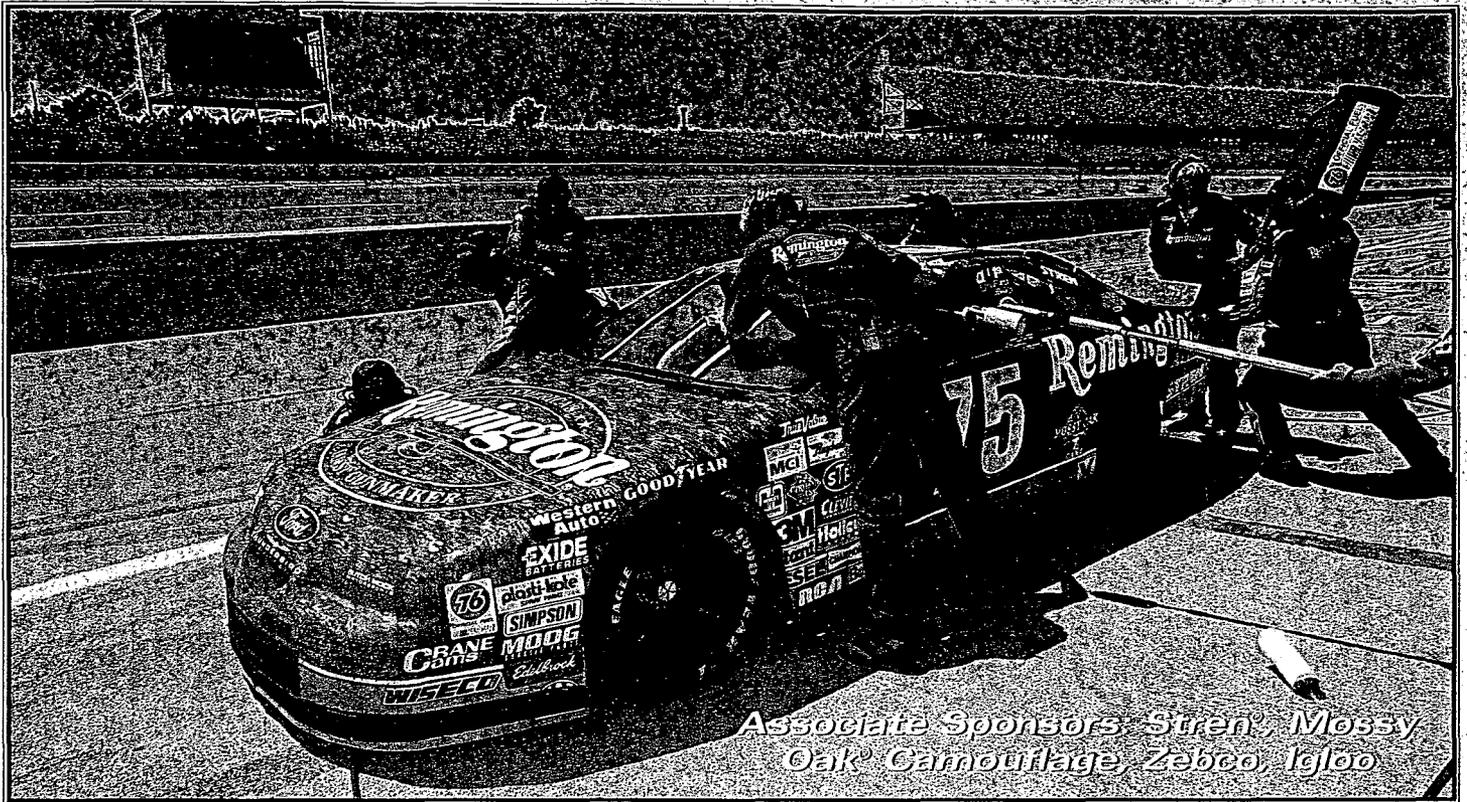

Associate Sponsors: Stren®, Mossy Oak® Camouflage, Zebco, Igloo

THE Hunter-Trader-Trapper BULLET KNIFE

One of our rarest Bullet™ Knives is once again available in our limited production collector series of modern Bullet™ Knife replicas. The 1998 edition brings back the R293 "Hunter-Trader-Trapper," a classic, two-blade, single-hinged, banana jack pattern. It has a closed length of 5 3/8" and is fitted with the original 4 5/16" long clip and spear blades. Like all its predecessors in the Bullet™ series, this high quality knife is constructed of the best in modern materials. The double-honed 440A stainless steel blades have a Scotchbrite finish. Body construction includes nickel-silver bolsters and pins, as well as solid brass liners. Handles are made of strong, stable Delrin®, and duplicate the appearance of original shinbone stag. The mark side handle includes the distinctive and traditional inlaid nickel-silver cartridge shield. Production quantities of the "Hunter-Trader-Trapper" are limited, so see your local Remington dealer and get your order in soon!

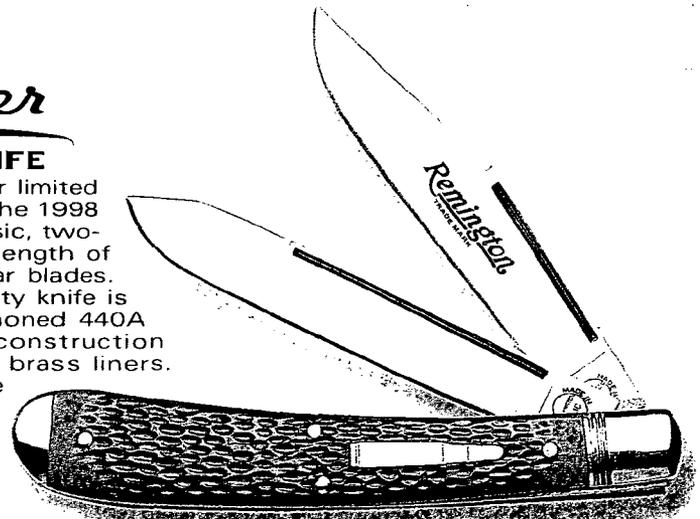

9500, ADL, Accelerator, BDL, Bandit, Brite Bore, Bronze Point, Bullet, CBee22, Classic, Copper Solid, Copper-Lokt, Core-Lokt, Cul-M-Rite, Cyclone, Disintegrator, Driving Band, Duplex, Express, Express-Steel, Fieldmaster, Figure 8, Fireball, Gamemaster, Golden, Golden Saber, Grizzly, Gun Club, High Impact, High Velocity Golden, Kleanbore, Lead-Lokt, Lok-Knot, MagnaThin, Magnum 14/40, Magnum 7/20, Marine Magnum, Model Seven, Model 11-87, Model 11-96, Model 32, Model 396, Model 40-X, Model 40-XB, Model 40-XBBR, Model 40-XC, Model 40-XR, Model 40-XRBR, Model 522, Model 541-T, Model 552, Model 572, Model 581-S, Model 597, Model 700, Model 870, Model 90-T, Model 1100, Model 7400, Model 7600, Model SP-10, Nitro 27, Nitro CLP, Nitro Mag, Nitro-Steel, Peerless, Peters, Power-Lokt, PowerBraid, Power Piston, Premier, Quick Look, R, Rangemaster, Rem, Rem DriLube, Rem Grip, Rem-Lite, Remington, Remington Country, Remington Leadless, Remington Racing, Remington Shooting School and Remington Shooting School Logo, Rustless, Sendero, ShurShot, Slugger, SPS, SPS-T, Speedmaster, Sportsman, STS, Stren, Stren Easy Cast, Stren Fish Logo, Stren Sensor, Subsonic, Super Magnum, Super Tough, Targetmaster, Thunderbolt, UMC, Unibody, Viper, Wetproof, Wingmaster, WonderLube, and Yellow Jacket are trademarks of Remington Arms Company, Inc., Madison, NC 27026. Cordura, Delrin, Imron, Kevlar, and Zytel are trademarks of DuPont. A-Frame is a trademark of Swift Bullet Co. Mossy Oak, Bottomland, Greenleaf, Fall Foliage, and Treestand are trademarks of Haas Outdoors, Inc. V-Max is a trademark of Hornady, Inc. Nosler, Solid Base, and Ballistic Tip are trademarks of Nosler, Inc. Advantage is a trademark of Spartan-Realtree Products, Inc. Black Out, Capmaster, Cyclone, and Wonder Lube are trademarks of Ox-Yoke Originals, Inc. Kraton is a trademark of Shell. TruGlo is a trademark of Tru-Glo, Inc.

Weights, stock dimensions, checkering pattern and wood grain may vary according to the individual firearm. Remington reserves the right to change or modify its products without notice. Pricing may vary by model, specification, color, size, and availability. All prices shown are manufacturer's suggested retail prices, actual prices may vary and are subject to change without notice. Follow the safety rules printed in firearms instruction books and on ammunition boxes. If you do not have an instruction book for your Remington firearm, write Remington Arms Company, Inc., Ilion, New York 13357, for a free copy. Please specify the model and serial number. The firearms herein have been photographed with their actions closed to properly showcase their features. In actual practice, any firearm not in use must be left with ammunition removed, action open, and safety on.

Remington.

Consumer Information, Arms Service, Parts and Repairs, and Custom Shop: 1 (800) 243-9700. Reach us on the web at: www.Remington.com