



Kemingion.


THE WORLD'S PRIMITER SOURCE


BOE BEENERVERING VIND VINDAMENTON.

For 194 years, Remington® and the Amadean sportsman have seen lift.

all logather And because no one has been at part of the great hunding and shooting tradition in this country longer, no one works hander to anticipate your needs and provide the finovation you demand. Title year's crop of new products is testament to this. Statutess steel goes black on our new ploteis 700° - Xervill testuring the patence of this year consolor Control Systems your tentiles and homes are seter with the advent of Unitmate Home Defense amountings and the bire statut your endudings with remains of new callier of the rate of conjugate long as well especially with a sense of new callier of the rate of conjugate long as well especially with a sense of new callier of the rate of conjugate long as well especially with a sense of new callier of the rate of conjugate long as well especially with a sense of new callier of the rate of conjugate long as a sense of the pages to come, one duffing the cartains of a maintenance above them all the pages to come, one duffing the cartains of a maintenance and a source above them all the pages to come, one duffing the cartains of a maintenance and a source above them all the pages to come, one duffing the cartains of a maintenance of the maintenance of the page of the p

Specification in the contraction of the contraction

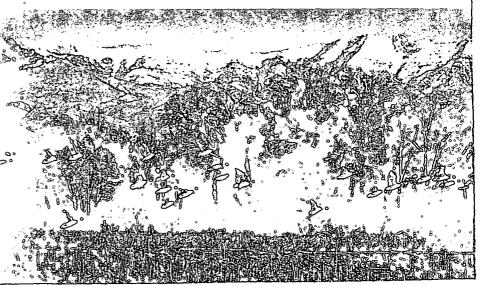


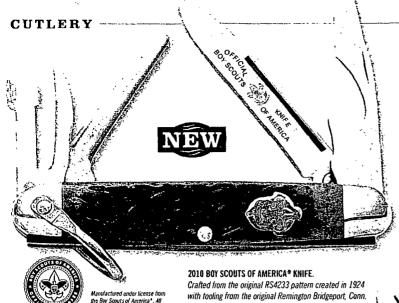

1911 MULTI-TOOL. Protected in a black oxide finish, it gets the job done with an array of tools including a bit driver system with 5 double-sided bits and dual bushing wrench/plier head. (Page 86)



Factory. (Page 79)

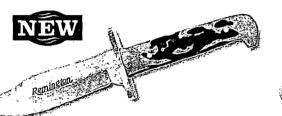

(limited offering). (Page 79)

2010 COPPERHEAD BULLET® KNIFE "DOUBLE STRIKE." The tradition of the Bullet Knife continues with a R2253 Copperhead pattern and a mahogany jigged bone with bullet shield. Also available in a Damascus Blade


PREMIER® TACTICAL SHEATHS. Designed to fit fixed-blade knives of many different sizes, these sheaths are made of the best quality Cordura® material to withstand rigorous use. Available in Black, Tan and OD Green. (Page 81)




HERITAGE SERIES KNIFES.

Available in a Delrin Stag handle for 2010, this knife boasts the Remington Arms Crest Shield, found on the front bolster of each Heritage Series Knife. A tradition dating back to the 1800s. (Page 84)

FIREARM ACCESSORIES

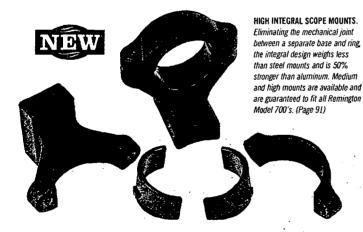

GUN SOCK. Excellent for long term storages; 52' long to fit most all long guns and the scope; silicon treated polyester fabric protects from dust and scratches and rust. (Page 90)

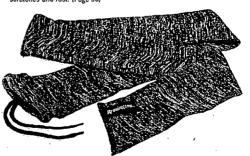

Blued or Parkerized finish. (Page 93)



R-15 MAGAZINE. Designed for the demands of the Model R-15, this magazinë is available in Black. (Page 93)




MODEL 870" MAGAZINE EXTENSION KIT. Add 2 or 3 extra shots to your shotgun's capacity. Available in a

HD ULTIMATE HOME DEFENSE

DON'T TRUST YOUR FAMILY'S SAFETY TO ANYTHING ELSE.



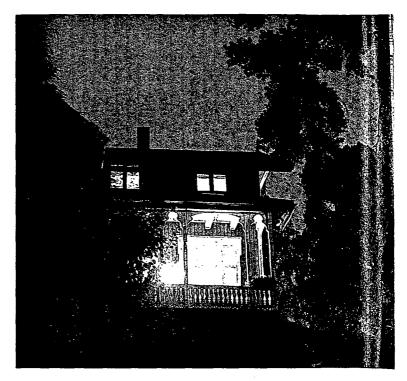


PISTOL & REVOLVER. Based on the same platform trusted by law-enforcement professionals to protect the American way of life is now available to defend your family and home. Loaded with our high-performance Brass Jacket Hollow Point (BJHP), these new rounds deliver massive expansion and deep penetration for ultimate stopping power. Premium nickel-plated cases resist corrosion and cycle dependably through extended storage. Available in the most popular pistol and revolver calibers.



					HD UL	TIMATE	HOME	DEFENS	E PISTOL	& REVO	DLVER					_
9mm Luger	HD9MMB .	1 1/2	124	BJHP	1125	1074	1031	963	349	317	293	255	0.2	1.0"	4.0"	4ª
380 Auto	HD308B	1 1/2	102	ВЈНР	940	920	901	866	200	192	184	170	0.3	1.2"	5.1*	4"
38 Special (+P)*	HD38SB	:11/2	125	BJHP	975	950	929	885	264	250	238	218	0.3	1.0	5.2	- 4"
40 S&W	HD40SWA	5 ½	165	BJHP	1150	1089	1040	964	485	435	396	340	0.2	1.0"	4.0"	4*
45 Auto ·	.HD45APB	2 1/2	230	BJHP.	875	853	833	795	391	372	355	323	0.4	1.5"	6.1*	5*

SHOTGUN. Featuring Remington Heavy Density (HD)
Tungsten-Bronze-Iron pellets that are heavier than standard
lead, these new rounds deliver dense, devastating patterns and
massive terminal knockdown when the stakes are at their highest.
Short-range patterns in smoothbore barrels are tight and extremely
devastating for one-shot confidence. Choose from two hard-hitting
12-gauge loads — BB for highest energy and Duplex for most pellets

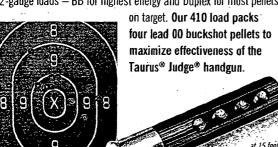

Three devastating shots at 15 feet with our new 2 ½ 410 HD Ultimate Home Defense shotshell featuring four 00 buckshot pellets each. Test fired through Tairus 2 Judge 2 revolver.



	eio :			000	
HD UL	TIMATE HOM	E DEFENSE S	HOTSHELL LOADS	- LEAD BU	CKSHOT
410B00HD	410	21/22	1300	. 4 pel_	OOBK
HD ULTIMA	TE HOME DE	FENSE SHOT	SHELL LOADS - TL	INGSTEN-BI	RONZE-IRON
FRW12SHDB · ·	12	21/	× 1250 +	1%	BB .
RW12SHD24	12	2 3/1	1250	1%	2x4

DISINTEGRATOR CTF

PISTOL & REVOLVER



PULVERIZING ALL PREVIOUS STANDARDS FOR EXCELLENCE IN FRANGIBLE TRAINING AMMUNITION.

Truly the ultimate choice for all lead-free training scenarios. Utilizing jacketless, copper tin frangible

bullets, Disintegrator® CTF $^{\text{m}}$ delivers complete breakup at distances as close as 5 ft. with no splashback, no jacket fragments and absolutely no lead residue. Disintegrator CTF bullets are formed from powder using a

compaction and sintering process that eliminates the need for a jacket to house the bullet core. When these completely frangible bullets strike a barrier, they're instantly reduced to dust-sized particles, dramatically reducing hazard to bystanders. Highly frangible design prolongs the life of target traps and backstops, and our Heavy Metal Free (HMF) primer offers the best shelf life available with a non-toxic primer.

				202.00	74.75.000					C2-20-4-30-3	Charles Charles Strate Land	227	CHEMICAL PROPERTY.
						DISIN	TEGRATOR	P CTF™					
9mm (+P)	CTF9MMB	1 1/2	100	CTSF	1300	1213	1141	375	327	289	- 02	0.7	4" .
38 Special (+P)*	CTF38SPLA	5 ¹ /2	101	CTSF	800	783	766	156	150	143	0.2	0.7	4"
40 S&W ·	CTF40SWA	5 1/2	125	CTSF	1300	1194	1110	469	.396	342	0.2	0.8	4"

t Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer. *Test Barrel Leagth CISF = Copper/Tio Sintered Frangible

PREMIER® ACCUTIP


450 BUSHMASTER -

No splashback
No Jacket fragments
No Lead residue

THE "BIG THUMPER" GETS A BIG DOSE OF AERODYNAMICS AND DEVASTATING EXPANSION. In honor of the 450 Bushmaster's debut on our supremely accurate R-15 platform, we're loading it with perhaps the most accurate .45-caliber bullet ever devised. Featuring our Power Port™ tip, this 260-grain AccuTip bonded projectile delivers exceptional flight characteristics for ultimate downrange precision and sustained energy. Its bonded construction, high-strength cartridge-brass jacket and spiral nose cuts combine to drive huge, uniform mushrooms through the toughest game with ease.



Caliber to describit to Brillet WE (pts) to Boilet Tipe PREMIER* ACCUTIP								
450 Bushmaster PRA450BI Z60 Accump								



260 GRAIN, 450 BUSHMASTER



PREMIER® NITRO SPORTING CLAYS

Smoke targets and all competitors with the finest sporting clays load in the world today. The Premier® Nitro performance that's dominated trap and skeet competitions for years is now available in high-velocity, 1-oz. loads specially formulated for the sporting clays enthusiast. Combining mild recoil with target-grinding pattern consistency, the new Premier Nitro Sporting Clays loads were created in answer to requests from NSCA All American Team Captain Wendell Cherry. They're extensively field tested and proven to crush the long birds with an astounding 1,350 fps. muzzle velocity in your choice of #7 ½ or #8 shot. And guaranteed to take your game to new heights and lengths in 2010.




Index Leagth Velocity Omnes Shot EDI No. Gauge (in.) (R./soc.@ 3 ft.) of Shot Sizes							
PREMIER® NITRO SPORTING CLAYS							
SIS12NSC17 12	21/4 1350 1 1 71/4,8						




TACK-DRIVING MASTERY

OF THE MOST EXTREME CONDITIONS.

The Model 700[™] remains the world's most accurate rifle out of the box, but never, ever stops evolving or improving. New additions this year include the Model 700[™] XCR[™] II, the Model 700 XCR II Camo Rocky Mountain Elk Foundation Edition, the Model 700 XCR II Camo Bone Collector Edition, the Model 700 SPS[™] Tactical and the Model 700 VTR[™] A-TACS[®] and the Model 700 CDL[™] SF Limited Edition in 280 Remington.

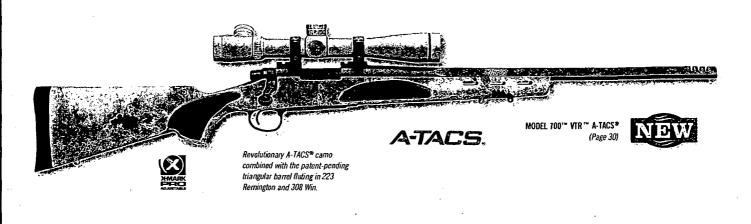


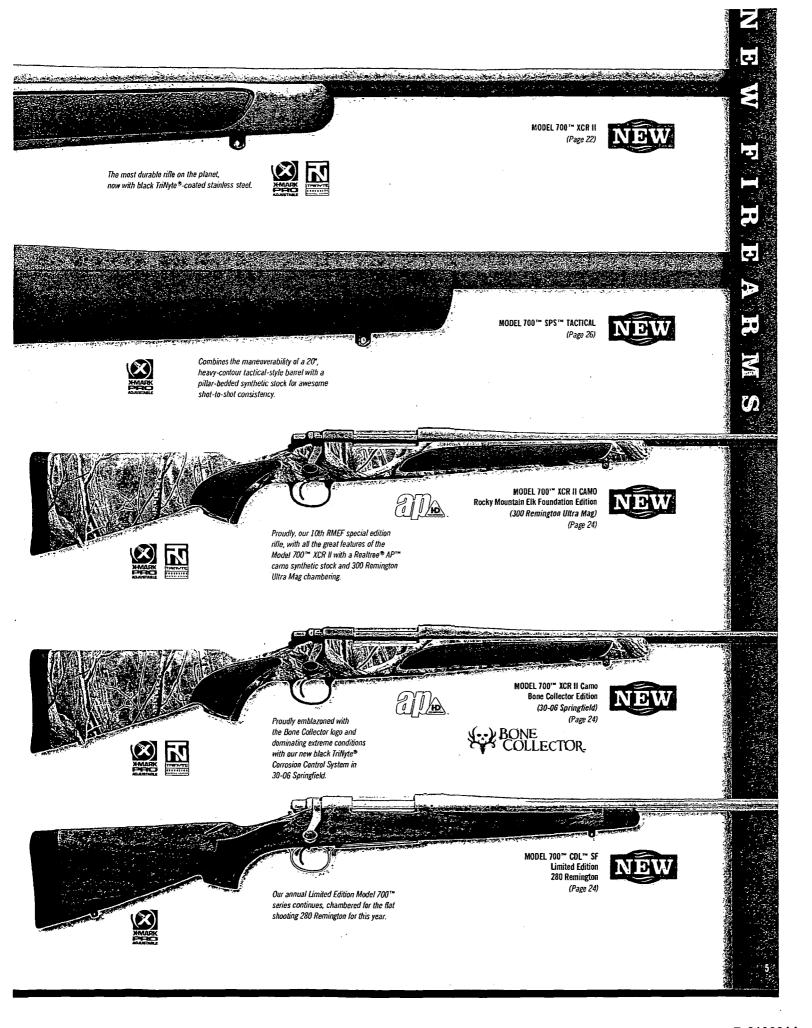





The tough-as-nails bad boy of the Remington* pump-action legacy adds four new members to the family this year. New armor-clad additions include the Model 887* Nitro Mag in black synthetic with a 26" barrel, Model 887 Nitro Mag Tactical. Model 887 Combo with two specialized barrels and Rem. Chokes for waterfowl and turkey and a Model 887 Bone Collector Edition equipped with a versatile 26" barrel and proudly displaying the Bone Collector logo. Also new in 2010 is the Model 887 fully rifled extra barrel with rifle sights.


Visit Remington.com for more details.

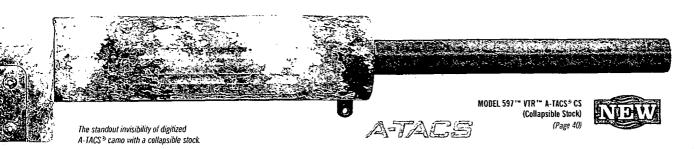

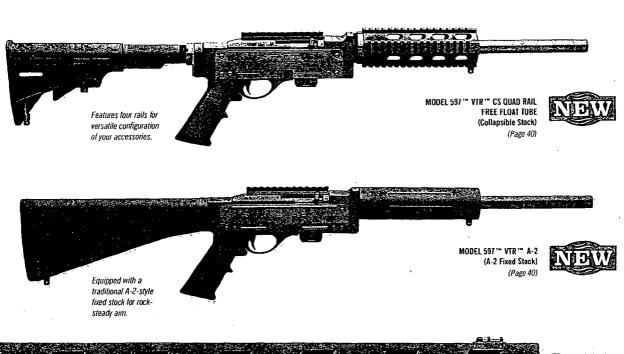

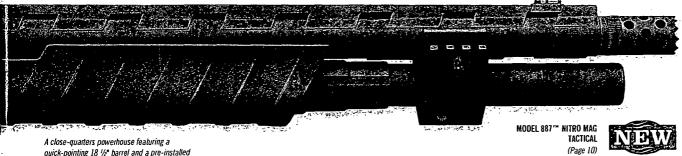

quick-pointing 18 1/2" barrel and a pre-installed 2-shot magazine extension.





CAMO COMBO (Page 10)



SuperCell RECOIL PAGE


Birds have bones, and they don't stand a chance against this special Bone Collector Edition Model 887.™

longbeards at long range and wreak major havoc on the flyway.



MODEL 887™ NITRO MAG BONE COLLECTOR (Page 10) BONE COLLECTOR.



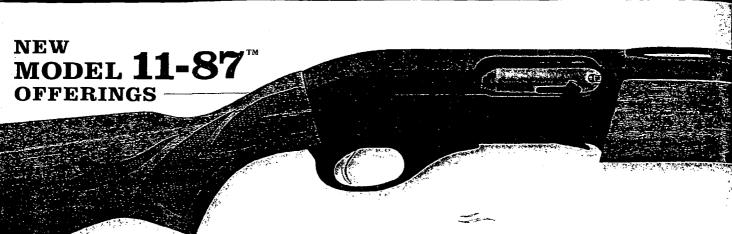


NEW SEMI-AUTO WORKHORSES FOR FIELD, WOODS AND WATER.

World-famous Model 11-87[™] speed, mild recoil and reliability in three new configurations. Choose from the classic appeal of our Model 11-87[™] Sportsman® Field, our completely updated Model 11-87 Sportsman Super Magnum Synthetic and Model 11-87 Sportsman Super Magnum Waterfowl featuring overmolded grips, HiViz[®] sights and more, and the long-range lethality of the Model 11-87 Sportsman Super Magnum ShurShot® Turkey.



America's favorite pump action is once again setting the standard for performance in a host of applications. This year, we're proud to introduce the Model 870 "Express" Tactical A-TACS' Camo the Model 870 SPS Super Magnum Turkey/Predator w/Scope, the Model 870 Express Turkey Camo and the Model 870 Express Super Magnum Turkey/Waterfowl.



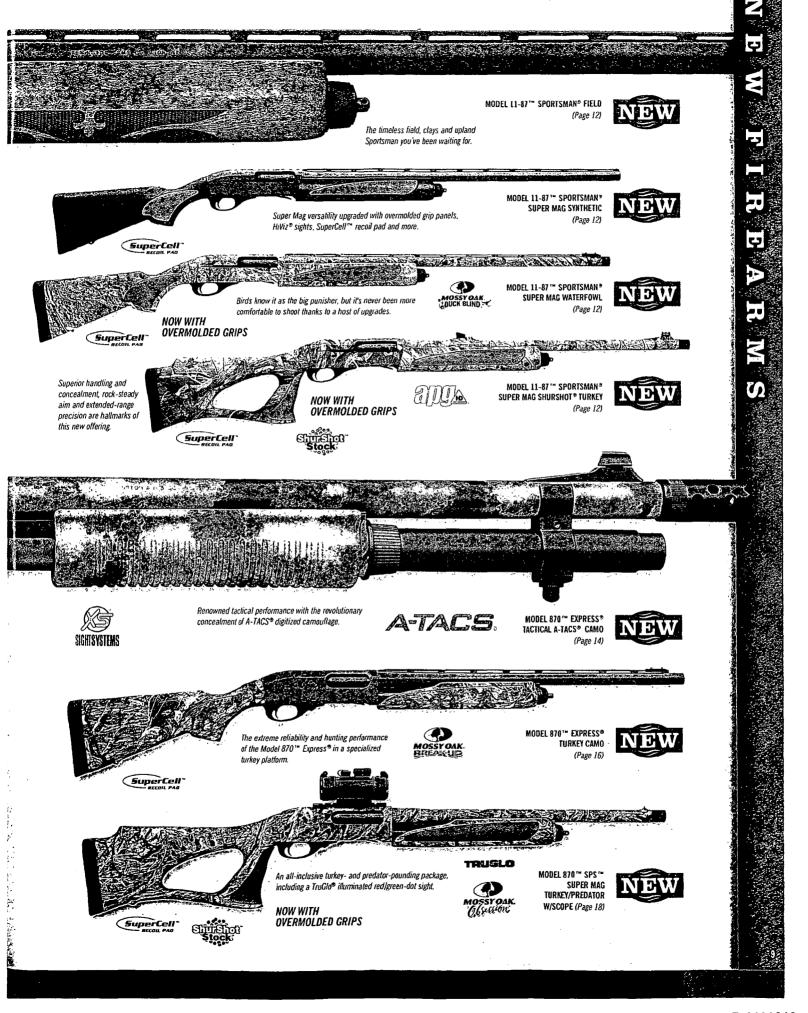




BUILT WITH ARMOR SKIN, BONES OF STEEL AND A 60-YEAR LEGACY OF GREATNESS.


The most durable shotgun on the planet. Born of the gunmaking expertise that brought you the best-selling, most trusted shotgun of all time, the Model 870,™ the Model 887™ Nitro Mag is an armor-clad warrior here to carry the torch of our great pump-gun legacy through the most extreme conditions on earth. Our exclusive ArmorLokt™ process seals the receiver and barrel in a vault of weather-impervious synthetic armor that's both completely rustproof and tough as nails. Similar to the Model 870, its receiver is crafted of solid steel and the barrel is hammer forged to last a lifetime. Twin steel action bars ensure smooth, positive chambering and ejection. And the sleek receiver design, awesome balance and natural pointing characteristics spell trouble for any bird within reach of its 12-gauge 3 ½" Super Magnum capability. The extremely rugged synthetic stock and fore-end are ergonomically contoured to offer a positive grip and comfortable handling. Swivel studs are built-in.

For 2010, the all-black Model 887 Nitro Mag is available with a 26" or 28" barrel, sporting a solid rib and included Modified Rem™ Choke. The Model 887 Nitro Mag Waterfowl Camo is dressed from butt to bore in vivid, high-detail Realtree® Advantage® MAX-4 HD™ camo, with a 28" barrel and an extended Over Decoys Rem Choke optimized for non-toxic waterfowl loads. We're also proud to introduce the ultimate knockout one-two for waterfowl and turkey, the Model 887 Nitro Mag Combo. It comes with a 22" turkey barrel with HiViz® fiber-optic rifle sights and a 28" waterfowl barrel with a HiViz® sight. To add to this already astounding offer, Extended Waterfowl and Super Full Turkey Rem Chokes are included. For Bone Collector fans, there's the Model 887 Nitro Mag Bone Collector Edition with a 26" barrel and emblazoned with the show's logo. Our new Model 887 Nitro Mag Tactical combines supreme toughness and dependability with a handy 18 ½" barrel, a 2-shot magazine extension and a barrel clamp with integral Picatinny rails for mounting your flashlight or other accessories. It also includes a ported, extended tactical Rem Choke and receiver mounted on Picatinny rail.



ARMORLOKT™ COATING. All exterior surfaces are locked in a vault of nail-tough polymer armor that's impenetrable to moisture and will never rust. This overmolded construction not only minimizes maintenance, it withstands abrasion and punishment like no other. Consider it full-coverage insurance for anything the season throws at you.



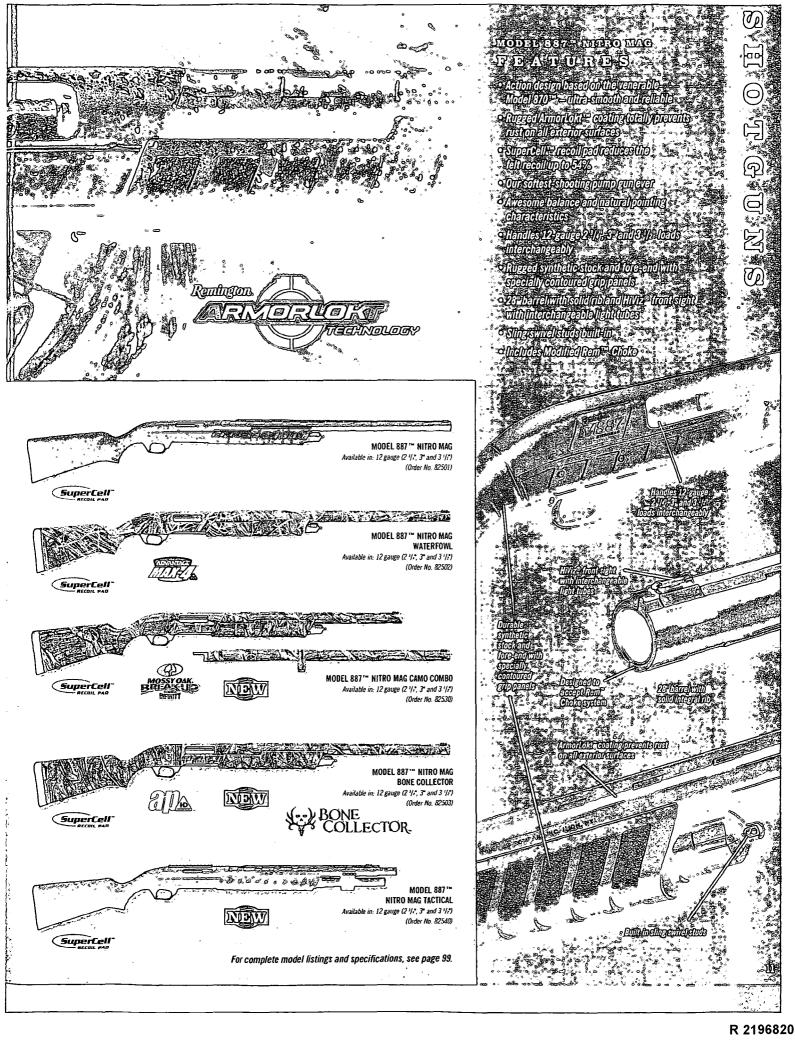

MODEL 11-87



RUT TO STRUT, IN EVERY STAND, BLIND, FIELD AND CLAYS COURSE BETWEEN.

No matter the season, our Sportsman answers the call with the lethal blend of speed, reliability and smooth operation that have made the Model 11-87[™] a standout since its introduction. These are workhorse shotguns, built to our legendary and uncompromising standards for autoloader performance. This year's lineup includes new 12- and 20-gauge field versions; a specialized fully rifled slug gun; all-purpose models in 12 and 20 gauge, black or camo; and a 20-gauge compact model with adjustable length-of-pull system. Truly as timeless and versatile as the American sportsman, the new **Model 11-87** [™] **Sportsman® Field** is a return to the roots of the Remington® semi-automatic shotgun — all-around utility and classic looks for clays, field and upland hunting. It features a handsome, satin-finished walnut stock and fore-end with fleur-di-lis checkering, and is available in 12- and 20-gauge versions with 2 ¾" and 3" capability. The nickel-plated bolt and gold-plated trigger perfectly accent the satin sheen of the barrel and receiver. Barrels are 28" on the 12-gauge model and 26" on the 20-gauge version. Both have a vent rib with dual beads and accept Rem™ Chokes (modified choke included).

Still deer season's MVP, the **Model 11-87 Sporstman ShurShot® Camo Cantilever** combines the extended-range slug accuracy of a fully rifled barrel with the ambidextrous comfort, maneuverability and rock-steady aim of ShurShot pistol-grip stock covered in Realtree® Hardwoods® Grey camo for concealment. The 21" barrel is handy in the wood and is fitted with a cantilever rail for easy scope mounting. With unfailing reliability, superior handling characteristics and breadth of line, the Model 11-87 Sportsman family continues to redefine semi-automatic shotgun performance.

MODEL 11-87[™]

SPORTSMAN® SUPER MAGNUM




THE QUICKEST & SMOOTHEST IN SUPER MAGNUM STRENGTH.

SuperCell RECOIL PAD

Its speed, versatility, bone-crushing power and swift pointing characteristics couldn't be topped, so we added a host of upgrades to our Model 11-87th Sportsman® Super Magnum for 2010 to improve handling, sight acquisition and more. All models now feature rubber overmolded grip panels on the stock and fore-end for a sure hold in all weather conditions and a black padded sling, with other enhancements on individual configurations. These shotguns tame the biggest, baddest, 3 ½" 12-gauge rounds with a soft-shooting action and our revolutionary SuperCellth recoil pad.

Our new Model 11-87 Sportsman® Super Magnum Waterfowl hides right along with you thanks to full Mossy Oak® Duck Blind™ camo coverage. It can be custom-fit to your build, clothing and shooting form; and includes an Adjustable Length of Pull Kit, offering a full 1" of adjustability. The 28" barrel accepts Rem™ Chokes. And the included Wingmaster HD® Specialized Waterfowl choke tubes are a lethal ticket when the birds are cupped and committed. It also comes with HiViz® sights featuring interchangeable light pipes. You'll find the same sights on the 28" vent-rib barrel of our do-all Model 11-87 Sportsman Super Magnum Synthetic.

The **Model 11-87 Sportsman ShurShot® Super Magnum Turkey** is the cutting edge in comfort, concealment and precision shot placement, boasting the ambidextrous ShurShot pistol-grip stock and full Realtree® APG™ HD™ coverage. Its 23" barrel has fully adjustable TruGlo® rifle sights and accepts Rem Chokes (Wingmaster HD Turkey Choke included).

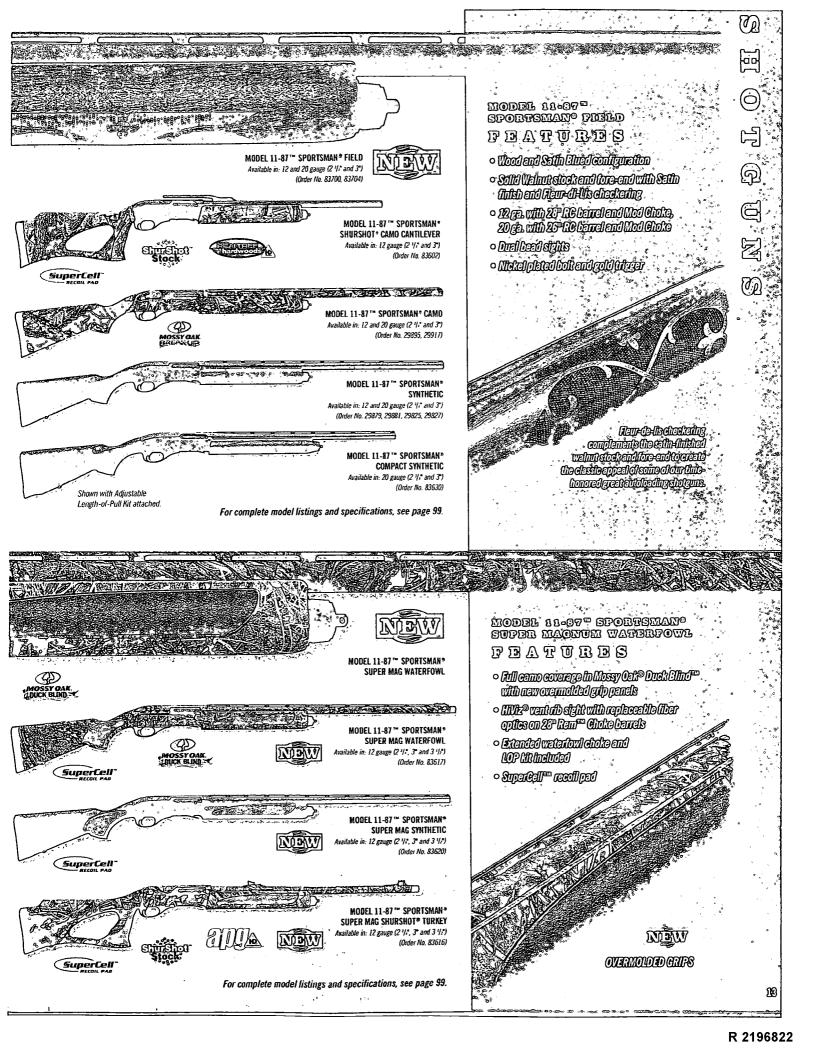

MODEL SP-10 PURPOSE



For serious extended-range shotgunners, the

Model SP-10[™] is the ultimate in lethality – from duck blinds to the turkey woods and everywhere in between. Its 3 ½" 10-gauge payloads are significantly superior in patterning efficiency to 12-gauge 3 ½" guns, and even produce less felt recoil. It features a corrosion-resistant gas-operated action in which a small cylinder – not the entire piston – moves, helping dampen rearward force. Ultra-reliable and smooth, it's the only shotgun worthy of the ultimate bird-leveling payload.

Ducks and geese beware: The big gun is now available with the state-of-the-art wetlands concealment — new Mossy Oak® Duck Blind ** camouflage. The **Model SP-10^{**} Waterfowl** features a 26" Rem ** Choke barrel with a high-visibility fiber-optic sight system, and comes with a full set of three Briley extended specialized waterfowl choke tubes.

Our **Model SP-10 Thumbhole** camo will reach out and bust a tom in grand fashion. Its thumbhole stock, adjustable Williams® fiber-optic Fire Sights[™] and handy 23" barrel make it the ultimate gobbler stopper. It's also fully dressed in Mossy Oak® Obsession™ camo.

The **Model SP-10 Magnum Camo** and **Model SP-10 Magnum Satin** come equipped with 26" or 30" vent-rib Rem™ Choke barrels with twin beads and interchangeable Full and Modified Rem™ Chokes. Choose from a Mossy Oak® Obsession or a traditional wood-stocked Satin finish.


TACTICAL SHOTGUNS —

ONE OF THE WORLD'S MOST TRUSTED & ACCOMPLISHED TACTICAL TEAMS.

Year after year, rugged ultra-dependable our legendary pump action Remington tactical shotguns are the #1 choice of law enforcement agencies across the country. They are and continually evolve as they're called to serve in new, increasingly demanding environments. Built on that's become the gold standard for high-risk applications, the new 12-gauge Model 870™ Express®

Tactical A-TACS® Camo is fully dressed in A-TACS digitized camo that absorbs surrounding light for ultimate concealment in urban environments. It has a quick-pointing 18 ½" barrel and includes our extended ported Tactical Rem™ Choke. SpeedFeed® IV pistol-grip stock optimizes control and dampens recoil with a SuperCell™ pad. For rapid target acquisition, it features a receiver-mounted, fully adjustable XS® Ghost Ring Sight rail with removable white bead front sight — Picatinny-style rail accepts optics and sight systems as well. This shotgun packs a full 7 rounds of 2 ³/4" or 3" 12-gauge firepower with the factory-installed 2-shot extension. The Model 870™ Express® Tactical with XSR® Ghost Ring Sights has all the same great features, but with a standard black synthetic stock and fore-end. Both models have drilled and tapped receivers and sling swivel studs.


Our all-new **Model 887™ Nitro Magnum Tactical** pump shotgun features a receiver and barrel fully encased in our exclusive ArmorLokt™ coating for rustproof, tough-as-nails dependability. It has an 18 ½" barrel, factory-installed 2-shot magazine extension and an ergonomically molded black synthetic stock and fore-end. The famous **Model 1100™ Tactical** shotguns come with our standard grip stock or the SpeedFeed IV pistol-grip stocks and a choice of 18" or 22" barrels. They're chambered for 2 ¾4" 12 gauge.

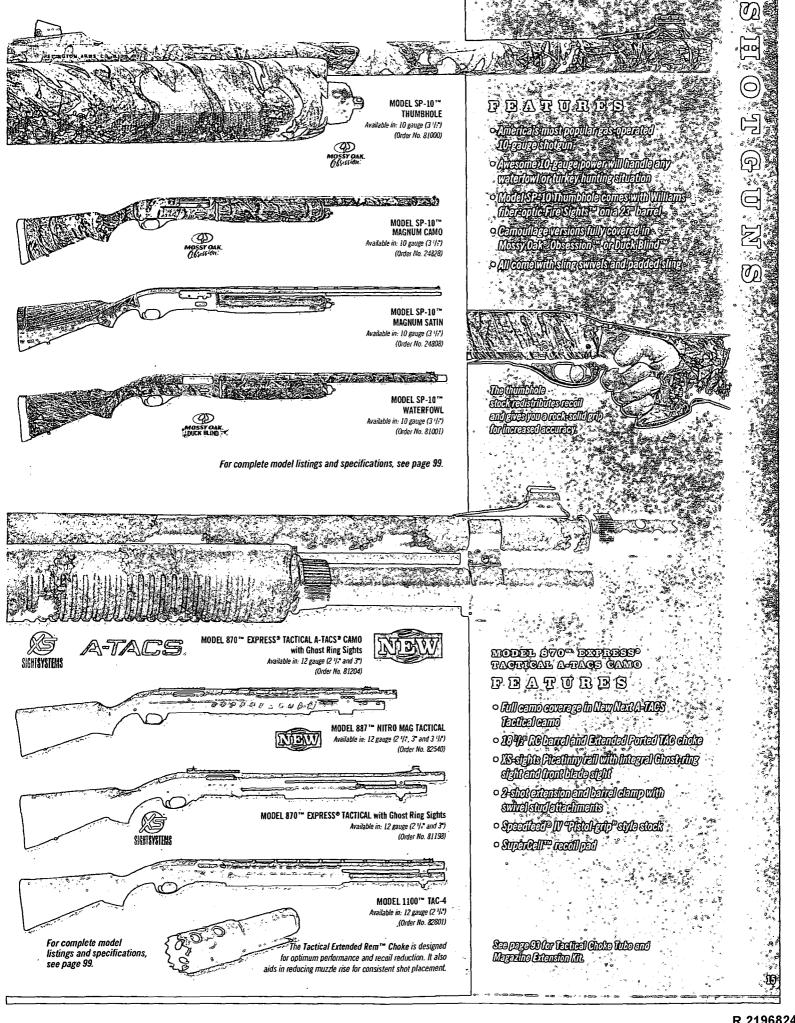



Sure as autumn arrives, the Model 870™ Wingmaster® rises to meet another day in the upland fields and woods of America. The Model 870 is so smooth and reliable that today — nearly 60 years after its introduction — it's still the standard by which all pump shotguns are measured. With a receiver machined from a solid billet of steel, it is the model of enduring strength. True to its original design, the pump glides with silky surety on two twin action bars for the utmost in positive chambering and ejection. These characteristics, along with its flawless balance and natural pointing qualities, have made the Model 870 the best-selling, most trusted shotgun of all time — of any action type, from any manufacturer. As the most aesthetically refined representative of our prestigious pump-action family, the Model 870 Wingmaster is a true American icon.

Available in 12 gauge 2 ³/₄" and 3", 20 and 28 gauge, and 410 bore, it has a custom-quality finish and handsome American walnut woodwork. The receiver and barrel are richly blued and highly polished for classic appeal. We also offer a broad selection of barrel and choke options to fit your application.

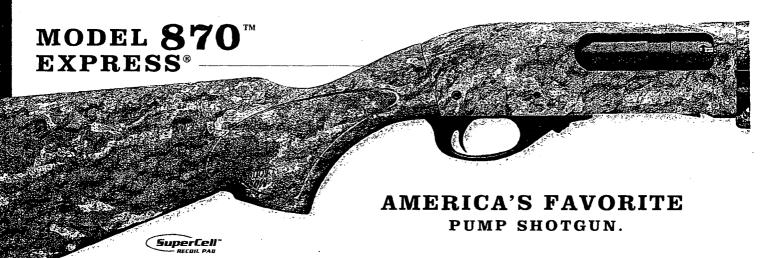



Its solid, dependable action makes it America's favorite, and our continual upgrades make it the most advanced, well-rounded family of pump shotguns around. Along with continually evolving designs, this shotgun's superiority is a matter of rugged dependability, great pointing characteristics and versatility. In fact, the Model 870™ has been the standard for slide-action performance for 60 years.

Our new Model 870 Express® Super Magnum Turkey/Waterfowl is just the dual-purpose bird slayer you've been waiting for. It cycles 2 ¾", 3" and 3 ½" 12-gauge rounds interchangeably and features full Mossy Oak® Bottomland™ camo coverage that blends into everything from the hardwoods to the flooded timber. A 26" barrel with HiViz® fiber-optics sights makes it ideal for virtually ever turkey hunting or waterfowl situation. Includes Wingmaster HD® Waterfowl and Turkey Extra Full Rem™ Chokes.

The 12-gauge (2 ¾" and 3") **Model 870 Express Turkey Camo** is the freezer-filling Express standard in a specialized design that'll wreck any tom's love life. It has a compact 21" barrel with a Turkey Extra Full Rem™ Choke and HiViz® fiber-optic sights. The stock is dressed to kill in Mossy Oak® Break-Up camo.

Our Model 870 Express ShurShot® Synthetic Turkey is optimized for big birds with the revolutionary ShurShot® synthetic pistol-grip stock that's contoured to accommodate both right- and left-handed shooters, while offering a steady-aiming platform that handles like lightning. A 21" barrel adds to its superb maneuverability. Mossy Oak® Obsession coverage on the stock and fore-end keeps you concealed. Includes Turkey Extra Full Rem Choke. With our Model 870 Express ShurShot Synthetic Fully Rifled Cantilever, the buck stops way out there. It features the incredible stability and comfort of our ambidextrous ShurShot stock and a 23" fully rifled barrel. Also available in 20 gauge.

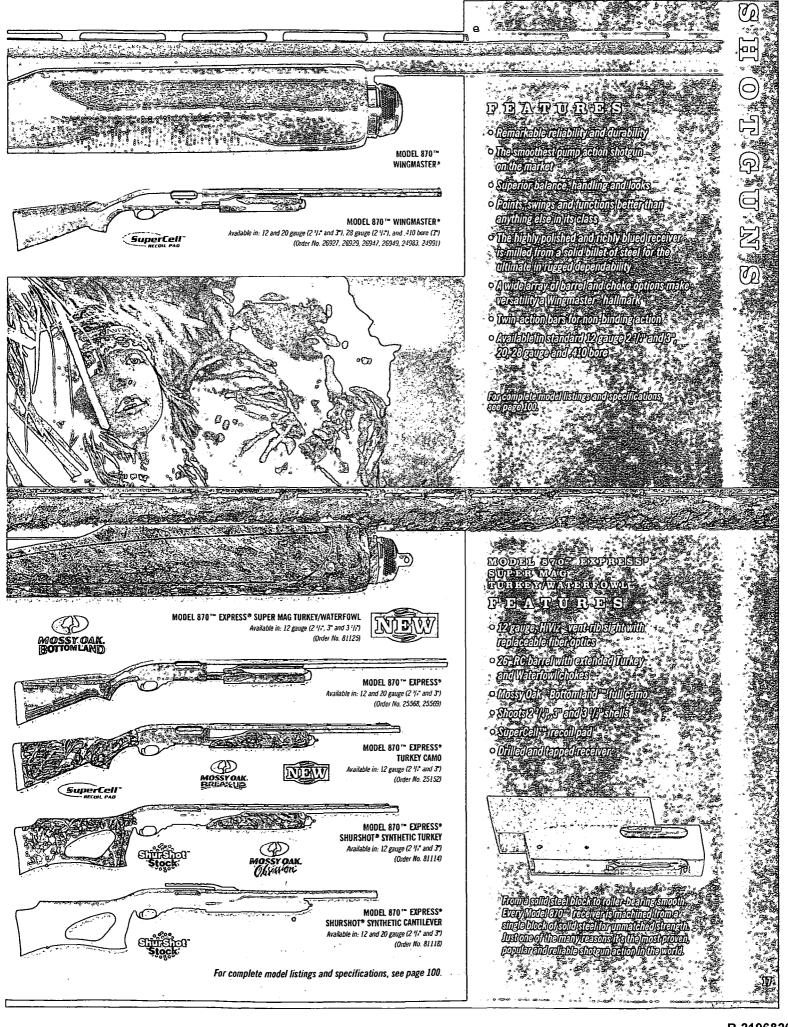

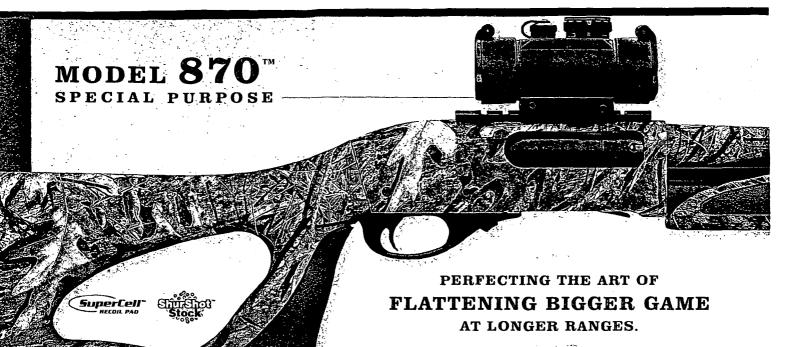

Introducing the most dependable slide action of all time in three advanced designs that will go the distance with deadly precision, whether your target is the crease behind a buck's shoulder, a wily

coyote or a big red head. The Model 870TM SPSTM Super Magnum Turkey/Predator w/scope is an all-inclusive, all-camo package put together with devastating implications for birds at extended range and predators that close the distance. Along with the ambidextrous freedom and handling ease of our ShurShot® pistol grip stock with grip-enhancing overmolds, it features a highly maneuverable 20" barrel and a TruGlo® red/green selectable illuminated sight mounted atop its pre-installed Weaver-style rail. It handles 2 ¾", 3" and 3 ½" 12-gauge rounds interchangeably. A black padded sling and Wingmaster HDTM Turkey/Predator RemTM Choke are included.

Our 12-gauge **Model 870[™] SPS[™] ShurShot® Synthetic Super Slug** advances deer-leveling technology to farther reaches and smaller group sizes than ever before. The 25 ½" extra-heavy, 1"-diameter barrel is pinned to the receiver to control vibration for rifle-like shot-to-shot consistency. For optimal slug flight, the barrel is a full 25 ½" long and features six Parabolic Ultragon [™] rifling grooves with a 1-in-35" twist. You also get the rock-steady aim and awesome control of our ShurShot pistol-grip synthetic stock. Receiver is drilled and tapped with Weaver rail included. Our **Model 870 SPS ShurShot Synthetic Turkey** features our ShurShot synthetic pistol-grip stock and a compact 23" barrel. The fully adjustable TruGlo® fiber-optic sights and an extended Wingmaster HD Turkey Rem Choke maximize pattern placement.

COMPETITION


SHOTGUNS



No shotguns have won more titles or are better equipped for the high-volume regimen of today's elite shooters. Prepare to see record scores crushed at a rapid rate by our latest upgrade to the lineup — the new **Model 1100¹™ Premier Sporting** series. Featuring nickel receivers with intricate fine-line embellishments and gold accents, they're as aesthetically impressive as they are sweet to point and shoot. Gold triggers and a custom Premier Sporting hard case complete the package. The Premier is offered alongside our original **Model 1100 Sporting** shotguns. Both the Model 1100 Sporting and Sporting Premier series offer discriminating shooters 12, 20, 28 and 410 options with semi-fancy American walnut stocks and fore-ends, vent-rib Rem¹™ Choke barrels and four Briley¹™ extended chokes as standard equipment.

Our **Model 1100 Competition** is super-tuned for the competitive scene. By overboring the 30" barrel and lengthening the forcing cones, we improved shot-to-shot pattern consistency and made what was one of the softest-recoiling actions in the world even easier on your shoulder. The receiver and all internal parts feature a nickel-Teflon® finish for the smoothest, most reliable cycling ever. It's optimized for 2 3/4" target loads and light field loads. Its optional adjustable comb can be fine-tuned to your shooting preference, and the barrel has a 10mm target-style rib. All these, plus a host of other upgrades, transform an already legendary design into an unstoppable force at the range.

Generations of die-hard competitors have made our **Model 1100 Classic Trap** and famous **Model 870™ Classic Trap** venerable mainstays. From 16s to the very back line, they continue to shoot their way to the top of major events every year.

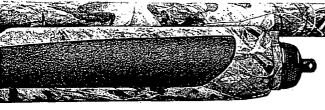



MODEL 870™ SPS™ SUPER MAGNUM TURKEY/PREDATOR W/SCOPE

Available in: 12 gauge (2 1/1, 3" and 3 1/2") (Order No. 81062)





MODEL 870™ SPS™ SHURSHOT® SYNTHETIC SUPER SLUG

Available in: 12 gauge (2 1/1" and 3") (Order No. 82101)





MODEL 870™ SPS™ SHURSHOT® SYNTHETIC TURKEY

Available in: 12 gauge (2 1/1, 3" and 3 1/2") (Order No. 81061)

See pages 92-93 for ShurShot® stocks and Wingmaster HD ** Choke Tubes.


For complete model listings and specifications, see page 101.


MODEL 870 "SPS" SUPER MAGNUM TURKEY/PREDATOR W/SCOPE

PERMANERA

- 12 gauge, 2 3/4", 3" and 3 1/2" chamber
- 20" barrel Türkey/Predator Extended Rem™ Chake included
- ShurShot® pistol grip stock with black overmolded grip panels
- TruGlo® 30mm Red/Green Dot Scope (Model TG8030DB) pre-mounted
- Full Mossy Oak® Obsession™ camo coverage
- Includes padded, quick-attach sling



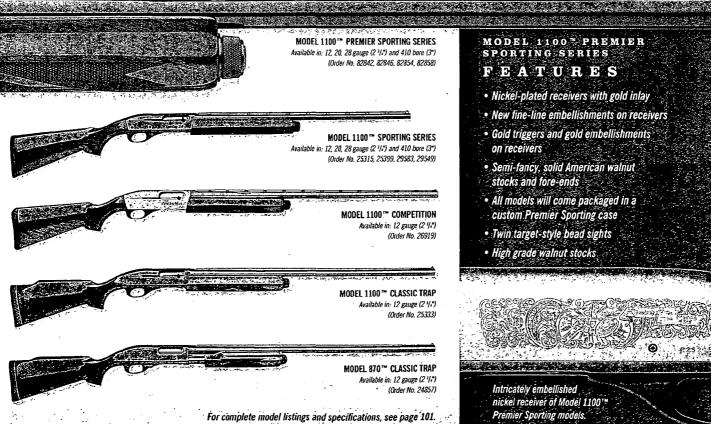

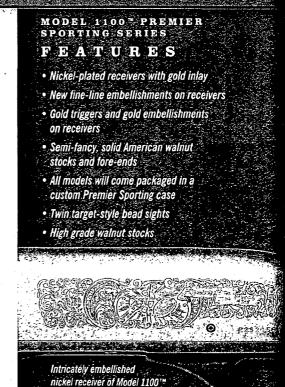


I AM THE LEGENDARY MODEL 700."

I AM THE STANDARD

BY WHICH ALL OTHERS ARE MEASURED AND CONTINUALLY FALL SHORT.

When the Model 700™ was introduced more than 45 years ago, it was ahead of its time, and it's even more so today. With enhancements such as our X-Mark Pro® Adjustable Trigger, the TriNyte® Corrosion Control System and the continual addition of hot new calibers, barrel contours and stock designs; the strongest and most accurate line of factory-built rifles in the world, is now also the most technologically advanced and versatile. We're proud of the Model 700's heritage — the superior out-of-the-box accuracy, the rock-solid dependability and the generation it's linked to. But we're even more excited about where it's headed.

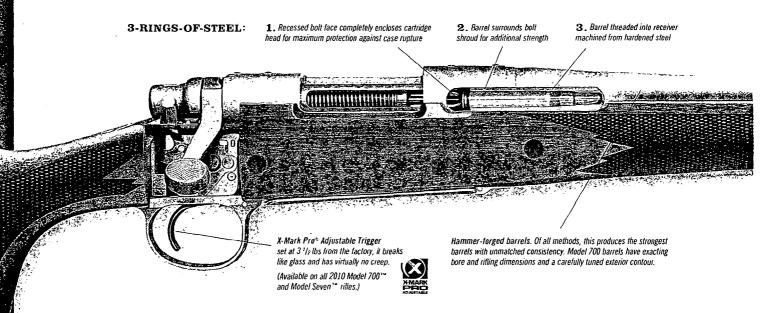

WHAT LEGENDS ARE MADE OF.

A breakthrough design in every sense, the Model 700™ emerged in 1962 as the first major advancement in the bolt-action rifle category since the 1890s. It was a long-awaited answer to the desires and demands of the hunting and shooting public — a supremely accurate rifle with sleek lines that was built to handle the higher pressures of the latest cartridge innovations. Since then, it has established itself as the most accurate and most popular factory-built rifle in American firearms history.


While there are many claims about accuracy in hunting rifles, the Model 700's heritage speaks louder than any words. Generations of hunters and shooters agree no other production rifle shoots tighter groups with so many bullets and loadings — right out of the box. Its inherent ability to place shots in a tiny cluster is what makes it the envy of every other riflemaker. But much more than that, it is the #1 bolt-action platform of choice for military and law-enforcement sniper units, and custom gunmakers worldwide. It has won more NRA Hunting Rifle Championships than any other firearm, and it's taken big game on every continent in the world.

LUOYS EINO NO DNIEITE LECUIUNO ESEUNVATE

The Model 700° is engineered with a cylindrical receiver, instead of the traditional flat-bottom type. Machined from solid-steal ber stock, titis design provides enhanced rigidity and strength while forming a more consistent bedding area for the action in the stock. This regulates harmories and also helps bring the barred to rest in the same place shot after shot. All of which translates to builts hitting the paper with near identical point of impact, shot after shot.

TUPE SECTION WOLLD

With the dramatic increase in precision of our manufacturing processes and the introduction of our K-Mark Pro® Titigger system, the exceptionally entry Model 700 trigger assembly gets better every year. And life been the best in the industry since its creation. Our ultra-lest lock time of 25-80 milliseconds is the best in the industry today, greatly minimizing the citests of shooter movement for improved on-game and on-larget results. The X-Mark Pro Adjustable. An externally adjustable trigger, with 2 lbs. range of adjustment, set at 3 % lbs. pull.

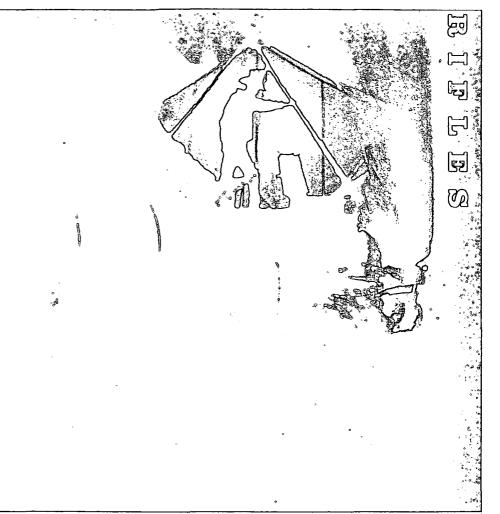


8-THINGS-OD-SHEETS

The strongest action in the world. Without question, the famingion Model 700 offic is the strongest action ever conscived. Close the bolt and your caratilgs is locked in a triple-reinforced walls of steel. The action's unique design also fully supports your caratilgs, creeting a tighter, more precise fit in the chamber and more exact all poment with the bore.

THE LEGISLE CONTINUES.

The Model 700 has been a standout since its introduction—at the range, in the field and on the rack—but its guts are what makes it the legardary fixture it its today. All its superior design elements come together with unmatched precision in our nation's longest-running manufacturing tecility. Each offle is then sent out into your hands where the next great diapter is written.



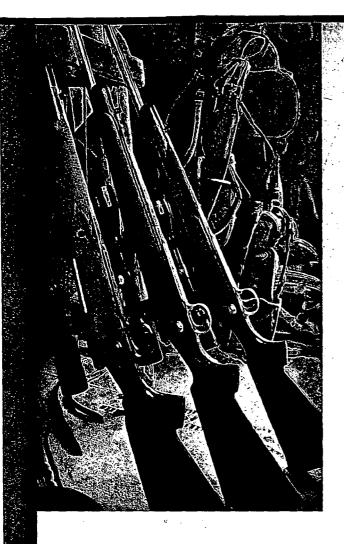

LEADING THE WAY ANYWHERE, ANYTIME.


When you build the world's best production hunting rifle, demand is high and the places it's called to serve are as diverse as its owners. For this reason, the Model 700™ family has evolved into the most complete and highly adapted rifle line available in the world today. There are stainless, rich blued and matte finishes to choose from with a variety of stock options, including camo and colored synthetic. With options from the 17 Remington® Fireball all the way up to the devastating 458 Win Mag, the range of calibers is unrivaled in the industry. Our nail-tough TriNyte® Corrosion Control System is the ultimate weapon against extreme conditions. And the revolutionary X-Mark Pro® Trigger is now externally adjustable for a clean break at the preferred weight of all shooters.

MODEL 700[™] XCR II



The most durable hunting rifle ever built. Featuring our TriNyte® Corrosion Control System, the introduction of the Model 700™ XCR in 2005 stretched the previous durability limits of stainless steel. And for 2010, the **Model 700 XCR II** is redefining its looks as well. The stainless steel barrel and receiver are now coated with matte black TriNyte for a more classic look with less glare for superior stealth. It's every bit as impervious to extreme conditions, with the same proven track record in accelerated saltwater testing that opened the world's eyes to the power of our patented technology. Simply put, TriNyte delivers scratch and corrosion resistance dramatically superior to standard stainless steel as well any protective coating by any other manufacturer.

The Model 700 XCR II is also optimized for sure handling in adverse climates. Its feature-laden olive drab green synthetic stock is a technological marvel that looks and feels the part with patented Hogue rubber overmolding featured at the grip and fore-end areas. These revolutionary enhancements give you a positive grip in the slickest environments. And shots are made infinitely more comfortable with our SuperCell recoil pad — the most effective on the market today. Our X-Mark Pro® Trigger System gives you a level of crispness and shot control once only available through high-dollar customization. Choose from a wide range of hard-hitting big-game cartridges, all delivered with the tack-driving accuracy only a legendary Model 700 barreled action could produce.

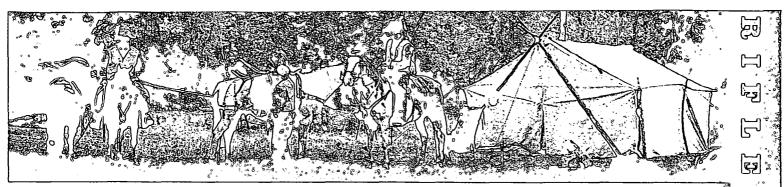


TRINYTE® CORROSION CONTROL

SYSTEM. (Patent Pending). Consisting of 416 Stainless Steel, electroless nickel and proprietary PVD, this armor-tough, multi-layer



coating is the world's most effective barrier against rust and abrasion for firearms, yet is only a fraction of a human hair in thickness. The only thing you'll notice is the near invincibility.

As proved in a rigorous saltwater test by an independent laboratory, our armor-tough, multi-layer Trillyte® coating forms a virtually impenetrable barrier to corrosion. It's the most effective on the planet, in fact.



Competition (stainless steel)


TRIGGER IS NOW EXTERNALLY

ADJUSTABLE. It breaks like glass, has virtually zero creep and offers a level of shot control unmatched by any factory trigger today.




The X-Mark Pro® Trigger delivers true custom-grade performance in a production trigger, and for 2010 is user-adjustable with readily available tools. Not that you'll feel the need. This year's version will also come from the factory with a lighter average pull weight $-3\,^{1/2}$ with 2 lbs. range of adjustment. While others use gadgets and add-ons to hide inconsistencies, Remington eliminates them

with state-of-the-art manufacturing techniques and the tightest possible production tolerances. A mirror-like finish on its components enhances corrosion resistance and adds to its breaks-like-glass feel. The externally Adjustable X-Mark Pro Trigger is now standard equipment on all cataloged Model 700™ and Model Seven™ rifles.



(D)

For more information, visit www.remington.com

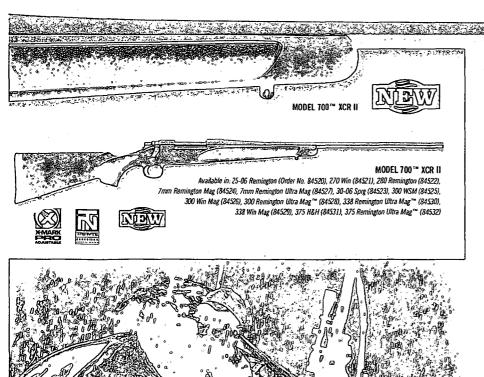

L B V L M B B S. WODER ACCOM

- Proprietary Inflyiting Conversion Control System provides unprecedented convosion resistence
- Stock leatures patented pubber exemptifing technology from Hogus® on grip and fore-endences
- · Geologies a 27 standard and magnum, 26 Cem Who Wag, and 27 975 WHI) 275 Cem Who Wag with offestyles
- · Uliged (loog) late magazine
- · Dilled and tapped for seepe mounts

يع



NEARLY 50 YEARS.

The Remington® Model 700,™ a rifle with no equal, and a superior performer in every way. Its accuracy and dependability have become the standard by which all other centerfire rifles are measured and continually fall short. Still the most accurate out-of-the-box rifle made, the Model 700 brings its famous action and renowned consistency to this diverse family of guns. All are now equipped with our externally adjustable X-Mark Pro® trigger system.

Featuring our armor-tough new black matte TriNyte® Corrosion Control System on its stainless steel barreled action, the **Model 700 XCR II** is still most durable rifle ever built, and now more stealthy than ever. Our RMEF Model 700 XCR II is our 10th Limited Edition Rocky Mountain Elk Foundation rifle. It has a stock dressed in Realtree® APTM HDTM camo and is chambered for the biggest, baddest, hardest-hitting 30 caliber in the woods — the 300 Remington Ultra Magnum. Also new in the family is the **Model 700 XCR II Camo Bone Collector Edition**, emblazoned with Michael Waddell's Bone Collector logo and built to master the most extreme conditions.

The Model 700 CDL™ is available with a distinctive high-polish blued finish and our ever-popular satin finish. Our line of Model 700 CDL SF rifles, offered in a wide range of chamberings, has become extremely popular. This year's Model 700 CDL SF Limited Edition comes in the deadly 280 Remington. Preferred for high-country hunts, the Model 700 Mountain Rifle continues to be a favorite thanks to its sleek lines, classic looks and lightweight carrying ease.





TriNyte® Corrosion Control System (Patent pending). Consisting of electroless nickel and proprietary PVD, this armor-tough, multilayer coating is the world's most effective barrier against rust and abrasion for firearms,

yet is only a fraction of a human hair in thickness. The only thing you'll notice is the near invincibility. Available in a variety of finish colors.



The.

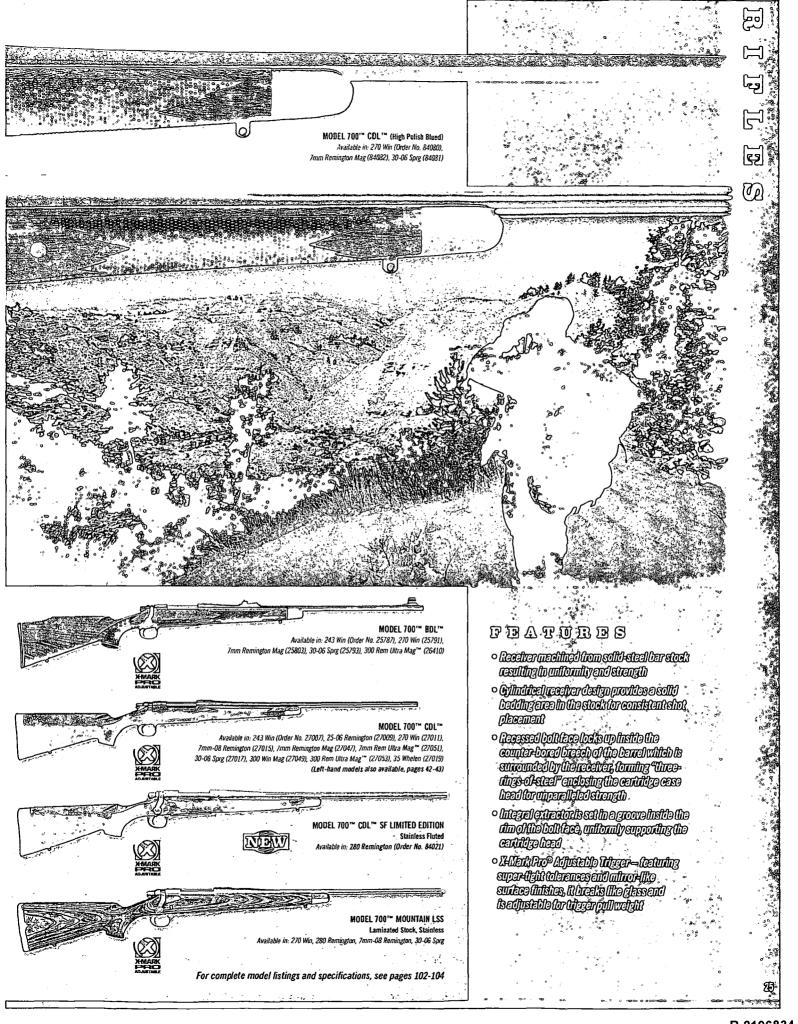

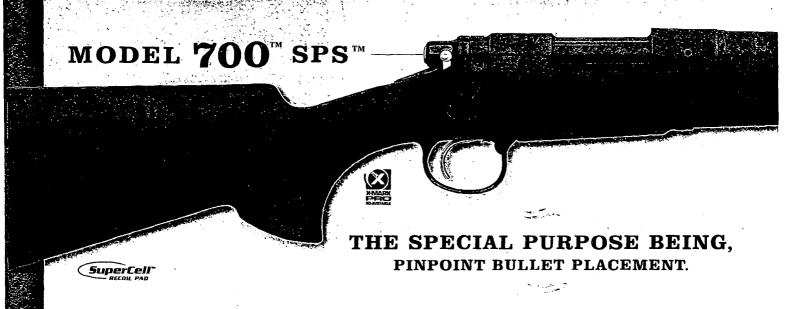


The Model 700TM SPSTM (Special Purpose Synthetic) puts legendary Model 700 accuracy and reliability within reach of most avid enthusiasts. It's a no-frills, tack-driving game-dropping machine built with everything you love about the Model 700, including a hammer-forged barrel, externally adjustable X-Mark Pro® trigger, SuperCellTM recoil pad and, of course, hair-splitting precision, straight out of the box. It features an ultra-rugged, ergonomically designed synthetic stock for superior weather resistance and handling. Standard finish is a matte blue for toughness and concealment. The Model 700 SPS Stainless has a stainless steel barrel and receiver for added corrosion resistance. Both are chambered in a wide variety of popular calibers for hunters and shooters of all preferences. With the Model 700 SPS "Buckmasters" Edition, you'll find all the standard features of our popular Model 700 SPS with the addition of a specially engraved floorplate featuring the Buckmasters logo and a Realtree® Hardwoods® HDTM SPS camo stock. Chambered in six popular calibers.

Our **Model 700 SPS Tactical** is a highly maneuverable member of the family, built for tack driving accuracy with a 20" heavy-contour tactical-style barrel and dual-point pillar bedding in its black synthetic stock. Hogue overmoldings on the stock facilitate sure handling, and it has a semi-beavertail fore-end for added stability off a rest. Chamberings include 223 Remington and 308 Win.



When our patented triangular barrel contour made its debut in varmint/target weight on the Model 700™ VTR, it was deemed one of the most innovative barrel designs conceived. Meet its big-game evolution, the Model 700™ XHR (Xtreme Hunting Rifle), firmly seated atop the food chain with the renowned accuracy and supreme strength of our Model 700 action as its foundation. Pick it up, and the first thing you'll notice is the impeccable balance. With a magnum contour barrel crafted in our patent-pending triangular formation, the rifle seems to point itself. This barrel design allows us to shave weight while maintaining the rigidity of a traditional round barrel. And the weight that remains is in all the right places. Plus, its surface area facilitates rapid cooling for more accurate follow-up shots. Not that you'll need them. Like all new Model 700s, the XHR features our new externally adjustable X-Mark Pro® trigger system that comes set from the factory with 3 ½ lbs. pull, and can be easily fine-tuned to your preference — by you.

Its cutting-edge performance and looks don't stop at the barrel. The Realtree® AP™ HD™ camo synthetic stock is equipped with patented Hogue overmolding accents at the grip and fore-end areas for comfort and a firm hold in adverse conditions. Then we added the world's most effective recoil pad — SuperCell — that reduces rifle kick to a gentle push. The barrel and action are finished in durable satin black oxide. A hinged floorplate magazine and jeweled bolt round out the impressive list of features. Gain the ultimate lethal advantage with the Model 700 XHR.

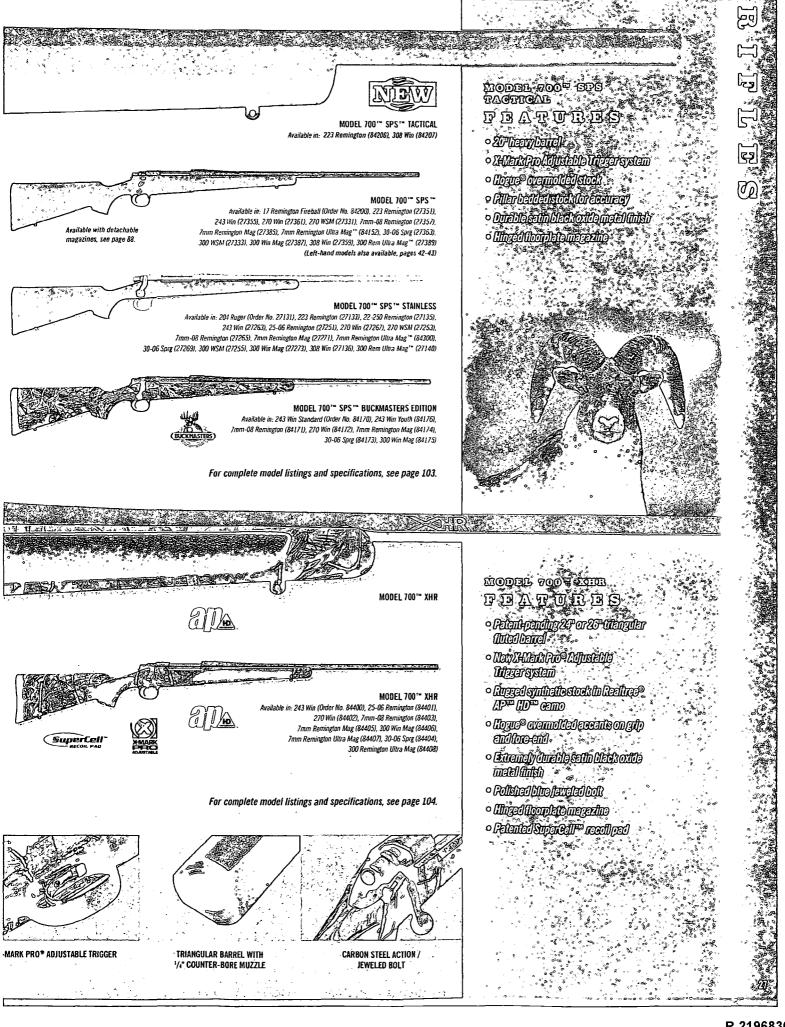



For all those cursed with perfectionism, we'd like to present a permanent fix. The tack-driving Model 700TM Target Tactical rifle is a confluence of family traits borrowed from our world-class Model 700 tactical, target and varmint rifles that come together like five shots in one hole. With its triangular VTR barrel configuration and Bell & Carlson Medalist Varmint/Tactical stock, its looks are nearly as remarkable as its ability to print tiny groups. The 26" barrel has a ½" counterbored muzzle to protect the rifling and stabilize bullet flight. It is also 5-R hammer-forged with tactical/target-style rifling like that used in our famous M-24 military rifles for the utmost in shot-to-shot consistency. Our externally adjustable X-Mark Pro® trigger adds to the impeccable control. And its stock has a fully adjustable comb and length of pull with a tapered fore-end for minute elevation adjustments on a rest. All of its accuracy-enhancing features are built on the legendary Model 700 foundation.

Although it has all the renowned design aspects and industry-leading out-of-the-box accuracy of a Remington varmint rifle, the **Model 700TM Sendero SF II** is chambered for long-action magnum cartridges for extended-range, big-game performance. It's equipped with a high performance composite stock reinforced with aramid fibers, featuring a contoured beavertail fore-end with ambidextrous finger grooves and palm swell. A full-length aluminum bedding block creates an accuracy-enhancing platform for its barreled action. For rapid cooling and reduced weight, its 26" heavy contour barrel features six longitudinal flutes.


For more tactical solutions, the Model 700 XCR Tactical Long Range Rifle and the Model 700 XCR Compact Tactical Rifle both feature diamond-hard TriNyte® PVD coating and the externally adjustable 40-X trigger.




"Why yes, that's really five shots." Tell your friends it's genetics. Fact is, when it comes to precision, there's no finer pedigree in the industry than Remington® varmint rifles. With our **Model 700™ SPS™ Varmint**, staking claim to our legendary accuracy is a more attainable feat than ever.

The Model 700 SPS Varmint is capable of punching tiny groups straight out of the box because it's built on the Model 700 action, the most solid, dependable and trusted in existence.

Its 26" heavy contour barrel is perfectly matched to its high-velocity caliber offerings, including the hot 17 Remington® Fireball. Plus, the ergonomically designed black synthetic stock has a vented beavertail fore-end for enhanced grip, reduced weight and better heat dissipation. And, sharp predator eyes won't spot the tough, non-reflective matte blued finish on the barrel and receiver. Other standard features include a hinged floorplate magazine, sling swivel studs, and a drilled and tapped receiver. The Model 700 SPS Varmint is destined to leave a lasting impression on any varmint that crosses its line of sight.

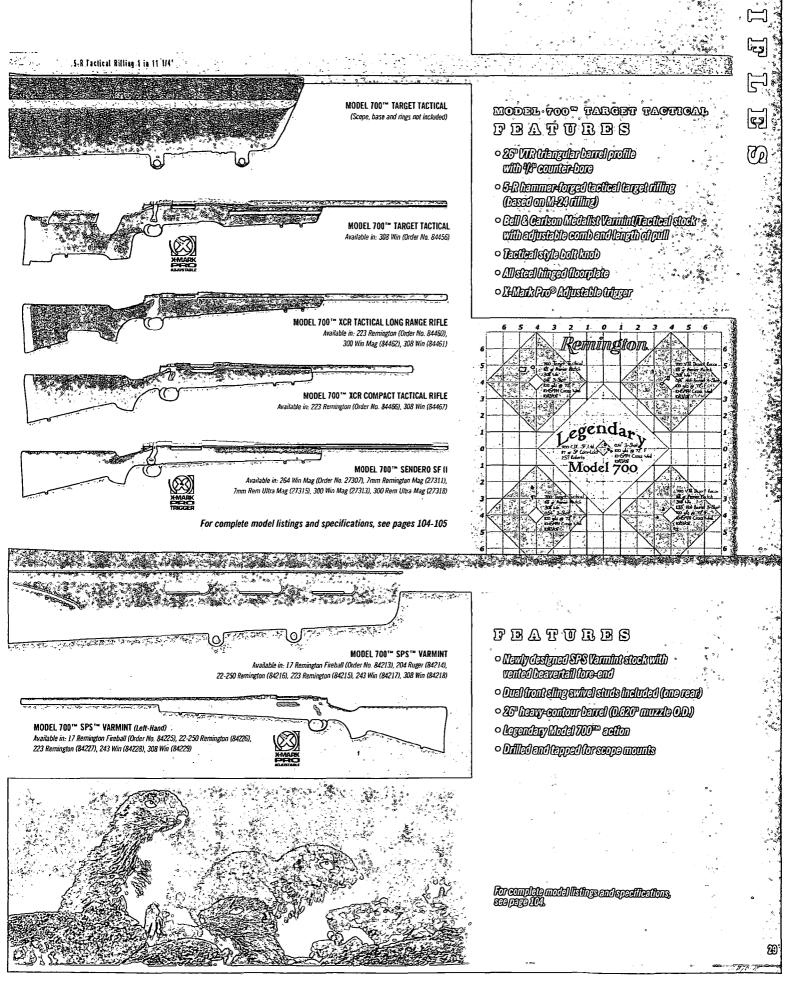

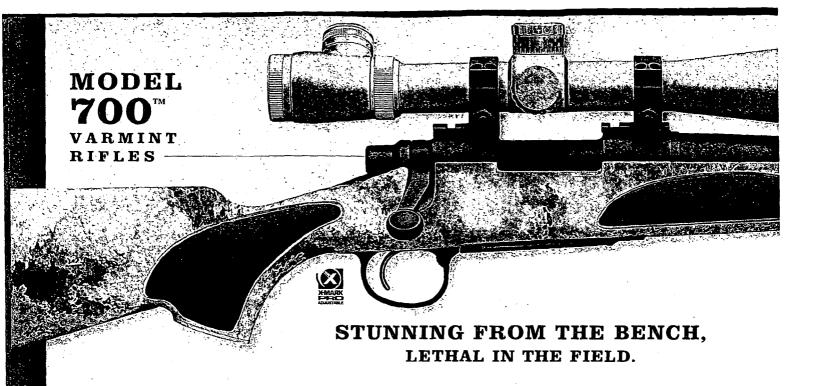

Built on the famous Model 700™ cylindrical action, Remington® Varmint rifles are the most accurate factory-built models we produce. You'll be stunned by the degree of precision you get straight out of the box. The varmints won't be so lucky.

On the new Model 700TM VTRTM A-TACS,® our revolutionary patent-pending triangular barrel design and one of the most advanced camo patterns ever devised converge to make a massive impact on varmint populations and shatter the previous standards for varmint-rifle performance. The 22" triangular barrel weighs less than traditional heavy barrels yet delivers the same degree of heat dissipation and rigidity. An integral muzzle brake with top-side venting reduces muzzle rise so you can keep your eye on the target. And mark our words, this rifle is a ghost in virtually any terrain. A Remington exclusive, the A-TACS camo pattern on its stock is formulated with a digitized pattern that absorbs surrounding light for chameleon-like versatility. Vents in the fore-end quicken barrel cooling. Like all new Model 700 rifles, it features the externally adjustable X-Mark Pro® Trigger system. Chamberings for this year are 223 Rem and 308 Win. Dual front swivel studs facilitate bipod and sling together. The original Model 700 VTR has identical features with an OD green synthetic stock and six available chamberings from the hot 204 Ruger to 308 Win.

If you value tiny groups and the big-time weather resistance of stainless steel and synthetic, consider our **Model 700 Varmint Stainless Fluted (SF)** an instant treasure. Its 26" heavy-contour barrel is fluted for weight reduction while maintaining rigidity and rapid cooling. We also added a concave dish crown that protects the rifling lands and promotes tack-driving bullet flight. The rugged synthetic stock has overmolded panels for a sure grip and a vented beavertail fore-end that keeps air flowing around the barrel.

Our **Model 700 VL SS** is equipped with a laminated thumbhole stock for enhanced stability, comfort and durability. Vents in its semi-beaver tail fore-end facilitate rapid cooling of the heavy-contour stainless barrel. For those who prefer a more traditional varmint rifle, there's the time-tested Model 700 VLS with its classic laminated stock and satin-blued barrel.

There's also the **Model 700 VS SF II**, a finely tuned machine with full-length aluminum bedding block that creates an ultra-stable, accuracy-enhancing platform. Further improving its shot-to-shot consistency is a 26" heavy contour barrel that's fluted for rapid cooling. Its high performance composite stock is reinforced with aramid fibers and features a contoured beavertail fore-end, ambidextrous finger grooves and a palm swell.





為可為以馬

MODEL 700™ VTR™ A-TACS® Available in: 223 Remington (Order No. 84362), 308 Win (84364) (Scope, base and rings not included)



MODEL 700™ VARMINT SF

Available in: 17 Remington Fireball (Order No. 84340), 204 Ruger (84341), 22-250 Remington (84342), 223 Remington (84343), 220 Swift (84344), 308 Win (84345)



MODEL 700" VTR"

Available in: 17 Remington Fireball (Order No. 84367), 204 Ruger (84369), 22-250 Remington (84373), 223 Remington (84370), 243 Win (84368), 308 Win (84371)



VTR INTEGRAL MUZZLE BRAKE



OVERMOLDED GRIPS ON STOCK



VTR TRIANGULAR BARREL CONTOUR



MODEL 700™ VL SS™ THUMBHOLE

Available in: 204 Ruger (Order No. 27443), 223 Remington (27445), 22-250 Remington (27447)



MODEL 700™ VLS™ Varmint Laminated Stock

Available in: 204 Ruger (Order No. 27467), 223 Remington (27491), 22-250 Remington (27489), 243 Win (27495), 308 Win (27499)



MODEL 700™ VS SF™ II Varmint Synthetic, Stainless Fluted

Available in: 17 Remington Fireball (Order No. 84352), 204 Ruger (26333), 220 Swift (26339), 223 Remington (26337), 22-250 Remington (26335)

For complete model listings and specifications, see pages 104-105.



The first time you carry it in the field, you'll understand why it's considered one of the finest dense-cover rifles in America. Lightning-fast in close quarters and superbly accurate for the long shot, the compact, short-action Model SevenTM has been a knock-down, drag-out leader in the woods since it was introduced in 1983. Its receiver and action design are based on the Model 700^{TM} and deliver the highest level of out-of-the-box accuracy, strength and reliability in a platform that's 2 $\frac{3}{8}$ " shorter overall and weighs just 6 $\frac{1}{2}$ lbs. (standard calibers). When you match this handy design with some of the hardest-hitting calibers known to big game — the short action magnum cartridges — you need a longer barrel. Thus, Model Seven rifles in these chamberings have a 22" magnum contour barrel.

The **Model Seven™ CDL** is the quintessential short-action hunting rifle featuring a classically styled American walnut CDL stock, a clean satin-finished barrel (except 350 Remington® Mag; 20" magnum contour barrel with sights) and our SuperCell™ recoil pad. It's chambered in a broad range of calibers from 17 Remington® Fireball up to 270WSM and 300WSM for everything from varmints to big game.

The **Model Seven™ Predator** is every predator and varmint's worst nightmare. It weighs in at 7 lbs. and is dressed butt to bore in Mossy Oak® Brush™ camo for the ultimate in mobility and concealment. The Predator's fluted, magnum-contour 22" barrel promotes awesome long-shot repeatability and cools quickly when the action heats up. Speaking of hot — the lineup of calibers, including our

17 Remington Fireball at 4,000 fps, is sure to light 'em up.




READY TO HUNT,
RIGHT OUT OF THE BOX.

Simply the finest, most complete embodiment of out-of-the-box accuracy and hunting performance in the industry today. Perfect for any hunter looking to fast-forward through the process of selecting a scope and components, the Model 770¹¹⁶ comes with a pre-mounted and boresighted 3-9x40mm riflescope. But most importantly, it's built to our rigorous standards for accuracy and reliability. Just choose your ammo and you're ready to shoot.

The rock-solid action is fitted with a precision-crafted button-rifled barrel to produce the tight groups and game-dropping results you expect from every Remington firearm. Its ergonomically contoured synthetic stock has a raised cheekpiece for rapid scope-to-eye alignment, plus grip texture in all the right places to maximize handling ease in the field. Offerings include the **Model 770[™] Stainless Camo** with a stainless steel barrel and receiver, and the added concealment of a Realtree® AP[™] HD[™] stock; or the standard **Model 770** with matte blued metalwork and a black synthetic stock. Chambered in a wide range of long and short-action calibers, the Model 770 is the quickest way to experience legendary Remington bolt-action performance, and a full freezer.



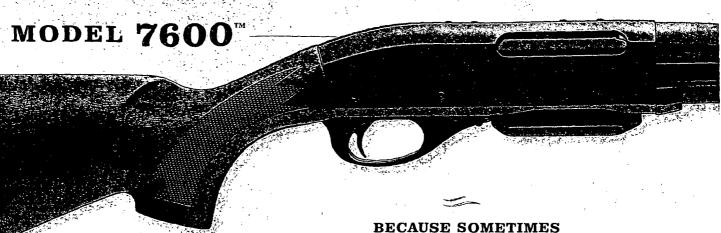

YOU NEED A QUICK ONE-TWO
THREE-FOUR-FIVE ...

Maybe you flinched? Or the animal turned at the last split-second? Either way, our Model 7600™ centerfire rifle will get you back on target — instantly. Because not only are they built to deliver legendary Remington® first-shot accuracy, they're also designed for ultra-fast follow-up shots — without ever having to unshoulder your rifle.

Our ever-popular **Model 7600**™ is one of the most proven deerslayers in the woods. It has a 22" barrel, a four-round magazine and is available in wood and durable synthetic models. All of our centerfire pumps feature quick-release magazines and Remington's rotary bolt lock-up design for exceptional strength, safety and reliability.







PUT FIVE SHOTS
THROUGH DEER HUNTING'S
NARROW WINDOW.


In the field, patience is a virtue, but when it's time to take action, sometimes you need the speed of a Model 750.™ Its improved gas system provides faster, smoother cycling. And its balanced low-profile design handles like lightning. Rapid follow-ups are its specialty, but famed Remington one-shot accuracy comes standard.

The Model 750 ™ Woodsmaster™ features a sleek American walnut stock and fore-end with machine-cut checkering. Felt recoil is diminished by its ultra-efficient gas operated action. .


For added durability in all conditions, the **Model 750 Synthetic** features all the Model 750 improvements only with a synthetic stock and fore-end. Go ahead, throw that narrow window wide open with the quickest gun in the woods, the Model 750.

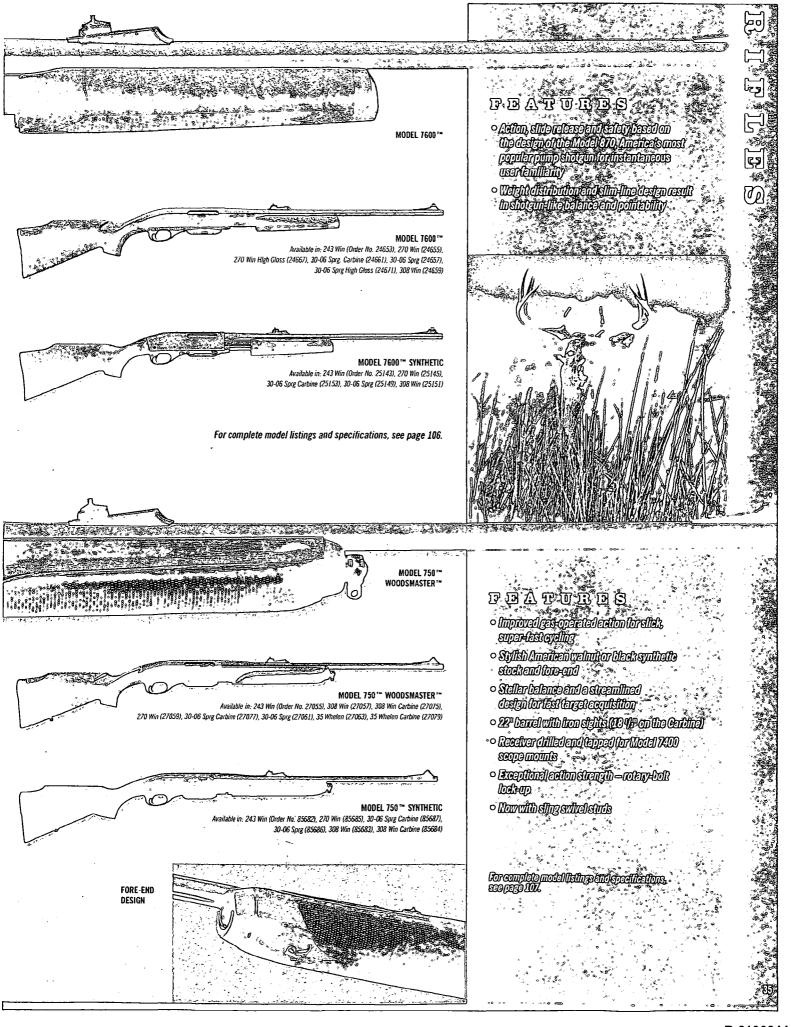


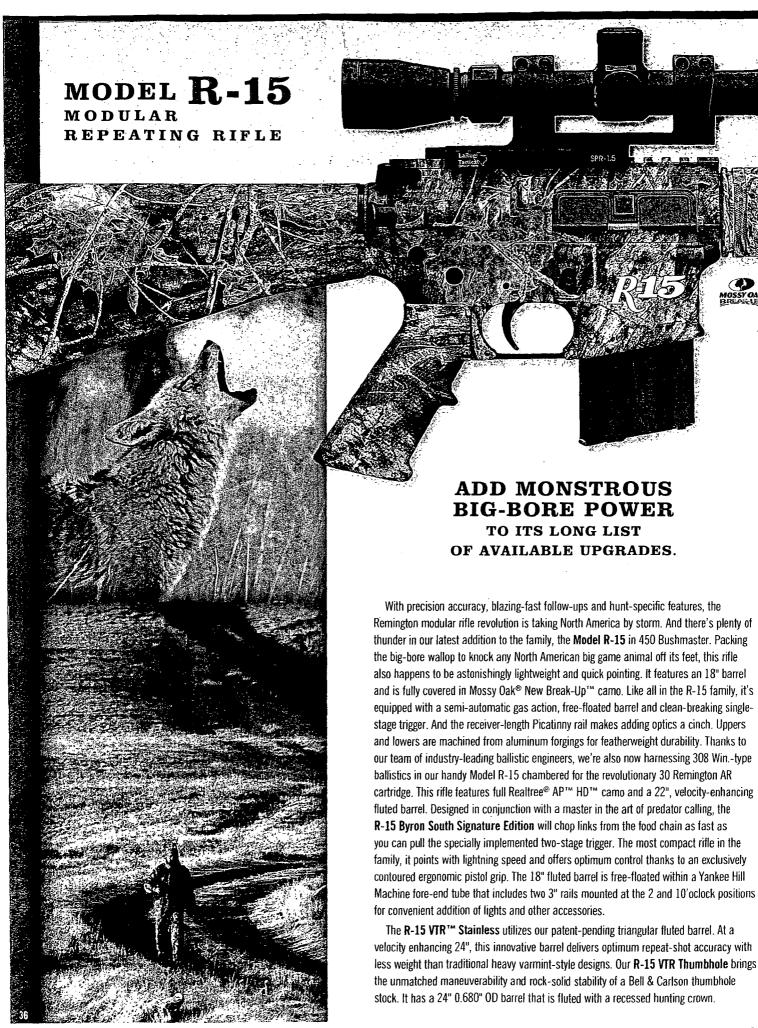

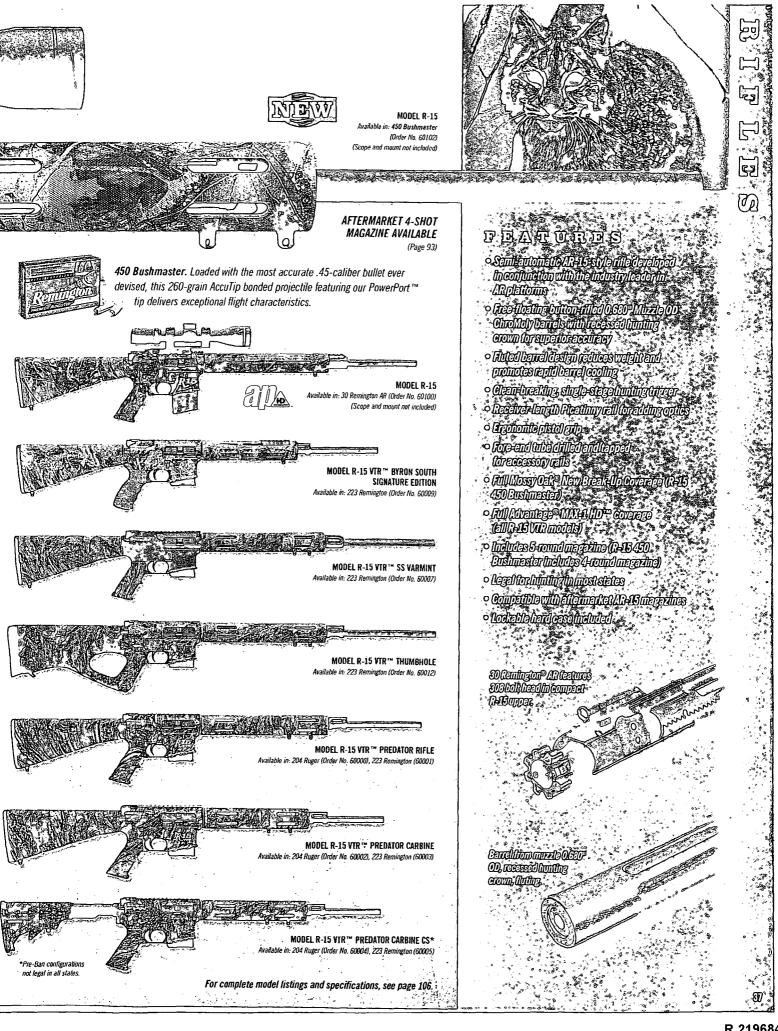

MODEL R-25 MODULAR

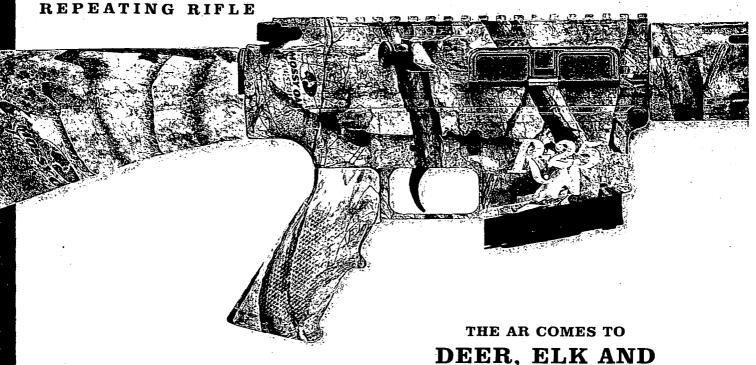

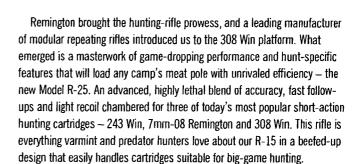

BEAR CAMP.

For peak accuracy, its precision-crafted 20" ChroMoly barrel is free-floated within the machined aluminum fore-end tube. Six longitudinal flutes forward of the gas block keep weight to a minimum and facilitate rapid heat dissipation. The barrel also features a recessed hunting crown to protect the rifling and aid in more consistent bullet flight. When it's time to make the shot, the R-25's ergonomic pistol-grip gives you unmatched control and rock-steady aim. As a whole, this rifle has a balanced, stable design that makes it deadly from the offhand position. True to our hunting market, the traditional two-stage trigger found on AR-platform rifles has been exchanged for a crisp, single-stage version that comes from the factory set at 4 $^{1}/_{2}$ to 5 lbs.

Its carefully tuned upper and lower are machined from rugged aluminum forgings. The entire gun is dressed in Mossy Oak® Treestand™ camo that makes it virtually invisible in the field. We included a 4-round magazine, and the R-25 is compatible with DPMS 308 Win-type magazines and accessories. Front and rear sling swivel studs are installed.



MODEL 597™ VTR™

IF LOOKS COULD KILL A BRICK OF AMMO...


Get your high-volume shooting fix for less.
a little gun with big-time centerfire attitude.
semi-auto plinking and hunting fun than you can shake its 16" barrel at. Reliability and supreme accuracy are hallmarks of the Model 597 action — proudly hailed as the most advanced semi-automatic rimfire available today.

Built on our famous Model 597™ 22 rimfire action, the new Model 597 VTR™ is a little gun with big-time centerfire attitude.

It's fully equipped to accept modular repeating rifle accessories and provides more its 16" barrel at. Reliability and supreme accuracy are hallmarks of the Model 597 action — proudly hailed as the most advanced semi-automatic rimfire available today.

Our Model 597 VTR A-TACS® is covered in revolutionary A-TACS digital camouflage that absorbs surrounding light for concealment in varied environments. It has a Pardus A2-style pistol-grip stock with a collapsible design that provides rapid length-of-pull adjustment. A receiver-mounted Picatinny-style rail accepts optics and accessories. Our Model 597 VTR CS has all the same features with a matte blued finish and black synethic stock. This rimfire is also available with a quad-rail free-floated tube that gives you ample space to trick it out with accessories — the Model 597 VTR CS Quad Rail. The Model 597 VTR A-2 has a traditional, fixed A-2-style pistol-grip stock and a receiver-mounted accessory rail. It's available with 10- and 30-round magazines. All other models in this lineup include 10-round magazines, but can easily be fit with high-capacity aftermarket options.

MODEL 597[™]




The speed with which they zip out rounds is rivaled only by the striking appearances of our new additions to this venerable, semi-auto rimfire lineup. Easily the most advanced rimfire rifle ever built, the Model 597™ represents the first technological breakthrough in the category in 35 years.

Our Model 597 action is #1 in autoloading rimfire reliability and out-of-the-box accuracy. The Model 597[™] TVP[™] (Target-Varmint Plinker) takes full advantage of the superior design. Truly the ultimate 22 target-rifle platform, this tack-driver features a 20" stainless heavy barrel and a laminated thumbhole stock that's contoured to accommodate right- and left-handed shooters with equal comfort. It offers impeccable balance for offhand shooting.

The Model 597 FLXTM leads the way in concealment with a FLX Digital camo stock. To game, the pattern assumes the detail and definition of surrounding limbs, leaves and shadows for near invisibility. Speaking of turning heads, our Mossy Oak® Blaze Orange Camo and Mossy Oak Pink Camo Model 597 are perhaps the most distinctive rimfires ever built. All have 20", standard-contour

carbon steel barrels and TruGlo® fiber-optic front sights. The **Model 597 Magnum Synthetic** features a stagger-stacked eight-round capacity magazine.

MODEL 597 MAGNUM SYNTHETIC Available in: 22 Win Mag (Order No. 26560)

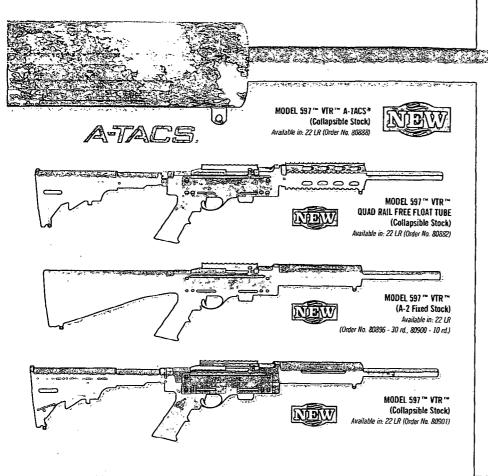

Model 597 " ver" v-tage BEATURES

ولي


وج

Ę.

@

- · Equipped to except and that repeating of lib accessorites
- o Dalle an Model 597 *** 22 climbre action
- o 16º barrel
- · Pandus Gollapsible stock
- · Receiver mounted Pleating-Style vell
- · Revolutionary A-TAGS® digital comordings

Forcomplete model listings and specifications, see page 100.

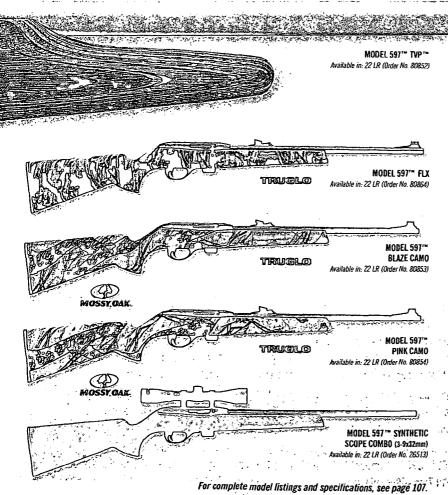

FEATURES

- · Boll-guildance system (calures twin, allened true leader from
- · Offered in both textured this by which व्यक्तिकार विकास विकास विकास करते हैं।
- · Non-glare matte finish

Model 697° ball travels

හිතැතුබ

lemmerene Tellon9/ विद्यम्भित्रकारिकाराक्रि,

ബാത്രിനിള്ള എവി

- · Patented, 10-shot metal detectable व्याद्भेष्टीक, छ-डोक्ट किर व्याद्भापक
- · leaf-shot, held-open belt for added safety
- · Toutho Ther-optic sights on camo models
- o Seepe vall included on Model 597 ^m TVP

didyphobaneloreetur Orpadestellamentend ගැනින්න් ggilderells/brillandess (tuottoday enhancedaecuracy

of amply chamber

*ල*නු නොක බරව ආක

මොලිකුගු literifficetton

Petenteddrop-ontelyle steggered-steckbormegadno assures cellable leading and lost conjudading

Unique all bed ment enstan

41

MODEL 552"/572"




For those who still love the look and feel of a classic rimfire rifle, our Model 572™ BDL™ Fieldmaster® and Model 552™ BDL Speedmaster® may be the finest available today. They combine richly blued carbon steel barrels with generously checkered high-gloss American walnut woodwork. But their beauty truly shines through a five-shot cluster — their tack-driving accuracy has made them an enduring customer favorite.

The versatile **Model 572TM BDLTM Fieldmaster®** is one of the most popular pump-action 22 rimfires made in America today. It handles 22 short, 22 long and 22 long rifle cartridges interchangeably. Other features include big-game sights, a positive cross-bolt safety and a grooved receiver for scope mounts.

The lightning-quick **Model 552™ BDL™ Speedmaster®** is the only American-made 22 autoloader that handles 22 short, long and long rifles interchangeably. It's also equipped with iron sights, a positive crossbolt safety and a receiver grooved for scope mounts.

LEFT-HANDED RIFLES

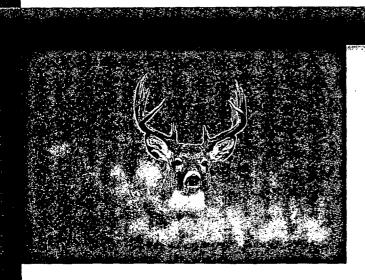


ACCURACY AND RELIABILITY ARE MORE THAN JUST RIGHT.

Nowhere will you find as broad a selection of left-handed centerfires. Remington® is proud to offer these specially configured Model 700™ rifles so everyone can experience the legendary accuracy and dependability of our flagship bolt action. This year, we've expanded the lineup with our Model 700™ SPS™ Left-Hand featuring a black matte finish and rugged synthetic stock. And we still offer the industry's first and only left-handed rifle made specifically for youth and small-stature shooters, Model 700™ SPS™ Compact Synthetic. Along with our unrivaled standards for out-of-the-box accuracy, all include the X-Mark Pro™ Trigger system for the highest degree of crispness and shot control you can get from the factory.

The **Model 700™ SPS™ Varmint** sports a 26" heavy-contour barrel complemented by a vented beavertail fore-end for rapid cooling and improved shot-to-shot consistency. It comes in five great short-action calibers including the hot 4,000-fps 17 Remington Fireball. Other standard features include a non-reflective black matte finish, hinged floorplate magazine, sling swivel studs and a drilled and tapped receiver.

The **Model 700™ CDL™** is the quintessential hunting rifle, embodying the best in traditional good looks, as well as our leading-edge standards for precision, durability and cartridge chamberings. The **Model 700™ SPS™ Compact Left-Hand** has a I" shorter length of pull, swift-handling 20" barrel and is offered in two venerable big-game calibers: 243 Win and 7mm-08 Remington.

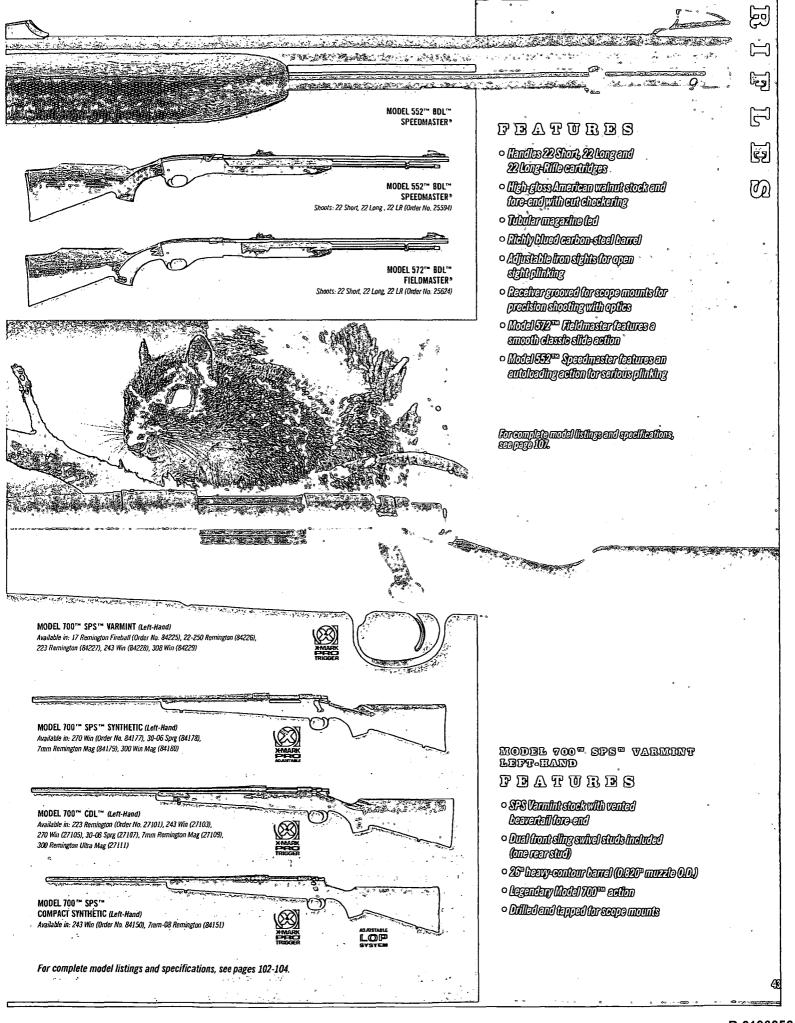

COMPACT FIREARMS



FOR EVERY TRADITION, THERE IS A BEGINNING.

Included with all 2010 synthetic Compact firearms, our Adjustable Length of Pull System offers a full 1" of adjustment, so any compact model can be custom-fit to shooters of small stature and grow alongside youngsters — all the way up to standard LOP.



- Two 1/4" LOP spacers
- One 1/2" LOP spacer
- Corresponding screw lengths to accommodate 3 different lengths
- · Full 1" of adjustment
- SuperCell™ recoil pad


See page 92 for the Adjustable Length of Pull Kit.


Young shooters are more likely to become stewards of the shooting sports if they start with a gun that fits properly. Exactly why we crafted our standard, premium-grade stocks with a shorter length of pull, then fit them to some of our finest firearms. For 2010, all synthetic compact firearms are equipped with our Adjustable Length of Pull System. So, fit can be customized to youngsters as they grow, and adults requiring a shorter length of pull can tailor compact firearms to their specific needs. For the ultimate in shooting comfort, all Compact rifles and shotguns also feature the world's most effective recoil pad — SuperCell.** Rifles feature 20" barrels and youth shotguns have 21" barrels (20" for deer gun).


The **Model 770[™] Compact** is the ultimate first centerfire rifle. It's chambered for the mild-recoiling 243 Win and comes out of the box with a pre-mounted, boresighted 3-9x40mm scope.


Other centerfires include our workhorse, short-action Model 700™ SPS™ Compact Synthetic. Now in a left-handed version chambered for 243 Win and 7mm-08 Remington, it's the first-ever southpaw compact rifle offering. Our Managed Recoil 7mm-08 Remington ammunition is the perfect complement to this addition. Our Model 700 SPS Buckmasters "Young Bucks" Compact comes in 243 Win, and features a specially engraved floorplateand Realtree® Hardwoods® Grey HD™ stock.

You wanted some "wow" factor for young ladies, and we answered with the 20-gauge Model 870 ** Express® Compact in Mossy Oak® Pink Camo. We also offer our 20-gauge Model 870 Express Compact with Realtree® Hardwoods® HDTM stock and fore-end, as well as our 20-gauge Model 870 Express Compact Jr. in black synthetic. All Jr. offerings have a 1" shorter length of pull than standard compact models. The gas-operated action of the 20-gauge Model 11-87TM Sportsman® Compact makes it the ultimate light-recoiling compact shotgun.

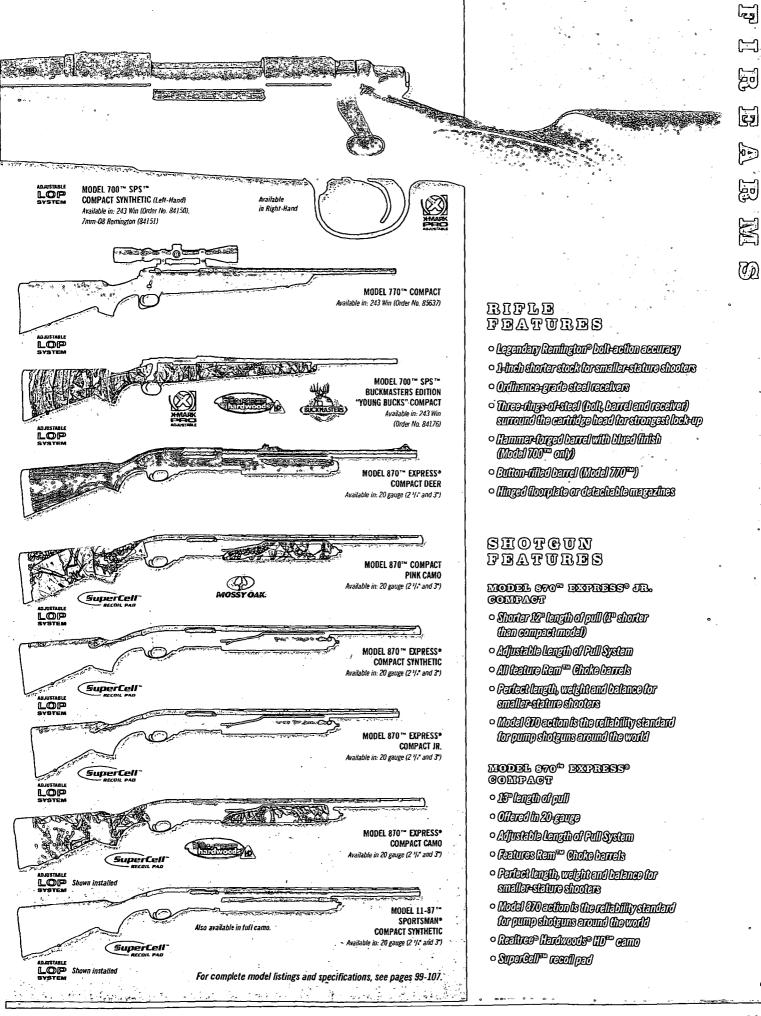

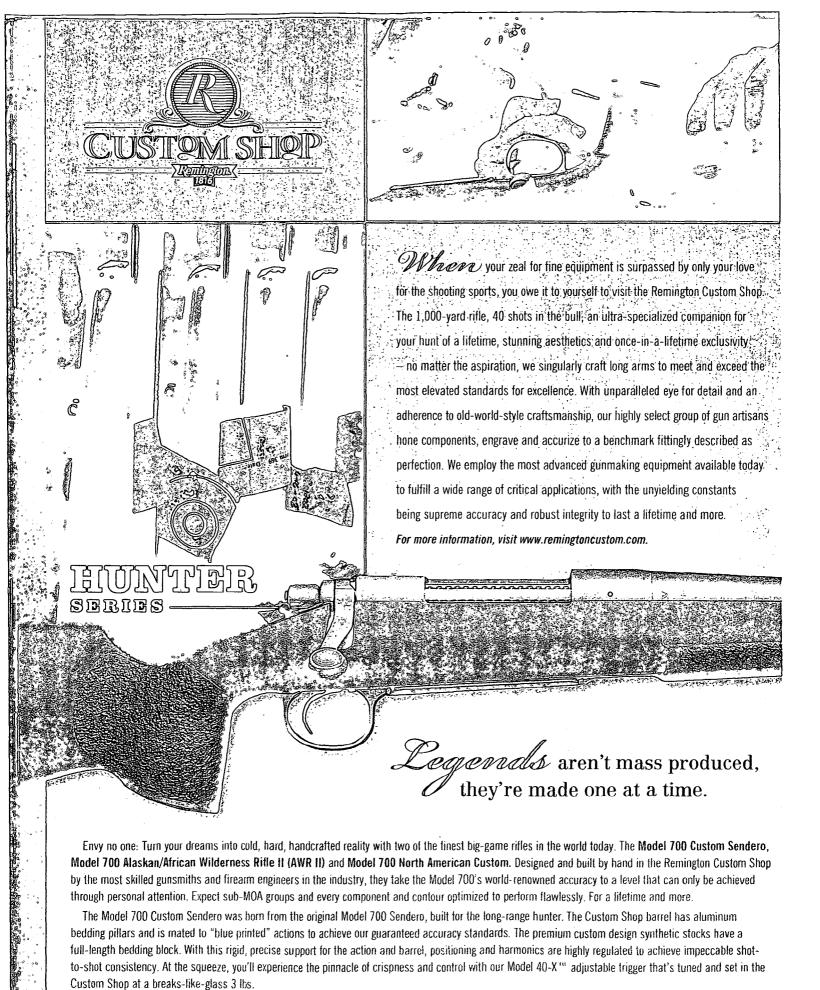

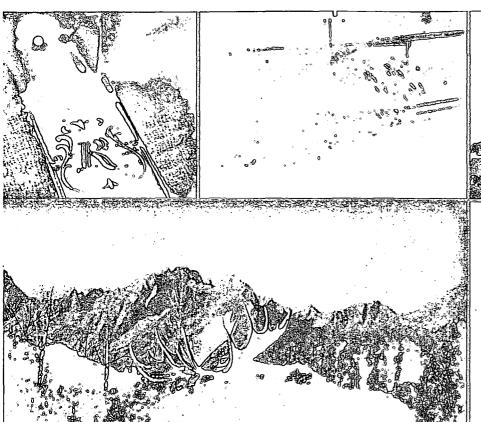

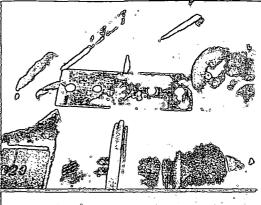

(C)

Ø

0

(P)

6

PBRFORMANGE


ENCINATION ASSULATE.

Gustom-turned and chambered berrels, blue printed actions and bolk lugs lapped to ensure tull contact and deliver playoffit accuracy.

ENCINIERIED ITEMATICE.
Unextreme precision with which a Gustom Shop dillaks built creates a flawless meshing of components and a piece of mechinary that will go the distance. Evaluating You be the fudge.

ENCINERIED TO FIFE.
Vour diseaun is designed and antical by sentous
shootens. From our hands to young, a Gustom
Shop dille is a dinely tuned instrument.


ENCINEETED TOUCH.
Alamington Oustom dille is a true shooter's tool, designed and builk to weather the hershest conditions.

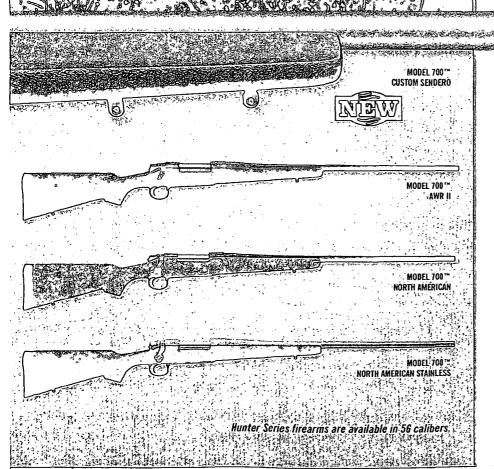

FBATURBS

- "Eliza printed" Model 700^m steinless or cerbon steel cefton to ensure receiver two and both face squareness and uniform bothing by contect
- Settin blired metal (thish and feweled bolk body (North American Model)
- Settin Statutess barrel essembly and fevraled both body (North American Statutess Model)
- Qustom Quaned and chambered hammer forged (Auted bearels (AWR II) and North American Qustom)
- Machined steel (rigger grand and engraved floorplate assembly
- · Recessed crown
- Model 40-Xadjustable tidgger tuned and set by Gustom Shop at 8 lbs.
- Aldies 30 cellber end smaller must deliver sub-MOA ecouracy or better putor to stilpment


4

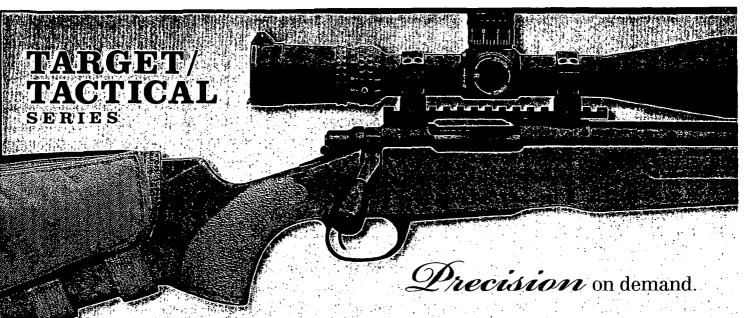

The rifles in this series are far-reaching testimony to our entrenchment in the tactical community, superior R&D and full-time commitment to augmenting a trained marksman's skills. **The Model XM3 Rifle System**, chambered for 308 Win, is fully rigged and ready to launch sub-MOA strikes out to 1,000 yards. Incorporating today's most advanced technologies, it is an unparalleled fusion of compact sizing, light weight, accuracy and range designed from the ground up by Lt. Col. USMC Ret. Norman A Chandler II of IBA under contract with the Defense Advanced Research Projects Agency (DARPA). His system starts with the legendary Model 40-XTM action platform. The receiver is mounted to a compact, 18 ½ stainless steel (mil-gauged) Hart barrel featuring a 1:10 twist with six grooves. It is match chambered and threaded to accept SureFire's muzzle brake/sound suppressor adapter. Titanium is used for the action, recoil lug, Picatinny rail mount and scope rings to reduce overall weight. A Nightforce NX3 3.5-15x 50mm illuminated mil-dot reticle scope is the ultimate in target detection. The lightweight stock is custom-designed by IBA and McMillan (A1-3) with removable length-of-pull spacers, plus forward grooves on the fore-end for a sure grip. It facilitates installation of the UNS Mount designed for night vision mounting. Proven dependable after 500 hours of saltwater testing, the Man-0-War metal finish is available in black and 0D green.


Hand-built in the Remington Custom Shop on our venerable 40-X action, the fully equipped Model 40-XS™ Tactical Rifle System comes with a Harris® bipod, world-class Leupold optics, Turner® AWS tactical sling and swivels in a Pelican® hard case. Its 416 stainless steel, 24" barreled action is coated with our proprietary non-reflective black polymer for protection, then custom-bedded in a McMillan A5 series stock with adjustable length of pull. This rifle and our Model 40-XB™ Tactical and Model 40-X™ Tac Mod with folding side stock and detachable magazine system, sit firmly atop the food chain in accuracy and dependability wherever they are called to serve.


The tack-driving Model 40-XBTM TDR (Target Deployment Rifle) and Model 40-XBTM TIR (Target Interdiction Rifle) have premium, match-grade stainless steel barrels that are hand-lapped for the utmost in consistency. Both are equipped with custom-tuned match triggers and feature built-in Surefire muzzle brakes.

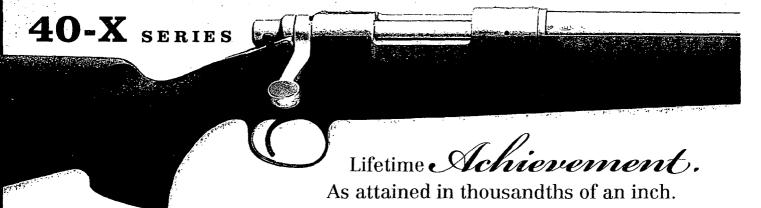

When you have a lifelong passion for precision, nothing says you've arrived like a five-shot group you can cover with a dime, and very few rifles on earth can elevate you to this stage in life as quickly as our Model 40-XTM series. Built on our world-famous Model 40-X action, the very same action that's dominated benchrest competitions since its creation in 1962, these rifles are handcrafted in the Remington Custom Shop to deliver the pinnacle of shot-to-shot consistency. The blueprinted action is impeccably squared to the barrel, and the barreled action is then hand-fitted and epoxy-bedded into the stock, creating a solid, exacting piece of machinery best compared to surgical equipment. An external adjustment on the 40-X trigger gives you a 1 ½- to 3 ½-lb. range, with a special 2-oz. trigger available as an option for select models. The stainless steel barrels are button rifled and hand lapped, then finished with a concave crown.


Our Model 40-XB Rangemaster has a satin-finished American walnut stock with a front swivel block and fore-end guide rail. The Model 40-XB Rangemaster Thumbhole has a two-tone brown laminated hardwood stock with a satin finish and a rock-steady thumbhole grip stock. Aramid-fiber-reinforced fiberglass forms the stock of the Model 40-XB. For both the Model 40-XB Rangemaster and Model 40-XB KS, the metalwork is all stainless steel for right-handed models. The left-handed model has a blued carbon steel receiver. All Model 40-X series rifles are available in a broad selection of chamberings.

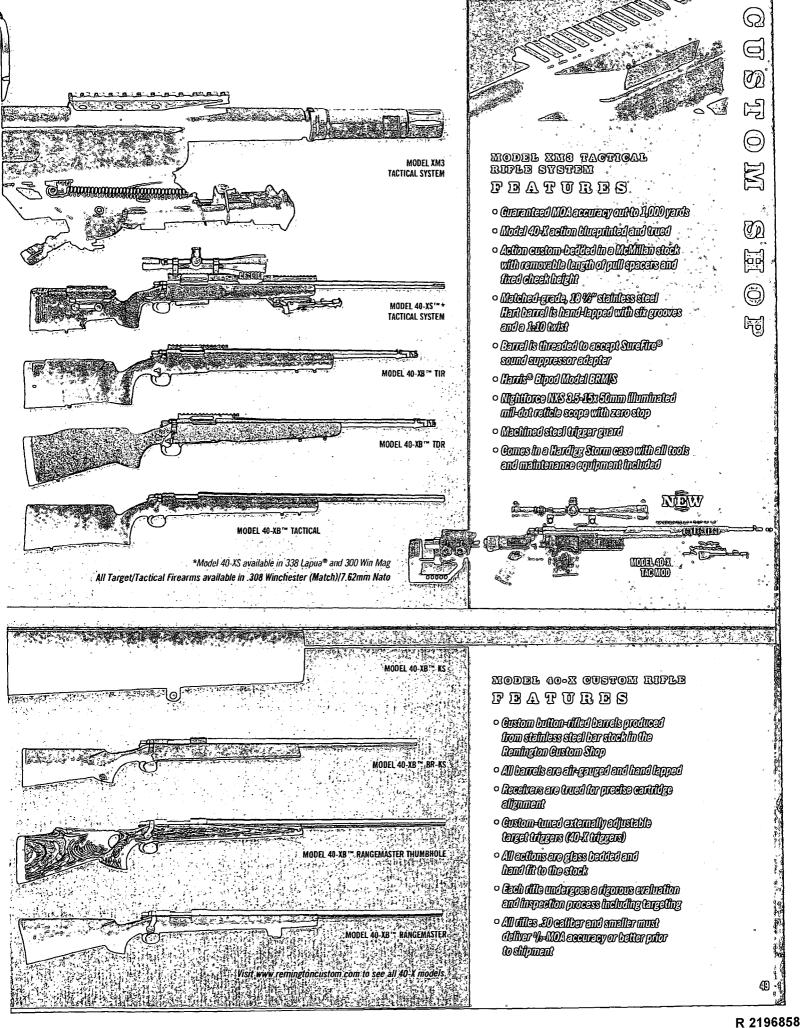


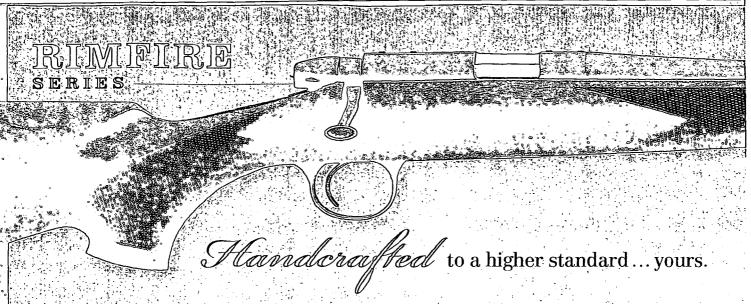

When you're holding a Model 547 Custom, quality of life tends to increase in proportion to the number of rounds you fire. These rifles deliver guaranteed groups or better at 50 yards, and do it with striking aesthetics and the substantial feel of a centerfire. Available in your choice of 22LR or 17HMR or by special request 22 magnium and 17 Mach 2. They're based on our famous Model 504 with many performance-enhancing details that only come with personal attention from our select group of industry-leading gunsmiths and firearm engineers. At the heart of their astounding accuracy is a button-rifled Shilen® barrel. These hand-lapped barrels start with a high-precision chamber (match-grade in 22LR offering) and are finished with a concave dish or target crown to protect the rifling and better stabilize bullets. Barrels are then locked to the solid-steel receiver with an advanced clamp design for the utmost in strength and stability. Lovers of the Model 700 will appreciate that the bolt has been expertly configured to mirror our legendary centerfire's. And before the rifles leave the factory, triggers are hand-tuned to a crisp 3-lb. pull.


The **Model 547 "C" Grade** has a sleek, C Grade contoured barrel with highly refined C-grade woodwork adorned with traditional cut checkering, then finished and polished by hand. It is complemented by a rich, high-polish-blued receiver and barrel. Our **Model 547 Target** has an 18 ½ stainless steel Shilen barrel with a heavy target contour. It has a target-style walnut stock built with the painstaking attention to detail that makes our Custom Shop craftsmen the best in the business. The **Model 547 Classic** has a redesigned fine-quality walnut stock virtually identical to the Model 700 CDL's, with a straight comb, elegant black grip cap and fore-end tip, and cut checkering. No matter which you choose, the Model 547 Custom is truly the rifle of a lifetime, and untold thousands of rounds.

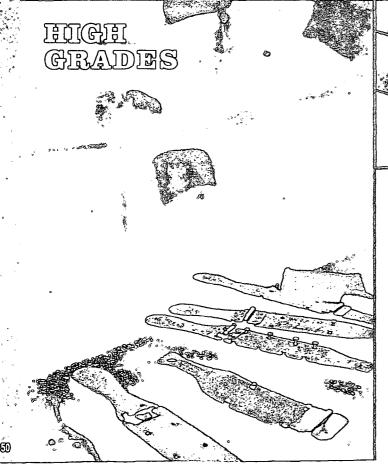

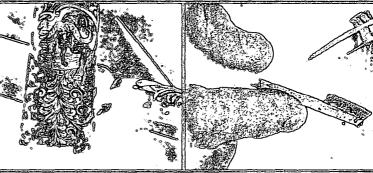

If you dream it, we can build it.

When your vision for a custom firearm extends well beyond the blueprint, enlist our elite group of highly skilled craftsman to bring the dream to fruition. A Remington Custom Shop High Grade rifle or shotgun is anything you want it to be. Our in-house master engraver will work with you produce all desired patterns and degrees of coverage, from standard to full customization. Your stock can be crafted to any

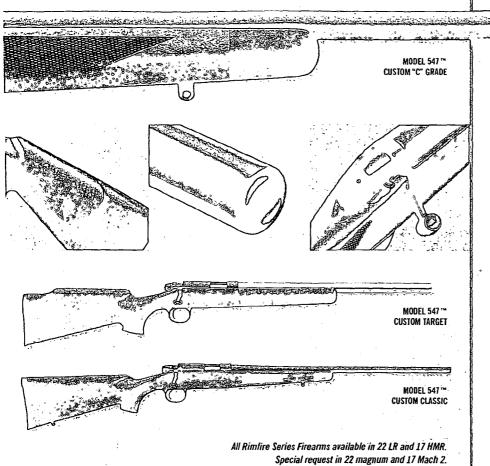

Moder eas and E & C L

 \bigcirc


더


(de)


(P)

(والم

- ં "ઉપલિંગ પિછી polish પીછવી કરવીમાં હતાવી પ્રાપ્તાભાગના 22" Shillen પેટવારી
- · Match chamber (2212) with conceive "Ush" crown
- o Stylish bolk hendle modelad efter the popular Model 700 bolk hendle "
- Integrated one place boll-lianGle and cooking place
- Redesigned stock with black lare-end tip and grip capend "GDL Style" checketing
- · Oustom Shop tuned trigger sex ax 8 Us.
- ં Gustanteed securety: 44°,5-shot group @ 50 yards with gallary texted target included







dimension and hand-checkered to your exact specifications. Choose from the world's finest selection of wood, all the way up to the most highly figured. We will finish and polish it by hand to match your desired sheen and colorization. How about an intricate design you'd like placed in 24 karat gold inlay? Nothing is out of reach. At Remington Custom Shop, precision engineering and artistry perfectly meld to exhibit guncraft in its highest form.




Don Talbot Master Engraver

Build your dream gun today at www.remingtoncustom.com

· 福文學是本語

The Redirector Anns Co. Is Prove To Convidue The Legacy Of



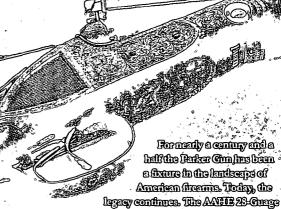

is built to your specifications using the original Charles


Parker Co. blueprints and drawings, and priced at \$49,000.

We're proud to say the very few of these shotgans that will be offered are exclisible exclusively from the Remington Arms Co. Visit our Web site at www.parkergumrakers.com or e-mail us at parker@remington.com.

513



STRIVED STRANDANT STRAND STRAND STRAND STRAND STRAND STRAND STRAND WELL STRAND WELL STRAND WELL STRAND STRAND STRAND WELL STRAND STRAND





CHIMANA SOUTHING SOUTH



PREMIER CORE-LOKT ULTRA BONDED .



THE NEW STANDARD OF ACCURACY IN

BONDED HUNTING BULLETS. Premier® Core-Lokt® Ultra Bonded®

is a bullet in a class of its own. It is the first and only bullet to successfully maximize the best features of two great types of hunting bullet construction. It delivers the extreme accuracy and retained energy you would expect from a tipped bullet, in combination with the outstanding penetration and weight retention that only a bonded, non-tipped bullet could deliver. This unique design provides the hunter a Premier bullet that yields devastating on-game performance from 50 to 500 yards. Premier Core-Lokt

Ultra Bonded — the new standard in high-performance hunting bullets.

CORE-LOKT* ULTRA BONDED* EXPANDS RELIABLY AT ALL REASONABLE HUNTING DISTANCES.





100 Yards



200 Yards






300 Yards



400 Yards

30-06 SPRG, 150-GR. PREMIER® CORE-LONT® ULTRA BONDED,® 5 SHOTS, .6", 100 YDS.



 More reliable. 50% thicker Core-Lokt section better controls expansion at higher velocities.


More deadly. Bonded jacket/core design with 2x diameter expansion and up to 95% weight retention for ultimate on-game performance.

The finest big-game bullet in the world is now available to handloaders.

(See page 68 for complete listings.)




			, ,
COST (W. E.		COLUMN	
PREMIE	R° CORE-LON	T* ULTRA BO	NDED*
223 Remington	PRC223R4	62	Core-Lokt* Ultra Bonded
243 Vin	PRC243WC	100	Core-Lokt* Ultra Bonded
25-06 Remington	PRC2506RA	115	Core-Lokt® Ultra Bonded
260 Remington	PRC260RB	140	Core-Lokt* Ultra Bonded
270 Yin	PRC270WB	140	Core-Lokt* Ultra Bonded
6.8mm Rem SPC	PRC68R4	115	Core-Lokt* Ultra Bonded
7 sum Remington Mag	PRC7MMRA	140	Core-Lokt* Ultra Bonded
7mm Remington Mag	PRC7MMRC	160	Care-Lokt* Ultra Bonded
7 rum Remington SA UM	PR7SM1	140	Core-Lokt* Ultra Bonded
7mm Remington SA UM	PR7SM4	160	Core-Lokt* Ultra Bonded
7mm Rem. Ultra Mag	PR7UM1	140	Care-Lokt* Ultra Bonded
7mm Rem. Ultra Mag	PR7UM2-P2	160	Care-Lokt' Ultra Bonded
30-06 Springfield	PRC3006A	150	Core-Lokt* Ultra Bonded
30-06 Springfield	PRC3006B	168	Core-Lokt' Ultra Bonded
30-06 Springfield	PRC3006C	180	Core-Lokt* Ultra Bonded
300 Win Mag	PRC300WA	150	Core-Lekt* Ultra Bonded
300 Win Mag	PRC300WC	180	Core-Lokt* Ultra Bonded
308 Win	PRC302WA	150	Core-Lokt* Ultra Bonded
308 Win	PRC308WC	180	Core-Lokt* Ultra Bonded
300 Remington SA UM	PR300SM1	150	Core-Lakt* Ultra Bonded
300 Remington SA UM	PR300SM4	180	Core-Lakte Ultra Bonded
300 Remington Ultra Mag	PR300UM4	180	Core-Lokt* Ultra Bonded
300 Remington Ultra Mag	PR300UM3-PZ	180	Core-Lokt* Ultra Bonded
338 V/m Mag	PRC338WA	225	Core-Loki* Ultra Bonded

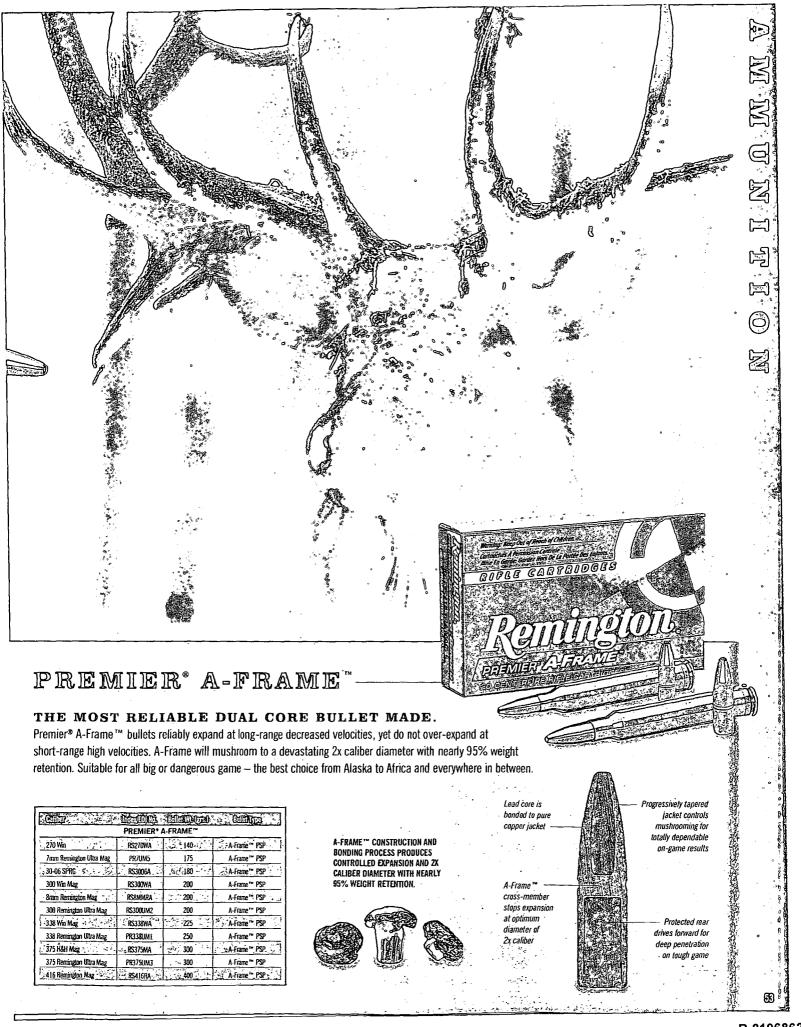

PREMIER ACCUTIP

PRECISELY THE BIG-GAME BULLET OF YOUR

DREAMS. It's the most accurate, polymer-tipped big-game bullet available today. Along with match-grade precision, it delivers an unprecedented combination of laser-flat trajectory and devastating terminal performance. AccuTip bullets expand quickly — producing an awesome level of transferred energy – to dispatch medium and big game with lightning authority. A thicker jacket and harder lead core regulate weight retention and optimize penetration. Make the switch and, trust us, big game won't know what hit 'em.

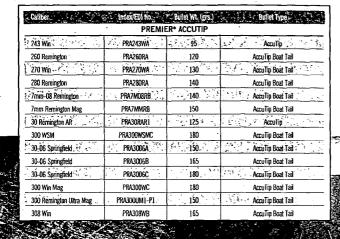




CARTRIDGES

PREMIER SCIROCCO BONDED

THE TOUGHEST POLYMER-TIPPED BULLET

AVAILABLE. The remarkable Swift™ Scirocco™ Bonded bullet maintains its status as the industry leader in bonded tipped bullets by delivering the highest ballistic coefficient of any bullet of its kind for the flattest trajectory and maximum retained energy. Combine that with unsurpassed accuracy and superior weight retention, Premier® Scirocco is unquestionably the most effective bonded, tipped bullet to sit atop a factory load. When a tougher tipped bullet is needed, turn to Scirocco.





30-06, 180-GR PREMIER* SWIFT** SCIROCCO BONDED 5 SHOTS, .8", 100 YDS.

SWIFT" SCIROCCO" BONDED BULLETS EXPAND RELIABLY OVER A WIDE RANGE OF TERMINAL VELOCITIES



100 Yards



200 Yards





243 Win	PRSC243WA	90	Scirocco ** Bonded
270 Win	PRSC270WA	130	Scirocco " Bonded
7mm Remington Mag	PRSC7MMB	150	Scirocco ** Bonded
7mm Remington Ultra Mag	PRSC7UM1	150	Scirocco " Bonded
30-06 Springfield	PRSC3006C	150	Scirocco*** Bonded
30-06 Springfield	PRSC3006B	180	Scirocce " Bonded
300 Win Mag	PRSC300WB	180	Scirocco *** Bonded
300 WSM	PRSC300WSMB	180	Scirocco™ Bonded
308 Win	PRSC308WB	165	Scirocce*** Bonded
300 Remington Ultra Mag	PR300UM5	150	Scirocca** Bonded
300 Remington Ultra Mag	PR300UM3	180	Scirocco** Bonded
300 Remington Ultra Mag	PR300UM3-P2	180	Scirocce™ Bonded

ACCUTIP

PREMIER® ACCUTIP-V

 $\textbf{PINPOINT DETONATION}. \ \textit{Expect dynamite results}. \ \textit{In varmint calibers},$

AccuTip-V combines superb flight characteristics and match-grade accuracy with a design

optimized for explosive on-game results. At impact, AccuTip's gold polymer tip is driven rearward causing the thin jacket and soft lead core to fragment violently. First and foremost, though, it gets there precisely shot after shot — it's the most accurate varmint bullet you can shoot.



AccuTip component bullets are now available to handloaders. (See page 68 for complete listings.)



Thin jacket and soft lead core disintegrate and cause massive terminal damage at all ranges

ACCUTIP-V



	PREMIE	R® ACCUTIP-V	
17 Remington Fireball	PRA17FB	- 20	AccuTip-V
17 Remington	PRA17RA	20	AccuTip-V
204 Ruger	PRA204A	32	AccuTip-V
204 Ruger	PRA204B	40	Accufip-V Boat Tail
221 Remington Fireball	PRA221FB	50	AccuTip-V Boat Tail
22 Hornet	PRA22HNA	35	Accutip-V
222 Remington	PRA222RB	50	AccuTip-V Boat Tail
223 Remington	PRA223RB	- 50	AccuTip-V Boat Tail
223 Remington	PRA223RC	55	AccuTip-V
22-250 Remington	PRA2250RB	50	AccuTip-V Boat Tail
243 Win	PRA243WB	. 75	AccuTip-V Boat Tail

AccuTip-V: Varmint-Specific Cartridges

PREMIER DISINTEGRATOR VARMINT

FRANGIBLE AND LEAD-FREE. EXPLOSIVELY VOLATILE ON GAME.

Now you see him. Now you don't. Disintegrator® Varmint. Loaded with lead-free frangible bullets that meet the requirements of non-toxic hunting areas, this ammunition delivers radical, explosive expansion that shatters the capabilities of conventional

lead core/copper jacketed bullets. Because they break into tiny fragments at impact, Disintegrator Varmint bullets will not ricochet, offering added peace of mind wherever you shoot. Extremely tight manufacturing tolerances combined with our industry-leading components produce tiny groups on paper as well. Get the supreme accuracy you expect from Remington with spectacular on-game results in two popular calibers: 223 Remington and 22-250 Remington, both with 45 gr. JHP bullets.

Caliber	Index/EDI No.	Bullet WL (grs.)	Bullet Type
	DISINTEGRA	TOR* VARMII	- TV
223 Remington	- DVZZ3RA	45	* Jacketed fron Core HP • 1
22-250 Remington	DV22250RA	45	Jacketed Iron Core HP






HITS LIKE A 308.

CARRIES

LIKE A 223.

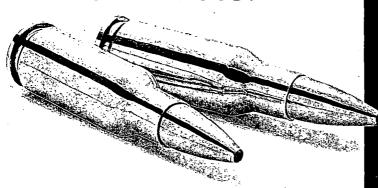

FIRST IN THE FIELD:

THE WORLD'S ONLY 30-CAL. BIG-GAME CARTRIDGE FOR THE LIGHTWEIGHT R-15 PLATFORM.

ONLY FROM REMINGTON.

Remington® now brings you 30 caliber hunting performance in a lightweight R-15 modular repeating rifle. Our **30 Remington® AR** cartridge produces big-game-dropping ballistics similar to the venerable 308 Win. with pressures perfectly suited to our lightweight R-15 platform. Comparable terminal power was once only available in the heavier AR-10 platform. This cartridge is the ultimate synergy of our ammunition and firearms expertise, as its development forever changes the shape of both categories, creating a revolutionary new big-game hunting system. Our lightweight R-15 platform — its minimal recoil, rapid follow-ups, easy maintenance and inherent accuracy — is now chambered for a cartridge that will put down deer-sized game with gusto. This year's offerings include the most trusted big-game bullet of all time, Core-Lokt, the pinnacle of polymer-tipped accuracy, AccuTip and an economical UMC loading. As a cartridge, the 30 Remington AR breaks new ground. In conjunction with our R-15 modular repeating rifle, it marks the

beginning of a new era in the deer woods of North America.



		30 REMING	うっぱぎ TON* AR	
1	30 Remington AR	PRA30RAR1	125	AccuTip
[30 Remington AR	R30RAR1	125	Core-Loki, PSP
EW	30 Remington AR	L30RAR2	150	Core-Lokt, PSP
	30 Remington AR	L30RAR1	123	MC UMC


See rifle specifications on page 106.

PREMIER® COPPER-SOLID® —

PURE ACCURACY AND DEVASTATING TERMINAL RESULTS – UNLEADED. Experience the game-leveling advantage of the finest lead-free bullet design on the market today. While it's classified as non-toxic, no big-game animal it comes in contact with will contest against its lightning-like terminal effects. It delivers extremely deep penetration with nearly 100% weight retention and has a sleek ogive profile with a polymer tip and boat tail base that give it outstanding flight characteristics. In fact, it's one of the finest extended-range lead-free hunting bullets we've ever offered due to its extremely high ballistic coefficient. At impact, the polymer tip

acts as a wedge, plowing through a built-in expansion chamber and initiating a mushroom that's consistently 1.8x bullet diameter — creating a large terminal wound channel from close range to the farthest reaches of your shooting ability. For the pinnacle of shot-to-shot consistency, these rounds are loaded using our industry-leading manufacturing processes and Remington Premier Gold Box™ components.



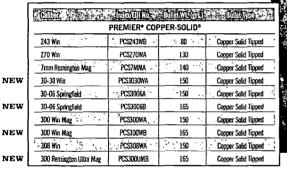

PREMIER® MATCH

IF THERE WERE A STRONGER WORD THAN ACCURATE, WE'D USE IT HERE.

Ever hear the phrase, "you could drive tacks with 'em?" Well, they're probably talking about Remington® Premier® Match ammunition. Using only match-grade bullets, Premier Match ammunition employs special


loading practices to ensure world-class performance and

accuracy with every shot. Maybe some day there will be a stronger word than accurate to describe Premier Match.

Until then we'll continue to prove it on paper.

PREMIER* MATCH

308 WIN, 168-GR. PREMIER® MATCH 5 Shots. .6", 100 yds.

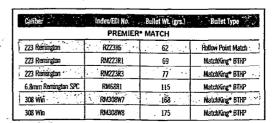

REMINGTON®


ULTRA MAG.

BIG GAME'S HIGHER POWER.

REMINGTON® ULTRA MAG.™

A revolution in high-performance big-game **ammunition.** In each of its calibers, the Remington Ultra Mag™ cartridges produce the highest velocities, the flattest trajectories and the highest energy levels available to big-game hunters today. This is due to their large case capacities and innovative, non-belted magnum case designs. These cases hold dramatically more powder and align with unmatched precision within the bore, making the world's most lethal family of cartridges the most accurate, as well. Available in the most trusted bolt-action rifle of all time – the Model 700™ – the Ultra Mag™ family is a truly superior gun and ammunition system geared for today's most discriminating hunters.

> INNOVATIVE CASE DESIGN RESULTS IN A "NON-BELTED MAGNUM" WITH A LARGER CASE DIAMETER, WHICH ALLOWS FOR DRAMATICALLY INCREASED POWDER CAPACITY.





muzzle velocity over 3 450 fas. it's one of the flattest-shooting big-game rounds on the planet - flatter than 7mm STW, flatter than a 22-250 varmint load. It's the perfect choice for long-range shots on any North American

> 375 Remington® Ultra Mag.™ The ultimate in stopping power. With over 5,000 ft-lbs of energy at the muzzle, it delivers more energy at 200 yards than 375 H&H at 100 yards - and with the same flat-shooting trajectory as a 150-grain 270 Win load.

300 Remington® Ultra Mag.™ The extreme standard for big game. With a 180-grain bullet, it delivers a muzzle velocity of 3,250 fps with 2,160 ft-lbs of retained energy at 500 yards. That's right, a trained marksman could knock an elk off its feet at nearly a quarter of a mile.


338 Remington® Ultra Mag.™ An excellent cartridge for bear, elk and moose, Loaded with a 250-grain bullet, it delivers over 600 ft-lbs greater muzzle energy than 338 Win Mag and retains a flatter trajectory all the way out to 500 yards.



SHORT-ACTION ULTRA MAG.™

Magnum performance in a lightweight, short-action firearm and ammunition package. Premier® Short-Action Ultra Mag™ cartridges offer ballistic performance equivalent to the two most popular belted magnums - 300 Win Mag and 7mm Remington Mag - in a fast handling short-action rifle. They feature a highly efficient case design that duplicates or exceeds belted magnum ballistics with less powder, in turn, generating less felt recoil.

Plus, they're inherently more accurate. The cartridge headspaces off the shoulder of the case, rather than a belt, promoting more precise bore alignment. It's big-time performance in a little package.

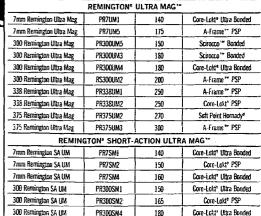


POWER LEVEL® AMMUNITION


One gun. One chambering. The ballistic characteristics of three cartridges.

Power Level® Ammunition allows you to incrementally tailor the performance of your rifle and ammunition to match your intended game species and hunting range, similar to the way shotgunners use 2 ½,", 3" and 3 ½" loads. The point of impact between Power Level loads stays within 2" out to 200 yards, so you'll have little to no scope adjustment when changing Power Levels. Now when you choose the 7mm or 300 Remington Ultra Mag,™ you're getting three guns in one. Simply put, never before has one cartridge offered this kind of versatility.


POINT OF IMPACT ACROSS ALL POWER LEVELS WITHIN 2", OUT TO 200 YARDS.




THE CONCEPT - SHOTGUN/SHOTSHELL

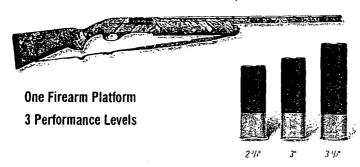

THE IDEA - APPLIED TO THE CENTERFIRE RIFLE

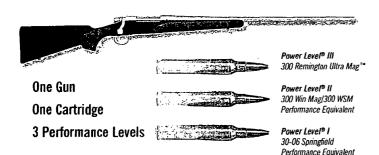

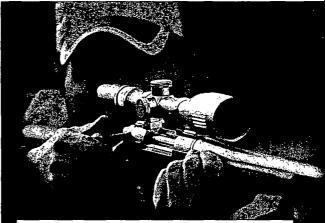

	CID				
PR7UM1	7mm Ultra Mag	Ш	7mm Ultra Mag	140	Core-Lokt® Ultra Bonded®
PRSC7UM1	7mm Ultra Mag	10	7mm Ultra Mag	150	Scirncco™ Bonded
PR7UM5	7mm Ultra Mag	SII	7mm Ultra Mag	175	A-Frame**
PR300UM5	300 Ultra Mag	111	300 Ultra Mag	. 150	Scirocco ** Bonded
PR300UM3	300 Ultra Mag	III ·	300 Ultra Mag	180	Scirocco*** Bonded
PR300UM4	300 Ultra Mag	01 .	300 Ultra Mag	180 -	Core-Lokt® Ultra Bonded®
RS300UM2	300 Ultra Mag	Ш	300 Ultra Mag	200	A-Frame**
PR7UM2-P2	7mm Ultra Mag	- 11	7mm Remington Mag	160	Core-Lokt® Ultra Bonded®
PR300UM2-P2	300 Ultra Mag	- 11	300 Win/300 WSM	180	Core-Lokt® Ultra Bonded®
PR300UM3-PZ	300 Ultra Mag	. ()	300 Win/300 WSM -	180	Scirocco*** Bonded
R7UM1-P1	7mm Ultra Mag	. 1	270 Win	140	Core-Lokt*
PRA300UM1-P1	300 Ultra Mag	. 1	30-06 Springfield	150	Accutip™
R300UM1-P1	300 Ultra Mag	1	30-06 Springfield	150	Core-Lokt®

POWER LEVEL® III

MAXIMUM ENERGY — EXTREME RANGE

- 300 Remington
 Ultra Mag™ performance
- The biggest, toughest game at extreme ranges

Remington : POWER LEVEL III
PREMIER' SCIROCCO BONDED
SCHEMINGIONUELALES

Simply the biggest, baddest, flattest-shooting 30 caliber in production today. At 200 yards, it delivers 485 ft.-lbs. more energy than the 300 Wby Mag and 28% more energy than the 300 Win Mag or 300 WSM.

POWER LEVEL® II

MAGNUM ENERGY -EXTENDED RANGE

- 300 Win Mag, 300 WSM performance
- Medium and large big game at extended ranges



With velocity and down range ballistics that mirror the 300 Win Mag and 300 WSM, Level II is ideal for elk, muleys or whitetails at extended range.

POWER LEVEL® I

TERMINAL ENERGY .

- 30-06 Springfield performance
- Whitetail-sized game out to long range

Remington, POWER LEVEL!

300 REMINGTON ULTRA MAG

Performs identically to the 30-06, the caliber that's dropped more big game than any other. The optimum deer hunting Power Level — coast to coast.



with a knack for filling their deer tag tend to have more than success in common. They trust their hunt to Remington® Core-Lokt.® For more than six decades, it has remained the leader in centerfire deer ammunition. And deservedly so.

The Deadliest Mushroom in the Woods™

The Core-Lokt bullet design is the original controlled-expansion bullet — and one of the most effective ever developed. Its progressively tapered copper jacket is locked to a solid lead core, promoting perfectly controlled expansion and high weight retention for absolutely dependable on-game results. You'll find its time-proven performance in both soft point and pointed soft point versions — and in a range of bullet weights for virtually every centerfire hunting caliber made.

CORE-LOKT* CORE-LOKT[®] POINTED SOFT POINT SOFT POINT Soft point shape Spitzer shape provides broad profile for improved frontal area for high velocity and energy impact and flatter trajectory rapid expansion Bullet cores are "Lokt" in place to provide deep penetration Jackets designed for progressive, reliable expansion to almost twice the original diameter

CORE-	CORE-LOKT* POINTED SOFT POINT									
6mm Remington	R6MM4	100	Pointed Soft Point							
243 Win	R243W3	100	Pointed Soft Point							
25-06 Remington	R25062	€ 100	Pointed Saft Point							
25-06 Remington	R25063	120	Pointed Saft Point							
6.5x55 Swedish	R65SWE1	140	Pointed Soft Point							
6.5mm Remington Mag	R65MM2	120	Pointed Saft Point							
260 Remington	R260R1	140	Pointed Soft Point							
264 Win Mag	R264W2	140	Pointed Soft Point							
270 Win	R270W2	130	- Pointed Soft Point							
270 WSM	R270WSM1	130	Pointed Soft Point							
280 Remington	R280R3	140	Pointed Soft Point							
280 Remington	R280R1	150	Pointed Soft Point							
-7mm-08 Remington	. R7M081	140,	Pointed Soft Point.							
7mm Remington Mag	R7MM4	140	Pointed Soft Point							
7mm Remington Mag	R7MM2	. 150	Pointed Soft Point							
7mm Remington Mag	R7MM3	175	Pointed Soft Point							
7mm Mauser (7x57)	R7MSR1	140	Pointed Soft Point							
7mm Remington SA Ultra Mag	PR7SM2	150	Pointed Soft Point							
30-40 Krag	R30402	180	Painted Soft Point							
30-06 Springfield	R30062	150	Pointed Soft Point							
30-06 Springfield	R3006B	165	Painted Soft Point							
30-06 Springfield	R30065	180	Painted Soft Point							
300 Savage	R30SV2	150	Pointed Soft Point							
30 Remington AR	R30RAR1	125	Pointed Soft Point							
300 Win Mag	R300W1	150	Painted Soft Point							
300 Win Mag	R300W2	180	Pointed Soft Point							
300 WSM	R300WSM1	150	Pointed Soft Point							
308 Win	R308W1	150	Pointed Soft Point							
308 Win	R308W3	180	Pointed Soft Point							
300 Wby Mag	R300W81	180	Pointed Soft Point							
300 Remington SA Ultra Mag	PR300SM2	165	Pointed Soft Point							
300 Remington Ultra Mag	R300UM1-P1	150	Pointed Soft Point							
338 Win Mag	R338Wi	225	Pointed Soft Point							
338 Win Mag	R338W2	250	Pointed Soft Point							
338 Remington Ultra Mag	PR338UM2	250	Pointed Soft Point							
35 Remington	R35R1	150	Pointed Soft Point							
35 Whelen	R35WH1	200	Pointed Soft Point							
350 Remington Mag	R350M1	200	Pointed Soft Point							

	CORE-LOKT* SC	OFT POINT	
257 Roberts	R257	117	Soft Point
270 Win	R270W4	150	Soft Point
280 Remington	R280R2	165	Soft Point
30-30 Win	R30301	150	Soft Point
30-30 Win	R30302	170	Soft Point
30-06 Springfield	R30064	180	Soft Point
30-06 Springfield	R30067	220_	Soft Point
308 Martin* Express	R308ME1	150	Soft Point
308 Win	R308W2	180	Soft Point
303 British	R303B1	180	Soft Point
32 Win Special	R32W\$2	170	Soft Point
8mm Mauser	REMSR	170	Soft Point
35 Remington	R35R2	200	Soft Point
450 Bushmaster*	R450B1	250	Soft Point
C	ORE-LOKT HOL	LOW POINT	
30-30 Win	R30303	170	Hollow Point

REMINGTON° RIFLE

Proof of our dedication to providing you with the widest selection of centerfire ammunition in the industry, our Rifle series consists of a multitude of calibers and popular bullet styles to match your specialized hunting and shooting pursuits. All assembled with premium components and the ultra-tight tolerances that put more home reloading presses on the back shelf than any other brand. Remington Rifle.



BRONZE POINT® TIPPED

Introduced by Remington® over 80 years ago, these were the first bullets to utilize a tipped design. Today Bronze Point still delivers exceptional long-range performance on medium-sized game. Sleek profile generates flat trajectory. On impact, the bronze tip is driven backward to create rapid, but controlled expansion.





NEW

NEW

Aerodynamic tip for superior long-range ballistics and rapid expansion

17 Remington	R17R2	25	Hollow Paint
22 Harnet	R22HN1	45	Pointed Soft Point
22 Hornet	R22HN2	45	Hollow Point
220 Swift	R220S1	50	Pointed Soft Point
222 Remington	R222R1	50	Pointed Soft Point
223 Remington	R223R1	55	Pointed Soft Point
223 Remington	R223R3	55	Metal Case
22-250 Remington	R22501	55	Pointed Soft Point
243 Vfin	R243W1	. 80	Pointed Soft Point
25-20 Win	R25202	86	Soft Point
250 Savage	R250SV	100	Pointed Soft Point
6.8mm Remington SPC	R68R1	115	Open Fip Match (OTM)
6.8mm Remington SPC	R68R2	115	Metal Case
270 Win	R270W1	100	Pointed Soft Point
7mm-08 Remington	R7M082	120	Hollow Point
30 Carbine	R30CAR	110	Soft Point
30 Remington AR	R30RAR2	150	Pointed Soft Point
30-06 Springfield	R30069	55	Pointed Soft Point
30-06 Springfield	R30061	125	Pointed Soft Point
7.62x39mm	R762391	125	Pointed Soft Point
7mm Rem SA Ultra Mag	PR7SM3	160	Pointed Soft Point
32-20 Win	R32201	100	Lead
338 Lapua Mag	RM338LMR1	250	Scenar
338 Martin Express	R338ME1	250	Soft Point
35 Whelen	R35WH3	250	Pointed Soft Point
375 H&H Mag	R375MI	270	Soft Point
375 Remington Ultra Mag	PR375UM2	270	Soft Point
444 Marlin	R444M	240	Soft Point
450 Bushmaster	PRA450B1	. 260	AccuTip
45-70 Government	R4570L	300	Semi-Jacketed Hollow Poin
45-70 Government	R4570G -	405	. Soft Point


BRONZE POINT* TIPPED								
270 Win	R270W3	130	Bronze Point Tipped					
30-06 Springfield	R30063	150	Bronze Point Tipped					
30-06 Springfield	R30066	180	Bronze Point Tipped					

(IIII) P(A	To HOLLOW PO	· CHIENTO ·.
222 Remington	-R2Z2R3	50	Power-Lokt Hollow Point
223 Remington	R223R3	55	Power-Lokt Hollow Point
243 Win	R243W2	80	Power-Lokt Hollow Point

POWER-LOKT HOLLOW POINT

Remington® Power-Lokt® delivers unmatched performance for small game and varmint hunting. The thin copper jacket is electrolytically plated to the lead core for near-perfect concentricity and gyroscopic balance. The result? Dead-on, benchrest-type accuracy with instant fragmentation on impact.





243 WIN, 80-GR.
REMINGTON® POWER-LOKT®
HOLLOW POINT, 5", 100 YDS.



Plated copper jacket for superior accuracy and instant fragmentation on impact



MANAGED-RECOIL

REDUCE RECOIL TO IMPROVE YO

At some point, all shooters feel the negative effects of recoil. Some hunters experience the frustration of missing a target because of flinching. Others know the aggravation of losing the opportunity for a second shot because of the time it takes for scope recovery. Then there's the shoulder pain after a day of hunting or practicing, which may deter future practice sessions. To fight these effects of recoil, Remington® developed Managed-Recoil® ammunition.

The Managed-Recoil ammunition succeeds where other recoilcontrol ammunition fails. Past attempts at curbing recoil have focused solely on the amount of gunpowder in the ammunition. Remington's Managed-Recoil focuses on the entire cartridge by incorporating a specially designed bullet built to perform at lower velocities.

FEATURES

- Fully effective hunting performance with less than 50% of the recoil of standard cartridges
- · Less anticipation of recoil
- Increased shooter confidence and improved shot placement
- · Quicker scope recovery for faster second shot placement
- Point of aim is within 2" of a standard cartridge at 100 yards
- · Target practice without the recoil pounding
- Specially designed bullets are optimized to deliver 2x expansion with over 75% weight retention on shots out to 200 yards

FULLY EFFECTIVE ENERGY AND EXPANSION OUT TO 200 YARDS:



100 yards







200 yan

MANAGED-REC




YOUTH AND WOMEN. Managed-Recoil® allows youth and women to practice and hunt effectively and comfortably with half the recoil. It even lets you use an existing gun without readjusting the scope because "point of aim – point of impact" is nearly identical to standard cartridges at 100 yards.

PRACTICE MAKES PERFECT. For targe shooters and hunters who target shoot to improve their performance, Managed-Reco cartridges provide more time on the range, without the bruises to prove it. After your practice session, you can switch to full-pol ammunition without scope adjustment.

MANAGED-RECOIL® COPPER SOLID™ SABOT SLUG.

The best-selling terminal performance and accuracy of our Copper Solid Slugs is now available in Managed-Recoil loads. With 40% less recoil, they're perfect for anyone who wants outstanding on-game results in rifled barrels without the




rearward punch. Or, use them to sight-in, then step up to full loads. There's no finer slug load for young or recoil-sensitive hunters.



MANAGED-RECOIL® SLUGGER® RIFLED SLUG.

Managed-Recoil® Slugger® Rifled Slugs offer remarkably effective performance with 45% less felt recoil than full velocity Sluggers. With effective energy out to 80 yards, these 1-ounce slugs easily handle the majority of smooth


bore shotgun deer hunting ranges. Also check out Managed-Recoil Buckshot; it's an ideal close-range performer.



JARKSMANSHIP IN THE FIELD.

No scope readjustment necessary. Remington® Managed-Recoil® Point of Impact is nearly identical to full velocity loads. Point of impact comparison at 100 yards. 30-06 Sprg. 125-grain Managed-Recoil® 30-06 Sprg. 150-grain PSP Core-Lokt May not operate all recoil or gas-operated finearms


A P P L I C A T I O N S

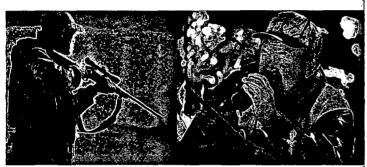

HUNTING WITH CONFIDENCE. Managed-Recoit® Rifle ammunition is designed for fully effective hunting performance out to 200 yards with less than half the recoil of a standard load. A shooter not anticipating the heavy recoil of a full load can better place a first shot on a game animal, and quickly re-acquire the target for a follow up shot. RECOIL-SENSITIVE HUNTERS. For shooters that are unable or unwilling to tolerate the recoil of a standard cartridge on the range or on the field, Managed-Recoil® Cartridges are the perfect solution. Effective performance with half the recoil.


50% LESS RECOIL.

Remington® Managed-Recoil® centerlire cartridges deliver 50% less recoil than standard velocity ammunition. Managed-Recoil 270 Win, 308 Win and 30-06 actually deliver less recoil than a standard velocity 243 Win!

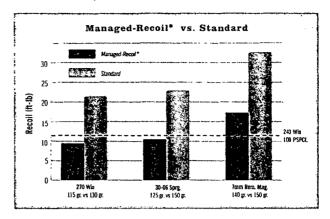

LETHAL PUNCH OUT TO 200 YARDS.

Managed-Recoil® rounds pack a lethal punch at the most common deer-hunting ranges. In fact, their energy levels exceed 1,100 ft.-lb. at 200 yards. Managed-Recoil 30-30 delivers 919 ft-lb. at 100 yards and is fully effective on deer-sized animals out to 125 yards.

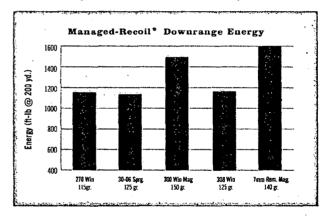

Caliber	Index/	Bullet Wt.	Bullet Type	Muzzle	, 50 yd.	Velocity (ft./s 100 yd.	ec.)	200 yd.	Muzzk	50 yd.	Energy (ft1 100 yd.	b.) - 150 yd.	200 yd.	50 y	Traje 100 y	tory (in.) i. 150 y	d. 200 yd.
				MAI	NAGED	-RECOIL®	CENTER	FIRE RIFLE									
260 Remington	Ŕ12601	:::140	Care-Lokt* PSP - :	2300	2206	2115	2024	1935	1644	1512	1389	÷ 1273 .	1165	0.1	zero	7. 7.2.1	- 1 1-6.3
7mm-08 Remington	RL7M081	140	Care-Lakt® PSP	2300	2195	2095	1995	1895	1644	1498	1361	1235	1118	0.2	zera	-2.1	-6.5
270 Win.	RL270W2	115	Care-Lakt* PSP	- 2710	2558	2412	2270	2133	1875	1671	1485	1315	1161	0.1	zero	. , 1.6	48
30-30 Win.	RL30301	125	Care-Lokt® PSP	2175	1993	1820	1658	1508	1313	1102	919	763	631	0.3	· zero	-3.0	
30-06 Springfield	~ RL30062	125	Care-Lokt® PSP	2660	2495	2335	2182	2034	1964		£ 1513	1321	- 1148 -	v.≓-0.1	oc. zero	1.5	4.9
300 Win. Mag.	RL300W1	150	Care-Lakt* PSP	2650	2509	2373	2241	2113	2339	2097	1875	1672	. 1486	-0.1	żero	-1.5	-4.7
308 Win:	- RL308W1	125	Care-Lakte PSP	2660	- 2501	. 2348	7199	2057	1964	1736	1529	1342	1174	0.1	Zeno	装置15	149 TO
7mm Remington Mag.	RL7MM4	140	Care-Lakt* PSP	2710	2594	2482	2372	2265	2283	2092	1915	1749	1595	0.0	zero	-1.5	-4.5
300 Remington Ultra Mag.	*RL300UM1	150	Care-Lakt* PSP-4	ું _દ ે-2815. ~	2669	> -2528	2391	- 2258	2639	2372	2127	1903	1698	.03	2.0.8	Z200	23

MANAGED-RECOIL® BUCKHAMMER® LEAD SLUGS. Managed-Recoil® Technology has been applied to Remington's most devastating lead slug. We've reduced felt recoil by over 40% to make the BuckHammer® easier on the shooter without sacrificing its on-game performance. The Managed-Recoil BuckHammer 12-gauge slug travels at a fast 1,350 fps at the muzzle and maintains an impressive 1,032 ft-lb. of deer-stopping energy at 100 yards. The 20-gauge, at 1,275 fps., delivers 746 ft.-lb. of energy at 100 yards. Standard

Remington

BuckHammer and Managed-Recoil BuckHammer slugs are designed for use with fully-rifled barrels or rifled choke tubes.

Index/ EDI Ho.	Gauge	Length - (in.)					Muz.		b.) 100 yd.	Trajecti 50 yd.	ory (in.) 100 yd.
RL12LSS 👙	·鲜12 写	为第2 // 建	17/4	1350	1107	9724	## 1991 W	1340	第1032 管	#20.0 W	38 5.5 T
RL20LSS	. 20	2 1/4	1/4	1275	1057	938	1379	948	746	0.0	-6.2

PISTOL & REVOLVER



EVERY APPLICATION,

ONE BRAND. Remington® has been making centerfire handgun ammunition longer than anyone. It should then come as no surprise that we offer the broadest line of pistol and revolver ammunition available. With loadings tailored to virtually every potential shooting application, our line includes vast choices of calibers, bullet weights, bullet styles and combinations of all these. Choose from a complete range of traditional bullet styles, as well as from some of the most sophisticated handgun bullets made. All cartridges are assembled from the highest quality components - with meticulous quality control - to assure reliability in all handgun actions.

GOLDEN	1
SABER [™]	HPJ



DEAD-SERIOUS BULLET INNOVATION.

A superior bullet for when the stakes are at their highest. Designed for law enforcement and personal defense, the Golden Saber™ High Performance Jacket successfully combines: match-type accuracy, deep penetration, maximum expansion and near 100% weight retention.

2/34 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	:	<u> </u>			*	•	<u>-:-</u>	 				<u></u>
Water Commen	incex/	Primer-	WL.		Veloc	ity (ft./se	c.i	Energy	y (ft-lbs.)	Mid-Range	Trajector	Barrel
Caliber	EDI No:	No.	(grs.)	Bullet Style				⇔ Muz. 50	yds: 100 yds:	50 yds.	100 yds."	Length*
Sayan San Yan	1,			REMINGTON	P&R AI	MMUNI	TION					
25 (6.35mm) Airto	R25AP	19	507	Metal Case	760	707.	659 🗢	64	56 : 48 [#]	20	87	2.2
32 S&W	- R32SW	1½	88	Lead Round Nose	680	645	610	90	81 73	2.5*	10.5*	3*
32 S&W Long	R32SWL	1 // 2	98	Lead Round Nose	705	570	635	115	98 88	23	10.5	4
32 (7.65min) Auto.	, R32AP	1%	71	Metal Case	905	- 855	810	129	115 97	1.4"	5.8	4"
157 Mag - 2	R357M7	2.5%	110	Semi-lacketed Hollow Point	1295	1094	9753	M: 410	292 232	0.8	3.5	4.7
124	R357M1	5 1/2	125	Semi-Jacketed Hollow Point	1450	1240	1090	583	427 330	0.6	2.8	4.
PER AND	R357M2	5 1/2	158	Semi-lacketed Hollow Point	1235	1104	1015	535	428 361	0.8	3.5%	4
	R357M3	51/4	158	Soft Point	1235	1104	1015	535	428 361	0.8"	3.5"	4"
	R357M5	5 1/2	158	Semi-Wadcutter	1235	1104	1015	.535	428 2 361	0.8	3.5"	4
	R357M10	51/1	180	Semi-Jacketed Hollow Point	1145	1053	985	524	443 388	0.9	3.9	87
9mm Luger	R9MM1	, ì <i>и</i> *	115	Jacketed Hollow Point	1155	1047	971 -	341	280 241	0.9	3.9"	4
	R9MM3	11/	115	Metal Case	1145	1048	978	335	280 244	0.9	4.0	4"
	R9MM6	11/2	115	Jacketed Hollow Point +P‡	-1250.7	1113	1019	399	316 265	0.8	3.5*	3473
4	R9MM2	11/4	124	Metal Case	1110	1030	971	339	292 259	1.0*	4.1"	. 4"
	R9MM8	11/1	147	Jacketed Hollow Point (Subsonic)	990	941	900	320	289 . 264	11	4.9	4 3
380 Auto.	R380A1	11%	88	Jacketed Hollow Point	990	920	868	191	165 146	1.2"	5.1	ŧ.
	R380AP	.1%:	95	Metal Case	955	865	785	190	160 . 130 .	1.4	5.9	4
38 S&W	R38SW	11/6	146	Lead Round Nose	685	650	620	150	135 125	2.4"	10"	4"
r 38 Special**.	R38S10	11/2	110	Semi-Jacketed Hollow Point +P ‡	995	926	871	242	210 185	12	5.1	4
	R38S16	11/2	110	Semi-Jacketed Hollow Point	950	890	840	220	194 172	1.4"	5.4	4
	R3852	-11/2	125	Semi-Jacketed Hollow Point +P ‡	945	898	8581 .	248	224 204	13	5.4	7-4-73
	R38S3	11/4	148	Targetmaster® Lead WC Match	710	634	566	166	132 105	2.4	10.8"	4"
	R38S5	.1%	158	Lead Round Nose	755	723	692 -	200	183 - 168	2.0	8.3"	4
	R38S6	11/2	158	Semi-Wadcutter	755	723	692	200	183. 168	2.0	83*	4*
13-77 (75-4)	R38S12	11/2	158	Lead Hollow Point + P ‡	890	855	823	278	257 238	1.4	6.0	4
38 Short Colt**	R38SC	11/5	125	Lead Round Nose	730	685	645		130 115	2.2	9.4"	6*
40 S&W	R40SW1	5 ½	155	. Jacketed Hollow Point	1205	1095	1017	499	413 356	0.8	3.6	4
	R40SW2	5 ½	180	Jacketed Hollow Point	1015	960	914	412	368 334	1.3	4.5	4*
41 Rem. Mag.**	R41MG1	2 1/2	210	Saft Point	1300	1162	1062	788	630 526	0.7	3.2	4
44 Rem, Mag.**	R44MG2	2 1/2	240	Soft Point	1180	1081	1010	741	623 543	0.9	3.7	4*
	R44MG3	2 1/2	240	Semi-Jacketed Hollow Point	1180	1081	1010	741	623 : 543 .:	0.9	3.7	4
44 S&W Special**	R44SW	21/2	246	Lead Round Nose	755	725	695	310	285 265	2.0	8.3	6"
45 Colt**	R45C1	2 1/2	225	Semi-Wadcutter	960	890	832	460	395 : 346	1.3	5.5	5
	R45C	21/2	250	Lead Round Nose	860	820	780	410	375 340	1.6*	6.6"	5*
45 Auto.	R45AP2	21/2	185	Jacketed Hollow Point	1000	939	889	411	362 324	1.1*	4.9"	5*-
	R45AP4	2 1/2	230	Metal Case	835	800	767	356	326 300	1.5*	6.8	5"
	R45AP7	21/2	230	Jacketed Hollow Point (Subsonic)	835	. 800	767	356	326 300	1.6	6.8	- Ś

#Ammunition with *+ P* on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer
*lest Barrel Length **Vented Barrel Ballistics

			PREMIE	R® GOLDEI	n sabef	?"" HPJ (H	IGH PERFO	RMANCE	JACKET)			
357 Magnum*	GS357MA	5 1/2	125	1220	1095	1009	413	333	283	0.8"	3.5	4"
9mm Luger	GS9MMB	11/2	124	1125	1031	963	349	293	255	1.0*	4.0"	4"
	GS9MMC	11/2	147	990	941	900	. 320	289	264	1.1"	4.9"	4"
9mm Luger (+P)	GS9MMD .	11/2	124	1180	1089	1021	384	327	287	0.8"	3.8"	4"
380 Auto.	GS380B	11/2	102	940	901	866	200	184	170	1.2*	5.1*	4"
38 Special (+P)*	GS38SB	11/2	125	975	929	885	264	238	218	1.0"	5.2"	4"
40 S&W	GS40SWA	51/2	165	1150	1040	964	485	396	340	1.0"	4.0"	4"
	GS40SW8	51/2	180	1015	960	914	412	368	334	1.3"	4.5"	4~
45 Auto.	GS45APA	21/2	185	1015	951	899	423	372	332	1.1*	4.5	5*
	GS45APB	21/2	230	875	833	795	391	355	323	1.5"	6.3*	5*
45 Auto. (+P)	GS45APC	21/2	185	1140	1042	971	534	446	388	1.0"	4.0*	5*

‡Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in facerms designated for this cartridge and so recommended by the gun manufacturer.

Exclusive brass jacket with precision nose cuts controls mushroom and Cases are nickeloptimizes energy plated to reduce transfer oxidation and mprove teeding Case mouth and primer Specially treated waterproofing aowders suppress for improved muzzle flash reliability

Bottom of ritling groove

Golden Saber **
Driving Band **

The bullet diameter directly ahead of the Driving Band's is reduced from groove to bore diameter, so the bullet is precisely aligned before the Driving Band engages the rifling. The result: match-grade accuracy and reduced barrel friction that conserves velocity.

The high-performance jacket expands to a larger diameter than lead core — over 1.6x diameter. Minimal lead deformation retains energy for deeper penetration.



Pistol and Revolver Interchangeability chart is located on page 107.

UMC® AMMUNITION

UMC HANDGUN CARTRIDGES.

All UMC ammunition is American-made in Lonoke, Arkansas, using first-quality factory-fresh brass and clean-shooting Kleanbore® primers to provide the best value for practice, personal defense and hunting.



UMC° RIFLE CARTRIDGES.

Made in the USA, value-priced and ideal for high-volume shooting, our UMC centerfire rifle ammunition is loaded in seven popular calibers, including the 30-06 Sprg, 308 Win, 7.62x39mm, 30 Carbine and 303 British. The 45- and 50-grain jacketed hollow point loads in 223 Remington and 22-250 Remington are perfect for varmint hunters. Available in



UMC® LEADLESS™ HANDGUN CARTRIDGES.

A must have for shooters that frequent indoor ranges, economical UMC® LeadLess™ cartridges virtually eliminate lead exposure at the firing line. Specially designed bullet actually prevents the vaporization of lead from the bullet's base upon firing. Standard



bullet weights duplicate the ballistics of conventional loads.

Nose profile designed to function smoothly in all action types

packet Powder blended for consistent velocity	Full-length	
blended for consistent velocity	copper jacket	
consistent . velocity		
	consistent	
	High-quality	
reloadable brass case	reloadable	

Clean-shooting, lead-free priming Solid lead core protected by thick copper jacket



Enclosed base virtually eliminates airborne lead at firing line



Galber	Index/ # EDI No.	Primer No.	(grs.)	Bullet Styre	, Ve Muz	ery One	et 100 yels				Mid-rang 50 yds.	
				UMC*	HANDG	UN CAR	TRIDGES					
9mm Luger	L9MM1	1%	115	JHP	1135	1041	973	329	277	242	0.9*	4.0*
	L9MM2	1%	124	MC	1100	1030	971	339	292	259	1.0-	4.1"
	L9MM3	1 N:	115	MC	1145	1048	978	335	280	244	0.9*	4.0°
	L9MM9	1 %	147	MC	990	941	900	320	289	264	1.1*	4.9*
10mm Auto	L10MM6	21/.	180	MC	1150	1063	998	529	452	398	0.9"	3.7
25 Auto (6.35mm)	L25AP	1 %	50	MC	760	707	659	64	56	48	2.0"	8.7
32 Auto	L32AP	1%	71	MC	- 905	855	810	129	115	. 97	· 1.4*	5.8*
357 Magnum**	1357M12	5 Y:	125	JSP	1450	1240	1090	583	427	330	0.6*	2.8"
357 Sig.	L357S1	.5⊁.	125	MC	1350	1146	1018	505	; 422	359	0.7*	3.3*
	L357S2	5%	125	JHP	1350	1157	1032	506	372	296	0.7*	3.2"
38 Super Auto+P	L38SUP	14	130	MC	1215	1099	1017	426	348	- 298	0.8"	3.6*
38 Special + P**	L38S2	1%	125	JHP	945	898	858	248	224	204	1.3"	5.4*
38 Special**	13855	1%	158	LRN	755	123	692	200	183	168	2.0*	8.3
	L38S11	1%	130	MC	790	766	743	173	163	153	1.7*	7.2*
380 Auto	L380AP	1%	- 95	MC	955	865	785	190	160	130	1.4"	5.9"
40 S & W	L40SW2	5 ⅓	180	JHP	1015	960	914	412	368	334	1.3*	4.5*
3	L40SW3	. 5∦:	180	MC	990	940	898	392	353	- 322 -	1.1	4.9
	L405W4	5%	165	MC	1150	1040	964	485	396	340	1.0"	4.0"
44 Remington Mag**	L44MG7	2 1/	180	ISP	1610	1365	1175	1036	., 745	551	0.5"	2.3
45 Auto	L45AP1	2 1/-	185	MC	1015	955	907	423	375	338	1.1*	4.8*
t ja saa ili	1.45AP4	2 1/	230	MC	835	800	· 767	356	326	300	1.6"	6.8*
	L45AP7	2 %	230	JHP	835	800	767	356	326	300	1.6"	6.8
45 GAP	L45GAP4	2 1/2	230	MC	880	84L -	805	395	361	. 331	1.5	5.2"

Caliber	Index/ ED! No	Primer No.	Wt. (grs.)	Bullet Style	Vel Muz	ocity (ft./s 100 yds.	ec.) 200 yds	Muz	nergy (ft-l 100 yds	bs.) 200 yds.	50	Short-ra	nge Traji 150	ectory (i 200	n inches 250	300
					UMC	CENTE	RFIRE	RIFLE C	ARTRID	GES		445				A STATE OF THE PARTY OF
17 Remington Fireball	L17FBV	1%	25	JHP	3850	3280	, 2780	823	597	429	0.0	0.9	0.9	zero	-2.0	-5.4
223 Remington	L223R3	11/2	55	MC	3240	2759	2326	1282	929	660	-0.1	0.6	zero	-1.9	-5.5	-11.0
1.325	L223R7	.71/2	45	HР	3550	2953	2430	1259	871	590	.0.1	0.4	zero	1.7	-4.8	-9.7 D
	L223R8	11/2	50	JHP	3425	2899	2430	1302	933	655	-0.1	0.5	zero	-1.7	4.9	-9.9
1 March 19 11	L223R9	7%	62.,	CTFB	- 3100 ·	2734	2396	- , 1323	1029	790 🥶	0.1	0.6	, zero	1.9	-5.4	-10.6
22-250 Remington	L22503	9 1/2	45	JHP	4000	3340	2770	1598	1114	767	-0.3	0.2	zero	-1.2	-3.5	-7.2
	L22504	9 1/2	50	- JHP	3820	3245	2739	1620	1169	833	0.1	0.8	0.9	zero	. 2.0	-5.4
7.62x39mm	L762391	71/2	123	MC	2365	2060	1780	1527	1159	865	Q.1	zero	-2.2	-6.8	-14.1	-24.5
30 Carbine	L30CR1	61/2	110	MC	1990	1567	1236	967	600	373	0.6	zero′	- 4.2	-12.9	-27.2	-48.6
30 Remington AR	L30RAR1	71/2	123	MC	2800	2464	2152	2141	1658	1264	0.9	21	1.9	zero	-3.8	-9.7
, 308 Win.	L308W4	.9%	150	MC *	2820	. 2533	2263	2648	2137	1705	-0.1	zero	** -1.2	-3.9	-8.4	<u>i4.7</u> ' (
308 Win.	L308W4B	9 1/2	150	MC	2820	2533	2263	2648	2137	1705	-0.1	zero	-1.2	-3.9	-8.4	-L4.7
30-06 Springfield	L30062	91/2	150	MC	2910	2617	2342	2820	2281	1827	_0.2	Zero	LL	, -3.6°	.7.7	-L3.6
303 British	L303B1	9%	174	MC	2475	2209	1960	2366	1885	1484	0.1	zero	-1.9	-5.9	-12.2	-21.4

Caliber	Index/ EDI No.	Primer 'No.	Wt. (grs.)	Bullet Style	Muz	elocity (ft. 50 yds	/sec.) 100 yds.	Muz.	nergy (ft- 50 yds	lbs.) 100 yds.	Mid-range Tr 50 yds.	ajectory 100 yds.
			UMC	LEAD	ESS"	HANDGI	JN CARTR	IDGES		_		· ·
9mm Luger	IL9MM11 &	341 M. 25	A115 🖫	FNEB	.1145	1048	. 3978 ->	335	3 280	(244)	0.9	4.0"
	LL9MM2	1 1/2	124	FNEB	1100	1030	971	339	292	252	1.0	4.1*
1. A. S. S. S. S.	JL9MM9 💢	\$11/2 · c	147	FNEB	990	941	900	320	289	264	. 11°	4.9
38 Special**	LL38S17	1% .	125	FNEB	850	822	796	201	188	176	1.4"	6.4"
38 Special+P**	्रे≇U38S2 ःः	**1 1/2 # 15	≸i25 ,÷	-FINEB	¢. 975	935		- 264	242	224	1.2	4.9
380 Auto	LL380AP2	11/1	95	FNEB .	955	. 865	785	- 190	160	. 130	L.4"	5.9
40 S & W	¥JLL40SW5	₩5% D	180	"FNEB	÷.,,990	3-940	. 898 ·	392	4/353	€ 322	11°.	¥4.9
45 Auto	LL45AP8	2 1/2	230	FNEB	835	. 800	- 767	356	326	300		. 6.8"

***Note: These ballistics reflect vented barrel.

CITB = Closed fin Plat Base | MC = Metal Case | FNEB = Flat Nose Enclosed Base | JHP = Jacketed Hollow Point | JSP = Jacketed Soft Point | LRN = Lead Round Nose





COMPETITION/TARGET RIMFIRE. When it comes to competition-grade rimfire ammunition, there's only one name good enough to share the Remington® brand — Eley. A company with a reputation for the world's most accurate and reliable rimfire ammunition, Eley, Ltd. has teamed up with Remington to offer three grades of their premier 22 long rifle ammunition for the serious target shooter: Target



						Pionia.			.mbgs	- Line		E) E
Rimfire Magnum				PF	REMIER ² GO	LD BOX RIMFII	RE					
Premier* 17 HMR	PR17HM1	17	AccuTrp-V	2550	2212	1901	245	185	- 136	0.1	0.0	-2.6
Premier* 22 Win Mag	PR22M1	33	AccuTip-V	2000	1730	1495	293	219	164	0.6	0.0	-4.5

cme - s		濇	(City)									
2010 0		2.5%		CO	MPETITION/T	ARGET RIMFIE	RE				A	
22 LR Remington/Eley Match EPS	RE22EPS	40	Lead Flat Nose	1085	1006	941	105	90	79	0.3	0.0	-7.1
Club Xtra	RE22CX	40	Lead Round Nose	1085	1006	941	105	90	79	0.3	0.0	-7.1
Target Rifle	RE27T	40	Lead Round Nose	1085	1006	941	105	- 90	79	0.3	0.0	-7.1

^{**}Note: Sight height 1.5" above axis of bore



your sights, Remington® offers the perfect 22 rimfire ammunition for any occasion.

Remington rimfire ammunition delivers the quality you expect. That's because we put the same level of care into making our rimfire ammunition as we do our centerfire ammunition, so you'll get the maximum performance from every shot.

22 Rimfire Magnum											
Remington 22 Magnum	R22M1	40	Jacketed Hollow Point	1910	1610 1350	324	230	.162	0.9	0.0	-5.7
Remington 22 Magnum	R22M2	40	Pointed Soft Point	1910	1600 1340	324	227	159	1.0	0.0	-5.8
Cilo(Ocio			Datasyb			ÇÎ PE		Mores	OM.		er Wyk
22 LR Hyper Velocity											1 1 1
Yellow Jacket®	1722/1700+	33	Truncated Cone Hollow Point	1500	1247 · · · < 1075	165	114	85,	-02-	0.0	4.1
Viper*	1922/1900+	36	Truncated Cone Solid	1410	1198 1056	159	115	89	-0.1	0.0	4.7
22 Short High Velocity				1 4	7						
Remington Golden Bullet	1022/1000+	29	Plated Lead Round Nose	1095	982 903	. 17	62	52	- 0.3	0.0	-7.4
22 LR High Velocity									4.	1,5	10 3 3
Remington Golden Bullet	1522/1500+	40	Plated Lead Round Nose	1255	1113 1017	140	110	92	0.0	0.0	-5.6
Remington Golden Bullet	1622+/1600++	36	Plated Hollow Point	1280	1117 1010	131	100	82	0.0	0.0	·, -5.6
Thunderbolt*	TB-22A+++	40	. Round Nose	1255	1113 1017	140	110	92	0.0	0.0	-5.6
Cyclone*	CY-22HP+++	36	Hollow Point	1280	1117 1010	131	100	82	0.0	0.0	-5.6
Game Load	GL-22HP	36	Hollow Point	1280	1117 1010	131	100	82	0.0	0.0	-5.6
22 LR Standard Velocity					100						-
Target	6122/6100+	40	Round Nose	1150	1048 - 976	. 117	. 98	85	. 02	0.0	6.4
22 LR Subsonic™		1 1		- : : : :							
Subsonic	SUB22HP/SUB22HP1+	38	Hollow Point	1050	965 901	93	79	69	0.3	-0.0	, -1.7.
22 LR Low Noise											· * * *

^{**}Note: Sight height 1.9' above axis of bore. + These 22's available in slide-open plastic packs of 100. ++ Available in 525 round and 550 round bulk packs. +++ Available in 525 round and 550 round bulk packs.

COMPONENTS

REMINGTON® RELOADING COMPONENTS. If you reload your own cartridges, then you shouldn't settle for anything but the best reloading components in the business — Remington. We offer industry-leading products that are changing the way sportsmen think about reloading.



PREMIER®
CORE-LOKT®
ULTRA BONDED®
BULLETS. Combine
world-class accuracy with
bonded bullet toughness to
give unmatched on-game
performance. Core-Lokt Ultra
Bonded — the new performance standard for your big
game hunting handloads.





PREMIER® ACCUTIP
BULLETS. Top off your
handloads with the most accurate
polymer-tipped bullet available today.
Near-perfect concentricity and an
overall ballistically superior design
make it one of the flattest-shooting
bullets in the world. Choose AccuTip
for big-game hunting or AccuTip-V for
awesome performance on varmints.

Index/EDI No. Description.





CORE-LOKT® BULLETS.

"The Deadliest Mushroom in the Woods," now a handloading component. It's the original controlled-expansion big-game bullet, delivering massive energy transfer as it expands to nearly 2x original diameter. For dead-sure reliability.

choose Core-Lokt bullets for your hunting handloads.



Index/EDI No. 5	Description ()
	CENTERFIRE PRIMERS
X22600	1 1/2 Small Pistol
X22604	2 1/2 Large Pistol
X22626	5 1/2 Small Pistol
X22506	6 1/2 Small Rifle
X22528	7 '/s Small Rifle BR
X22608	9 1/2 Large Rifle
X22522	9 1/2 M Magnum Rifle
ETRONX"	ELECTRIC CENTERFIRE PRIMERS
XEL22610	9 1/2 Large Riffe (Electric)

	Caliber 2	A								
CONSUMER PACK BAGGED RIFLE BULLETS										
RB2241 224 45 HP										
RB2242	224	50	PSP							
RB224P1	224	50	PLHP							
RB2244	224	55	MC							
RB2243	224	- 55	PSP							
RB224P2	224	55	PLHP							
RB2247	224	62 '	HP Match							
RB243P1	243	80	PLHP							
RB2432	243	80	PSP							
RB2682	6.8mm	115	MC							
RB3085	308	150	MC ·							
RB303B	310 (303 Brit.)	180	SP Core-Lold							
RB3231	8mm	185	PSP Core-Lot							
RB4571	457	300	SJHP							
CONSU	MER PACK BAG	GED PISTOL	BULLETS							
RB9MM3	9mm	115	MC							
RB9MM11	9mm	115	FNEB							
RB9MM5	9mm	115	JHP							
RB9MM2	9mm	124	MC							
RB9MM8	9mm	147	JHP							
RB380AP	356 380 Auto	95	MC							
RB38S11	356 38 Special	130	MC							
RB357M7	357/38	110	SJHP							
RB357M1	357/38	125	SJHP							
RB357M2	357/38	158	SJHP							
RB40SW1	40/10mm	155	JHP							
RB40SW3	40/10mm	180	MC							
RB40SW5	40/10mm	180	FNEB							
RB40SW2	40/10mm	180	JHP							
RB41MGI	41	200	SJHP							
RB44MG6	44	210	SJHP							
RB44MG3	44	240	SJHP							
RB45AP4	45 Automatic	230	MC							
RB45AP8	45 Automatic	230	FNEB							
RB45AP7	45 Automatic	230	JHP							

CONSUMER PACK RIFLE BRASS									
RC17FB	17 Remington Fireball								
RC17R	17 Remington								
RC204R	204 Ruger								
RC22H	22 Hornet								
RC221FB	221 Remington Fireball								
RC222R	222 Remington								
RC223R	223 Remington								
RC2250R	22-250 Remington								
RC220S	220 Swift								
RC243W	243 Win								
RCGMMR	6mm Remington								
RC2506R	25-06 Remington								
RC2520W	25-20 Win								
RC257R	257 Roberts								
RC65S	6.5x55 Swedish Mauser								
RC260R	260 Remington								
RC68SPCR	6.8mm Remington SPC								
RC270W	270 Win								
RC270WSM	270 WSM								
RC7M08R	7mm-08 Remington								
· RC7MMG	7mm Remington Magnum								
RC7MMRS	7mm Remington SA Ultra Magnum								
RC7MMRA	7mm Remington Ultra Magnum								
RC280R	280 Remington								
RC3030W	30-30 Win								
RC300RS	300 Remington SA Ultra Magnum								
RC3DORA	300 Remington Ultra Magnum								
RC3006	30-06 SPRG								
RC300WM	300 Win Mag								
RC300WSM	300 WSM								
RC303B	303 British								
RC308W	308 Win								
RC3220W	32-20 Win								
RC8MSR	8mm Mauser								
RC8MMG	8mm Remington Magnum								
RC338W	338 Win Mag								
RC338RA	338 Remington Ultra Magnum								
RC350R	350 Remington Magnum								
RC35W	35 Whelen								
RC375H	375 H&H Magnum								
RC375RA	375 Remington Ultra Magnum								
RC4440W	44-40 Win								
RC4570G	45-70 Government								
	SUMER PACK PISTOL BRASS								
RC357MG	357 Magnum								
RC357X	357 Maximum								
RC9MM	9mm Luger								
RC38AS	38 Super Auto + P								
RC38SP	38 Special								

	MER PACK PISTOL BRASS (cont.)
RC40SW .	40 S&W
RC41RA	41 Remington Magnum
RC44RA	44 Remington Magnum
RC44SW	44 S&W
RC45C	45 Cott
RC45A	45 Auto
RC454C	454 Casull


Index/E01 No.:	Caliber	Wt. (gr.) -7	Bullet Type		
PREMIER®	CORE-LOKT® U	LTRA BOND	ED* BULLET		
RBC2433	243/6mm	100	PSP		
RBC2571	25	115	PSP		
RBC2642	26/6.5mm	140	PSP		
RBC2682	27/6.8mm	115	PSP		
RBC2772	27/6.8mm	140	PSP		
RBC2841	28/7mm	140	PSP		
RBC2843	28/7mm	160	P\$P		
RBC3081	30	150	PSP		
RBC3082	30	168	PSP		
RBC3083	30	180	PSP		
RBC3381	338	225	PSP		
	REMIER* ACC	UTIP BULLE	TS		
RBA1771	17	20	AccuTip-V		
RBA2042	20	40	AccuTip-V		
RBA2241	22	50	AccuTip-V		
RBAZ242	22	55	Accutip-V		
RBA2431	24/6mm	75	AccuTip-V		
RBA2432	24/6mm	95	AccuTip		
RBA2642	26/6.5mm	140	AccuTip		
RBA2771	27	130	AccuTip		
RBA2841	28/7mm	140	AccuTip		
RBAZ842	28/7mm	150	Accutip		
RBA3081	30	150	AccuTip		
RBA3082	30	165	Ac c uTip		
RBA3083	30	180	Accutip		
	CORE-LOKT	BULLETS			
B2432	24/6mm	100	PSP		
B2571	25	100	PSP		
B2462	26/6.5mm	140	PSP		
82772	27	130	PSP		
B2842	28/7 mm	150	P\$P		
B3081	30	150	PSP		
B3083	30	180	PSP		
B30301	30	150	SP		

BR = Bench Rest | FNEB = Flat Nose Enclosed Base HP = Hollow Point | IHP = Jacketed Hollow Point | MC = Metal Case PLHF = Power Lost Hollow Point | PSP = Pointed Soft Point SIHP = Semi-Jacketed Hollow Point | SP = Soft Point

PREMIER ACCUTIP BONDED SABOT SLUG

THEY PUNCH HUGE HOLES WITH PINPOINT ACCURACY, AND IT'S ALL ABOUT THE TIP.

The AccuTip doesn't just look intimidating, it's flattening whitetails and competitors in the tipped-slug market with devastating ferocity. Guided by our Power Port™ Tip, these bonded sabot slugs hit with a degree of accuracy and terminal performance unmatched by any other we've tested. It is a true masterpiece of aerodynamics that consistently prints tiny 100-yard groups and transfers tremendous knockdown force to the farthest reaches of shotgun range. At 58-cal, our 12-gauge version is the largest tipped slug you'll find anywhere. In field testing, both the 12- and 20-gauge versions produced huge wound channels and crumpled every deer they touched with a single shot. Spiral nose cuts, bonded construction and a high-strength cartridge-brass jacket come together on game to create large, perfect mushrooms with over 95% weight retention from 5 to 200 yards. With

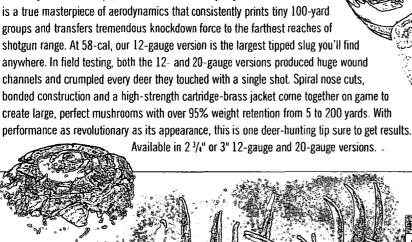



The Premier® AccuTio slug exhibits impressive accuracy at all ranges. (5-shot @ 100 yds. with




CONTROLUED EXPANSIO ANOTHER DEADLY MUSHROOM

(MOCAL)



	(E)					n 100r1			100fg.	070°	(Cor)(
		٠.	PRE	MIER A	CCUTIP B	ONDED :	SABOT SI	LUGS		•		
PRA12	12	2 1/4	385-gr.	1850	1611	. 1401 ،	. 2925 .	2218	. 1677	27	3.5	0.0
PRA12M	12	3	385-gr.	1900	1656 -	1439	3086	2344	1771	2.5	3.4	. 0.0
PRA20	20	23/4	260-gr.	1850 -	1610	1399	1976	1496	1130 🛴	27	. 3.6	0.0
PRAZOM	20	3	260-gr.	1900	1655	1438	2084	1581	1193	2.5	3.4	0.0

t 0.0 indicates yardage at which shotgun was sighted in

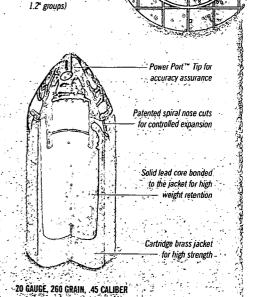

®

€

녆


(0)


i2-gauge

HIGH-PERFORMANCE SABOT SLUGS

PREMIER® CORE-LOKT® ULTRA


BONDED® SABOT SLUGS. This is one slug that's anything but sluggish when it comes to performance. The Remington® Core-Lokt Ultra Bonded® is a sleek, ultra-fast, flat-shooting shotgun sabot slug that's virtually in a class of its own. With incredible accuracy, it delivers a 385-grain, .50-caliber, jacketed, bonded bullet that yields near 100% weight retention and expands to 2x in diameter. Designed for use in fully rifled barrels only, the Core-Lokt® Ultra Bonded offers a high-tech blend of sabot power and surgical precision that could be just what the doctor ordered.

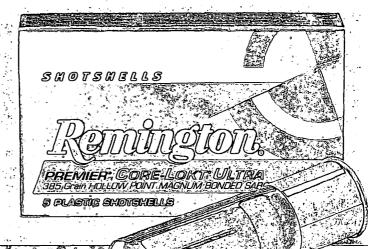

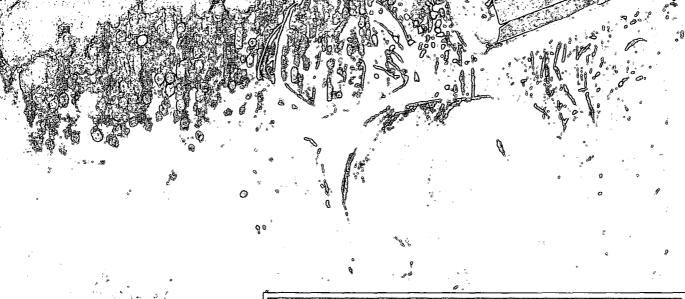

MANAGED-RECOIL® COPPER SOLID™ SABOT

SLUGS. The best-selling terminal performance and accuracy of our Copper Solid Slug is now available in a reduced recoil load. With 40% less recoil, they're perfect for anyone who wants outstanding on-game results without the rearward punch. Or, use them to sight-in, then step up to full loads. There's no finer slug load for young or recoil-sensitive hunters.



	To the second		COL.		30 6		. E		0	jh	Ţωχ	
		E: AUGU S	PREMIER*									
PR12CLU	12	21/4 .	385-gr.	1900	1770	1648	3086	2682	2325	1.8	2.4	0.0
PR20CLU	20	21/4	260-gr.	1900	1750	1615	2084	1774	1506	2.0	2.7	0.0
PREMIER® COPPER SOLID® SABOT SLUGS												
PR12CS	12	23/4	1	1450	1320	1208	2040	1689	1417	0.01	-3.5	
PR12MCS	12	3	1	1550	1408	1283	2331	1923	1597	0.01	-2.9	
PR20CS	20	24	%	1500	1360	1240	1444	1187	986	0.01	-3.1	
			MANAG	ED RECO	IL COP	PER SOLI	D™ SABO	T SLUG				
RL12CS	12	2 1/4	1	1200	1113	1046	1400	1204	1063	0.0	-5.5	_

† 0.0 indicates yardage at which shotgun was sighted in

PREMIER[®] COPPER SOLID[®] SABOT SLUGS. The

unique, all-copper shotgun deer load. Designed specifically for use in fully rifled barrels. Outstanding on-game performance with 2x

caliber expansion and virtually 100% weight retention. Consistently delivers 2 ½", 5-shot groups at 100 yards.



HIGH-PERFORMANCE LEAD SLUGS

BUCKHAMMER* **LEAD SLUGS**. When it's time to put the hammer down, this lead slug delivers a devastating one-two punch of precision and explosive power. Specifically designed for rifled barrels and rifled choke tubes, it has an attached stabilizer that optimizes

flight to produce 3-inch, 100-yard groups. And weight retention at impact is consistently 100 percent. Choices include 12- and 20-gauge full-power and Managed-Recoil® versions. This season, put that big buck down for the count with the hardest-hitting, most accurate lead slug in the woods. BuckHammer.®

The BuckHammer's lead slug offers near 100% weight retention with full 12-gauge (.73 cal.) diameter.



The innovative design of the stabilizer allows the BuckHammer® to deliver 3° groups at 100 yards with 13% more energy than any other lead slug on the market. (3°, 1 ³/* oz. 12 gauge)





The BuckHammer* Lead Slug exhibits impressive accuracy by putting 100 shots inside an amazing 3 1/2" group at 100 yards. 2 3/4", 1 oz. 20 gauge)

Index/EDI No.	Cargo	VICTOR Market		BUCK		100 yo	Muz.	iengy (n. 1 30 yu	100 yr.	100		
SP12LSS	12	2 1/4	1 1/4	1550	1320	1145	2935	2177	1600	0.0	-3.6	
SP12MLSS	12	3	11/4	1500	1234	1059	3232	2281	1710	0.0	-4.0	
SP20LSS	20	2 1/4	1	1500	1159	995	2236	1461	1074	0.0	-4.6	
SP20MLSS	20	3	1	1550	1245	1051	2470	1592	1135	0.0	-4.1	_
			MANA	GED-REC	OIL' BU	KHAMME	R° LEAD	SLUGS				
RL12LSS	12	2 1/4	11/4	1350	1107	972 -	1991	1340	1032	0.0	-5 .5	
RL20LSS	20	2 1/1	7/1	1275	1057	938	1379	948	746	0.0	-6.2	

			SLUG	GER* HI	GH VELO	CITY RIFLE	D SLUGS				
HV12RS ·	12	21/1	- 1/4	1800	1252	978	2751	-1517	813	0.0 [†]	-4.1
PHV12MRS	12	3	7/1	1875	1302	998	2989	1442	847	0.0†	-3.7
HV20RS	20	21/4	1/2	1800	1321	1037	1575	848	523	0.01	-3.6
				SLUG	GER" RIF	LED SLUG	S				
P12RS	12 .	23/4	1	1560	1175	977	2361	1340	. 926	0.01	-4.8
12SRS	12	2 1/4	1	1680	1285	1045	2738	1605	1059	0.01	-3.8
12MRS	12	3	1	1760	1345	1075	3005	1753	1121	0.01	-3.4
PIGRS	16	21/4	1/5	1600	1175	965	1989	1072	724	0.0 [†]	-4.8
20RS	20	21/4 .	1/1	- 1580	1240	1034	1513	931	648	0.0†	-4.2
P4IRS	.410	2 1/2	1/5	1830	1335	1040	654	348	211	0.0†	-3.5
-			MANA	GED-REC	OIL* SLU	GGER' RIF	LED SLUG				
LIZES	12	23/4	MANA 1	GED-REC	OIL* SLU 988	GGER* RIF	LED SLUG		739	0.0	t



This higher velocity slug exits the barrel at 1,800 fps, 13% faster than standard 1 oz. slugs. The $^{7}\!/_{8}$ oz. Slugger High Velocity delivers more energy at 50 yards with flatter trajectory on deer than standard 1 oz.

slugs. Produced in most popular slug loadings $-2^{3}/4^{\circ}$ and 3° 12 gauge and $2^{3}/4^{\circ}$ 20 gauge. Designed for the avid deer hunter using smooth bore guns.



SLUGGER® RIFLED SLUGS.

Remington's most popular, accurate, hard-hitting slug. Slightly oversized for great smooth-bore shotgun performance, resulting in better sealing against the barrel wall for greater accuracy.



EXPRESS® MAGNUM AND EXPRESS® BUCKSHOT.

One of the great values in shotgun deer loads. A combination of heavy cushioning behind the shot column and a granulated polymer buffering helps maintain pellet roundness for tight, even patterns.

index/ EDI No.	Gauge	-Shell Length	Velocity (ft/sec. @ 3 ft.)	Buckshot Size	Pellet Count
	EXPRES	S° MAGNUM E	BUCKSHOT LOAD	S – BUFFERE	j
12SB00	112	2 1/1	1290	00 -	12
12HB000	. 12	3*	1225	000	10
12HB00	12	3°	1225	00	15
12HB4	- 12	3*	1225	. 4	41
1235B00 ¹	. 12	31/8	1125	00	18
•	EXI	PRESS* BUCK	SHOT LOADS - B	UFFERED	
128000	12	2 1/1	1325	~~ 000 ⁻ €	8 %
12B001	12	2 1/1"	. 1325	00	9
1280	12	21/1	1275	. 0	12
12B1	12	2 1/1*	1250	1	· 16
1284	12	2 1/1	1325	. 4	27 -
2083	20	2 1/1	1220	3	20
9.		MANAGED	RECOIL® BUCKSI	1 OT	
RL12BK00	÷ 12	27.	72 1200 tg j	00	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

1 Utilizes Remington® Power-Piston one-piece wa

WINGMASTER HD

DROP-DEAD BETTER.®

Absolutely no shotshell on the market can touch Wingmaster HD at long range. All of its revolutionary characteristics — optimized density, choke responsiveness and consistent roundness — come together on game with an unmatched level of deadly force. Patterns with Wingmaster HD will put a Drop-Dead Better® 60% of its pellets in a 30" circle at 60 yards!

At 12.0 g/cc, it's 10% denser than lead and 56% denser than steel. Most importantly, it's the scientifically proven most lethal combination of bone-crushing energy and pellets on-bird. Wingmaster HD is also nearly as soft as steel shot, which makes it easier on your barrel than most high-density loads. And it's more responsive to chokes, allowing you to open up the pattern for closerange hunting or stretch shotgun range to its farthest reaches. Dramatically stretch your kill zone with the most deadly extendedrange payload you can buy. Remington Wingmaster HD.



Wingmaster HD® Waterfowl and Predator Payloads

THE ULTIMATE EXTENDED-RANGE PAYLOAD

- · Denser patterns
- Devastating pellet energy
- Flies true near perfect shape

FEATURES

- HD = Heavy Density
- 12.0 g/cc density for optimal combination of pellet count and pattern density
- · Proprietary composite of Tungsten-Bronze-Iron
- · Round, consistent pellets:
- Travel straighter and longer
- Improve long-range lethality
- Tighter patterns
- More even pellet distribution
- · Uniform pellet density
- Softer pellets are easier on your barrel and more responsive to chokes
- Better patterns at long and short ranges more lethal than lead
- Approved for waterfowl hunting by the USF&W and Canada




MORE UNIFORM WEIGHT.

Wingmaster HD's smooth, round pellets are extremely aerodynamic. They are uniform in weight and true to listed shot size.


Non-toxic,
56% denser
than steel and
10% denser
than lead,
it's the most
lethal choice
whatever you're
shotgunning for:
WATERFOWL
TURKEY
PREDATORS


12.0 G/CC - BEST PELLET MATERIAL DENSITY.


Testing proves Wingmaster HD® delivers the best combination of pellet energy and pattern density.

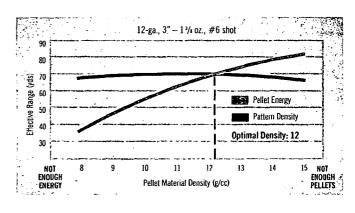


DEEPER PENETRATION AT LONG RANGES.

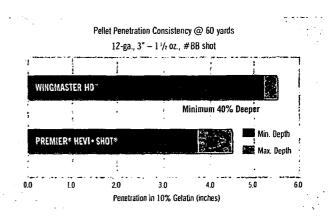

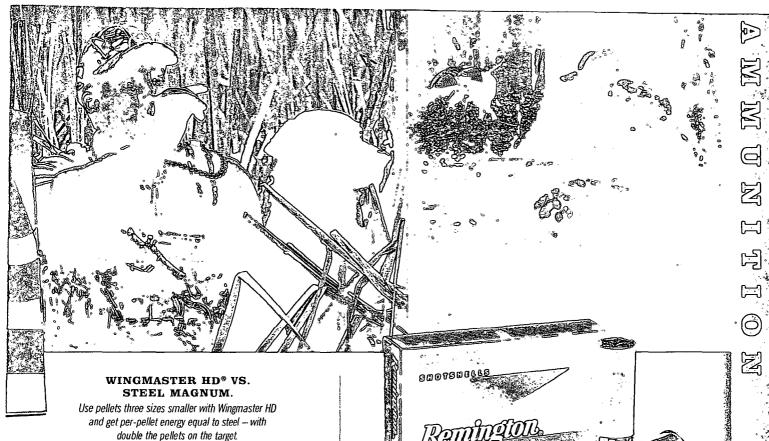

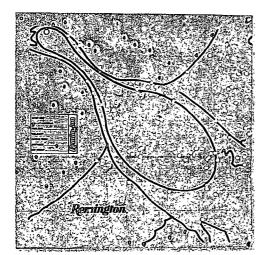

Wingmaster $HD^{\oplus} - 12$ -ga., $3^{\circ} - 1^{3}/8$ oz., #6 shot

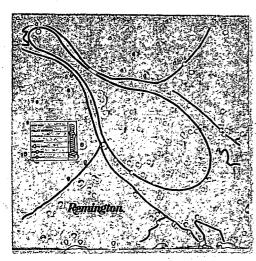

Steel Magnum - 12-ga., 3" - 1 3/8 oz., #3 shot



Long range turkey devastation. Its smooth, round shape delivers awesome aerodynamics and sustained payload energy.

		3 Doj (1)	TO THE	o a Onton	912
DIG.	NGMASTER I	ID WATERE	WL PAYLOADS -	10 ROUNDS PE	R BOX
RW10B	TOMPOTENT	is which	THE T ATECADO	10 1001100 11	BB 3
RW102	10	31/2	1300	1%	2
RW12S4 RW12S6	- 12 · ·	2 1/4	1325	- z _e 1% - 5.	7 3 6 7 3 E
RW122 - RW124 RW126	12		1450	77 1 % T.2	2 4
RW12M2 RW12M4 RW12M6	12	3	1450	1%	2 4 6 7
RW12HMB RW12HM2 RW12HM4	12	3 P	1300	M. T	BB 2 4
RW1235MB RW1235M2 RW1235M4	12	31/4,-	1300	42:22 -1%	88 2 2 4
RW1235M6 RW20SM4 RW20SM6	<u>2</u> 0	-21/4	1300		6
RW20M4 RW20M6	20	ستندو شد	1300	1//	6
	MASTER HD	MAGNUM T	URKEY PAYLOAD	S – 5 ROUNDS	PER BOX
RW12HMH4 RW12HMH6	12-	3	1225	1%	6
RW1235HM4	. 12	131/6	1225	1% 5	27 (4 27)
RW20HM4	20	3	1185	1 1/4	. 4
w	INGMASTER	HD® PREDAT	OR PAYLOADS -	LO ROUNDS PE	R BOX
RW12VT	12 -	3.73	1300	1%	Tage (Sal
RW1235VT	. 12	3 1/2	1350	1%	· •T

では、100mmので



SPORTSMAN° HI-SPEED" STEEL LOADS

NS16HV

NS20HVS

16

20

2 1/4

21/4



HIGH VELOCITY, HIGH VALUE.

- · Economical, Hi-Speed™ steel loads
- · Waterfowl loads for every hunting situation
- Upland loads for use in non-toxic zones and for practice shooting
- · Shot size selection to match your game

***************************************		- (EB)			
	SI	PORTSMAN® H	I-SPEED" STEE	L LOADS	
SSTHV10	10	3 1/2	1500	11//	BB, 2
SST12	12	23/4	1365	1	6.7
SST12S	12	21/4	1375	1 1/4	2, 4
SSTHV12H	12	3	1550	11//	BB, 2, 4
SSTHV12HM	12	3	1400	11/4	BB. 1, 2, 3, 4
SST12HM	12	3	1300	1 1/4	BB, 2
SSTHV1235	12	31/5	1550	11/4	BB, 2
SST20	20	23/4	1425	2/.	7

15/15

3/4

1300


1425

LEAD MAGNUMS

PREMIER: HIGH VELOCITY MAGNUM COPPER-PLATED BUFFERED TURKEY LOADS.

The high-performance lead load for avid turkey hunters. 3" and 3 1/2" 12-gauge payload leaves the muzzle at 1,300 fps. Delivers hard-hitting knockdown power. Loaded with our Power Piston® one-piece wad and Magnum-grade Copper-Lokt® lead shot for dense patterns and deep penetration.



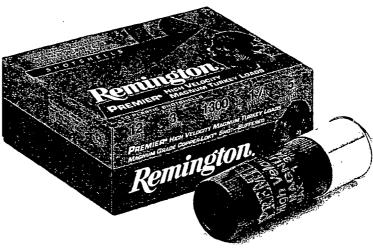

PREMIER® MAGNUM COPPER-PLATED BUFFERED TURKEY LOADS.

Our original Magnum turkey loads. As fine a lead shotshell as you can carry in the woods. Magnum-grade Copper-Lokt® shot is cushioned with special polymer buffering and further protected by our Power Piston® one-piece wad for dense, even patterns. Delivers superb performance and devastating knockdown power out of tightly constricted turkey chokes.

PREMIER® DUPLEX® MAGNUM COPPER-PLATED BUFFERED LOADS.

A specialized layering of Magnum-grade Copper-Lokt® No. 4 shot over No. 6 shot. Larger pellets deliver excellent retained energy and penetration, while smaller pellets enhance pattern density. Awesome versatility for uncertain shooting distances on turkeys and late-season pheasants.



BUFFERED MAGNUMS.

Excellent for turkey or long-range pheasants. Heavy payloads of Magnum-grade shot are packed with polymer buffering and enclosed in our patented Power Piston® one-piece wad to provide dense, even patterns and uniform shot strings.

NITRO TURKEY



NITRO TURKEY® EXTENDED RANGE BUFFERED MAGNUMS.

- · Nitro Mago extra-hard lead shot
- Patterns over 80% with Super Full choke
- · Patterns like copper-plated shot


15 25 317 32	B.C. office	0	00°54 - 154°	1.153.7	STATE STREET	TROOP AND A SECOND
EDI No.	Gauge	Lengor (in.)	Velocity (ft./sec. @ 3	ft)	of Shot	Sizes
PREMIER*	HIGH VELOCI	TY MAGNUM	COPPER-PLAT	TED TU	RKEY LOADS	- BUFFERED
PHV12M	12	3	1300	7	1%	4,5,6
PHV1235M	· 12	3 1/1	1300		2	4, 5
PREM	IIER° MAGNU	M COPPER-PL	ATED LEAD T	URKEY	LOADS - BU	FFERED
PIOHM	10	31/2	1210	19.1	21/4	4
P12SM	12	21/4	1260		11/2	4,5
P12XHM	- 12	.,73	.1175	1	2	4,5,6
P1235M	.12	. 31/2	1150		2 1/4	4
P20XHM	20	3	1185	. 3	14	6 7
PR	EMIER DUPL	EX* MAGNUM	COPPER-PLA	ATED L	DADS – BUFF	ERED
MP12S	. 12	21/4	1260	2	11/2	4x6
MP12H	. 12	3	1210		1%	4x6
		NITRO MAG	LOADS - BU	FFERE) .	
NM12S	- 12	2 1/	1260		11/4	2,4,6
NM1Z	12	3	1280	ا دومبرچيدرسه	1%	4, 6
NM12H	12	3	1210	11.0	17/	2.4.6
NM20S	20	2 1/4	1175		1%	4,6
NM20H	20	3 **:	. 1185	L v.	, 1%	4,6
l	NITRO	TURKEY M	AGNUM LOAD	S – BU	FFERED	
NT12S4	12	21/27	1260	بتثنث	11/6	4
NT12H	12	3	1210	Periodo e	1%	4, 5, 6
-NT1235	_ = 12 -	31/1:	(Care 1300)	A CONTRACTOR	2.2	4, 5, 6
NT20M	20	3	1185		11/4	5
	Ť	** * *			•	

UPLAND

NITRO PHEASANT® LOADS.

For pattern, energy and performance, nobody beats
Nitro Pheasant. The best of our Pheasant load offerings,
Nitro Pheasant uses Remington's own Copper-Lokt®
copper-plated lead shot with high antimony content,
the hardest lead we make for hunting. Hard shot stays
rounder for truer flight, tighter patterns and greater
penetration. So when it comes to bringing down tough
birds like pheasant, you need a load that delivers
maximum pattern density and lethal energy — you need
Nitro Pheasant. Available in both high velocity and
magnum loadings in both 12 and 20 gauge.



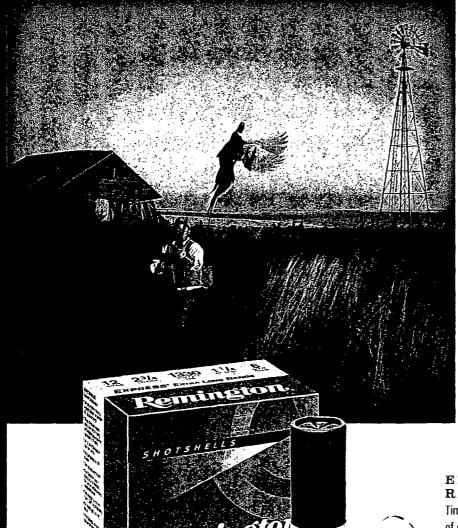

PHEASANT LOADS.

For the broadest selection in game-specific upland lead shotshells, Remington® Pheasant Loads are the perfect choice. Their high velocity and long-range performance are just right for any pheasant hunting situation. Standard high-base payloads include 12, 16, and 20 gauge.



EXPRESS* EXTRA LONG RANGE LOADS.

Time-proven performance for all upland game. The choice of experienced small game hunters across the country because our Express line offers the best balance of payload and performance. Available in a broad selection of loadings — from 12 gauge to 410 bore — with shot sizes ranging from BB all the way down to 9.



LEAD GAME LOADS.

Budget-stretching shotshells for a wide variety of hunting. Available in 410 bore, 20-, 16- and 12-gauge loadings.



SPORT LOADS.

Economical, multi-purpose loads. Built with our premium Power Piston® wad and plastic Unibody hulls. Loaded with No. 8 shot. Ideal for skeet, trap and sporting clays, as well as quail, doves and woodcock.

STEEL GAME AND TARGET LOADS.

Specifically designed for upland birds and clay target shooting where mandated. One ounce of steel No. 7 has nearly the same pellet count as 1 1/8 oz. of lead No. 8. Perfect combination of velocity and pattern density at normal distances.



			v ou	HE	
De de la constante	NITR	O PHEASANT	LOADS - COPPE	R-PLATED	
NP12	12	21/4	1400	1%	, 4, 5, 6
NP12M	12	21/:	1300	1%	4, 5, 6
NP12HV	. 12	21/4	1450	1%	3. 4,5,6 S
NP12HM	12	3	1350	1 1/4	4, 5
NP20	20	21/4 -	1300		5,6
NP20M	20	3	1185	1 1/4	5, 6
	E	XPRESS* EXT	RA LONG RANGE	LOADS	
SP12	12	21/	. 1330	1%	BB. 2, 4, 5, 6, 7 1/2, 9
SP16	16	23/4	1295	1 1/4	4, 6, 7 1/2
SP20 :	20	21/4	1220	1 4%	4, 5, 6, 7 1/2, 9
SP28 .	28 ·	23/4	1295		6.7 1/2
SP410	.410	21/1	1250	· ½	4, 6, 7 1/2
SP413	.410	3	1135	"/s	4, 6, 7 1/2
		PHE	ASANT LOADS		<u> </u>
PL12	. 12	2 1/4	1330	1 14 8	4, 5, 6, 7 1/2
PL16	16	21/4	1295	1 1/4	6
PL20	20	·~ 2½	1220	1.31	4, 5, 6, 7 /2
		PROMOTI	ONAL GAME LOA	DS	
GL12 -	12	21/.	1290	. 1. 4%	6,71/4,8
GL16	16	21/	1200	1	6,71/2,8
, GL20 🗧 🛴	20	. 27/	1225	1.16	6,71/2,8
GL410*	410	21/2	1200	1/2	6
			ORT LOADS	-	
R12SL	12	24	1290	1.1.	. 8
R20SL :	20	21/4	1200	7/1	8
			E AND TARGET LO		
GLSTL12 -	12	-21/	1325	1. 1. 3	G 7 7 7 1
GLSTL20	- 20	27/7	1325	· 1/4	1 1
*20-round box		: 13.50 M. J	F	11 3 11	S. • (

M

TARGET LOADS

PREMIER* NITRO 27° HANDICAP TRAP LOADS.

Designed for long-yardage trapshooting and long-range sporting clays, our custom powder blend, Power Piston® wad and Premier® STS® primer mix have improved the Nitro 27's performance allowing more consistent velocities, 15% better pattern performance and softer

recoil. So if you're looking for tremendous targetbreaking performance, choose the improved Nitro 27.



PREMIER[®] STS[®] TARGET.

The standard in target shooting reliability. Absolutely consistent from shot to shot. Bar none, the most reliable, most reloadable shells you can shoot. Available in 12, 20, 28 gauge and 410 bore.






GUN CLUB* TARGET LOAD LINE.

An excellent choice for economical shooting. These high-quality shells are loaded with the same care as our top-of-the-line STS® loads and feature a Power Piston® wad and the reliable STS® Primer mix. Many shooters are discovering that they can get acceptable reloading life while stretching their shooting dollar.



MANAGED RECOIL STS TARGET. Dramatically reduced recoil – 40% less in the 12-ga. load — with target-grinding STS® consistency and pattern density. Ideal for new shooters and recoil-sensitive individuals.

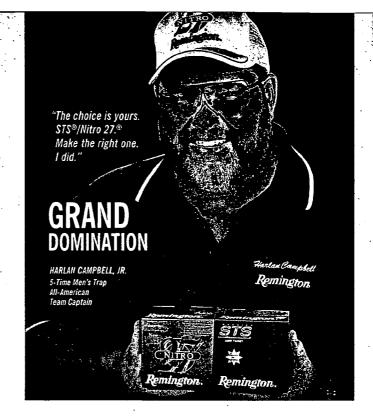

COMPETITORS AT THE GRAND CHOOSE REMINGTON® AS THEIR WINNING AMMUNITION.

Great champions think alike. For the seventh
year in a row, shooters who used Remington
shells won more trophies than competitors using
other brands at the 2009 ATA Grand American World Trapshooting
Championship. And for good reason! Remington STS® and Nitro 27® target


loads provide softer recoil, better pattern performance, and more consistent velocities (not to mention the most reloadable hull on the market). Isn't it time you switch to Remington and step into the winner's circle?


	Cons	a design			(125) (1450-241)	0165 0650	
	P	REMIER" STS" TARGET LOA	DS - EX	TRA HARD	STS* TARGE	SHOT	
STS121	12	Premier STS Target	21/4	2 3/4	1185	1	7 1/1, 8, 8 1/2
STS12LR	12	Premier STS Low Recoil	2 1/4	2 1/1	1100	11/4	8
STS12L	12	Premier STS Light Target	2 3/4	23/4	1145	1 1/4	7 1/2, 8, 8 1/2, 9
STS12LH	12	Premier STS Light Handicap	2 1/2	3	1200	1%	7 1/2.8
STS12NH1	12	Premier Nitro 27 Handicap	23/4	HNDCP	1290	1	7 1/2, 8
STS12NH	12	Premier Nitro 27 Handicap	2 1/4	HNDCP	1235	11/2	71/2.8
STS12NSC	12	Premier STS Nitro Sporting Clays	2 3/4	Max	1300	1 %	7 1/2, 8
STS12NSC1	12	Premier STS Nitro Sporting Clays	27	Max	1350	1	7 1/2,8
STS12P	12	Premier STS Pigeon	2 1/2	3 1/4	1235	1 1/4	71/6
STS20LR	20	Premier STS Low Recoil	21/4	2 1/:	1135	1/4	9
STS20SC	20	Premier STS Target	21/4	2 1/2	1200	1/4	8
STS20	20	Premier STS Target	2:4	2 1/:	1200	'/ı	9
STS28NSC	28	Premier STS Nitro Sporting Clays	21/2	21/4	1300	2/4	71/2
STS28SC	28	Premier STS Target	23/4	2	1200	7	3
STS28	28	Premier STS Target	23/4	2	1200	7/.	9
STS410NSC	.410	Premier STS Nitro Sporting Clays	2 1/:	Max	1300	' /:	8
STS410SC	.410	Premier STS Target	21/2	Max	1200	%	81/4
STS410	.410	Premier STS Target	2 1/2	Max	1200	1/:	9
		MANAGED-REC	OIL" STS	' TARGET	LOADS		
RLSTS12	12	Managed-Recoil STS Target	2 %		1100	½	8 1/6
RLSTS20	20	Managed-Recoil STS Target	2 1/2		1100	1/4	8 ½
		GUN CLL	JB' TAR	GET LOADS	5		
GC121	12	Gun Chib	21/2	23/4	1185	1	7 1/2,8
GC12L	12	Gun Club	2 3/2	23/4	1145	1 1/6	7 1/1, 8, 9
GC12	12	Gun Club	2 1/:	3	1200	1%	7 1/2,8
GC20	20	Gun Clut	21/:	2 1/2	1200	1/4	71/:, 8. 9

2010 BOY SCOUTS OF AMERICAS KNIFE

- 2nd year knife of a 5 year program
- . BSA® Officially Licensed Product
- · Original RS4233 scout pattern created in 1924
- Made with tooling from the original Remington Bridgeport, Conn. factory
- · Undergoes over 115 hand operations
- Includes a 4" x 6" reproduction of Norman Rockwell's painting "I Will Do My Best," circa 1945
- Made in the USA ===



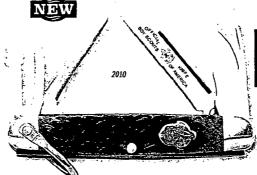








Boy Scouts of America*, the Universal Emblem, Be Prepared*, are either registered trademarks or trademarks of the Boy Scouts of America in the United States and/or other countries. "I Will Do My Best", by Norman Rockwell. Used with permission of the Boys Scouts of America. Manufactured under license from the Boy Scouts of America. All rights reserved.

2010 COPPERHEAD BULLET KNIFE "DOUBLE STRIKE"

- R2253 Copperhead pattern
- Blade material/options 440 high carbon stainless steel
 (Ladder Damascus Blade also available Limited Offering)
- Blade measurements 3" clip blade with long nail pull and a 3" spey blade with long nail pull
- Closed measurement 3 3/4"
- Handle material/points of interest Mahogany jigged bone with bullet shield. The distinctive large bolster that the Copperhead pattern is known for has the Remington logo stamp.
- Made in the USA







REMINGTON® CUTLERY COLLECTOR'S CLUB

In 2009, Remington introduced the Remington Cutlery Collector's Club (RCCC). With the introduction of the Club, we have experienced a renewed interest in knife collectors world wide with interest in expanding their Remington collections.

In 2009 RCCC created two membership knives, the standard membership knife was the Senator RC6163 and the Junior Membership knife, the single blade Barlow RBC41. RCCC's "Knife of the Year" was an exquisite recreation of the first knife ever produced by Remington the RC103.

You must be a RCCC member to purchase these knives and many other special offer knives. For more information on how to join the Club or to find out more details on this knife and the other special offer knives you can log onto www.remingtoncutlery.com or mail in your request for more information to Remington Cutlery Collector's Club, 870 Remington Drive, Madison, NC 27025

"SHOOT LIKE A GIRL... IF YOU CAN!™" SERIES KNIVES

- 440 high carbon stainless steel blades with mirror finish
- Smooth pink bone handle
- Made in the USA








7


3

PREMIER TACTICAL KNIVES

TANGO® SERIES

- Overall length 10 ½" (Fixed), Closed measurement 4 ¾" (Folder)
- Blade material 5 1/4" (Fixed), 3 5/8" (Folder); Civilian Grade: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo; Law Enforcement Grade: 440C stainless steel Mill Spec: Mil-C 13924 blade with etched Remington® LE logo; Military Grade: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- Blade options Drop, Clip and Tanto
- Handle material G-10

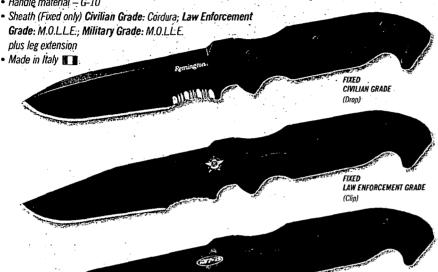

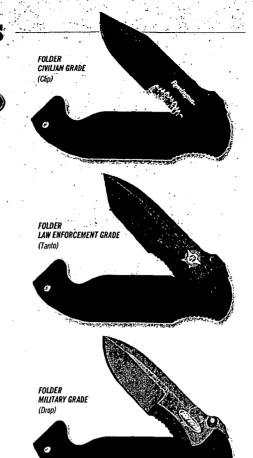







ZULU® SERIES

• Overall length – 10 1/2" (Fixed), Closed measurement – 4 3/4" (Folder)

MILITARY GRADE (Tanto)

- Blade material 4 ³/₄" (Fixed), 3 ⁵/₈" (Folder); Civilian Grade: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo; Law Enforcement Grade: 440C stainless steel Mill Spec: Mil-C 13924 blade with etched Remington® LE logo; Military Grade: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- Blade options Drop, Clip and Tanto
- Handle material Anodized aluminum with 3M non-slip inserts

• Sheath (Fixed only) - Civilian Grade: Cordura; Law Enforcement Grade: M.O.L.L.E.; Military Grade: M.O.L.L.E. plus leg extension Made in Italy CIVILIAN GRADE LAW ENFORCEMENT GRADE (Drop) MILITARY GRADE (Tanto)


Glow in the

PREMIER™ RESCUE

ESCAPE "


- Blade material 440C stainless steel with Teflon® coating
- Blade options Single: 3 ¹/₂" Sheepfoot blade Double: 3 ¹/₂" Sheepfoot blade and 3" push button automatic seat belt/web cutter
- Handle material Rugged, slip resistant Forprene handle with glow in the dark insets, solid one piece 4.5mm thick glass breaker and lanyard hole
- Handle point of interest Open back frame spine allows easy cleaning of knife
- Handle options Black or Olive Green
 Double: Blade lock button in handle | Single: Pocket clip
- Sheath Heavy duty Cordura sheath with M.O.L.L.E. system
- Made in Italy



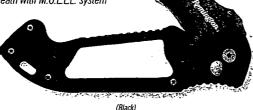

sheath with

(5 1/2" Closed)

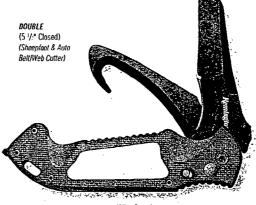

(Olive Green)

PREMIER™ EXCURSION

EXCURSION™ (FIXED)

- Overall length 9 5/8" (Clip), 9 1/z" (Gut Hook)
- Blade material 420 stainless steel PTFE-Teflon® coated and etched Remington® logo, Clip: 4 ¹/₂" long, Gut Hook: 4 ¹/₄" long
- Blade options Clip and Gut Hook
- Handle material Injection molded black rubber with 420 SS frame
- Sheath Cordura with belt loop
- Made in Italy






PREMIER™ TACTICAL SHEATHES

- · Designed to fit fixed blade knives of many sizes
- Made of the best quality cordura and built to withstand rigorous use
- · Removable belt extension
- M.O.L.L.E. securing strap
- · Front pocket with removable closure
- Kydex blade protector insert which can be removed for easy cleaning
- Adjustable leg strap with rubberized weave to hold in place while active
- Tight weave cord for extra tie down ability and/or additional uses
- · Available in Black, OD Green and Tan









PREMIER™ HUNTING KNIVES

ELITE HUNTER® SERIES


- Overall length $-9^{1/8}$ " (Fixed), Closed measurement $-4^{1/2}$ " (Folder)
- Blade material 440C stainless steel with satin finish, 4 1/4" long
- · Blade options (Fixed) Drop Point and Clip Point
- Blade options (Folder) Single: 3 3/8" Drop Point | Single: 3 3/8" Clip Point | 2-Blade: 3 3/8" Drop Point and 3 1/4" heavy duty Saw | 3-Blade: 3 3/8" Drop Point, 3 1/4" heavy duty Saw, and 3 3/8" Gut Hook
- Handle material 6061 aircraft aluminum scales with optional insets
- Handle options Olive Wood and Genuine Stag insets

Fixed Sheath

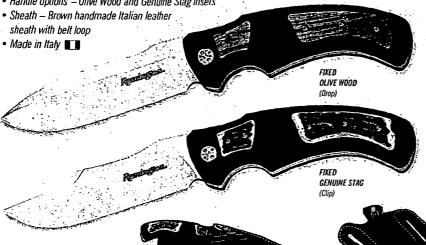

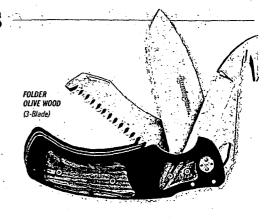



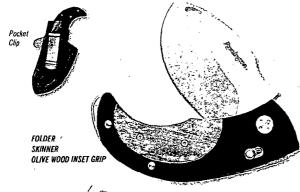






ELITE SKINNER™ SERIES

Hip Holster

- Overall length 8" (Fixed), Closed measurement 4" (Folder)
- Blade material 440C stainless steel with satin finish, 3" long
- · Blade options Deep swell belly Skinner and Gut Hook
- Handle material (6061 aircraft aluminum with inset options Folder) or Solid with finger grooves for ergonomic grip and lanyard hole
- Handle options Olive wood and G-10 (insets Folder Only)
- Sheath Black and Brown handmade Italian leather sheaths with quick release snaps and pocket clip for quick belt or pack attachment

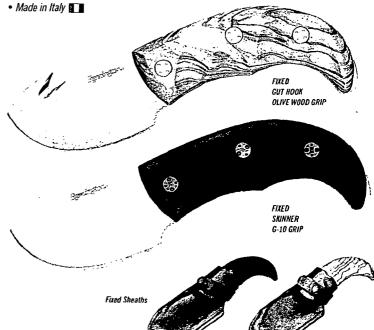




KNIVES

SPORTSMAN" SERIES F.A.S.T.* (FIXED)

- Blade material/options 440 stainless steel with bead blast finish or black oxidized coating with a serrated/straight combo edge
- Blade Length 5 3/3", 3.9mm thick
- Handle material Anodized aluminum scales with rubberized coating riveted to a solid one piece 3.9mm thick tang with lanyard hole
- Handle options Black, Mossy Oak® Obsession®, Mossy Oak® Blaze Orange (New for 2009) or Realtree® Advantage® MAX-4 HD™
- Overall length 10 1/2"
- Sheath Heavy duty black nylon sheath with belt loop




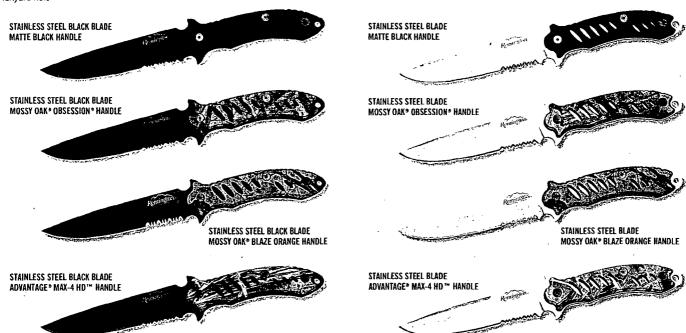



SPORTSMAN™ SERIES F.A.S.T.* (FOLDER)

- · Fast Action opening with a Soft Touch handle
- Blade material/options 440 stainless steel with bead blast finish or black oxidized coating with a serrated/straight combo edge
- Blade lengths Large: 3 5/8" | Medium: 3 1/8"
- Handle material Anodized aluminum scales with rubberized coating; includes pocket clip and lanyard hole
- Handle options Black, Mossy Oak® Obsession,® Mossy Oak® Blaze Orange (New for 2009) or Realtree® Advantage® MAX-4 HD™
- Closed measurement Large: 5" | Medium: 4 1/8"







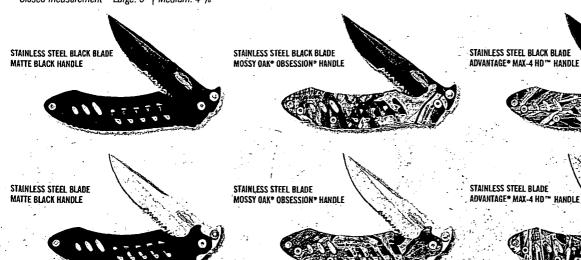


KNIVES

HERITAGE SERIES

The Remington Arms Crest Shield, found on the front bolster of each Heritage Series knife, represents a tradition dating back to the 1800s. From 1888 to 1914, this crest could be found on every firearm manufactured by Remington Arms Co., Inc. And is still used today.

- Handle options Delrin Stag (New for 2010), Green Jigged Bone and Laminated Wood, nickel silver bolsters and thick brass liners
- Blade materials 440 high carbon stainless steel and hollow ground
- Made in the USA

DELRIN STAG

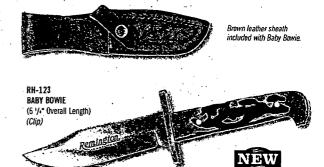




























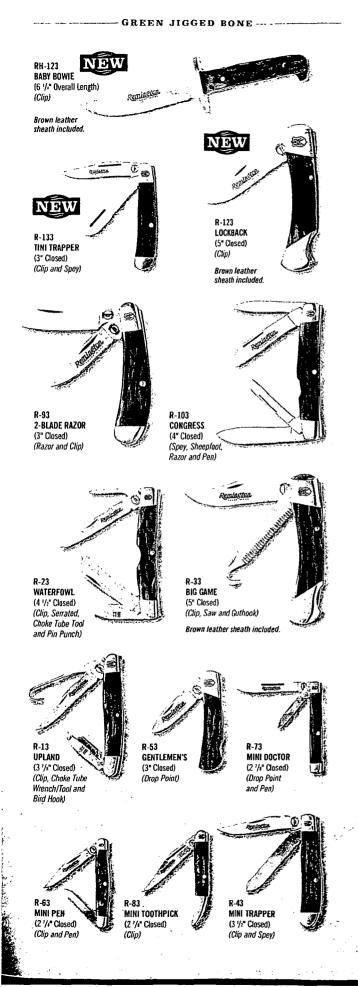


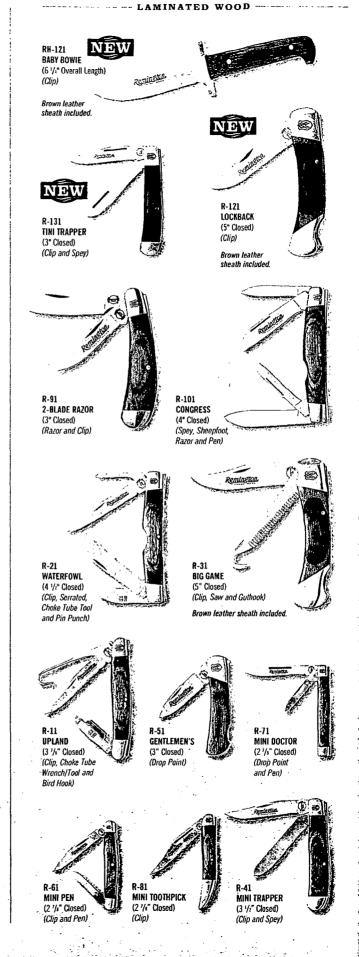

KNIVES

1911 MULTI-TOOL

- G10 handles
- · Black oxide finish
- Dual bushing wrench/plier head
- · Mainspring housing punch
- · Bottle opener/screwdriver
- Can opener
- · 8Cr13MoV steel drop/serrated blade
- · Bit driver system with 5 double sided bits
- · Liner lock and thumb stud
- · Belt case included

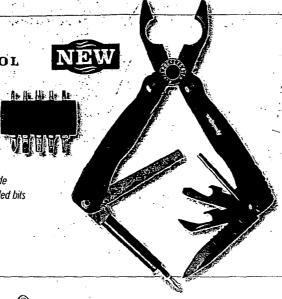



WINGMASTER" MULTI-TOOL

- · The ultimate waterfowl/upland multi-tool
- · Scissor head with bone notch cut-out and lock
- 3" saw
- 1 3/4" blade
- Guthook
- Choke tube wrench (12- and 20-ga.)
- · LED push button light
- · Ergonomic handles with rubber inserts for easy grip
- · Heavy duty nylon sheath with belt loop included



SPORTSMAN™ SERIES (FIXED)

- Overall length − 9 3/4" (Drop, Skinner, Skinner Clip), 9 3/8" (Clip), 9 3/16" (Drop w/Gut Hook)
- Blade material 420HC (high carbon) stainless steel with etched Sportsman™ Series logo
- Blade Length 4 ⁵/₈" (Drop. Drop w/Gut Hook), 4 1/4" (Clip). 49/16" (Skinner), 311/16" (Skinner Clip)
- Blade options Drop and Gut Hook
- · Handle material -- Black synthetic non-slip
- Sheath Black leather





DOVE/QUAIL CLEANING SET

- Caping knife overall length 5 1/2"
- Hook overall length: 4 1/4"
- Needle nose scissors overall length: 4 1/2"
- · All three tools fit into a black nylon sheath with belt loop





DUCK/PHEASANT

- Caping knife 440 stainless steel with bead blast finish and measures 6 3/4" long
- Hook overall length 7"
- wings with ease and measures 6"
- · All three tools fit into a black nylon sheath with belt loop

CLEANING SET

• Scissors - bone notch cut out for clipping

BIG GAME SKINNER SET • Knife material - one piece 440 stainless steel knives with

- mirror finish and have a finger ring for easy carry and grip • Gut hook — Easy to sharpen hook measures 7 1/4"
- Skinner overall length: 7 3/8"
- Caping blade overall length: 6 1/2"
- · All three knives fit snug in a heavy duty black nylon sheath with belt loop







Ø

KNIVES

INSIGNIA EDITION™ (FIXED)

- Overall length 8"
- Blade material 440 stainless steel, 3 1/2" long
- Blade options Drop and Gut Hook
- Handle material Black Laminate and Burl Wood with Sportsman™ Series medallion inlayed in handle
- Sheath Black leather



WHITTLER

and Pen)

INSIGNIA EDITION™ (FOLDER)

• Handle options — Black Laminate and Burl Wood with Sportsman™ Series medallion inlayed in handle Blade materials - 440 stainless steel

(Drop)



























DECALS

- · Vinyl die cut decals
- · Waterproof
- · Oil, acid and alkali resistant
- · Usable on smooth and corrugated surfaces
- · Heat resistant up to 350 degrees
- . Up to 7 years outdoor durability
- · Available at Remington retailers





























CLEANING KITS

UNIVERSAL ALL-A-ROUND KIT

- · Cleans all your shotguns, rifles and pistols (22 caliber to 12 gauge)
- Contains an assortment of brushes, 3-piece brass rod, patches, patch puller and waterproof/stain resistant Rem Pad
- Portable cleaning station packaged in a polyethylene storage tube that hangs on a peg or sits on a shelf for convenience

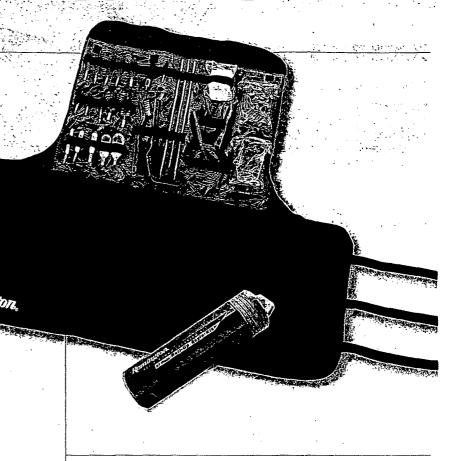

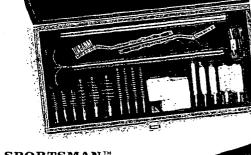


SPORTSMAN™ UNIVERSAL KIT


- 27-piece (true count) cleaning kit – includes 50 patches (22 caliber to 12-gauge)
- 3-piece brass rod accepts standard #8-32



FIELDMASTER® KIT

- Brass 3-piece rod with swiveling handle
- Rem® Oil (1-oz.) and Brite Bore™ (2-oz.)
- An assortment of bronze bore brushes for 22, 270 and 30 calibers as well as 12 and 20 gauges

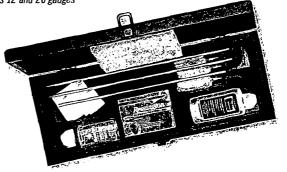

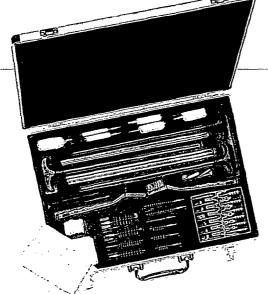

TARGETMASTER™ DELUXE KIT

- 52-piece (true count) kit has all you need includes 100 patches
- · Sturdy aluminum case with positive latches
- 3 sets of 3-piece rods: Rimfire rod (17-22), Centerfire rod (22 and up) and Shotgun/muzzleloader rod
- Adapters allow for cleaning of handguns (17-50)



REMINGTON CLEANING KITS READILY ACCEPT STANDARD #8-32 CLEANING BRUSHES, MOPS, JAGS AND STANDARD SHOTGUN BRUSHES/MOPS. (THE RIMFIRE ROD IN THE TARGETMASTER ACCEPTS .17 COMPONENTS, AND HAS AN ADAPTER FOR #8-32 ACCESSORIES.)

J

CHEMICALS



REM® OIL

- · Cleans dirt and grime from exposed metal surfaces while displacing non-visible moisture from metal pores
- · Protects internal and external metal parts from rust and corrosion
- Exclusive Teflon formula provides a thin, long-lasting film that keeps actions working smoothly by reducing metal-to-metal wear
- Available in: 10 oz. aerosol can, 6 oz. spray pump (MoistureGuard). 4 oz. aerosol can, 2 oz. bottle with child resistant cap and 1 oz. squeeze bottle with child resistant cap





REM® OIL WIPES

- 6" x 8" wipe cloth saturated with Rem Oil
- · Available in: 12 Count Clampack, 100 Count Display and 60 Count Pop-up Canister (with large 7" x 8" wipes)



MOISTUREGUARD GREASE

- Uses Volatile Corrosion Inhibitor Technology
- 6cc multi-purpose grease syringe
- · Safe on all metal surfaces
- Instantly provides superior long-lasting lubrication and protection
- Penetrates into smallest cracks and crevices and crevices

REM SHOTGUN CLEANER

- · Cleans trigger groups, gas ports, choke tube hreading, receivers, chambers, barrels and magazine tubes
- · Dissolves powder residue, fouled lubricants, burnt carbon deposits and gunk
- · Blasts away gummy caked on grime from hard to reach areas such as ejectors, firing pin assemblies, trigger components and bolt recesses
- Available in: 18-oz. aerosol can





REM® ACTION CLEANER

- · Easily cleans dirt, powder residue and caked-. on lubricants from disassembled actions and fire-control mechanisms
- · Dries quickly and leaves no residue
- Available in: 10.5-oz. can with jet-spray extension tube

BRITE BORE™ SOLVENT

- Dissolves carbon and powder fouling, removes copper, lead and plastic deposits
- · Handy size for field range use
- · Low odor contains no CFC's
- Available in: 6 oz. can, 4 oz. jar and





REM® DRILUBE™

- · Teflon-based lubricant provides a tough, non-congealing film without the residue of dry graphite lubes
- Keeps firearms functioning dependably to -40°F
- Available in: 4 oz. aerosol can

40-X™ BORE CLEANER™

- Formerly Remington Bore Cleaner
- 40-X name ties into the product's origins in Precision Benchrest Shooting
- · Formulated for rifles to improve cleaning, accuracy and performance
- Fast and easy to use no soaking or foul odors
- Available in: 2 oz. white oval bottle with child resistant cap and 4 oz. squeeze bottle



GUN STORAGE

MOISTUREGUARD™ GUN PLUGS


- Uses Volatile Corrosion Inhibitor Technology
- · Protects all metals from rust and corrosion
- Place in chamber or mount in gun cabinet/safe to protect gun
- · Leaves no scent or residue
- · 30 cubic feet of protection
- Use as a snap cap
- Available in: 12 gauge, 20 gauge, Centerfire and New for 2009 — Pistol Plugs (Offered in Universal and 22 caliber)



GUN SACK

- . Thick 100% polyester fabric protects against dirt and scratches
- Draw string closure
- · Treated with silicon to help protect from rust
- One size fits all.—with or without scope (52" long)



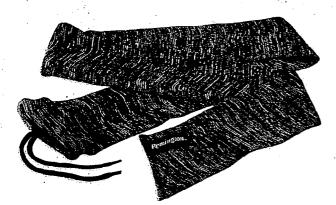

MOISTUREGUARD™ SUPER SAFE PLUG

- · Uses Valatile Corrosion Inhibitar Technology
- · Protects all metals from rust and corrosion
- · Place or hang in gun cabinet/safe -
- Superior storage protection
- · Leaves no scent residue . .
- · 216 cubic feet of protection for up to one year





MODEL 365 MINI DEHUMIDIFIER

- . Protects up to 60 days before recharging is necessary
- · Self-contained unit requires no wiring or extension cords

REM DRI™ 35 DESICCANT

- Removes moisture to prevent rust corrosion and eliminates odors in gun safes and cabinets
- · No electricity required
- · Rechargeable for multiple uses





CABLE LOCK

- · Fits most shotguns, rifles and pistols
- California approved



TRIGGER BLOCKS

Available in: 3-Pack or Single

VCI

MISCELLANEOUS



BORE LIGHT


- Ideal for inspecting used firearms, cleaning firearms and inspecting bore for obstructions
- · Includes both curved and straight light tubes
- · LED light eliminates intense glare



MOISTUREGUARD™ REM® CLOTH

- · Uses Volatile Corrosion Inhibitor Technology
- 10" x 10" multi-purpose cloth wipe

 Instantly protects all metals from rust and corrosion



CLEANING PATCHES

- For all shotguns, black powder guns, rifles and rimfire rifles
- 100% cotton
- Enclosed in polybag for easy carrying in the field
- Pre-sized for optimum cleaning

(1)


SCOPE MOUNTS


INTEGRAL SCOPE MOUNTS - HIGH

- Fits 30mm scope tube without inserts or 1" with inserts
- Z-2 alloy construction 50% stronger than aluminum
- Super strong design base & lower ring all in one
- Secure attachment TORX® grade 8 tactical screws
- Fits all Remington Model 700's
- · Available in black or silver
- · Made in the USA





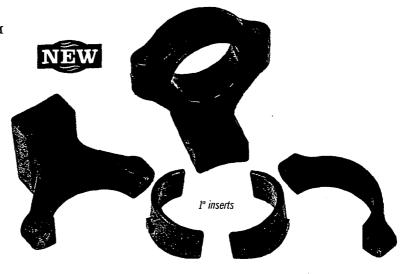




INTEGRAL SCOPE MOUNTS - MEDIUM

- · Fits 1" scope tube only
- Z-2 alloy construction 50% stronger than aluminum
- Secure attachment TORX® grade 8 tactical screws
- .• Fits all Remington Model 700's
- · Available in black or silver
- Made in the USA







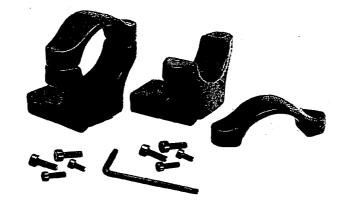

R-15 MINI RISER

- Full Advantage® Max-1 HD™
- · Fits any Picatinny rail
- · Larger screw for more clamping power
- Made from aircraft quality aluminum and hardcoated to Mil. Specs.
- 1.3" long





PICATINNY

- Full Advantage® Max-1 HD™
- € 31,º long

RISER

R-15 4" FORE-END RAIL

- Full Advantage® Max-1 HD™
- Made from aircraft quality aluminum and hardcoated to Mil. Specs.
- Standard Picatinny configuration
- · Co-witness with flat top upper receiver
- Mounting screws included
- 1/4" tall



STOCKS/FORE-ENDS

MODEL 870™ & 11-87™ SHURSHOT

- · Ambidextrous design for turkey, deer and predator hunters
- · Ergonomic grip for solid shot placement
- · Lightweight synthetic construction
- Available in Black and Mossy Oak® Obsession™
- · Comb designed for perfect eye alignment with sights and/or scope
- · Molded in sling swivel stud









MODEL 870, 1100 & 11-87 1

- · Available in Black and Mossy Oak® Break-Up®
- 16-ga. and 12-ga. Adult and Compact

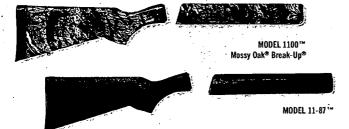


MODEL 700™ & MODEL SEVEN™

· Available in Black synthetic



For a full listing of available stocks & fore-ends, visit www.remington.com

ADJUSTABLE LENGTH OF PULL KIT




Kit includes:

- Two 1/4" LOP spacers
- One 1/2" LOP spacer
- Corresponding screw lengths to accommodate
 3 different lengths

For a complete list of compatible firearms, visit www.remington.com

EXTRA BARRELS

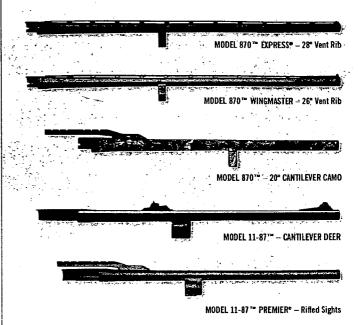


For a complete list of extra barrels, see page 109.


SUPERCELL™ RECOIL PAD




OUR PUMP BEATS THEIR SEMI-AUTOS.

The world's most effective recoil pad. So potent, in fact, it single-handedly helped our Model 870 generate up to 54% less recoil than our leading competitors' autoloading shotguns with factory pads. Its millions of tiny Super Cells absorb and release energy over a longer time period to create a more comfortable shooting experience than was ever before possible with conventional materials.



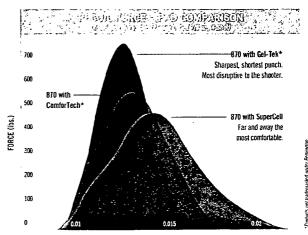





CHOKE TUBE BAG

- Holds six flush or extended chakes
- · Pocket with zipper for wrench
- · Heavy-duty zippered Cordura pouch
- Belt loop for carry convenience



CHOKE TUBE WRENCH

· Comes in 12 and 20 gauge




MAGAZINES



MODEL 870™ MAGAZINE EXTENSION KIT

- · Add more rounds to your shotgun's capacity
- Extends magazine chamber:
- -18" Extension adds 2 extra shots
- 20" Extension adds 3 extra shots
- Available in Blued or Parkerized finish
- Package includes tube assembly, swivel assembly with screw, magazine extension spring and coupling

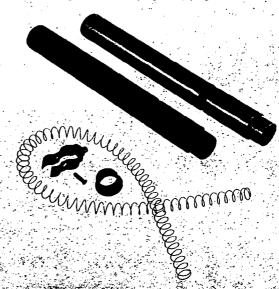










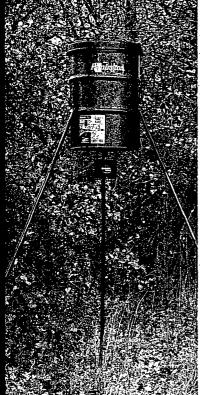

Air Rifles & Soft Air Rifles

CROSMAN CORP.
7629 Route 5 & 20
East Bloomfield, NY 14443
1-800-7AIRGUN
crosman.com
remington.com/airguns

Area Rugs, Mats and Carpet

MILLIKEN & CO. 201 Lukken Industrial Dr. West La Grange, GA 30240 800-342-5539 remington.com/lodgecabin

ATV Accessories

ARCTIC CAT 601 Brooks Ave. South Thief River Falls, MN 56701 218-681-8558 arcticcat.com remington.com/atv

Calendars

CALENDAR PROMOTIONS / GLOBAL MARKETING 2121 Belvedere Charlotte, NC 28205 800-862-8393 countrygallerycalendars.com remington.com/lodgecabin

Decorative Wooden Collectables

88 Bluff Lane Taylorsville, NC 28681 828-632-4985 vintageeditions.com remington.com/lodgecabin

VINTAGE EDITIONS, INC.

Dog Kennels

KENNEL AIRE 801 E. North St. Ottawa, KS 66067 800-346-0134 kennel-aire.com remington.com/pets

Eye & Hearing Protection, Safety Gloves, Hard Hats, Vests and Footwear

RADIANS
7580 Bartlett Corp Drive
Bartlett, TN 38133
901-388-7776
radiansinc.com
remington.com/safetygear
remington.com/footwear

Fine Art Prints

WINFIELD GALLERIES
748 Hanley Industrial Court
St. Louis, MO 63144
314-644-2805
remingtonartwork.com
remington.com/lodgecabin

Food Plot Products, Scent Lures and Game Calls

BUCK EXPERT
262, Principale, C.P. 10
Saint-Benjamin
Quebec GOM 1NO
Canada
418-594-5009
buckexpert.com
remington.com/wildlife

Flashlights, Lanterns, Headlights & Spotlights

RAYOVAC
601 Rayovac Drive
Madison, WI 53711
800-237-7000
rayovac.com
remington.com/lodgecabin

Game Calls

WILDGAME INNOVATIONS
101 Cason Road
Broussard, LA 70518
337-839-6267
remington.com/gamecalls

Gun Cases, Paper Targets and Shooting Accessories

THE ALLEN COMPANY
P.O. Box 445
525 Burbank St.
Broomfield, CO 80020
303-469-1857
allencompany.net
remington.com/huntshoot

Gun Safes and Cabinets

LIBERTY SAFE AND SECURITY, INC. 1199 West Utah Ave. Payson, UT 84651 800-247-5625 libertysafe.com remington.com/safes


Headwear


OUTDOOR CAP COMPANY, INC. 1200 Melissa Lane Bentonville, AR 72712 800-826-6047 outdoorcap.com remington.com/apparel










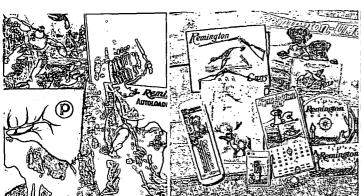





एंड

[بين]

٤

(P)



PARAMOUNT P.O. Box 9 #1 Paramount Drive Bourbon, MO 65441 800-255-4287 paramountapparel.com

Lighters and Lighter Accessories

ZIPPO 33 Barbour Bradford, PA 16701 814-368-2700 zippo.com remington.com/personal

Meat Snacks, Steak Snacks, **Beef Jerky & Sausage Sticks**

TRAIL STEAKS 4295 Cromwell Road, Suite 205 Chattanooga, TN 37421 877-875-3759 trailsteaks.com remington.com/food

Outdoor Clothing

THE BRINKMANN CORPORATION 4215 McEwen Rd Dallas, TX 75244 877-525-9070 brinkmann.net remington.com/apparel

Sacks

FOX RIVER MILLS P.O. Box 298 Osage, IA 50461 800-247-1815 foxsox.cam remington.com/footwear

Sporting Dogs

COASTAL PET PRODUCTS 911 Leadway Ave. Alliance, OH 44601 800-321-0248 coastalpet.com remington.com/pets

Sporting Sunglasses & Disposable Lighters

<u>HALPERN</u> 8290 Amwiler Road Atlanta, GA 30360 800-624-5280 halpernimport.com

Tin Signs, Magnets, License Plates and **Light Switch Covers**

DESPERATE ENTERPRISES, INC. P.O. Box 604 Sharon Center, OH 44274 330-239-0500

desperate.com remington.com/lodgecabin

Treestands

W.I.C. - REMINGTON TREESTANDS P.O. Box 352 Windom, MN 56101 507-831-2540 remingtontreestand.com remington.com/huntshoot

Video Games

MASTIFF L.L.C. 2762 B. Octavia St. San Francisco, CA 94121 415-674-6615 mastiff-games.com

Wallpaper Borders & **Bathroom Accessories**

YORK WALLCOVERINGS P.O. Box 5166 York, PA 17405 717-846-4456 yorkwall.com remington.com/lodgecabin


Wildlife Feeders and **Digital Game Cameras**


BA PRODUCTS 602 Fountain Parkway Grand Prairie, TX 75050 800-847-8269 remingtonfeeders.com remington.com/wildlife




FOR MORE INFORMATION OR LICENSEE OPPORTUNITIES.

CONTACT US AT 336-548-8535 OR VALUEDPARTNER@REMINGTON.COM







TULF L.	n 01		ATEMET	161	1			191		, 5				3 5			1013132			, ,,,,,,,	WIIIVG	TON)
	endo/eda	ит. (er)		PRIMER	u021£ 10	VELOCITY 10 , 200	(fpš)	TOO FOOL	7 Y	D.G	ser (ft-lb 0 300	400 500		SHDET-EURG	e ¹ TRAJECTOR 200		100	LONG-F	ANGE TRA	eriom*		SHIESTE
17 Remington Fireball	GANTO	,	Control Sme	AUGUST TALE		u, 2001 30 223	10.00	400 500 (EX) (EX)	\$100	100 21 (T) (T		grant and a second and a second				250 SUI. (16) 25()		ou 200 O 103	· Y.O	300 - 400 200 - 410	500 3 €003	OUES
	1177:37	25	UNIC Lacketed Hollow Point	11/16	3850 32	_			873	October 1		206 2 137	Contractor Contractor		4 - 172 12 -	20位54号		18,162	100		347	0.193
17 Remington	TELLER V	2	CERT	ŪĿ	(PE) (S	9) 200	200 E	031 (624)	£13	(3)) (3	(22)	EV E	A) (1 📾	Œ	<i>1</i> 2 49	E	7 (k)	ETO 6	Œ W	-202	-0.185
, a	R17R2 -	25	Hollow Point	1h	-			993 1617	906	652 46						1.9 -5.0	1.5 1	-		****	32.0	0.187
204 Ruger	(FIAMA)	180 J		146.	(20) E	7 7 30 T	-		-		distant			-	(IE)	-	-	T en	-	(1); dΩ /6 = 16/		0210
22 Hornet	HRAZOUS GRAZZANA	(U)	(Corpy (Corp.) (Corp.)	IAD.	\$500 £2	N 113) 21 873		23 E.A.	11/21	23, 62 <u>1</u> 1	7 100	485 383 . 55. 51			THE REAL PROPERTY.	9 41 B 23		70. 235 70. 235	-) 455	010
LETTER	R22HNI	45	Pointed Soft Point	6 ¹ /2	-			948 840	723	417 22	5 127			· ·		6.0 -30.0	1.4 2		-12.4	120	10000000	. 0.130
	RZ2HN2	45	Hollow Point	61/2 .	2690 20	42 1502	1128	948 840	723	417 22			0.0 z	ero -2.1		6.0 -30.0	1.4 7			25.8 -74.2		0.130
-220 Swift	R220Si	50	Pointed Soft Point	91/2	3780 31			710 1357	1586	1107 76	0 506	325 204	0.0 0	.3 zem	-1.4	4.0 8.2	0.4 1	O zero	-2.3	62 -20.	1 45.1	0.175
221 Rem. Fireball	FAZIFI)	.03	Acade Person	J.h				627 (1368)		75) - 56	-		-) in		AL - 101) o	W	A. A. A. A.	58.8	0.233
222 Remington	R222R1 R222R3	50	Pointed Soft Point	71/2	3140 26	02 2123 35 2182		1350 1107 1432 1172	1094	752 50				1.7 zero		6.5 -13.1 6.2 -12.5	1.9 1			97 -31.		0.175
[2] (1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	PRA222R8	· 50	Power-Lokt* Hollow Point According V Book Fail	1/2				1432 1172 1740 1471	1094	771 52 836 87		228 152 336 240	l	1.7 zero		12.5 30. e107	1.6		-	-92 -29.1 78 -23.		0.188
223 Remington	DV223RA	45	lacketed from Tin Core HP	-1½		11. 2355			100		4 .347		1 1 1 2 1 1 1	.5 zero	AA SEE		25. 3	41400	HO.	300 PARTY.	547	0.161
	122373	55 4	UMC* Metal Case	71h	3240 27	59 2326	- 193 3 - , 1	587 1301		929, 66			00 - 0	L6 ⇒ zero	1-19:	55 -110	÷16 ×1		3.1	81: -25.		0.202
	L223RJ	45	LIMC* Jacketed Hollow Point	.14 -	3550 29	53 / 2430	1964 4	559 1241 /	1259	871 59	0 385	243 154	-01 ,, 0	4 × zero	;IJ.;;	489.7	,24° 2	9 . 22	750 ×	4.D - 19.	3 - 49.3	0.173
	L223R8	50	LIMC* Jacketed Hollow Point	:1h	10		-	633 , 1324)	1302	-	1 646	A partition of the second	017 (1/13,-1	3 zen :	-28;	7.3 23.	4 : 52 <i>7</i> "	0.192
	PRAZZ3R8	108	Acculip V Boat Tall 1998	1.12	341D# 29	a the second	and the second	ALE POLICE		ALM LAKE OF	ACC STATE	4136 2976	Contract Con	- WALLES	4B)	A STATE OF THE PARTY	220.1	6 20	A10	3413,15	12315	0247
• •	R223R1	55 55	Pointed Soft Point	71/2	3240 22 3240 27	And the second	Record to make	1871 - 1598 1554 1270	1282	921 64	2017	295 197	PRE TOWN	.6 zero	4.8 mm x x	512 - 993 5.6 - 11.2	1413214330446	435 zero	NAME OF	7 is 21. 82 -26.	A STATE OF THE STA	0.197
	R223R2	55	Power-Łokt* Hollow Point	11/2	3240 27			627 1341	1282	939 67).6 zero		5.4 -10.7	 	.4 zero		7.9 -24.1		0.209
	R223R3	55	Metal Case	71/2	3240 27			1587 1301	1282	929 66			 	1.6 zero		5.5 -11.0		5 zero		8.1 -25.		0.202
	PRC223R4	62	Core-Lokt® Ultra Bonded**	11/2_	3100 26			676 1409	—-	1000 74				.6 zero	-2.0		1.7 - 1			82 -25.		0.234
	R223R6	62	Hollow Point Match	71/2		72 2162	e	1471 1217	707 700	911 64		,		.7 zero		6.5 -12.9	1.9 , 1			9.4 -29.5		0.205
	L223R9	.62 69	Closed Top Flat Base	1/h	3100 £ 27 3000 £ 27	34 2396 20 2457		1795 ₄ 1537 ₄ 1975 1758	1323		- 20	598 473	0.1		S . M . 13	5.4 -10.6 : 5.3 -10.3	2 - 3 - 3 - 3	7. 2	30	7.4 -21.	5 * 45.4 9 45.4	0.261
	RM223R3	77 .	MatchKing* BTHP MatchKing* BTHP	71/2	2788 25			871 1675		1133 92 1102 90			 	1.6 zero 1.8 zero		62 -12.0	2.0 1	.5 zero 7 *zero		8.5 -25.		0.362
22-250 Remington	127503	,45	*UMC* Jacketed Hollow Point	91/2		40 = 2770			L	1114: 76			1-	-	**************************************	35, 4.72	2			3.0 5 14		0.173
	1225041	50 -	UNIC® Jacketed Hollow Point	91/2	3820 ~ 32	45 2739	2286	1878" 1523	1620	1169 . 83	3 - 580	392 < 258	0.1%	9 . 09	230	21,5.6	1.8 3 2	2√×1.7	Zero	3.14 14.0	6 36.1	0.192
	DV22250RA :	45	Jacketed Iron-Tin Core HP	91/2	4000 32	93 2690	2159	1696 1320	. 1598	1084 72	3 466	287 174 :	0.0 (19 . 0.9	Z200 ,	21 -5.8		•		3.2 -15.	-	0.161
	PRAZZ50RB	50	Acculin V Boat laid 200	\$9)fic	Section 2	ALL THE PARTY	OF PARTY AND	198 1878	Tarter Co.	1238 94	1000	RIJATA PERSON	200	37701141	3000	19 49	A 100 C	0 15	\$2 1 STAN	21 12	建筑地域 (40%)	1-0247
Sorm Remination ‡	R22501 R6MM4	55 100	Pointed Soft Point Core-Lokt® Pointed Soft Point	91/2	3680 31 3100 28			1832 1493 2104 1889	_	1777 14			 -	1.3 zero 1.6 zero		4.0 -8.1 4.8 -9.3	ļ	4 1.8 3 zero		-3.3 -15.5 -6.7 -19.8		0.197
243 Win.	PRA243WB	975g	Accuracy Boat Tail	9 h	TAKE STREET	65 275 2	and the second second	articano reas	100000		re terms at	842 671	2002	4 200	- The Party Mar.	40.2.78	20.22	A 12 1.86	and the same of	3.00 13.	THE PERSON NAMED IN	0330
_	R243W1	80	Pointed Soft Point	91/2	3350 29	- A	A STATE OF	1951 1670	ALC: PARKED	1551 11	200	2 045 Here 211 23	2 x 2284	1.5 zero	32 m 1 6 8 CM	4.5 -8.8	क्ष्म _{ार्थ} संदर्भके	7 2.0	7.20.00	-3.5 -15	eyec. Tree	0.255
	R243W2	80	Power-Lokt* Hollow Point	91/2	3350 29	55 2593	2259 1	1951 1670	1993	1551 119	906	676 495	0.0 (.5 zero	-1.6 -	4.5 -8.8	2.2 2	7 2.0	zero -	3.5 -15.8	8 -37.3	0.255
	PCS243WB 🔻	.80	Copper Solid Tipped	91/2		11 2696		128 1872		1610 12		ضغنننيك).4 zero		42 - 82	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	- 4-22		3.2 - 14.		0.299
	PRSC243WA	.90	Swift Scirocco® Bonded According ######	91/2 \$	CONTRACTOR OF	71 2635 47 2590	- marrieda no	The second s	10000	1647 13 1710 14	day to the	TO THE PERSON NAMED IN COLUMN	20 - 2007	15 zeno 15 zeno	THE PERSON	4.5 -8.9 4.6 - 9.2	1.47: 1	3 zero 3 zero			8 - 38.3 5⊗ 40.2 ≥	0.390
	PRC243WC	100	Core-Loke" Ultra Bonded"	9½	2960 27	- Section	34 000年史	033 1832	STOKE SE	A color	6 1120	A MANAGER	A 17 8 19 6	15 zero	CASH CANADA	5.3 -10.3		5 zero	C + 377	7.3 -21.0	A 2014 A 24	D.373
	R243W3	100	Core-Lakt* Pointed Soft Point	91/2	2960 26			1993 1786		1615 13:				1.7 zero		5.4 -10.4	·	5 zero		7.5 -22.		0.356
25-06 Remington	R25062	100	Core-Lokt* Pointed Soft Point	91/2	3230 28	93 2580	2287 2	2014 - 1762	2316	1858 14	78 1161	901 689	0.0 ().5 zero	-1.7 -	4.6 -9.1	1.3 1	3 zero	-2.6 -	6.6 -19.1	B -41.7	0.292
	PRC2506RA	115	Core-Lokt* Ultra Bonded**	91/2	3000 27			2081 1881	2298	1933 16		1106 903).6 zero		5.1 -9.9		.4 zero		7.1 -20.		0.380
25-20 Win.	R25063 R25202	120	Core-Lakt* Pointed Soft Point Soft Point	9 ¹ / ₂	2990 27			2032 1825 858 797	2382		4 1351		-).6 zero		5.2 -[0.]	 	4 zero 9 -22.9		72 -21.		0.362
25-20 Will. 250 Savage	R250SV	86 100	Pointed Soft Point	91/2	1460 11 2820 25	94 1030 04 2210		858 797 1684 1461	407 1765	272 20 1392 10			+	3.5 -13.2 ero -1.3	-30.0 -! -4.1 -	54.7 -89.1 8.7 -15.3		.9 -22.9 .8 zero		78.5 -173. -9.2 -27.		0.190
257 Roberts	R257	117	Core-Lokt* Soft Point	91/2		91 1961		1404 1199		1363 99			1	ero -1.6		0.5 -19.5		3 zero		11.7 -36.		0.240
6.5x55 Swedish	R65SWEI	140	Core-Lokt® Pointed Soft Point	91/2	2550 23	53 2164	1984	1814 1654	2021	1720 14	56 1224	1023 850	0.0 z	ero -1.5	-4.8	9.9 -17.0	2.4 2	.l zero	-3.9	9.8 -27.	0 -57.8	0.435
6.5mm Remington Mag	R65MM2	120	Core-Lokt* Pointed Soft Point	9½M	3210 29	NAME OF TAXABLE	w	2102 1867				1177 929	1] zero		4.9 -9.5	1	0 2.1		3.5 -15.		0.323
260 Remington	PRAZEORA	120	Acculin Boat Lail	9/2	F 4 3/4 2 24 4 5	87 2512	21. 27. 25.19		25.7	17	1.00	1340) 1146 1217 1021	A 45.00 CM) zero	Y 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	230 24 25 24 2	31.18,250, 12.	5 inero	11	7 2 20 83 24.	7 411 a 0 472	0.480
	R260R1 PRC260RB	140	Core-Lokt* Pointed Soft Point Core-Lokt* Ultra Bonded**	91/2		44 2347 54 2365		2013 1849		2027 17:).8 zero).8 zero		6.1 -11.7 6.0 -11.5	ļ	.7 zero .7 zero		8.1 -23.		0.435
	R/2018	140E	Core Tolds Printed Soft Point	94276				1660 - 1511			The state of the state of	¥ 856; ₹710 ¥	<u> </u>			20 206	1			174-34		0.435
264 Win. Mag.	R264W2	140	Core Loke Pointed Soft Point	91/zM	3030 27	82 2548	2326 2	2114 1914	2854	2406 20	18 1682	1389 1139	0.1 ().6 zero	-1.8	5.0 -9.6	1.5	.4 ZETO	-2.7	6.9 -20.	2 -41.3	0.384
6.8mm Rem, SPC	R68R1	115	Open Tip Match (OTM)	91/2		73 2135				1437 110			1	.0 zero		7.3 -14.1		O zero		10.0 -29.		0.344
	R68R2	115	Metal Case	91/2				1565 1363		1385 10			 -	.0 zero		7.8 -15.1	ļ	.l zero		10.6 -32		0.292
	PRC68R4	115	MatchKing* BTHP Core-Lokt* Ultra Bonded**	91/2		35 2119 32 2058		1676 1484 1574 1372		1428 11428 11428				.0 zero		7.4 -14.3 7.8 -15.0	<u> </u>	.1 zero		10.1 -30. 10.7 -32.		0.333
270 Wm.	R270W1	100	Pointed Soft Point	91/2		24 2561		1916 1636		1898 14).5 zero		4.6 -9.1		8 2.0		-3.6 -16.		0.252
	NUMBER OF	115	Core-Loke Powded Soft Powds	91/2.5	The Real Property			1636 1425		-		583 519				00 :178		07.21		-	6 70.1 g	.0206
	PRAZZOWA ?	130	Acculing Boat Tail	9%,	12 - 14 4,70	45 2639	200	1. Jun 19 19 19	1 1 1 1 1		7. 1	1467, 1243	00 (15 i zero	11.7	4 <i>7</i> 90	14: 1	3 . Zero .	*****	64 : 18	2 2 3 2 2 3 2 3	, 0.447
	PRSC270WA	130	Swift Scirocco Bonded	91/h_		38 2627						1438 1211	+		1.7				-25			0433
	R270W2 R270W3	130	Core-Lokt* Pointed Soft Point Branze Point*	91/2	L	76 2510 002 2559		2022 1801 2110 1904				1180 936 1285 1046).6 <i>z</i> ero).6 zero		5.1 -9.8 4.9 -9.5		.4 zero .3 zero		-7.0 -20.		0.336
	PCS270WA	130	Copper Solid Tipped	91/2				2229 2044				1285 1046).6 <i>1</i> ero		4.9 -9.5				-3.4 -14.		0.372
	PRC270WB	140	Core-Lokt* Ultra Bonder	91/2	2925 26			1975 1771	-			1212 975).7 zero		5.5 -10.7	 	.5 zero		-7.5 -22		0.360
	RS270WA	140	Swift A-Frame* PSP	91/2	2925 26	52 2394	2152 . 1	1923 1711	2659	2186 17	82 1439	1150 910	0.2).7 zero		5.5 -10.9	17 1	.5 zero	-3.1	-7.8 -23.	2 -48.0	0.339
	R270W4	150	Core-Loke* Soft Point	91/2		04 2183		1618 1385			37 1185		1).8 zero		6.7 -13.0	1	8 zero		9.4 -28		0261
270 WSM	R270WSM1	130	Core-Lokt* Soft Point	9½M		86 2707		2196 1963			-	1392 1112)4 zero		4.2 -8.2				-3.2 -14		0.336
280 Remington [†]	PRAZBORA R280R3	140	Acculing Core-Lokt* Pointed Soft Point	91/2	A	04 2617 58 2528		20.30	7.7	·		1594, 1369 1373 1128	*******	16 zero 16 zero	20.8	4.8 - 9.2 ○ 5.1 - 9.8	44. 44. 44. 5	9 213 4 zeo		3.4 ≨ -14. 1.0 20.	2 73 4 7	0.486
	R280R1	150	Core-Lokt* Pointed Soft Point	91/2				1912 1705		2293 18			+).0 Aso).7 zero		5.8 -11.2		.6 zero		-8.0 -23.		0.346
	R280R2	165	Core-Lokt* Soft Point	91/2		10 2220				2308 180			+	ero -1.3		8.6 -15.2	1	8 zero		9.1 -27.		0.290
		_																				

						-					~											
	A	B.	्रेष्ट्रचूच्या द्व	100			tra	2 N. W.		× 12 (Sec.	-	Acres 1		يون د لوي او. حود المينتوران	ر در ۱۳ پنجه ۱ خدمهای	E C	303	1		
997	ماستعدسا أدال	[120]	Hollow Point	9 1/2		7705 7107		1000 1770	2398 19	79 1621 1	316 1058	812			<u> </u>	102	1.6	1.4 25	29	7.3	21.7 -44.9	0.242
7mm-08 Remington	R7M082	-				725 2467		1992 1778	<u> </u>						1.9 -5.3	-10.2						0.343
]	R7M081	140	Core-Lokt* Pointed Soft Point	9 1/2	2860 2	625 2402	2189	1988 1798	2542 21	42 1793 1	1 90 1228	1005	0.2 0.7	2610 -i	2.1 -5.7	-11.0	1.8	1.6 22	0 -3.1	-7.8 -	22.9 -46.8	0.390
1	PRATMOSEB	140	Accutio Boat Tail	91/2	2860 2	670 2489	2314	2146 .1986	2542 22	16 1925 1	664 1432	1225	0207	ZE00	20 -54	-10.3	.17	1.5 zer	0 -29	7.3 -	21.1 -42.5	0.486
l l	RL7M081	140	Core-Lold* Painted Soft Point	91/2	2361 2	151 1951	1764	1590 1433	1732 14	37 1183 9	67 786	638	0.1 zem	-2.0 -	60 -12.4	-21.3	30,	25 æ	0 -4.8	-12.2 -	35.6 -72.8	0.390
7mm Rem Magnum	PRC/MMARA	140	Core-Lokt" Ultra Bonded "	91/z M		934 2707		2283 2086	1	76 2277 1		111	0.1 0.5		1.5 4.3	-8.4		1.2 zer			17.7 -36.0	0.409
Attentiven mediation					<u> </u>																	
1	R7MM4	140	Care-Lokt' Pointed Soft Point	9½M	-	923 2684		2243 2039		55 2240 1		1292	0.0 0.5		1.6 -4.4	-8.5		2.6 1.9			14.2 -32.0	0.390
1	RL7MM4	140	Core Loke Pointed Soft Point	9 // M.	2710=2	482 2265	20.0	1855, 1583	2283 211	15 2 1595 2	318 31081	23)	-00 :=	ીશ ડ	2 37	15.1	09 1	20 2	43-65	12.5	30.8 35 59.2	£0.388
[]	PCS7MMA	140	Copper Solid Tipped	91/2	3175 2	964 2762	2570	2385 2208	3133 27	30 2372 2	053 1768	1516	-0.1 0.5	zero -:	1.5 -4.2	-8.1	21	2.5 1.8	3 zero	-3.1 -	13.2 -29.5	0468
ì	PRSC/MMB	150	Swift Sciracco Bonded	91/2M	3110 2	927 2751	2582	2419 2262	3221 28	52 2520 2	220 1948	1704	0.0 0.5	780 -	1.6 -4.3	-82	1.3	1.2 200	0 -23	-5.9 -	17.0 -34.0	0.533
!!!	PRA7MMRA :	140		91/2M						44 2397 2							21				13.0 29.0	
1			According Bloat Fail	4.4.4.4	200	971 2777		2412 2241		W 4 M G 1 1 7 2	Contraction of the Contraction o	Care Lyn	201 5 0.5	-data-	15 7-42	30.	C		-10 m		A. 4 () 2 (0.486
	PRAZMMAB	150	Accurito Boat Tail	-91/2 M .	3110 - 2	926 : 2749	2579	2415 2258	3221 28	50 2516 2	215 1943	:1697 -3	0.0 0.5	· 79TO	16 4.3	ु -8 2 '″	13	1.2 zer	0 -23	-59	17 34.1	0.530
	R7MM2	150	Core-Lokt* Pointed Soft Point	91/2M	3110 2	830 2568	2320	2085 1866	3221 26	67 2196 1	792 1448	1160	0.0 0.6	7870 -	1.7 -4.8	-9.3	1.4	1.3 zer	0 -26	-6.7 -	199 -41.1	0.346
1	PRC/MMRC	160	Core-Lokt* Uitra Bonded"	91/2M	2950 2	724 2510	2305	2109 1924	3091 26	36 2237 1	887 1581	1315	0.1 0.6	zero -	1.9 -5.2	-10.0	1.6	1.4 zer	0 -2.8	-7.1 -	20.8 -42.4	0.415
! !	R7MM3	175	Core-Lokt* Pointed Soft Point	9½M		645 7440		2057 1879	<u> </u>			1372	0.2 0.7		2.1 -5.6	-10.7		1.5 ær			22.1 -44.8	0.427
				<u> </u>					ļ													 -1
7mm Mauser (7x57)	R7MSR1	140	Core-Loke® Pointed Soft Point	91/2	2660 2	2435 2221	2018	1827 1648	2199 18	43 1533 1	266 1037	844	0.0 zero	-1.4 -4	4.4 -9.1	-15.8	2.2	1.9 zer	0 -3.6	-9.2 -	27.4 -55.3	0.390
7mm Remington	PR7SM!	140	Core-Lokt* Ultra Bonded™	91/2M	3175 2	934 2707	2490	2283 2086	3133 26	76 2277 1	927 1620	1353	0.1 0.5	zero -	1.5 -4.3	-8.4	1.3	1.2 zer	0 -2.4	-6.0 -	17.7 -36.0	0.409
SA Ultra Mag	PR7SM2	150	Core-Lokt* Pointed Soft Point	91/2 M	3110 2	2831 2568	2321	2087 1867	3221 26	69 2197 1	793 1450	1161	0.0 0.6	7ero -	1.7 -4.8	-9.3	2.5	29 2	zero	-3.6 -	15.7 -35.9	0.346
	PR7SM4	160	Core-Lokt* Ultra Bonded**	91/2 M		733 2518		2117 1931				1323	0.1 0.6		1.9 -5.2	-9.9		3.1 2.1			16.2 -36.5	0.414
1																						 1
7mm Rem Ultra Mag"	PR7UM1	140	Core-Lokt* Ultra Bonded**	91/2M		1170 2929		2485 2278		23 2667 2			-0.2 0.3		1.3 -3.6	-7.0		22 1.			1L.7 -26.4	0.409
POWER	PRSC/UM1	150	Swift Scirocco Bonded	9½M	3325	1132 2948	2771	2602 2438	3682 32	67 2894 2	558 2254	1979	-0.1 0.4	ZETO -	1.3 -3.6	-7.0	-1.8	22 1.	S zero	2.6 -	11.4 -25.3	0.533
FEAET III	PR7UM5	175	Swift A-Frame PSP	91/2M	3025 2	831 2645	2467	2296 2212	3555 31	14 2718 2	364 2047	1764	0.0 0.6	2970 -	17 47	-9.0	24	28 - 21) Z910	-3.4 -	14.5 -32.2	0.493
POWER LEVEL II	PR7UM2-P2	160	Core-Lokt* Ultra Bonded***	91/2 M	 	724 2508		2108 1922				1312	0.1 0.6	<u> </u>	1.9 -5.2	-10.0	<u> </u>	1.4 Zer			20.8 -42.4	0.414
		-																				
POWER LEVEL I	R7UM1-P1	140	Core-Lokt* Pointed Soft Point	91/2M		768 2549		2139 1950	2797 23			1181	0.1 0.6		1.8 -5.0	-9.6		3.0 2.2			15.8 -35.6	0.409
30 Carbine	L30CRI	110	UMC® Metal Case	;6⅓	1990	567 1236	1035	923 842	967 6	00 373	62 208	.173	20.6 * zero	.42 ·1	29 27.2	48.6	28	zero , 7.	3 -20.4	40.3	05.6 -211.8	0.166
	R30CAR	110	Soft Point	61/2	1990 1	567 1236	1035	923 842	967 6	00 373 2	262 208	173	0.6 zero	-4.2 ·1	2.9 -27.2	-48.6	<i>2</i> 970	4.2 -12	9 -27.2	-48.6 -1	17.1 -225.5	0.166
30 Remington AR	PRA30RARI	125	Acculin Boat Tail	11/2	2800 2	531 2278	2039	1816 1610	2176 17	78 1440 1	153 915	719	0.3 0.8	7910 -	2.3 -6.3	-122	20	1.7 zer	0 -3.4	-8.7 -	25.8 -53.5	0.335
	ROURARI	125						1606 1380				529	03 0.9			-13.4					29.4 -62.7	
		-	Core-Lokt's Pointed Soft Point	71/2		465 2154			ļ		967 716							1.9 zer				0.267
	R30RAR2	150	Core-Lokt* Pointed Soft Point	71/2	2575 2	2302 2047	N/A	N/A N/A	2208 17	65 1395 (WA NA	N/A	0.0 zero	-1.6 -	5.1 -10.6	-18.5	2.5	2.2 zes	0 -4.3	-10.9 -	32.5 -67.9	0.314
	L30RAR1	123	Metal Case	71/2	2800 2	464 2152	1864	1603 1376	2141 16	58 1264 9	348 701	517	0.3 0.9	ZBF0 -	2.5 -6.9	-13.5	2.1	1.9 zer	0 -3.8	-9.7 -	29.5 -62.9	0.266
30-30 Win.	FR 30301	125	Core-Lakt Pointed Soft Point	972	2175	820 1508	皇1255景	1032 975	1018, 9	G (3). (37 325	264	03. 750	400 4	भी विश	2337	(20)	en 4.5	2 400	-278 -	72S; =1469;	0.215
	R30301	150	Core-Lokt* Soft Point	91/2	2390 !	973 1605	1303	1095 974	1902 12	W-17-	565 399	316	0.2 zero	-	7.6 -16.1	-28.8	1.6	zero -4.	3 -12.1	-24.0 -	64.2 -133.2	0.193
ł	PSC3030WA	150		91/2		806 1448		1022 924	1641 10			284				-37.3						!
ļ		-	Copper Solid Topped									25.72.1						4.2 zer		<u> </u>	68,6 -149,0	0.186
•	R30302	170	Core-Lokt* Soft Point	91/2	2200 1	895 1619	1381	1191 1061	1827 13	55 989 7	720 535	425	0.3 zero	-2.7 -1	8.3 -17.1	-29.9	18	zero -4.	6 -12.6	-24.5 -	62.6 -125.3	0.254
	R30303	170	Core-Lakt* Hallow Paint	9 1/2	2200 1	895 1619	1381	1191 1061	1827 13	55 989 7	20 535	425	0.3 zero	-2.7 -4	8.3 -17.1	-29.9	1.8	zero -4.	6 -12.6	-24.5 -	62.6 -125.3	0.254
30-40 Krag	R30303 R3040Z	170 180	Core-Lokt* Hollow Paint Core-Lokt* Pointed Soft Point	91/2		895 1619 213 2007		1191 1061 1632 1468	 		720 535 314 1064	425 861	0.3 zero 0.1 zero		8.3 -17.1 5.6 -11.6			zero -4. zero -3.			62.6 -125.3 39.9 -76.7	0.254
	R3040Z	180	Core-Lokt* Pointed Soft Point	91/2	2430 2	213 2007	1813	1632 1468	2360 19	57 1610 1	314 1064	861	0.1 zero	-1.8 -	5.6 -11.6	-19.9	1.2	rero -3.	2 -8.5	-16.2 -	39.9 -76.7	0.383
30-06 Sprg. Accelerator *	R3040Z R30069	180 55	Core-Lokt* Pointed Soft Point Pointed Soft Point	9½ 9½	2430 2 4080 3	213 2007 1484 2964	1813 2499	1632 1468 2080 1706	2360 19 2033 14	57 1610 1 82 1073 7	314 1064 763 528	861 355	0.1 zero -0.4 0.2	-1.8 zero -	5.6 -11.6 1.0 -3.0	-19.9 -6.2	1.2	rero -3.	2 -8.5 1 zero	-16.2 - -2.6 -	39.9 -76.7 12.2 -30.0	0.383 0.197
	R3040Z R30069 R30061	180 55 125	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point	9½ 9½ 9½	2430 2 4080 3 3140 2	213 2007 1484 2964 2780 2447	1813 2499 2138	1632 1468 2080 1706 1853 1595	2360 19 2033 14 2736 21	57 1610 1 82 1073 7 45 1662 1	314 1064 763 528 269 953	861 355 706	0.1 zero -0.4 0.2 0.0 0.6	-1.8 -: zero -: zero -	5.6 -11.6 1.0 -3.0 1.9 -5.2	-19.9 -6.2 -10.1	1.2 1.4 1.5	zero -3. 1.8 1.4 1.4 zer	2 -8.5 4 zero 0 -2.8	-16.2 - -2.6 -	39.9 -76.7 12.2 -30.0 22.4 -47.6	0.383 0.197 0.268
30-06 Sprg. Accelerator *	R3040Z R30069	180 55	Core-Lokt* Pointed Soft Point Pointed Soft Point	9½ 9½	2430 2 4080 3 3140 2	213 2007 1484 2964 2780 2447	1813 2499 2138	1632 1468 2080 1706	2360 19 2033 14 2736 21	57 1610 1 82 1073 7	314 1064 763 528 269 953	861 355 706	0.1 zero -0.4 0.2 0.0 0.6	-1.8 -: zero -: zero -	5.6 -11.6 1.0 -3.0 1.9 -5.2	-19.9 -6.2	1.2 1.4 1.5	rero -3.	2 -8.5 4 zero 0 -2.8	-16.2 - -2.6 -	39.9 -76.7 12.2 -30.0 22.4 -47.6	0.383 0.197
30-06 Sprg. Accelerator *	R3040Z R30069 R30061	180 55 125	Core-Lold* Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lold* Pointed Soft Point	9 ½ 9 ½ 9 ½ 9 ½	2430 2 4080 3 3140 2 2660 2	213 2007 1484 2964 2780 2447 2335 2834	1813 2499 2138	1632 1468 2080 1706 1853 1595	2360 19 2033 14 2736 21 1964 15	57 1610 1 82 1073 7 45 1662 1	314 1064 763 528 269 953	861 355 706 469	0.1 zero -0.4 0.2 00 0.6	-1.8 -: zero -: zero -:	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 - 1 0.4	-199 -6.2 -10.1	1.2 1.4 1.5	zero -3. 1.8 1.4 1.4 zero -2.	2 -8.5 2 zero 0 -2.8 9 -1/8	-162 - -26 - -7.4 - -152 -	39.9 -76.7 12.2 -30.0 22.4 -47.6	0.383 0.197 0.268
30-06 Sprg. Accelerator *	R3040Z R30069 R30061 R130062	180 55 125 125 150	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point	9 ½ 9 ½ 9 ½ 9 ½	2430 2 4080 3 3140 2 2660 2	213 2007 1484 2964 2780 2447 335 2834 2617 2342	1813 2499 2138 1757	1632 1468 2080 1706 1853 1595 1509 1300	2360 19 2033 14 2736 21 1964 15 \$2820 \$22	57 1610 1 82 1073 7 45 1662 1 13 1148 1 81 1827 7	314 1064 763 528 269 953 555 632 446 1131	861 355 706 489 876	0.1 zero -0.4 0.2 00 0.6 -01 250 -02 zero	-1.8 -200 - 200	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 +10.4 1.6 -17.7	-19.9 -6.2 -10.1 -18.3 -13.6	12 14 15 10	zero -3. 1.8 1.4 1.4 zer 20 -2.	2 -8.5 1 zero 0 -2.8 9 -7.8 0 -3.2	-16.2 - -2.6 - -7.4 - -15.2 -	39.9 -76.7 12.2 -30.0 22.4 -47.6 38.9 -78.0	0.383 0.197 0.268 0.267 \$0.314
30-06 Sprg. Accelerator *	R3040Z R30069 R30061 R30062 R30062 7L30062 PRSC3006C	180 55 125 125 150 150	Core-Loke* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Loke*; Pointed Soft Point UNIO** Metal Case - Swift Scirozoo** Bonded	9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 4080 3 3140 2 2660 2 2910 2 2910 2	213 2007 484 2964 2780 2447 3355 2834 2617 2342 2696 2492	1813 2499 2138 1757 2084 2298	1632 1468 2080 1706 1853 1595 1509 0300 1843 1622 2111 1934	2360 19 2033 14 2736 21 1954 15 \$2820 \$22 2820 24	57 1610 1 82 1073 2 45 1662 1 13 1148 1 81 1827 3 21 2069 1	314 1064 763 528 269 953 365 652 446 1131 758 1485	861 355 706 469 875	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 zero -0.1 20.7	-1.8	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 +0.3 3.6 -17.1 2.0 2.53	-199 -62 -101 4183 4136 2	12 14 15 10 16	7ero -3. 1.8 1. 1.4 zer 1.6 zer 1.5 zer	2 -8.5 1 zero 0 -2.8 9 -7.8 0 3.2 0 -2.9	-16.22.67.415.28.27.3	39.9 -76.7 122 -30.0 224 -47.6 38.9 -78.0 244 -50.97 211 -42.3	0.383 0.197 0.268 0.257 \$0.314
30-06 Sprg. Accelerator *	R30069 R30061 R30062 7130062 PRSC3006C	180 55 125 125 150 150	Core-Lokt * Pointed Soft Point Pointed Soft Point Pointed Soft Point (Core-Loke) Pointed Soft Point (Loke) Media Cose Swift Softocoo* Bonded (Accuracy Total	91/2 91/2 91/2 91/2 91/2 91/2	2430 2 4080 3 3140 2 2660 2 2210 2 2910 2	213 2007 484 2964 2780 2447 335 2834 2617 2342 2696 2492 2686 2473	1813 2499 2138 1757 2084 2270	1632 1468 2080 1706 1853 1595 1509 1300 1843 1622 2111 1934 2077 1833	2360 19 2033 14 2736 21 1964 15 32820 322 2820 24	57 1510 1 82 1073 7 45 1662 1 13 1148 1 81 1827 3 21 2069 1	314 1064 763 528 269 953 866 632 446 1131 758 1485 716 1136	861 355 706 489 875 1246	0.1 zaro -0.4 0.2 0.0 0.6 -0.1 zaro -0.2 zaro -0.1 0.7	-1.8 -200 -200 -200 -200 -200 -200 -200 -20	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 +10.4 3.6 +10.1 2.0 +5.3 7.0 - 5.5	-199 -6.7 -10.1 418.3 1413.6 10.2 x 410.3	12 14 1.5 10 16 16	7ero -3. 1.8 1. 1.4 zer 1.6 zer 1.5 zer 1.5 zer	2 -8.5 1 zero 0 -2.8 9 -7.8 0 -2.9 0 -2.9 0 -2.9	-16.22.67.415.28.127.47.4	39.9 -76.7 122 -30.0 224 -47.6 38.9 -78.0 244 -50.9 21.1 -423.2	0.383 0.197 0.268 0.257 \$0.314 \$\frac{1}{2}\$ \$0.435 \$\frac{1}{2}\$
30-06 Sprg. Accelerator *	R30402 R30069 R30061 R30062 *130062 PRSC3006C PRA3006A	180 55 125 125 150 150 150	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point (Core-Lokt) Pointed Soft Point (MCC-Messa Coses Swift Scinocoo* Bonded (Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½	2430 2 4080 3 3140 2 2660 2 2910 2 2910 2 2910 2	2213 2007 4484 2964 2780 2447 2335 2034 2617 2342 2696 2492 2686 2473 2617 2342	1813 2499 2138 1757 2084 2298 2270 2083	1632 1468 2080 1706 1853 1595 1509 0300 1843 1622 2111 1934 2077 1833 1843 1622	2360 19 2033 14 2736 21 1964 15 \$2820 522 2820 24 2820 22	57 1510 1 82 1073 7 45 1662 1 13 1148 1 81 1827 7 91 2037 1 81 1827 1	314 1064 763 528 269 953 555 652 446 1131 758 1485 716 1436 445 1131	861 355 706 469 876 1246 876	0.1 zero -0.4 0.2 -0.0 0.6 -0.1 zero -0.2 zero -0.1 zero	Zero Zero Zero Zero Zero Zero Zero Zero	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 -10.3 3.6 -17.3 2.0 -5.3 2.0 -5.4 2.2 -5.9	-199 -6.7 -10.1 -18.3 -13.6 -10.2 -10.3 -11.4	12 14 1.5 10 16 16	72 -3. 1.8 1.4 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -3.	2 -8.5 1 zero 0 -2.8 9 -7.8 0 -2.9 0 -2.9 0 -3.2	-162267415253274532	39.9 -76.7 122 -30.0 224 -47.6 38.9 -78.0 244 -75.0 21.1 -42.3 21.5 -43.7 244 -50.9	0.383 0.197 0.268 0.267 \$0.314 \$0.435 0.314
30-06 Sprg. Accelerator *	R30069 R30061 R30062 7130062 PRSC3006C	180 55 125 125 150 150	Core-Lokt * Pointed Soft Point Pointed Soft Point Pointed Soft Point (Core-Loke) Pointed Soft Point (Loke) Media Cose Swift Softocoo* Bonded (Accuracy Total	91/2 91/2 91/2 91/2 91/2 91/2	2430 2 4080 3 3140 2 2660 2 2910 2 2910 2 2910 2	213 2007 484 2964 2780 2447 335 2834 2617 2342 2696 2492 2686 2473	1813 2499 2138 1757 2084 2298 2270 2083	1632 1468 2080 1706 1853 1595 1509 1300 1843 1622 2111 1934 2077 1833	2360 19 2033 14 2736 21 1964 15 32820 322 2820 24	57 1510 1 82 1073 7 45 1662 1 13 1148 1 81 1827 7 91 2037 1 81 1827 1	314 1064 763 528 269 953 555 652 446 1131 758 31485 716 1436 445 1131	861 355 706 489 875 1246	0.1 zaro -0.4 0.2 0.0 0.6 -0.1 zaro -0.2 zaro -0.1 0.7	Zero Zero Zero Zero Zero Zero Zero Zero	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 +10.4 3.6 +10.1 2.0 +5.3 7.0 - 5.5	-199 -6.7 -10.1 418.3 1413.6 10.2 x 410.3	12 14 1.5 10 16 16	7ero -3. 1.8 1. 1.4 zer 1.6 zer 1.5 zer 1.5 zer	2 -8.5 1 zero 0 -2.8 9 -9.8 0 3.2 0 2.9 0 -2.9 0 -3.2	-162267415253274532	39.9 -76.7 122 -30.0 224 -47.6 38.9 -78.0 244 -50.9 21.1 -423.2	0.383 0.197 0.268 0.257 \$0.314 \$\frac{1}{2}\$ \$0.435 \$\frac{1}{2}\$
30-06 Sprg. Accelerator *	R30402 R30069 R30061 R30062 *130062 PRSC3006C PRA3006A	180 55 125 125 150 150 150	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point (Core-Lokt*) Pointed Soft Point (MCC-Messa Cose Swift Scinocoo* Bonded (Core-Lokt*) Pointed Soft Point Core-Lokt* Pointed Soft Point	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½	2430 2 4080 3 3140 2 2660 2 2210 2 2310 2 2910 2 2910 2	2213 2007 4484 2964 2780 2447 2335 2034 2617 2342 2696 2492 2686 2473 2617 2342	1813 2499 2138 1757 2084 2298 2270 2083 2189	1632 1468 2080 1706 1853 1595 1509 0300 1843 1622 2111 1934 2077 1833 1843 1622	2360 19 2033 14 2736 21 1964 15 \$2820 \$22 2820 24 2820 22 2820 22 2820 23	57 1510 1 82 1073 2 45 1662 1 13 1148 1 81 1827 1 81 1827 1 49 1944 1	314 1064 763 528 269 953 556 652 446 1131 758 1485 716 1436 445 1131 596 1298	861 355 706 469 876 1246 1193 876 1047	0.1 zero -0.4 0.2 -0.0 0.6 -0.1 zero -0.2 zero -0.1 zero	2870 - 28	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 -10.3 3.6 -17.3 2.0 -5.3 2.0 -5.4 2.2 -5.9	-199 -6.7 -10.1 -18.3 -13.6 -10.2 -10.3 -11.4	12 14 1.5 10 16 16 10 18	72 -3. 1.8 1.4 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -2. 16 200 -3.	2 -8.5 4 zero 0 -2.8 9 -7.8 0 -3.2 0 -2.9 0 -2.9 0 -3.0	-162267415282273828211	39.9 -76.7 122 -30.0 224 -47.6 38.9 -78.0 244 -75.0 21.1 -42.3 21.5 -43.7 244 -50.9	0.383 0.197 0.268 0.267 \$0.314 \$0.435 0.314
30-06 Sprg. Accelerator *	R30402 R30069 R30061 R30062 ***********************************	180 55 125 150 150 150 150 150	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lokt* Pointed Soft Point JUNC* Metal Case Swift Somoton Bonded Account Pointed Soft Point Bronze Point Core-Lokt* Pointed Soft Point Core-Lokt* Ultra Bonded **	9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2	2430 2 4080 3 3140 2 2660 2 2210 2 2210 2 2210 2 2210 2 2210 2	213 2007 484 2964 2780 2447 335 2834 5617 2342 656 2473 2617 2342 656 2416 2631 2368	1813 2499 2138 1757 2084 2270 2083 2189 2121	1632 1468 2080 1706 1853 1595 1509 0300 1843 1622 2111 1934 2077 1833 1843 1622 1974 1773	2360 19 2033 14 2736 21 1953 15 \$7820 \$22 2820 22 2820 23 2820 23	57 1510 1 82 1073 ; 45 1662 1 13 1148 1 81 1827 1 81 1827 1 49 1944 1 05 1868 1	314 1064 163 528 269 953 555 632 446 1131 758 1485 716 1436 445 1131 5596 1298 448 1188	861 355 706 469 876 1193 876 1047 933	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 2.0 -0.1 zero -0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7	280 - 280 -	5.6 -11.6 1.0 -3.9 1.9 -5.2 1.9 -10.4 3.6 -10.4 2.0 -5.3 2.0 -5.6 2.1 -5.8	-199 -6.7 -10.1 18.3 13.6 10.2 x -10.3 -11.4 -10.8 -11.2	12 14 1.5 10 16 16 18 1.7	72 -3. 1.8 1.4 28 28 28 28 28 28 28 28 28 28 28 28 28	2 -8.5 4 zero 0 -2.8 9 -0.3 0 -2.9 0 -2.9 0 -3.2 0 -3.0 0 -3.1	-16.2 - -2.6 - -7.4 - -15.2 - -15.2 - -1.3 - -1.1 - -8.0 -	39.9 -76.7 12.2 -30.0 22.4 -47.6 38.9 -78.0 24.4 -50.9 22.1 -42.1 21.5 -43.0 22.4 -50.9 22.7 -46.6 23.8 -49.3	0.383 0.197 0.268 0.267 30.314 0.335 0.314 0.365 0.331
30-06 Sprg. Accelerator *	R300402 R30069 R30061 R30061 R30062 PR30060 R30063 R30063 PRC3006A PCS3006A	180 55 125 150 150 150 150 150	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lokt* Pointed Soft Point Soft Somotion Bonded Accord Pointed Soft Point Bronze Point Core-Lokt* Pointed Soft Point Bronze Point Core-Lokt* Ultra Bonded Copper Sofid Tipped	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 4080 3 3140 2 2600 2 2210 2 2310 2 2910 3 2910 3 2910 3	2213 2007 484 2964 4780 2447 335 2834 6617 2342 656 2492 656 2416 6631 2368 6678 2458	2499 2138 1757 2084 2270 2083 2189 2121	1632 1468 2080 1706 1853 1595 1509 0300 1883 1622 2111 1934 2077 1893 1843 1622 1974 1773 1889 1674 2048 1660	2360 19 2033 14 2736 21 1934 15 \$7820 522 2820 22 2820 22 2820 23 2820 23 2820 23	57 1610 1 82 1073 7 45 1662 1 13 1148 8 81 1277 7 21 2069 1 91 1327 1 81 1827 1 49 1944 1 05 1868 1 88 2012 1	314 1064 763 528 269 953 865 662 446 1131 758 31485 445 1131 596 1298 448 1188 683 1397 4	861 355 706 459 876 1246 1133 876 1047 933	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 0.7	280 - 280 -	5.6 -11.6 10 -3.0 19 -52 19 -10.4 3.6 -30.2 20 -53 20 -56 21 -58 20 -54	-199 -6 Z -10.1 -18.3 -13.6 -10.2 -10.3 -11.4 -10.8 -11.2 -10.4	12 14 1.5 10 16 16 18 1.7 1.8 1.7	72 -3. 1.8 1.4 28 28 28 28 28 28 28 28 28 28 28 28 28	2 -8.5 4 zero 0 -2.8 9 -3.3 0 3.2 0 2.9 0 -3.2 0 -3.2 0 -3.2 0 -3.0 0 3.1	-16.22.67.415.215.27.38.27.18.07.47.47.47.47.47.87.47.87.	399 -76.7 122 -30.0 224 -47.6 339 -78.0 244 -509.7 211 -423 215 -337 244 -50.9 227 -46.6 238 -49.3 218 -44.5	0.383 0.197 0.268 0.257 3.0.414 3.0.435 0.314 0.365 0.331 0.400
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R130062 P130062 P130062 R30063 R30063 PR13006A PCS3006A PCS30068	180 55 125 150 150 150 150 150 150 150	Core-Lotd* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lotd* Pointed Soft Point WMC* Metal Case Swift Scinocio Bonded Accura Point Bronze Point Core-Lotd* Pointed Soft Point Bronze Point Core-Lotd* Uttra Bonded Copper Sofid Tripped Copper Sofid Tripped Copper Sofid Tripped	9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2	2430 2 4080 3 3140 2 2630 2 2910 2 2910 2 2910 2 2910 2 2910 2 2910 2 2910 2	2213 2007 484 2964 4780 2447 335 2834 5617 2342 656 2492 656 2416 6631 2368 5578 2468	1813 2499 2138 1757 2084 2298 2270 2083 2189 2121 2248 2217	1632 1468 2080 1706 1853 1595 1509 0300 1983 1622 2011 1934 2017 1893 1843 1672 1974 1773 1889 1674 2048 1860 2039 1870	2360 19 2033 14 2736 21 1964 15 \$7820 52 2820 22 2820 23 2820 23 2820 23 2820 23 2820 23	57 1610 1 82 1073 7 45 1662 1 13 1148 1 13 1277 2 21 2069 7 2037 1 81 1827 1 49 1944 1 05 1868 1 88 2012 1 70 2115 1	314 1064 763 528 769 953 855 652 446 1131 758 1436 445 1131 556 1238 448 1188 683 1397 5 800 1523	861 355 706 469 876 1246 1193 876 1047 933 1152	0.1 zero -0.4 0.2 0.0 0.6 -0.1 20.0 -0.2 0.7 0.2 0.7 0.2 0.7 -0.2 0.7 -0.1 20.7 -0.1 20.7 -0.1 20.7	2870 - 2870 - 2870 - 2870 - 2870 - 2870 - 2870 - 2870 - 2870 - 1.4	5.6 -11.6 10 -3.0 19 -52 19 -10.4 3.6 -3.7 20 -5.3 20 -5.6 21 -5.8 20 -5.4 43 -8.6	-199 -6.7 -10.1 -18.3 -13.6 -10.2 -10.3 -11.4 -10.8 -11.2 -10.4 -14.6	12 14 1.5 10 16 16 18 1.7 1.8 1.7 2.1	72 -3. 1.8 1.4 22 22 22 22 22 22 22 22 22 22 22 22 22	2 -8.5 4 zero 0 -2.8 9 -3.8 0 32.0 0 29 0 -2.9 0 -3.2 0 -3.0 0 -3.1 0 29 0 -3.3	-1622674152827.18.07.4827.482	339 - 761 122 - 309 224 - 475 389 - 780 244 - 509 211 - 423 2215 - 437 224 - 509 227 - 466 238 - 493 218 - 445 234 - 441	0.383 0.197 0.268 0.267 0.314 0.345 0.314 0.365 0.331 0.400
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30062 R30062 R30062 R30063 R30063 R30063 R53006A R53006A R53006A R53006A R53006A	180 55 125 150 150 150 150 150 150 165	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Loke* Point Listor* Media Case	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 4080 3 3140 2 2660 2 2210 2	213 2007 4484 2964 4780 2447 335 2834 5617 2342 666 2443 667 2342 656 2416 6531 2368 6578 2458 6579 2403	1813 2499 2138 1157 2084 2270 2083 2189 2121 2248 2217	1632 1468 2080 1706 1853 1595 1595 0300 1883 1632 2277 1833 1843 1622 1974 1773 1889 1674 2048 1660 2039 1870	2360 19 2033 14 2736 21 1534 1553 155 2820 22 2820 22 2820 23 2820 23 2820 23 2820 23	57 1610 1 82 1073 7 45 1662 1 13 1148 1 13 1148 1 21 2069 1 2037 1 49 1944 1 49 1944 1 49 1944 1 49 1944 1 49 1945 1 49 1945 1 40 1 41 1 42 1 43 1 44 1 45 1 46 1 47 2 48 2 40 2 41 1 42 1 43 2 44 1 45 1 46 1 47 2 48 2 40 2 41 2 41 2 42 2 43 2 44 2 45 2 46 2 46 2 47 2 48 2 48 2 49 2 40 2 40 2 41 2 41 2 42 2 43 2 44 2 45 2 46 2 46 2 46 2 46 2 46 2 46 2 46 2 46 2 46 2 47 2 48 2 48 2 49 2 40 2	314 1064 763 528 269 953 555 632 446 1131 758 1436 445 1131 596 1238 448 1188 683 1397 5 800 1523	861 355 706 469 876 1246 1193 876 1047 933 1152	0.1 zero 0.4 0.2 0.0 0.6 0.1 zero 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zero 0.1 zero	2870 - 28	5.6 -11.6 10 -3.0 19 -5.2 19 +0.0 3.6 40. 20 53. 20 54 22 -5.9 20 -5.6 21 -5.8 20 54 43 -8.6 21 -5.9	-199 -6.7 -10.1 -183 -136.2 -10.2 -10.3 -11.4 -10.8 -11.2 -10.4 -14.6 -1111	12 14 15 10 16 16 18 17 18 17 21	1.8 1.4 zero -2.16 zero 1.5 zero 1.5 zero 1.5 zero 1.5 zero 1.6 ze	2 8.5 4 zero 0 -2.8 9 -9.8 0 32.0 0 29.0 0 -3.2 0 -3.0 0 3.1 0 2.9 0 3.3 0 3.3	-1622674152822138214807482748278787879	399 - 76.1 122 - 30.0 224 - 47.6 389 - 78.0 244 - 59.9 211 - 42.3 215 - 43.3 221 - 46.6 238 - 49.3 218 - 44.5 224 - 47.1 220 - 45.2	0.383 0.197 0.268 0.257 0.214 0.045 0.314 0.365 0.331 0.400 0.447
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R130062 P130062 P130062 R30063 R30063 PR13006A PCS3006A PCS30068	180 55 125 150 150 150 150 150 150 150	Core-Lotd* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lotd* Pointed Soft Point WMC* Metal Case Swift Scinocio Bonded Accura Point Bronze Point Core-Lotd* Pointed Soft Point Bronze Point Core-Lotd* Uttra Bonded Copper Sofid Tripped Copper Sofid Tripped Copper Sofid Tripped	9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2	2430 2 4080 3 3140 2 2660 2 2210 2	2213 2007 484 2964 4780 2447 335 2834 5617 2342 656 2492 656 2416 6631 2368 5578 2468	1813 2499 2138 1157 2084 2270 2083 2189 2121 2248 2217	1632 1468 2080 1706 1853 1595 1509 0300 1983 1622 2011 1934 2017 1893 1843 1672 1974 1773 1889 1674 2048 1860 2039 1870	2360 19 2033 14 2736 21 1534 1553 155 2820 22 2820 22 2820 23 2820 23 2820 23 2820 23	57 1610 1 82 1073 7 45 1662 1 13 1148 1 13 1277 2 21 2069 7 2037 1 81 1827 1 49 1944 1 05 1868 1 88 2012 1 70 2115 1	314 1064 763 528 269 953 555 632 446 1131 758 1436 445 1131 596 1238 448 1188 683 1397 5 800 1523	861 355 706 469 876 1246 1193 876 1047 933 1152	0.1 zero -0.4 0.2 0.0 0.6 -0.1 20.0 -0.2 0.7 0.2 0.7 0.2 0.7 -0.2 0.7 -0.1 20.7 -0.1 20.7 -0.1 20.7	2870 - 28	5.6 -11.6 10 -3.0 19 -5.2 19 +0.0 3.6 40. 20 53. 20 54 22 -5.9 20 -5.6 21 -5.8 20 54 43 -8.6 21 -5.9	-199 -6.7 -10.1 -18.3 -13.6 -10.2 -10.3 -11.4 -10.8 -11.2 -10.4 -14.6	12 14 15 10 16 16 18 17 18 17 21	72 -3. 1.8 1.4 22 22 22 22 22 22 22 22 22 22 22 22 22	2 8.5 4 zero 0 -2.8 9 -9.8 0 32.0 0 29.0 0 -3.2 0 -3.0 0 3.1 0 2.9 0 3.3 0 3.3	-1622674152822138214807482748278787879	339 - 761 122 - 309 224 - 475 389 - 780 244 - 509 211 - 42 3 215 - 483 227 - 466 238 - 493 218 - 445 234 - 441	0.383 0.197 0.268 0.267 0.314 0.345 0.314 0.365 0.331 0.400
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30062 R30062 R30062 R30063 R30063 R30063 R53006A R53006A R53006A R53006A R53006A	180 55 125 150 150 150 150 150 150 165	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Loke* Point Listor* Media Case	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 4080 3 3140 2 2660 2 2910 2	213 2007 4484 2964 4780 2447 335 2834 5617 2342 666 2443 667 2342 656 2416 6531 2368 6578 2458 6579 2403	1813 2499 2138 1757 2084 2270 2083 2189 2121 2248 2217 2047	1632 1468 2080 1706 1853 1595 1595 0300 1883 1632 2277 1833 1843 1622 1974 1773 1889 1674 2048 1660 2039 1870	2360 19 2033 14 2736 21 2736 21 2533 15 2520 522 2820 22 2820 22 2820 23 2820 23 2820 23 2820 23 2821 24 2822 23 2822	57 1610 1 82 1073 7 45 1662 1 13 1148 1 13 1148 1 21 2069 1 2037 1 49 1944 1 49 1944 1 49 1944 1 49 1944 1 49 1945 1 49 1945 1 40 1 41 1 42 1 43 1 44 1 45 1 46 1 47 2 48 2 40 2 41 1 42 1 43 2 44 1 45 1 46 1 47 2 48 2 40 2 41 2 41 2 42 2 43 2 44 2 45 2 46 2 46 2 47 2 48 2 48 2 49 2 40 2 40 2 41 2 41 2 42 2 43 2 44 2 45 2 46 2 46 2 46 2 46 2 46 2 46 2 46 2 46 2 46 2 47 2 48 2 48 2 49 2 40 2	314 1064 763 528 769 953 755 652 766 1131 758 1485 716 1136 1136 1131 1131 1131 1131 1131 11	861 355 706 469 876 1246 1193 876 1047 933 1152	0.1 zero 0.4 0.2 0.0 0.6 0.1 zero 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zero 0.1 zero	2870 2870 2870 2870 2870 2870 2870 2870	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 -10.4 3.6 -20 2.0 -5.3 2.0 -5.6 2.1 -5.8 2.0 -5.4 4.3 -8.5 2.1 -5.9 2.3 -6.3	-199 -6.7 -10.1 -183 -136.2 -10.2 -10.3 -11.4 -10.8 -11.2 -10.4 -14.6 -1111	12 14 1.5 10 16 1.8 1.7 1.8 1.7 2.1	1.8 1.4 zero -2.16 zero 1.5 zero 1.5 zero 1.5 zero 1.5 zero 1.6 ze	2 -8.5 4 zero 7 -2.8 9 -3.8 0 -3.2 0 -3.2 0 -3.0 0 -3.1 0 -2.9 0 -3.2 0 -3.0 0 -3.1 0 -2.9 0 -3.3 0 -3.3 0 -3.3	-162267415232323334827.48.07.48.27.48.27.48.27.48.38.38.38.48.7	399 - 76.1 122 - 30.0 224 - 47.6 389 - 78.0 244 - 59.9 211 - 42.3 215 - 43.3 221 - 46.6 238 - 49.3 218 - 44.5 224 - 47.1 220 - 45.2	0.383 0.197 0.268 0.257 0.214 0.045 0.314 0.365 0.331 0.400 0.447
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30062 R30064 RC3006A RC3006B RC3006B RC3006B RC3006B	180 55 125 125 150 150 150 150 150 165 165 165	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Loks* Pointed Soft Point Listor Media Case Listor Pointed Soft Point Listor Media Case Listor Pointed Soft Point Browze Point Core-Lokt* Utra Bonded Accuting Beat Lat Core-Lokt* Pointed Soft Point Copper Sofd Tipped Accuting Beat Lat Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Utra Bonded* Core-Lokt* Utra Bonded*	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 2 4080 3 3140 2 2230 2 2210 2 2210 2 2210 2 2210 2 2210 4 2220 2 2220 2 2220 2	213 2007 484 2964 2780 2447 335 2854 5517 2342 556 2416 6631 2368 6578 2458 5597 2403 5597 2403 5544 2233	1813 2499 2138 1757 2084 2270 2083 2189 2121 2248 2217 2217 2047 2079	1632 1468 2080 1706 1853 1595 1509 1300 1843 1622 2111 1934 2077 1889 1843 1622 1974 1773 1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1668	2360 19 2033 14 2736 21 1931 15 3 2820 22 2820 22 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23	57 1610 1 82 1073 ; 45 1662 1 133 1143 1 81 1277 ; 21 2069 1 2037 1 49 1944 1 05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1	314 1064 763 528 769 953 758 622 766 11312 758 1485 3 716 1436 7445 1131 7596 1298 7498 1188 7683 1397 6 769 1522 769 1523 769 1523 769 1523	861 355 706 469 876 1246 876 1047 933 1152 1281 963 1037	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 zero -0.1 zero -0.2 0.7 -0.1 zero	2870 2870 2870 2870 2870 2870 2870 2870	5.6 -11.6 1.0 -3.0 1.9 -5.2 1.9 -10.4 3.6 -10.4 3.6 -10.4 2.0 -5.3 2.0 -5.6 2.1 -5.8 2.0 -5.4 4.3 -8.5 2.1 -5.8 2.2 -5.9 2.3 -6.3 2.3 -6.3 2.3 -6.3	-199 -6.7 -10.1 -18.3 -13.6 -10.2 -10.2 -10.8 -11.2 -10.8 -11.2 -10.4 -10.8 -11.1 -10.8 -1	12 14 1.5 10 16 16 17 18 18 11 18 20 1.9	1.8 1.4 zeero -3. 1.8 1.4 zeero -2. 1.6 zeero 1.5 zeero 1.5 zeero 1.5 zeero 1.5 zeero 1.5 zeero 1.5 zeero 1.7 zeero	2 -8.5 4 zero 0 -2.8 9 =3.8 0 32.0 0 -2.9 0 -3.2 0 -3.0 0 -3.1 0 2.9 0 3.3 0 3.2 0 3.0 0 3.1 0 2.9 0 3.3 0 3.3	-162 -26 -74 -452 -452 -73 -82 -717 -80 -74 -74 -87 -87 -87 -85 -85 -85 -85 -85 -85 -85 -85 -85 -85	399 - 76.7 122 - 30.0 224 - 47.5 389 - 52.0 224 - 25.0 221 - 42.3 2215 - 83.7 224 - 50.9 224 - 50.9 224 - 50.9 224 - 45.0 228 - 45.3 2218 - 445.2 221 - 45.2 221 - 45.2 221 - 45.2 221 - 45.2 222 - 45.2 223 - 45.2 224 - 50.9 225 - 53.2 225 - 53.2 25.1 - 51.7	0.383 0.197 0.268 0.267 0.314 0.345 0.331 0.400 0.447 0.339 0.356
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30062 R30064 RC30064 RC30066 RC30066 RC30068 RC30068 RC30068 RC30068 RC30068	180 55 125 125 150 150 150 150 150 165 165 168	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lokt* Pointed Soft Point Like* Meial Case Soft Sonoco* Bonded According Boat Lat Core-Lokt* Pointed Soft Point Brouze Pointed Soft Point Core-Lokt* Ultra Bonded According Boat Lat Core-Lokt* Ultra Bonded According Boat Lat Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Ultra Bonded According Boat Lat Core-Lokt* Ul	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 2 4080 3 3140 2 2210 2 2210 2 2210 2 2210 2 2210 2 2210 2 2210 2 2220 2 2220 2 2220 2 2220 2 2220 2	213 2007 484 2964 2780 2447 335 2854 5617 2342 5696 2492 666 2413 6617 2342 6656 2416 6631 2368 6678 2458 6579 2403 5534 2283 5546 2306 539 2360	1813 2499 2138 1757 2084 2298 2270 2083 2189 2121 2248 2217 2047 2079 2188	1632 1468 2080 1706 1853 1595 1500 1300 1943 1622 2011 1934 2077 1889 1843 1622 1974 1773 1889 1674 2088 1870 2039 1870 1825 1621 1866 1668	2360 19 2033 14 2736 21 1953 15 \$2820 52 2820 22 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23	57 1510 1 82 1073 ; 45 1662 1 13 1148 1 81 1827 2 121 2169 2 100 2037 1 49 1944 1 05 1868 1 88 2012 1 70 2115 1 52 1909 1 18 1984 1 76 2225 1	314 1064 (63 528 (269 953 (855 652) (446 1131) (753 1485 (716 1436 (445 1131 (596 1298 (498 1188 (633 1397 6 (800 1523 (534 1220 (613 1299 (914) 1637	861 355 706 469 876 1246 876 1047 933 1152 1281 963 1037	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 zero -0.1 zero -0.2 0.7 0.2 0.7 0.2 0.7 -0.1 zero -0.1 zero -0.1 zero -0.3 0.8 0.3 0.8 0.3 0.8	2870 - 28	56 -11.6 10 -3.9 119 -5.2 129 -10.2 13.6 -10.2 120 -5.3 120 -5.6 121 -5.8 120 -5.4 143 -8.5 121 -5.9 123 -6.3 123 -6.3 124 -6.5 125 -6.3	-199 -6.7 -10.1 -183 -136 -102 -114 -108 -112 -104 -121 -119 -116	12 14 15 10 10 18 18 11 18 41 21 20 19	11.8 17 17 18 18 17 18 18 18 18 18 18 18 18 18 18 18 18 18	2 8.5 1 2ero - 2.8 9 -0.8 0 3.2 0 2.9 0 2.9 0 3.2 0 3.2 0 3.0 0 3.1 0 2.9 0 3.0 0 3.1 0 2.9 0 3.2 0 3.3 0 3.3 0 3.3 0 3.3 0 3.4 0 3.4 0 3.4 0 3.4 0 3.4 0 3.4 0 3.4 0 3.5 0 3.4 0 3.6 0	-162 -26 -74 -452 -452 -73 -82 -74 -82 -74 -82 -82 -87 -85 -85 -82 -82	399 - 76.7 122 - 30.0 224 - 47.6 389 - 78.0 224 - 50.9 221 42.3 225 - 46.6 228 - 49.3 238 - 49.3 248 - 49.3 259 - 49.3 269 - 49.3	0.383 0.197 0.268 0.257 0.314 0.435 0.314 0.365 0.331 0.400 0.447 0.339 0.356
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30063 R30064 R503066 R503066 R503066 R503066 R503066 R503066 R503066 R503066 R503066	180 55 125 150 150 150 150 150 150 165 165 168 180	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Loke* Pointed Soft Point Libro* Metal Case Soft Toponted Soft Point Libro* Metal Case Soft Toponted Soft Point Brouze Pointed Soft Point Brouze Pointed Soft Point Core-Loke* Ultra Bonded ** Copper Soft Topond Copper Soft Topond Copper Soft Topond Copper Soft Toponted Soft Point Core-Loke* Pointed Soft Point Core-Loke* Pointed Soft Point Core-Loke* Pointed Soft Point Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** ASSUTITE SOFT Toponted Soft Toponted Soft Pointed Soft Toponted Soft Topon	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 2 4080 3 3140 2 2630 2 2910 2 2910 2 2910 2 2910 2 2910 2 2900 2 2800 2 2800 3	213 2007 484 2964 2780 2447 335 2834 517 2342 556 2497 555 2416 5631 2368 5575 2403 5597 2403 5546 2306 539 2389	1813 2499 2138 4157 2083 2288 2270 2083 2189 2121 2244 2217 2017 2007 2019 2188 2202 2202	1632 1468 2080 1706 1853 1595 1505 2300 1943 1622 2111 1934 2077 1893 1843 1672 1974 1773 1889 1674 2039 1870 1825 1621 1866 1668 2023 1887	2360 19 2033 14 2736 21 1953 15 37820 52 2820 24 2820 22 2820 23 2820 23 2820 23 2827 23 2827 23 2827 23 2827 24 2827 25 2827	57 1510 1 82 1073 3 45 1662 1 11 1148 1 12 21 2169 1 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2	314 1064 (63 528 (269 953 (855 662 (446 1131) (753 1485 (716 1436 (445 1131 (759 1298 (451 1131 (759 1298 (750 1523 (750 1523 (750 1523 (750 1537	861 355 706 455 1246 1246 1193 876 1047 933 1152 1281 2281 963 1037 1339 1085 2	0.1 zero -0.4 0.2 -0.0 0.5 -0.1 zero -0.2 0.0 -0.1 zero -0.2 0.7 -0.2 0.7 -0.2 0.7 -0.1 zero -0.1 zero -0.3 0.8 -0.3 0.8 -0.3 0.8 -0.3 0.8	2870 2870 415 2870 2870 2870 2870 2870 2870 2870 2870	56 -11.6 10 -3.9 119 -5.2 129 -10.2 13.6 -10	-199 -6.7 -10.1 -183 -136 -10.2 -10.8 -11.4 -10.8 -11.2 -10.4 -14.6 -11.9 -11.6 -11.9 -11.6 -11.6	12 14 15 10 10 10 18 11 18 11 17 21 21 20 19	18 1.14 research 2 2 2 2 2 2 2 2 2 2 2 2 3 3 2 2 2 3 3 2 2 3 3 2 3 2 3 3 3 2 3	2 8.5 4 zero 2.8 9 43.3 10 3.2 2 9 3.0 2 9 3.0 0	-162 -26 -74 -452 -452 -711 -80 -74 -82 -87 -85 -85 -82 -711 -85 -85 -85 -85 -85 -85 -85 -85 -85 -85	399 - 76.7 122 - 30.0 224 - 47.6 389 - 78.0 224 - 50.9 221 - 42.3 2215 - 53.9 224 - 50.9 227 - 46.6 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 229 - 53.2 25.1 - 51.7 229 - 47.9	0.383 0.197 0.268 0.257 0.114 0.435 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.300 0.377
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30062 R30064 RC30064 RC30066 RC30066 RC30068 RC30068 RC30068 RC30068 RC30068	180 55 125 125 150 150 150 150 150 165 165 168	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lokt* Pointed Soft Point Like* Meial Case Soft Sonoco* Bonded According Boat Lat Core-Lokt* Pointed Soft Point Brouze Pointed Soft Point Core-Lokt* Ultra Bonded According Boat Lat Core-Lokt* Ultra Bonded According Boat Lat Core-Lokt* Pointed Soft Point Core-Lokt* Ultra Bonded According Boat Lat	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 2 4080 3 3140 2 2630 2 2910 2 2910 2 2910 2 2910 2 2910 2 2900 2 2800 2 2800 3	213 2007 484 2964 2780 2447 335 2834 517 2342 556 2497 555 2416 5631 2368 5575 2403 5597 2403 5546 2306 539 2389	1813 2499 2138 4157 2083 2288 2270 2083 2189 2121 2244 2217 2017 2007 2019 2188 2202 2202	1632 1468 2080 1706 1853 1595 1500 1300 1943 1622 2011 1934 2077 1889 1843 1622 1974 1773 1889 1674 2088 1870 2039 1870 1825 1621 1866 1668	2360 19 2033 14 2736 21 1953 15 37820 52 2820 24 2820 22 2820 23 2820 23 2820 23 2827 23 2827 23 2827 23 2827 24 2827 25 2827	57 1510 1 82 1073 ; 45 1662 1 13 1148 1 81 1827 2 121 2169 2 100 2037 1 49 1944 1 05 1868 1 88 2012 1 70 2115 1 52 1909 1 18 1984 1 76 2225 1	314 1064 (63 528 (269 953 (855 662 (446 1131) (753 1485 (716 1436 (445 1131 (759 1298 (451 1131 (759 1298 (750 1523 (750 1523 (750 1523 (750 1537	861 355 706 455 1246 1246 1193 876 1047 933 1152 1281 2281 963 1037 1339 1085 2	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 zero -0.1 zero -0.2 0.7 0.2 0.7 0.2 0.7 -0.1 zero -0.1 zero -0.1 zero -0.3 0.8 0.3 0.8 0.3 0.8	2870 2870 415 2870 2870 2870 2870 2870 2870 2870 2870	56 -11.6 10 -3.9 119 -5.2 129 -10.2 13.6 -10	-199 -6.7 -10.1 -183 -136 -10.2 -10.8 -11.4 -10.8 -11.2 -10.4 -14.6 -11.9 -11.6 -11.9 -11.6 -11.6	12 14 15 10 10 10 18 11 18 11 17 21 21 20 19	11.8 17 17 18 18 17 18 18 18 18 18 18 18 18 18 18 18 18 18	2 8.5 4 zero 2.8 9 43.3 10 3.2 2 9 3.0 2 9 3.0 0	-162 -26 -74 -452 -452 -711 -80 -74 -82 -87 -85 -85 -82 -711 -85 -85 -85 -85 -85 -85 -85 -85 -85 -85	399 - 76.7 122 - 30.0 224 - 47.6 389 - 78.0 224 - 50.9 221 42.3 225 - 46.6 228 - 49.3 238 - 49.3 248 - 49.3 259 - 49.3 269 - 49.3	0.383 0.197 0.268 0.257 0.314 0.435 0.314 0.365 0.331 0.400 0.447 0.339 0.356
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30063 R30064 R503066 R503066 R503066 R503066 R503066 R503066 R503066 R503066 R503066	180 55 125 150 150 150 150 150 150 165 165 168 180	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Loke* Pointed Soft Point Libro* Metal Case Soft Toponted Soft Point Libro* Metal Case Soft Toponted Soft Point Brouze Pointed Soft Point Brouze Pointed Soft Point Core-Loke* Ultra Bonded ** Copper Soft Topond Copper Soft Topond Copper Soft Topond Copper Soft Toponted Soft Point Core-Loke* Pointed Soft Point Core-Loke* Pointed Soft Point Core-Loke* Pointed Soft Point Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** ASSUTITE SOFT Toponted Soft Toponted Soft Pointed Soft Toponted Soft Topon	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 2 4080 3 3140 2 2630 2 2910 2 2910 2 2910 2 2910 2 2910 2 2900 2 2800 2 2800 2 2800 2 2800 3 2725 3	213 2007 484 2964 2780 2447 335 2834 5617 2342 656 2497 656 2497 656 2416 6631 2368 6573 2488 5575 2403 5546 2306 533 2380 4455 \$243	1813 2499 2138 1757 2284 2270 283 2189 2121 2244 2217 2047 2079 2188 22070	1632 1468 2080 1706 1853 1595 1505 2300 1943 1622 2111 1934 2077 1893 1843 1672 1974 1773 1889 1674 2039 1870 1825 1621 1866 1668 2023 1887	2360 19 2033 14 2736 21 1953 15 37820 522 2820 24 2820 22 2820 23 2820 23 2820 23 2827 23 2827 24 2827 25 2827	57 1510 1 82 1073 3 45 1662 1 11 1148 1 12 21 2169 1 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2 21 2169 2	314 1064 63 528 269 953 65 662 446 1131 758 1485 9 716 1436 445 1131 996 1288 498 1188 683 1397 9 800 1523 534 1220 613 1299 914 1637 660 1333	861 355 705 465 475 475 475 475 475 475 475 47	0.1 zero -0.4 0.2 -0.0 0.6 -0.1 zero -0.2 zero -0.1 zero -0.2 0.7 -0.2 0.7 -0.2 0.7 -0.1 zero -0.1 zero -0.3 0.8 -0.3 0.8 -0.3 0.8 -0.0 zero	-1.8	56 -11.6 10 -3.0 19 -52 19 -603 3.6 -67 20 -53 22 -59 20 -56 21 -58 20 -54 43 -85 21 -53 23 -63 23 -63 24 -63 42 -87	-199 -62 -101 -183 -136 -102 -103 -114 -108 -112 -104 -121 -119 -116 -151	12 14 15 16 16 17 18 18 17 18 18 17 18 18 17 19 19 19 19 19 19 19 19 19 19 19 19 19	200 200 200 200 200 200 200 200 200 200	2 85 4 280 0 -28 9 32 0 29 0 29 0 32 0 32 0 30 0 31 0 32 0 32 0 34 0 33 0 35 0 35 0 35 0 35 0 35 0 35	-162	399 - 76.7 122 - 30.0 224 - 47.6 389 - 78.0 224 - 50.9 221 - 42.3 215 - 53.9 224 - 50.9 227 - 46.6 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 228 - 49.3 229 - 53.2 25.1 - 51.7 229 - 47.9	0.383 0.197 0.268 0.257 0.114 0.435 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.300 0.377
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30064 R50306A	180 55 125 150 150 150 150 150 165 165 168 180 180	Core-Lotal Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lotal Pointed Soft Point LONG Media Case Swift Scinozon Bonded Core-Lotal Pointed Soft Point Brouze Point Core-Lotal Pluta Bonded " Copper Sofid Tupped Copper Sofid Tupped Core-Lotal Pointed Soft Point Core-Lotal "Utra Bonded" Accust Bost Tase Swift Aframe "SS Soft Scinozon" Bonded " Swift Scinozon Bonded " Swift Scinozon Bonded "	9 /h	2430 2 4080 3 3140 2 2910 2 29	213 2007 484 2964 2780 2447 335 2044 5517 2342 656 2416 6573 2368 6573 2468 6579 2403 656 236 6579 2403 656 236 6579 2403 656 236 6579 2403	1813 2499 2138 1757 2284 2270 283 2189 2121 2244 2217 2047 2079 2188 2002 2002 2003	1632 1463 2080 1706 1853 1595 1550 0300 1883 1622 2011 1994 2077 1893 1843 1672 2048 1860 2039 1870 1825 1621 1866 1668 2024 1867 1832 1948 1832 1704 2038 1870	2360 19 2033 14 2736 21 1953 15 2820 22 2820 22 2820 22 2820 23 2820 2	57 1510 1 82 1073 3 45 1662 1 11 1138 1 12 12 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 21 2069 1 22 22 22 2	314 1064 63 528 269 953 55 662 446 11317 758 3485 4 710 1136 1238 445 1131 596 1238 443 1138 600 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523 800 1523	861 355 706 469 876 1246 133 1047 933 1152 1221 123 133 1037 133 133 145 146 146 146 146 146 146 146 146	01 zero 04 02 00 06 01 zero 02 07 02 07 02 07 02 07 02 07 02 07 02 07 02 07 02 03 03 08 03 08 03 08 03 08	18 20 20 20 20 20 20 20 20 20 20 20 20 20	55 -11.6 10 -30 19 -52 19 -52 19 -63 36 -17.7 20 -53 20 -56 21 -58 20 -54 43 -65 23 -63 23 -62 23 -63 42 -87 40 -83	-199 -62 -101 -483 -135 -135 -135 -114 -108 -112 -104 -112 -119 -121 -119 -154 -151 -151	12 14 15 16 16 17 18 17 18 17 19 19 19 19 19 19 19 19 19 19 19 19 19	200 23 200 200 200 200 200 200 200 200 2	2 85 4 280 0 -28 9 33 2 32 32 30 32 32 33 30 33 30 33 3 3 3	-162	399 - 76.1 122 - 30.0 224 - 47.6 389 - 78.0 240 - 50.9 211 - 42.3 215 - 50.9 227 - 46.6 238 - 49.3 238 - 44.1 229 - 45.9 251 - 51.7 239 - 41.9 253 - 52.7 239 - 52.7 249 - 52.7	0.383 0.197 0.268 0.257 0.314 0.435 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.330 0.356
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30063 R30064 R30068	180 55 125 125 150 150 150 150 150 165 165 168 180 180 180	Core-Lotal Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lotal Pointed Soft Point LONG Media Case Swift Scinozon Bonded Account Dear Late Core-Lotal Pointed Soft Point Brouze Point Core-Lotal Ultra Bonded " Copper Sofid Topped Account Bear Late Core-Lotal Pointed Soft Point Core-Lotal Pointed Soft Point Core-Lotal Ultra Bonded " Account Bear Late Core-Lotal "Ultra Bonded " Swift Aframe Late Swift Scinozon Bonded * Swift Scinozon Bonded * Soft Scinozon Bonded * S	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 480 3 3140 4 230 2 2910	2213 2007 24484 2964 247780 2447 2435 2439 2436 2439 2436 2439 2436 2439 2436 2436 2436 243	1813 2499 2138 ATEL 2084 2758 2270 2083 2189 2121 2244 2217 2079 2188 2200 288 2000 288 2000 2188 2000 2188 2000 2188 2000 2188	1632 1468 2080 1706 1853 1595 1500 0300 1883 1632 2077 1883 1843 1672 2048 1860 2039 1870 1835 1631 1846 1668 2024 1867 1837 1944 1838 1704 2038 1878	2360 19 2033 14 2736 21 1533 15 2820 22 2820 22 2820 22 2820 23 2820 2	57 1510 1 82 1073 4 45 1662 1 10 1108 1 11 1108 1 12 21 2069 1 20 2037 1 49 1944 1 05 1868 1 88 2012 1 70 2115 1 18 1984 1 70 215 1 18 1984 1 70 225 1 23 2010 1 17 2069 1	314 1064 63 528 269 953 55 652 446 11317 758 1485 9 716 1436 445 1131 596 1298 493 1189 6 800 1523 800 1523 800 1523 904 1637 660 31343 713 1415 900 1644	861 355 706 469 876 1047 933 1152 1221 1221 133 1037 133 1037 1161 140 161 161	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 zero -0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.7 0.1 0.7 0.7 0.7 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8	18 (20) (20) (20) (20) (20) (20) (20) (20)	56 - 11.6 10 - 30 19 - 52 20 - 10.1 20 - 53 20 - 50 20 - 50 20 - 50 20 - 50 20 - 50 21 - 58 20 - 54 3 - 56 3 - 50 22 - 53 23 - 62 23 - 63 42 - 83 42 - 84 40 - 83 49 - 103	-199 -62 -101 -103 -103 -104 -108 -114 -108 -112 -114 -119 -119 -119 -119 -119 -119 -119	12 14 15 16 16 18 17 18 17 18 17 19 19 19 19 19 19 19 19 19 19 19 19 19	18 11.4 22.2 21.1 22.1 22.1 22.1 22.1 22.1	2 8.5 4 zero 0 -28 8 9 -13 3 1 2 2 2 9 0 3 2 2 9 0 3 2 0 3 1 0 3 1 0 3 3 1 0 3 3 1 0 3 3 1 1 3 3 5 1 1 3 3 5 1 1 3 3 5 1 1 3 3 5 1 1 3 3 5 1 1 3 3 5 1 1 3 3 5 1 1 3 3 5 1 1 3 3 5 1 1 3 3 5 1 4 3 3 7 4 4 3	-162	399 - 76.1 122 - 30.0 224 - 47.6 389 - 78.0 240 - 50.9 211 - 42.3 215 - 50.9 227 - 46.6 238 - 49.3 218 - 44.5 229 - 45.9 25.1 - 51.7 229 - 45.9 25.1 - 51.7 239 - 45.9 25.1 - 51.7 239 - 45.9 25.1 - 51.7 239 - 47.9 2338 - 72.8	0.383 0.197 0.268 0.257 0.314 0.305 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.301 0.402 0.402 0.402 0.402 0.402
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30063 R30064 R30068	150 150 150 150 150 150 150 165 165 165 180 180 180 180	Core-Lotal Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lotal Pointed Soft Point Brouze Point Core-Lotal Pointed Soft Point Brouze Point Core-Lotal Pointed Soft Point Core-Lotal Ultra Bonded " Copper Sofid Tipped Copper Sofid Tipped Core-Lotal Pointed Soft Point Core-Lotal Pointed Soft Point Core-Lotal "Ultra Bonded" Account Booked " Account Booked " Account Booked " Swift Scircoco "Booked " Swift Scircoco "Booked " Swift Scircoco "Booked " Core-Lotal" Pointed Soft Point Core-Lotal" Pointed Soft Point Core-Lotal" Pointed Soft Point Core-Lotal" Pointed Soft Point	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 2 480 3 3140 4 230 2 2210	2213 2007 4484 2964 247780 2447 2435 2439 2436 2439 2436 2439 2436 2439 2436 2439 2436 2439 2436 2439 2436 2439 2436 2439 2437	1813 2499 2138 ATEL 2084 2758 2270 2083 2189 2121 2244 2217 2007 2083 2087 2079 2188 22070 2188 22070 2188 22070 2208	1632 1468 2080 1706 1853 1595 1500 0300 1883 1632 2077 1883 1843 1672 2078 1889 1674 2048 1860 2039 1870 1835 1631 1836 1668 2024 1867 1837 1948 1838 1704 2038 1878 1456 1653	2360 19 2033 14 2736 21 1533 15 2820 22 2820 22 2820 22 2820 23 2820 2	57 1510 1 82 1073 45 1662 1 11 1148 1 12 2169 1 21 2069 1 23 44 1944 1 05 1868 1 88 2012 1 70 2115 1 18 1984 1 70 2215 1 18 1984 1 70 2225 1 22 12010 1 17 2225 1 23 1635 1 24 2228 1 23 1635 1 36 2023 1	314 1064 63 528 269 953 662 446 11311 758 1455 716 1136 1596 1298 449 1188 830 1592 633 1397 6 830 1522 634 1220 613 1299 914 1637 660 1333 713 1415 910 1644	861 355 706 635 1037 1047 933 1152 1228 1037 1239 1161 1405 1161 1405 1161	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zero -0.1 zero -0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.0 zero -0.0 zero	18 cm	55 - 11.6 10 - 30 19 - 52 20 - 803 20 - 803 20 - 803 20 - 803 20 - 803 20 - 804 20 -	-199 -62 -101 -103 -103 -103 -104 -108 -112 -104 -119 -119 -119 -119 -119 -119 -119 -11	12 14 15 16 16 18 17 17 18 18 17 19 19 21 21 21 22 24 21	tero 3. 18 11 14 222 165 222 165 222 165 222 165 222 165 222 165 222 167 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222	2 8.5 4 zero 0 -2.8 9 -1.3 10 3.2 2 9 0 3.2 0 3.0 0 3.	-162	399 - 76.1 122 - 30.0 224 - 47.6 389 - 78.0 244 - 50.9 241 - 45.9 244 - 50.9 227 - 46.6 238 - 49.3 218 - 44.5 224 - 47.1 229 - 53.2 25.1 - 51.7 239 - 45.0 25.1 - 52.7 24.9 - 47.1 25.2 - 52.7 24.9 - 47.1 25.3 - 52.7 24.9 - 47.1 25.3 - 52.7 25.9 - 53.2 25.1 - 51.7 26.5 - 54.4 26.3 - 54.0	0.383 0.197 0.268 0.257 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.3037 0.402 0.402 0.408 0.383
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30063 R30064 R30068	180 55 125 125 150 150 150 150 150 165 165 168 180 180 180	Core-Lotal Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lotal Pointed Soft Point LONG Media Case Swift Scinozon Bonded Account Dear Late Core-Lotal Pointed Soft Point Brouze Point Core-Lotal Ultra Bonded " Copper Sofid Topped Account Bear Late Core-Lotal Pointed Soft Point Core-Lotal Pointed Soft Point Core-Lotal Ultra Bonded " Account Bear Late Core-Lotal "Ultra Bonded " Swift Aframe Late Swift Scinozon Bonded * Swift Scinozon Bonded * Soft Scinozon Bonded * S	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 480 3 3140 4 230 2 2210	2213 2007 24484 2964 247780 2447 2435 2439 2436 2439 2436 2439 2436 2439 2436 2436 2436 243	1813 2499 2138 ATEL 2084 2758 2270 2083 2189 2121 2244 2217 2007 2083 2087 2079 2188 22070 2188 22070 2188 22070 2208	1632 1468 2080 1706 1853 1595 1500 0300 1883 1632 2077 1883 1843 1672 2048 1860 2039 1870 1835 1631 1846 1668 2024 1867 1837 1944 1838 1704 2038 1878	2360 19 2033 14 2736 21 1533 15 2820 22 2820 22 2820 22 2820 23 2820 2	57 1510 1 82 1073 4 45 1662 1 10 1108 1 11 1108 1 12 21 2069 1 20 2037 1 49 1944 1 05 1868 1 88 2012 1 70 2115 1 18 1984 1 70 215 1 18 1984 1 70 225 1 23 2010 1 17 2069 1	314 1064 63 528 269 953 662 446 11311 758 1455 716 1136 1596 1298 449 1188 830 1592 633 1397 6 830 1522 634 1220 613 1299 914 1637 660 1333 713 1415 910 1644	861 355 706 635 1037 1047 933 1152 1228 1037 1239 1161 1405 1161 1405 1161	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 zero -0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.1 0.7 0.7 0.1 0.7 0.7 0.7 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8	18 cm	55 - 11.6 10 - 30 19 - 52 20 - 803 20 - 803 20 - 803 20 - 803 20 - 803 20 - 804 20 -	-199 -62 -101 -103 -103 -104 -108 -114 -108 -112 -114 -119 -119 -119 -119 -119 -119 -119	12 14 15 16 16 18 17 18 17 18 17 19 19 19 19 19 19 19 19 19 19 19 19 19	tero 3. 18 11 14 222 165 222 165 222 165 222 165 222 165 222 165 222 167 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222	2 8.5 4 zero 0 -28 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	-162	399 - 76.1 122 - 30.0 224 - 47.6 389 - 78.0 240 - 50.9 211 - 42.3 215 - 50.9 227 - 46.6 238 - 49.3 218 - 44.5 229 - 45.9 25.1 - 51.7 229 - 45.9 25.1 - 51.7 239 - 45.9 25.1 - 51.7 239 - 45.9 25.1 - 51.7 239 - 47.9 2338 - 72.8	0.383 0.197 0.268 0.257 0.314 0.305 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.301 0.402 0.402 0.402 0.402 0.402
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30063 R30064 R30068	150 150 150 150 150 150 150 165 165 165 180 180 180 180	Core-Lotal Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lotal Pointed Soft Point Brouze Point Core-Lotal Pointed Soft Point Brouze Point Core-Lotal Pointed Soft Point Core-Lotal Ultra Bonded " Copper Sofid Tipped Copper Sofid Tipped Core-Lotal Pointed Soft Point Core-Lotal Pointed Soft Point Core-Lotal "Ultra Bonded" Account Booked " Account Booked " Account Booked " Swift Scircoco "Booked " Swift Scircoco "Booked " Swift Scircoco "Booked " Core-Lotal" Pointed Soft Point Core-Lotal" Pointed Soft Point Core-Lotal" Pointed Soft Point Core-Lotal" Pointed Soft Point	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 4 480 3 3140 4 2300 2 231	2213 2007 4484 2964 247780 2447 2435 2439 2436 2439 2436 2439 2436 2439 2436 2439 2436 2439 2436 2439 2436 2439 2436 2439 2437	1813 2499 2138 1157 2298 2298 2200 2083 2181 2244 2217 2247 2070 2188 2002 2180 11727 2042 2084	1632 1468 2080 1706 1853 1595 1500 0300 1883 1632 2077 1883 1843 1672 2078 1889 1674 2048 1860 2039 1870 1835 1631 1836 1668 2024 1867 1837 1948 1838 1704 2038 1878 1456 1653	2360 19 2033 14 2736 21 1953 15 32820 22 2820 22 2820 23 2821 232 2933 24 2933 22 2933 22 293 24 2933 24 2933 24	57 1510 1 82 1073 45 1662 1 11 1148 1 12 2169 1 21 2069 1 23 44 1944 1 05 1868 1 88 2012 1 70 2115 1 18 1984 1 70 2215 1 18 1984 1 70 2225 1 22 12010 1 17 2225 1 23 1635 1 24 2228 1 23 1635 1 36 2023 1	314 1064 (63 528 (63 528 (63 528 (64 5131) (75 1131) (75 1135 (75	861 355 706 635 1037 1047 933 1152 1228 1037 1239 1161 1405 1161 1405 1161	0.1 zero -0.4 0.2 0.0 0.6 -0.1 zero -0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zero -0.1 zero -0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.0 zero -0.0 zero	18 (20) (20) (20) (20) (20) (20) (20) (20)	55 - 11.5 10 - 30 19 - 52 19 - 52 19 - 60 10 - 52 10 - 53 10 - 54 10 -	-199 -62 -101 -103 -103 -103 -104 -108 -112 -104 -119 -119 -119 -119 -119 -119 -119 -11	12 14 15 16 16 18 17 17 18 17 19 19 19 19 19 19 19 19 19 19 19 19 19	tero 3. 18 11 14 222 165 222 165 222 165 222 165 222 165 222 165 222 167 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222 168 222	2 8.5 2 2 8.5 2 2 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	-162	399 - 76.1 122 - 30.0 224 - 47.6 389 - 78.0 244 - 50.9 241 - 45.9 244 - 50.9 227 - 46.6 238 - 49.3 218 - 44.5 224 - 47.1 229 - 53.2 25.1 - 51.7 239 - 45.0 25.1 - 52.7 24.9 - 47.1 25.2 - 52.7 24.9 - 47.1 25.3 - 52.7 24.9 - 47.1 25.3 - 52.7 25.9 - 53.2 25.1 - 51.7 26.5 - 54.4 26.3 - 54.0	0.383 0.197 0.268 0.257 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.3037 0.402 0.402 0.408 0.383
30-06 Springfield	R3040Z R3006F R3006F R3006F R3006F R3006C R3006C R3006C R3006C R3006A PCS3006A PCS3006A PCS3006B R3006B R3006B R3006C	180 55 125 125 150 150 150 150 150 165 165 180 180 180 180 180 180 180 180 180	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Utina Bonded " Core-Lokt* Utina Bonded " Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Utina Bonded " Accoll to Boate I all Core-Lokt* Utina Bonded " Accoll to Boate I all Core-Lokt* Utina Bonded " Core-Lokt* Utina Bonded " Core-Lokt* Opinited Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Boroze Point* Core-Lokt* Soft Point	9 ½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½	2430 2 4880 3 3440 2 3140 2 2310 2 23	2213 2007 2484 2564 2564 2565 247 2565 247 2565 247 2565 247 2565 247 2565 247 2565 247 2565 247 2565 247 2565 2565 256 2565 2566 256 2566 2566	1813 2499 2138 1157 2091 2298 2298 2200 283 2189 2121 2244 2217 2047 2047 2079 2186 11777 2042 2084 1632	1632 1463 2080 1706 1853 1595 1650 0300 1843 7162 2011 1934 2072 1839 1843 1672 2048 1860 2039 1870 1825 1621 1826 1638 2022 1937 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1793 1488 1663 1889 1725 1422 1246	2360 19 2033 14 2736 21 2736 21 2931 15 2820 22 2820 22 2820 22 2820 23 2821 22 2817 22 2913 24 2913 25 2913 24 2913 24 2913 24 2913 24 2913 24	57 1610 1 82 1073 4 45 1662 1 113 1148 1 121 213 1 121 2169 1 121 2169 1 121 2169 1 121 2169 1 121 2169 1 121 2169 1 122 2169 1 123 2269 1 124 2269 1 125 1 126 2225 1 127 2027 1 128 1984 1 129	314 1064 (63 528 (269 953 (65) 622 (466 1131) (753 1465 (716 1436 (45) 1131 (45) 123	861 355 706 450 876 126 876 1104 933 1104 933 1103 1104 1161 1406 1105 11189 758	0.1 zaro 0.4 0.2 0.0 0.6 0.1 zaro 0.1 zaro 0.2 0.7 0.0 zaro	18	55 - 11.5 10 - 3.0 13 - 5.2 10 - 10.0 15 - 5.2 10 - 5.0 15 - 5.2 10 - 5.0 1	-199	12 14 15 10 16 11 18 11 11 12 12 12 12 12 12 13 13 14 15 15 15 15 15 15 15 15 15 15 15 15 15	rero -3. 1.8 1/1 222 222 223 224 224 224 224 225 22	2 8.5 2 8.5	-162	399 - 76.1 122 - 30.0 1224 - 47.5 38.9 - 76.0 224 - 50.9 221 1	0.383 0.197 0.268 0.267 50.114 0.405 0.314 0.365 0.331 0.400 0.447 0.399 0.566 0.400 0.402 0.207 0.208 0.383 0.412 0.284
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30063 PR30064 PC30068 PR30068 R30068	180 125 125 150 150 150 150 150 165 165 168 180 180 180 180 180 180 180 180 180 18	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Utra Bonded ** Core-Lokt* Opinted Soft Point Core-Lokt* Opinted Soft Point Core-Lokt* Utra Bonded ** Core-Lokt* Opinted Soft Point Core-Lokt* Pointed Soft Point	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 4880 3 3140 2 2310 2	2213 2007 24484 2564 2564 2565 2447 2565 2455 2565 2455 2565 2455 2565 2565 2565 2665 2565	1813 2499 2138 1757 2298 2270 2083 2217 2217 2217 2017 2018 2218 2217 2017 2017 2017 2017 2017 2017 2017	1632 1463 2080 1706 1853 1595 1650 0300 1843 7622 2111 1334 2072 1833 1843 1672 2033 1870 2033 1870 2033 1870 1825 1621 1836 1668 2024 1857 1832 1748 1832 1748 1832 1748 1832 1748 1833 1643 1844 1663 1859 1725 1422 1245	2360 19 2033 14 2736 21 1953 15 2820 22 2820 22 2820 22 2820 23 2820 2	57 1510 1 82 1073 4 5 1662 1 113 1143 1 127 21 2069 1 2037 4 81 2127 2 12 2069 1 2037 4 181 1827 1 182 1944 1 1944 1 1944 1 1944 1 1945 1 195 1 196 1 197 2 115 1 107 2 115 1 108 1 109 1 10	314 1064 (63 528 (269 953 (65) (62) (446 1131) (753 1485 (716 1436 (445 1131 (55) (612) (613 129 (613 129 (613 129 (614 131 (617) (627) (637) (637) (636 1362 (736 1441 (301 988 (433 143 886	861 355 706 450 126 378 76 133 1047 933 1037 1152 128 128 139 144 144 159 1105 1118 1189 758 685	0.1 zaro 0.4 0.2 0.0 0.6 0.1 zaro 0.2 zaro 0.1 zaro 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.0 zaro	18	55 - 11.5 1.5	-199 -67 -101 -103 -103 -104 -108 -104 -112 -104 -115 -121 -119 -121 -151 -151 -151 -151 -154 -150 -224 -176	12 14 15 10 16 16 17 18 17 17 18 17 19 19 19 19 19 19 19 19 19 19 19 19 19	18 114 mm 2 2 116 mm	2 8.5 2 8.5	-162	399 - 76.1 122 - 30.0 1224 - 47.5 389 - 76.0 244 - 50.9 211 42.3 215 - 50.9 224 - 45.6 228 - 45.6 228 - 45.6 228 - 45.6 228 - 45.6 228 - 45.6 229 - 53.2 25.1 - 51.7 239 - 52.7 249 - 52.	0.383 0.197 0.268 0.267 0.3014 0.345 0.331 0.400 0.447 0.339 0.356 0.800 0.407 0.402 0.303 0.402 0.402 0.303 0.402 0.402 0.303 0.402 0.402 0.403
30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30062 R30063 R30068	180 125 125 150 150 150 150 150 165 168 180 180 180 180 180 180 180	Core-Lock* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lock* Pointed Soft Point List To Soft To Soft Point List To Soft Point List To Soft To Soft Point List To Soft To Soft Point List To Soft To	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 3140 2 3140 2 3140 2 3140 2 3100 2 3100 2 3100 2 3100 2 3100 2 3100 2 3200 2 3200 2 3200 2 3200 2 3200 2 3200 2 3200 2 3200 2 3200 3 3230 3 3230 3	2213 2007 4844 2964 4854 2964 4855 2447 4855 2455	1813 2499 2138 1752 2798 2798 2798 2798 2798 2798 2798 2798 2799 27	1632 1463 2080 1706 1853 1595 1650 2030 1843 1622 2111 1934 2077 1833 1843 1622 1974 1773 1883 1674 2048 1860 2039 1870 2039 1870 1825 1621 1836 1668 2024 1867 1833 1644 1832 1704 2038 1870 2038 1870 1830 1648 1831 1704 2038 1870 2038 1	2360 19 2033 14 2736 21 1933 15 2820 22 2820 22 2820 22 2820 23 2827 232 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 25 2933 24 2933 24 2933 25 2933 24 2933 25 2933 24 2933 25 2933 24 2933 25 2933 24 2933 25 2933 26 2933	57 1610 1 82 1073 3 45 1662 1 113 1143 1 81 2127 2 21 2069 2 21 2069 2 21 2069 2 21 2063 2 21 2063 2 21 2063 2 21 2063 2 21 2063 2 21 2010 3 21 3 22 2010 4 22 2083 3 36 202	314 1064 (63 528 (269 953 (65) (62) (446 1131) (753 1485 (716 1436 (445 1131 (758 1436 (445 1131 (758 1436 (445 1131 (758 1436 (445 1131 (758 1436 (445 1131 (758 1436	861 355 706 459 876 128 876 1047 933 1037 128 1663 1007 1189 758 685 1001	0.1 zaro 0.4 0.2 0.0 0.6 0.1 zaro 0.1 zaro 0.2 0.7 0.2 0.7 0.1 zaro 0.2 0.7 0.1 zaro 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.0 0.3 zaro 0.0 zaro	18	55 - 11.5	-199 -62 -101 -83 -103 -103 -104 -108 -104 -112 -121 -119 -151 -151 -151 -151 -153 -154 -1550 -224 -176 -87	12 14 15 15 10 10 10 10 10 10 10 10 10 10 10 10 10	rero 3.18 11.14 ree 2.21 11.5 ree 11.5	2 8.5 8 20 0 28 8 20 0 28 8 20 0 29 0 32 0 32 0 32 0 32 0 34 0 33 0 35 0 35 0 35 0 35 0 35 0 35	-162	399 76.7 122 30.0 1224 47.5 389 580 124 50.9 121 42.3 1215 830 124 50.9 124 50.9 124 50.9 125 830 128 48.3 128 48.5 128 48.5 128 48.5 128 48.5 128 48.5 128 48.5 128 52.7 129 41.7 120	0.383 0.197 0.268 0.267 0.314 0.345 0.331 0.400 0.447 0.339 0.356 0.402 0.377 0.402 0.294 0.333 0.412 0.294 0.314
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30063 PR30064 PC30068 PR30068 R30068	180 125 125 150 150 150 150 150 165 165 168 180 180 180 180 180 180 180 180 180 18	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Utra Bonded ** Core-Lokt* Opinted Soft Point Core-Lokt* Opinted Soft Point Core-Lokt* Utra Bonded ** Core-Lokt* Opinted Soft Point Core-Lokt* Pointed Soft Point	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 2 3140 2 3140 2 3140 2 3140 2 3100 2 3100 2 3100 2 3100 2 3100 2 3100 2 3200 2 3200 2 3200 2 3200 2 3200 2 3200 2 3200 2 3200 2 3200 3 3230 3 3230 3	2213 2007 4844 2964 4854 2964 4855 2447 4855 2455	1813 2499 2138 1752 2798 2798 2798 2798 2798 2798 2798 2798 2799 27	1632 1463 2080 1706 1853 1595 1650 0300 1843 7622 2111 1334 2072 1833 1843 1672 2033 1870 2033 1870 2033 1870 1825 1621 1836 1668 2024 1857 1832 1748 1832 1748 1832 1748 1832 1748 1833 1643 1844 1663 1859 1725 1422 1245	2360 19 2033 14 2736 21 1933 15 2820 22 2820 22 2820 22 2820 23 2827 232 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 25 2933 24 2933 24 2933 25 2933 24 2933 25 2933 24 2933 25 2933 24 2933 25 2933 24 2933 25 2933 26 2933	57 1510 1 82 1073 4 5 1662 1 113 1143 1 127 21 2069 1 2037 4 81 2127 2 12 2069 1 2037 4 181 1827 1 182 1944 1 1944 1 1944 1 1944 1 1945 1 195 1 196 1 197 2 115 1 107 2 115 1 108 1 109 1 10	314 1064 (63 528 (269 953 (65) (62) (446 1131) (753 1485 (716 1436 (445 1131 (758 1436 (445 1131 (758 1436 (445 1131 (758 1436 (445 1131 (758 1436 (445 1131 (758 1436	861 355 706 459 876 128 876 1047 933 1037 128 1663 1007 1189 758 685 1001	0.1 zaro 0.4 0.2 0.0 0.6 0.1 zaro 0.2 zaro 0.1 zaro 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.0 zaro	18	55 - 11.5	-199 -67 -101 -183 -103 -104 -108 -104 -112 -121 -119 -151 -151 -183 -154 -1550 -224 -176 -87	12 14 15 15 10 10 10 10 10 10 10 10 10 10 10 10 10	rero 3.18 11.14 ree 2.21 11.5 ree 11.5	2 8.5 8 20 0 28 8 20 0 28 8 20 0 29 0 32 0 32 0 32 0 32 0 34 0 33 0 35 0 35 0 35 0 35 0 35 0 35	-162	399 - 76.1 122 - 30.0 1224 - 47.5 389 - 76.0 244 - 50.9 211 42.3 215 - 50.9 224 - 45.6 228 - 45.6 228 - 45.6 228 - 45.6 228 - 45.6 228 - 45.6 229 - 53.2 25.1 - 51.7 239 - 52.7 249 - 52.	0.383 0.197 0.268 0.267 0.3014 0.345 0.331 0.400 0.447 0.339 0.356 0.800 0.407 0.402 0.303 0.402 0.402 0.303 0.402 0.402 0.303 0.402 0.402 0.403
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30062 R30063 R30068	180 125 125 150 150 150 150 150 165 168 180 180 180 180 180 180 180	Core-Lock* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lock* Pointed Soft Point List To Soft To Soft Point List To Soft Point List To Soft To Soft Point List To Soft To Soft Point List To Soft To	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 4 480 3 3140 4 200 7 2910 2 2910	2213 2007 4844 2964 4857 486 2964 487 487 488 2964 488 2968 488 243	1813 2499 2138 1727 2288 2270 2081 2189 2121 2217 2017 2017 2017 2017 2017 2016 2188 2022 2070 2188 2022 2070 2188 2022 2070 2188 2022 2070 2188 2022 2070 2188 2022 2070 2188 2022 2070 2084 1632 2084 1632 2880 880	1632 1463 2080 1706 1853 1595 1650 2030 1843 1622 2111 1934 2077 1833 1843 1622 1974 1773 1883 1674 2048 1860 2039 1870 2039 1870 1825 1621 1836 1668 2024 1867 1833 1644 1832 1704 2038 1870 2038 1870 1830 1648 1831 1704 2038 1870 2038 1	2360 19 2033 14 2736 21 2736 21 2533 15 2820 22 2820 22 2820 23 2821 24 2837 22 2913 24 2913 22 2913 24 2913 22 2913 24 2913 22 2913 24 2913 22 2913 24 2937 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 22 2938 2938 2938 2938 2938 2938 2938 2938	57 1610 1 82 1073 3 45 1662 1 113 1143 1 81 2127 2 21 2069 2 21 2069 2 21 2069 2 21 2063 2 21 2063 2 21 2063 2 21 2063 2 21 2063 2 21 2010 3 21 3 22 2010 4 22 2083 3 36 202	314 1064 (63 528 (269 953 (65) (652) (446 1131) (753 1485 (716 1436 (445 1131 (758 1485 (758 148	861 355 706 459 126 137 138 1007 128 1037 128 1037 1339 1037 1339 1037 1339 1161 1400 1189 758 685 1091 595 1091 595 1091 595 1091 595 1091 595 1091 595 1091 595 1091 595 1091 595 1091 1095 10	0.1 zaro 0.4 0.2 0.0 0.6 0.1 zaro 0.1 zaro 0.2 0.7 0.2 0.7 0.1 zaro 0.2 0.7 0.1 zaro 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.0 0.3 zaro 0.0 zaro	18	56 - 11.6 10 - 3.0 10 - 3.0 10 - 5.2 10	-199 -62 -101 -83 -103 -103 -104 -108 -104 -112 -121 -119 -151 -151 -183 -154 -150 -224 -176 -87	12 14 15 10 10 10 10 10 10 10 10 10 10 10 10 10	118 114 2220 221 221 2221 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220 2221 2220	2 8.5 8 20 0 28 8 20 0 28 8 20 0 29 0 32 0 32 0 32 0 32 0 34 0 33 0 35 0 35 0 35 0 35 0 35 0 35	-162	399 - 76.1 122 - 30.0 1224 - 47.5 389 - 58.0 124 - 50.9 121 42.3 1215 - 8.3 1218 - 48.3	0.383 0.197 0.268 0.267 0.314 0.345 0.331 0.400 0.447 0.339 0.356 0.402 0.377 0.402 0.294 0.333 0.412 0.294 0.314
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30063 R30066 R30066 R30066 R30066 R30066 R30066 R30066 R30066 R30066 R30067	180 125 125 150 150 150 150 150 165 165 180 180 180 180 180 150 150	Core-Lock* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lock* Pointed Soft Point Liston Pointed Soft Point Liston Pointed Soft Point Browze Pointed Soft Point Browze Pointed Soft Point Core-Lock* Ultra Bonded ** Core-Lock* Ultra Bonded ** Lock* Lock* Pointed Soft Point Core-Lock* Volt Point Core-Lock* Pointed Soft Point Core-Lock* Ultra Bonded ** Lock* Pointed Soft Pointed Soft Point Core-Lock* Ultra Bonded ** Lock* Pointed Soft Pointed Soft Point Core-Lock* Ultra Bonded ** Lock* Pointed Soft P	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 480 3140 4820 2910 2910 2910 2910 2910 2910 2910 29	2213 2007 4844 2964 4857 486 2965 487 487 488 2966 487 488 2966 488	1813 2499 2138 1727 2288 2270 2083 2189 2217 2217 2017 2017 2017 2017 2018 2188 2277 2017 2018 2188 2270 2188 2270 2188 2270 2188 2270 2270 2384 2652 2540 2570 2584	1463 1463 2080 1706 1853 1595 1853 1852 1974 1773 1889 1870 1825 1826	2360 19 2033 14 2736 21 2736 21 2820 22 2820 22 2820 22 2820 23 2820 23 2827 24 2827 24 2827 24 2827 24 2827 24 2827 24 2837 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 24 2933 22 2933 22 2933 22 2933 22 2933 22 2933 22 2933 22 2933 22 2933 22 2933 22 2933 22 2933 22 2933 22 2933 293 3605 22	57 1610 1 82 1073 3 45 1662 1 11 1148 1 12 2169 2 12 2069 2 13 2037 1 149 1944 1 170 2115 1 170 2115 1 170 2115 1 170 2115 1 170 2125	314 1064 63 528 269 953 55 622 446 1131 758 1485 1131 758 1485 1131 528 445 1131 528 445 1131 528 633 1397 630 1522 534 1220 613 1299 914 1657 650 1343 713 1415 910 1664 192 899 666 1362 730 1988 143 886 823 1420 164 972 833 1496	861 355 706 459 459 126 379 1047 933 1152 128 963 1007 128 1161 400 1189 758 665 1091	0.1 zaro 0.4 0.2 0.0 0.5 0.1 zaro 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zaro 0.3 0.8 0.3 0.8 0.3 0.8 0.0 zaro	18	56 11.6 10 30 10 52 10 60 10 52 10 60 10 52 10 50 10	-199 -62 -101 -83 -103 -104 -108 -114 -108 -112 -119 -121 -119 -151 -151 -183 -154 -175 -37 -412 -85	12 14 15 16 18 17 17 18 17 17 18 17 17 18 17 17 17 17 17 17 17 17 17 17 17 17 17	118 114 20000 22 115 200000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 20000 115 200000 115 200000 115 200000 115 20000 115 20000 115 20000 115 200000 115 20000 115 20000 115 200000 115 200000 115 200000 115 200000 115 200000 115 20000	2 8.5 2 8.5	-162	399 - 76.1 122 - 30.0 1224 - 47.6 189 - 76.0 124 - 75.0 125 - 50.9 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 121 - 42.3 122 - 42.3 123 - 42.3 124 - 42.1 125 - 42.3 126 - 52.7 127 - 42.3 128 - 42.3 138 - 72.8 138 - 72.8 139 - 64.6 189 - 39.8 138 - 39.8 138 - 33.8 138 - 33.8	0.383 0.197 0.268 0.267 0.268 0.267 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.260 0.207 0.402 0.307 0.402 0.303 0.412 0.294 0.314 0.294 0.310
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30063 R30064 R30066 R30066 R30066 R30066 R30066 R30067 R30064 R30067 R30064 R30067 R30064 R30067 R30069 R30064 R30066 R30067 R30067 R30069 R30064 R30067 R30068 R30066 R30067 R30069 R30069 R30069 R30069 R30066 R30069 R30066 R30066 R30067 R30069 R30066 R30066 R30067 R30069 R30069 R30066 R30067 R30069 R30066 R30066 R30067 R30069 R30066 R30067 R30069	180 55 125 150 150 150 150 150 165 168 180 180 180 180 180 180 180 18	Core-Lotal * Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lotal * Pointed Soft Point Liston Floring Soft Point Core-Lotal * Ultra Bonded ** Copper Soft Tipped Liston Floring Soft Point Core-Lotal * Ultra Bonded ** Local In Boat Tell Liston Floring Soft Point Core-Lotal * Soft Point Core-Lotal * Floring Soft Point Core-Lotal * Floring Soft Point Core-Lotal * Floring Soft Point Core-Lotal * Soft Point Core-Lotal * Floring Soft Point Core-Lotal * So	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 480 3140 4820 3140 4820 32910 2910 2910 2910 2910 2910 2910 2910	2213 2007 4844 2964 4857 4857 4859 48	1813 2499 2138 1727 2281 2283 2280 2283 2217 2217 2217 2207 2218 2217 2217 2217 2217 2217 2217 221	1463 1463 2080 1706 1853 1595 1853 1852 1853 1854 1862 1853 1854 1852 1854 1852 1854 1852 1854 1852 1854 1852 1854 1855	2360 19 2033 14 2736 21 2736 21 2820 22 2820 22 2820 22 2820 23 2820 23 2827 22 2820 23 2827 22 2820 23 2827 22 2820 23 2827 22 2820 23 2827 22 2820 23 2827 22 2827 22 2827 22 2827 22 2827 22 2827 22 2827 22 2913 24 2837 22 2913 24 2837 22 2913 26 2913 2	57 1510 1 82 1073 3 45 1662 1 11 1148 1 12 2169 2 12 2069 2 13 2037 1 149 1944 1 149 1944 1 170 2115 1 170 2115 1 170 2115 1 170 2115 1 170 2125	314 1064 63 528 269 953 55 622 446 1131 758 1485 1131 758	861 355 706 459 459 1226 1193 876 1047 983 1152 1228 1037 1228 1161 400 1165 1188 685 1091 593 1168	0.1 zavo 0.4 0.2 0.0 0.5 0.1 zavo 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zavo 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.0 zavo	18	56 - 11.6 10 - 30 10 - 30 10 - 52 10 10 10 10 10 10 10 10 10 10 10 10 10	-199 -62 -101 -83 -103 -104 -108 -104 -112 -119 -119 -110 -151 -151 -151 -151 -150 -224 -176 -37 -172 -35 -37 -172 -35 -37 -172 -35 -37 -172 -35 -37 -172 -35 -37 -37 -37 -37 -37 -37 -37 -37 -37 -37	12 14 15 10 16 11 17 18 17 17 18 17 17 18 17 17 18 17 17 17 18 17 17 17 17 17 17 17 17 17 17 17 17 17	118 114 2224 118 2224 118 128 128 129 129 129 129 129 129 129 129 129 129	2 8.5 2 8.5	-162	399 - 76.1 122 - 30.0 1224 - 47.6 389 - 76.0 124 - 47.6 389 - 76.0 125 - 50.0 126 - 50.0 127 - 46.5 128 - 44.5	0.383 0.197 0.268 0.267 0.214 0.435 0.314 0.365 0.331 0.400 0.447 0.356 0.309 0.356 0.300 0.407 0.402 0.248 0.383 0.412 0.294 0.314 0.294 0.310 0.310
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30062 R30064 R30066 R30066 R30066 R30066 R30067 R30066 R30067 R30068 R30061 R30061 R30066 R30067 R30066 R30067 R30068 R30068 R30068 R30068 R30068 R30068 R30068	150 150 150 150 150 150 150 150 165 165 168 180 180 180 180 180 180 180 180 180 18	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lokt* Pointed Soft Point Soft Pointed Soft Point Soft Pointed Soft Point Brouze Pointed Soft Point Brouze Pointed Soft Point Core-Lokt* Ultra Bonded " Copper Sofi Tipped Local Tipped Loc	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2430 (480 (480 (480 (480 (480 (480 (480 (48	2213 2007 4844 2964 4856 2447 5056 2497 505	1813 2499 2138 1757 228 228 2270 2083 2189 2121 2217 2017 2017 2079 2188 1777 2042 2084 16532 2384 1850 2384 2384 2387 2384	1483 1706 1853 1853 1854 1853 1852 1853 1854 1855	2360 19 2033 14 2736 21 2736 21 2530 15 2820 22 2820 22 2820 23 2820 23 2827 24 2827 24 2827 24 2827 24 2827 24 2827 24 2827 24 2827 24 2837 25 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 25 2913 24 2913 24 2913 24 2913 24 2913 24 2913 25 2913 24 2913 2	57 1610 1 82 1073 3 45 1662 1 11 1148 1 12 213 1 13 1148 1 13 127 2 13 2069 1 14 149 1 144 1 149 1 144 1 149 1 144 1 170 2 115 1 170 2 115 1 170 2 115 1 170 2 115 1 170 2 115 1 170 2 170	314 1064 63 528 269 953 555 652 446 1131 758 1485 716 1436 5445 1131 959 128 800 1523	861 355 706 459 459 1226 1193 876 1047 228 1037 128 1161 400 1161 1189 758 685 1091 963 1168	0.1 zero 0.4 0.2 0.0 0.5 0.1 zero 0.1 zero 0.1 zero 0.1 zero 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zero 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.0 zero	18 cm	56 - 11.6 10 - 30 10 - 52 10 - 60 10 - 52 10 - 60 10 - 52 10 - 60 10 - 52 10 - 50 10 -	-199 -62 -101 -83 -103 -104 -108 -104 -114 -105 -116 -117 -121 -119 -116 -155 -151 -154 -150 -175 -176 -176 -177 -172 -176 -177 -172 -170 -170 -170 -170 -170 -170 -170 -170	12 14 15 16 18 17 17 18 17 20 19 22 1 21 21 21 3 24 13 19 -12 20 19 19 19 19 19 19 19 19 19 19 19 19 19	118 114 2224 112 224 1	2 8.5 2 8.5	-162	399 - 76.1 122 - 30.0 1224 - 47.6 389 - 76.0 124 - 47.6 389 - 76.0 125 - 50.0 126 - 50.0 127 - 46.5 128 - 44.5	0.383 0.197 0.268 0.267 0.214 0.435 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.300 0.407 0.402 0.248 0.383 0.412 0.294 0.314 0.294 0.310 0.310
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30064 R30066 R30066 R30066 R30066 R30066 R30067 R30066 R30067 R30066 R30067 R30068	150 150 150 150 150 150 150 150 165 168 180 180 180 180 180 180 180 180 180 18	Core-Lota* Pointed Soft Point Core-Lota* Pointed Soft Point Brouze Point Core-Lota* Uttra Bonded " Coper Sofd Toped Pocolity Boat Tat Core-Lota* Uttra Bonded " Core-Lota* Uttra Bonded " Account Boat Toped Pocolity Boat Tat Core-Lota* Uttra Bonded " Account Boat Toped Pocolity Boat Tat Core-Lota* Uttra Bonded " Account Boat Toped Core-Lota* Uttra Bonded " Core-Lota* Uttra Bonded " Core-Lota* Uttra Bonded " Swift Scincoon Bonded " Swift Scincoon Bonded Soft Point Core-Lota* Pointed Soft Point Core-Lota* Pointed Soft Point Core-Lota* Pointed Soft Point Core-Lota* Pointed Soft Point Core-Lota* Uttra Bonded " Core-Lota* Pointed Soft Point Core-Lota* Pointed Soft Point Core-Lota* Pointed Soft Point Core-Lota* Uttra Bonded " Core-Lota* Pointed Soft Point Core-Lota* Bonded " Co	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 (480 (480 (480 (480 (480 (480 (480 (48	2213 2007 4844 2964 4856 2447 5056 2497 5056 2497 5056 2497 5056 2416	1813 2499 2138 1757 228 2270 2083 2189 2121 2217 2047 2079 2188 2070 2082 2082 2070 2083 2070 2189 2277 2042 2084 1632 2384 1632 2384 26372 26373 26374 2637	1483 1483 1595	2360 19 2033 14 2736 21 2736 21 1953 15 2820 22 2820 22 2820 23 2820 23 2820 23 2820 23 2827 24 2827 24 2837 22 2837 22 2913 24 2913 2	57 1510 1 82 1073 3 45 1662 1 11 1148 1 12 2169 2 12 2069 2 13 2037 1 149 1944 1 150 1888 2012 1 170 2115 1 170 2115 1 170 2115 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 171 2125 1 171 2125 1 172 225 1 173 225 1 174 225 1 175	314 1064 63 528 269 953 555 652 4466 1131 758 1485 1131 956 128 445 1131 880 1523 800 1523	861 355 706 459 459 193 876 1047 933 1152 1226 963 1037 1309 1161 1405 1189 1758 685 1001 953 1168	0.1 zero 0.4 0.2 0.0 0.6 0.1 zero 0.1 zero 0.1 zero 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zero 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.0 zero 0.0 zero 0.0 zero 0.1 zero 0.0 zero	18 cm	56 - 11.6 10 - 30 19 - 52 19 - 60 10 -	-199 -62 -101 -83 -103 -104 -108 -108 -114 -108 -112 -119 -119 -119 -119 -119 -119 -119	12 14 15 16 18 18 17 20 19 20 24 21 13 13 19 19 19 19 19 19 19 19 19 19 19 19 19	118 114 222 112 222 112 222 122 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 222 12 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222	2 8.5 2 8.5	-162	399 - 76.1 122 - 30.0 1224 - 47.6 1389 - 78.0 124 - 50.9 1211 - 42.3 1215 - 50.9 1214 - 50.9 1215 - 50.9 1215 - 50.9 1216 - 48.9 1217 - 48.9 1218 - 48	0.383 0.197 0.268 0.267 0.268 0.267 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.300 0.407 0.402 0.248 0.333 0.412 0.294 0.314 0.294 0.310 0.310 0.390
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30062 R30062 R30062 R30062 R30062 R30062 R30064 R30066 R30066 R30066 R30066 R30067 R30066 R30067 R30068 R30061 R30061 R30066 R30067 R30066 R30067 R30068 R30068 R30068 R30068 R30068 R30068 R30068	150 150 150 150 150 150 150 150 165 165 168 180 180 180 180 180 180 180 180 180 18	Core-Lokt* Pointed Soft Point Pointed Soft Point Pointed Soft Point Pointed Soft Point Core-Lokt* Pointed Soft Point Soft Pointed Soft Point Soft Pointed Soft Point Brouze Pointed Soft Point Brouze Pointed Soft Point Core-Lokt* Ultra Bonded " Copper Sofi Tipped Local Tipped Loc	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 (480 (480 (480 (480 (480 (480 (480 (48	2213 2007 4844 2964 4856 2447 5056 2497 5056 2497 5056 2497 5056 2416	1813 2499 2138 1757 228 2270 2083 2189 2121 2217 2047 2079 2188 2070 2082 2082 2070 2083 2070 2189 2277 2042 2084 1632 2384 1632 2384 26372 26373 26374 2637	1483 1483 1595	2360 19 2033 14 2736 21 2736 21 1953 15 2820 22 2820 22 2820 23 2820 23 2820 23 2820 23 2827 24 2827 24 2837 22 2837 22 2913 24 2913 2	57 1510 1 82 1073 3 45 1662 1 11 1148 1 12 2169 2 12 2069 2 13 2037 1 149 1944 1 150 1888 2012 1 170 2115 1 170 2115 1 170 2115 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 170 2125 1 171 2125 1 171 2125 1 172 225 1 173 225 1 174 225 1 175	314 1064 63 528 269 953 555 652 4466 1131 758 1485 1131 956 128 445 1131 880 1523 800 1523	861 355 706 459 459 193 876 1047 933 1152 1226 963 1037 1309 1161 1405 1189 1758 685 1001 953 1168	0.1 zero 0.4 0.2 0.0 0.6 0.1 zero 0.1 zero 0.1 zero 0.2 0.7 0.2 0.7 0.2 0.7 0.1 zero 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.3 0.8 0.0 zero 0.0 zero 0.0 zero 0.1 zero 0.0 zero	18 cm	56 - 11.6 10 - 30 19 - 52 19 - 60 10 -	-199 -62 -101 -83 -103 -104 -108 -108 -114 -108 -112 -119 -119 -119 -119 -119 -119 -119	12 14 15 16 18 18 17 20 19 20 24 21 13 13 19 19 19 19 19 19 19 19 19 19 19 19 19	118 114 222 112 222 112 222 122 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 12 222 222 12 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222 222	2 8.5 2 8.5	-162	399 - 76.1 122 - 30.0 1224 - 47.6 389 - 76.0 124 - 47.6 389 - 76.0 125 - 50.0 126 - 50.0 127 - 46.5 128 - 44.5	0.383 0.197 0.268 0.267 0.214 0.435 0.314 0.365 0.331 0.400 0.447 0.339 0.356 0.300 0.407 0.402 0.248 0.383 0.412 0.294 0.314 0.294 0.310 0.310
30-06 Springfield 30-06 Springfield	R30402 R30069 R30061 R30061 R30061 R30062 R30062 R30062 R30062 R30064 R30068 R30066 R30066 R30066 R30066 R30067 R30067 R30067 R3007	150 150 150 150 150 150 150 150 165 163 180 180 180 150 150 150 150 150 150 150 150 150 15	Core-Lota* Pointed Soft Point Core-Lota* Soft Foint Core-Lota* Pointed Soft Point Core-Lota* Utra Bonded * Core-Lota* Utra Bonded * Core-Lota* Utra Bonded * Synt Sorticore Bonded *	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2430 4 480 3 3140 4 2300 2 231	2213 2007 4844 2564 2564 2565 2467 2565 2466 2665 2466 2665 2	1813 2499 2138 1157 2283 2270 2833 2270 2833 2121 2244 2217 2217 2207 22082 1777 22042 22084 1652 2384 1652 2384 1652 2384 2572 2617 2722 2844 2727 2728 2728 2728 2729 2729 2729	1632 1463 2080 1706 1853 1595 1500 0300 1843 [1672 2111 1934 2077 1833 1843 1674 2043 1860 2039 1870 2039 1870 1825 1621 1836 1663 2020 1837 1466 1251 1846 1663 1839 1725 1422 1246 1631 1432 2065 1810 1549 1846 1549	2360 19 2033 14 2736 21 1934 15 2820 22 2820 22 2820 22 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2820 23 2837 24 2837 22 2913 24 2913 22 2913 24 2913 24 2913 25 2913 24 2837 22 2913 24 2913 2	57 1610 1 82 1073 3 45 1662 1 113 1143 1 81 2127 3 21 2369 1 22 2307 4 45 1944 1 45 1944 1 46 1944 1 47 2115 1 70 2115 1 71 2115 1 71 2115 1 72 222 2311 1 73 232 2311 1 74 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 2311 1 77 232 232 2 77 232 231 2 77 232 231 2 77 232 231 2 77 232 231 2 77 232 231 2 77 232 232 232 2 77 232 232 232 2 77 232 232 232 2 77 232 232 232 2 77 232 232 232 232 2 77 232 232 232 232 232 232 232 232 232 232 232 2	314 1064 (63 528 (63 528 (63 528 (64 51131) (75 1435 (75 1435 (76 1435 (76 1436 (77 1435 (77 143	861 355 706 455 876 129 876 11047 933 1152 1221 1221 1221 1221 1221 1221 12	0.1 zero 0.4 0.2 0.0 0.6 0.1 zero 0.1 zero 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.2 0.7 0.0 zero	18	56 - 11.6 10 - 30 10 - 52 10 - 60 10 - 52 10 - 60 10 - 53 10 - 54 10 -	-199 -67 -101 -68 -136-2 -102 -103 -114 -108 -112 -104 -112 -119 -119 -121 -119 -151 -151 -154 -150 -224 -175 -87 -175 -87 -100 -100 -100	12 14 15 16 18 18 17 18 20 19 21 12 21 13 24 13 19 19 19 19 19 19 19 19 19 19 19 19 19	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	2 8.5 2 8.5 3 18 18 18 18 18 18 18 18 18 18 18 18 18	-162	399 - 76.1 122 - 30.0 1224 - 47.6 1389 - 78.0 124 - 50.9 1211 - 42.3 1215 - 50.9 1214 - 50.9 1215 - 50.9 1215 - 50.9 1216 - 48.9 1217 - 48.9 1218 - 48	0.383 0.197 0.268 0.267 0.3014 0.305 0.331 0.400 0.447 0.339 0.356 0.331 0.402 0.402 0.248 0.383 0.412 0.294 0.314 0.294 0.310 0.310 0.309

Note: These ballistics reflected a test barrel length of 24° except those for 30 Carbine and 44 Remington Magnum which are 20° barrels. Specifications are nominal. Ballistics figures established in test barrels. Individual rifles may vary from test barrel results. "zero" indicates yardage at which rifle was sighted in. "Inches above or below line of sight. Hold low for positive numbers, high for negative numbers. I 280 Remington and Jrmn Express. Remington are interchangeable.

4 Somm Remington and 244 Remington are interchangeable.

Bullet does not rise more than 1° above line of sight from muzzle to sighting-in range. 2 Notes does not rise more than 1° above line of sight from muzzle to sighting-in range.

Managed-Recoil ** (pages 62-63)

Premier* Copper Solid* (page 57)

Premier * Core-Lokt * Ultra Bonded (page 52)

Premier* Disintegrator* Varmint (page 55)

Premier Match (pages 57)

Premier AccuTip (pages 54-55)

Premier® Scirocco® Bonded (page 54)

Swift A-Frame PSP

UMC® (page 65)

Core-Lokt® (pages 60)

² Bullet does not rise more than 3" above line of sight from muzzle to sighting-in range.

				-				
19.5	CHECK/EDI	NT. (町)		PRESER	VELOCITY (fps)	MUZZIE 100 200 300 400 500	SHORT-RANSE TRANSLITURY	LENG-RANCE TELEFORMY SULISHE
20011	RELEGE		SERVE ZUFE	RUMBER	ESZE 100 200 300 400 500		50 100 150 200 250 300	100 150 200 250 300 400 500 commosti
300 Win Mag (cont.)	R300W2	180	Core-Lokt® Pointed Soft Point	91/2M	2960 2715 2482 2262 2052 1856	3501 2945 2463 2044 1683 1375	0.1 0.6 zero -1.9 -5.3 -10.2	1.7 1.5 zero -2.9 -7.4 -21.3 -43.7 0.383
	RS300WA	200	Swill A-Frame (FSP	97303	2023 253 200 2180 190 1085	8540 2200 2500 2023 1126 1146	02 03 5 22 42 40 412	18 16 63 49 49 49 49 (63)
300 WSM	R300WSM1	150	Core-Lokt* Pointed Soft Point	91/2M	3320 2977 2660 2364 2087 1830	3671 2952 2356 1861 1451 1116	-0.1 0.4 zero - 1.5 -4.3 -8.5	12 12 zero -24 -6.2 -18.6 -39.0 0.294
	DESCRIPTION OF THE PERSON OF T	.ED	Amin Redic	9/20	800 20 22 20 20 20 20 20 20 20 20 20 20 2	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	01 03 20 40 40 40	25 26 28 cm 40 406 400 (40) ·
	PRSC300MSMB	180	Swill Scincero Bonded	974U	230 231 250 242 225 216	1859 903 760 222 200 1750 ·	00 05 45 46 48 49	16 18 m 26 06 400 50 000
308 Marlin Express	R308ME1	150	Soft Point	91/2	2725 2275 1871 1519 1239 1057	2473 1724 1166 768 511 372	0.0 zero -1.6 -5.3 -11.5 -20.7	2.7 2.3 max -4.8 -12.7 -40.8 -91.5 0.193
308 Win.	RECEVE.	123	DEFECT OF THE SECTION	900	760 FZ 212 103 163 163	LES HES DE 913 TES ESS	10 m 10 40 40 400	D = 40 40 40 (16 (16)
	L308W4	100	UMP Mar Dass	96	2820 2533 2263 2010 1775 (551)	- 259 267 1765 1855 1859 2H	-01 m -12 40 40 400 -	20 17 = 30 93 422 433 (09)
	PRSC308WA	150	SMil Senery Borded	9/2	2820 2611 2410 2219 2037 1863	2648 2269 1935 1640 1331 1156	00 = 411 - 36 - 36 - 412	18 16 co 41 18 20 40 105
	PRC308WA	150	Core-Lokt* Ultra Bonded:**	91/2	2820 2546 2288 2046 1819 1611;	2648 2159 1744 1394 1102 864	0.2 280 -1.2 -39 -8.2 -14.4	1.9 2.1.7 zero -3.4 -8.6 -25.5 -53.1 0.331
	R308W1	150	Core-Lokt* Pointed Soft Point	91/2	2820 2533 2263 2009 1774 1560	2648 2137 1705 1344 1048 810	0.0 zeso -1.2 -3.9 -8.4 -14.7	2.0 1.7 zero -3.4 -8.8 -26.2 -54.8 0.314
	PCS308WA	150:	Copper Solid Topped	3 91/61	2820 # 2593 2376 2171 1975 1791	F 2648 F 2238 1881 1569 F 1299 5 1068 F	02 08 zen 3 -224 -59 113	#18# 16# mo 2-324 80 2341 4782 0400%
-	PRA308WB	165	Accurin Boat (a)	90	2700 2501 2311 2129 1958 1792	2570 -2292-1957 -1660 1401-1176	-01 no 48 -41 -45 40	20 16 - 30 36 46 50 007
	RM308W7	168	MatchKing® BTHP	91/2	2680 2493 2314 2143 1979 1823	2678 2318 1998 1713 1460 1239	0.0 zero -1.3 -4.1 -8.5 -14.7	2.1 1.8 zero -3.4 -8.6 -24.7 -49.9 0.475
	RM308W8	175	MatchKing® BTHP	91/2	2609 - 2433 2264 2102 1946 1798	2644 2300 1992 1716 1472 1256	0.4 0.9 zero -2.5 -6.7 -12.8	2.2 1.9 zero -3.6 -9.0 -25.9 -51.9 0.496
-	PRC308WC	180	Core-Loid* Ultra Bonded™	91/2	2620 2404 2198 2002 1818 1644	2743 2309 1930 1601 1320 1080	 	
	R308W2	180		91/2	<u> </u>			
		_	Core-Loite Soft Point		2620 2274 1955 1666 1414 1212	2743 2066 1527 1109 799 587	0.0 zero -1.7 -5.3 -11.2 -19.7	2.6 2.3 zero -4.6 -11.8 -36.3 -78.2 0.248~
200114 14	R308W3	180	Core-Lokt* Pointed Soft Point	91/2	2620 2393 2178 1974 1782 1604	2743 2288 1896 1557 1269 1028	0.0 zero -1.5 -4.6 -9.5 -16.5	23 20 zero -3.8 -9.7 -28.3 -57.8 0.383
300 Wby. Mag.	R300WB1	180	Core-Lokt* Pointed Soft Point	91/z M	3120 2866 2626 2398 2181 1976	3890 3282 2755 2298 1902 1561	0.0 0.5 zero -1.7 -4.6 -9.0	1.4 1.3 zero -2.5 -6.4 -18.9 -38.7 0.383
303 British	130381	1743	UMC: Metal Case	9 1/2	2475 \$220 4950 4772 4520 1338	2366 1885 1484 1155 833 6 697 F	00 an 49 459 4120 4210	28 24 m 47 119 366 743 71315
	R30381	180	Core-Lold* Soft Point	91/2	2460 2124 1817 1542 1311 1137	2418 1803 1319 950 687 517	0.1 zero -2.0 -6.3 -13.2 -23.1	1.3 zero -3.6 -9.8 -19.1 -49.4 -99.9 0.247
7.62x39mm	1762391	123	UND MAD (200)	19%	\$255, 2000 ftco ftco 1935 ftco	1527 1159 885 683 477 1651	00 pm 422 458 AM 4215	15 and 38 104 202 515 103.0 0266 2
	R762391	125	Pointed Soft Point	91/2	2365 2062 1783 1533 1320 1154	1552 1180 882 652 483 370	0.1 zero -2.2 -6.7 -14.0 -24.5	1.5 : zero -3.8 -10.4 -20.1 -51.3 -102.5 0.267
300 Remangton	PR300SM1	150	Core-Lold" Ultra Bonded'"	91/2 M	3200 2901 2622 2359 2112 1880	3410 2803 2290 1854 1485 1177	0.1 0.5 zero -1.6 -4.6 -8.9	1.3 -1.2 zero -2.5 -6.4 -19.1 -39.6 0.330
Short Action Ultra Mag	PR300SM2	165	Core-Lokt* Pained Soft Point	91/2 M	3075 2792 2527 2276 2040 1819	3464 2856 2339 1898 1525 1213	0.1 0.6 zero -1.8 -5.0 -9.7	1.5 · 1.4 zero -2.7 · 7.0 · -20.7 · 42.1 0.339
	PR300SM4	180	Core-Lokt* Ultra Bonded**	91/2 M	2960 2727 2506 2295 2094 1904	3501 2972 2509 2105 1753 1449	0.1 0.5 zero -1.9 -5.2 -10.0	1.6 1.4 zero -2.8 -7.1 -20.9 -42.6 0.403
	RM300SM7	190	MatchKing® BTHP	91/2 M	2900 2725 2557 2395 2239 2089	3547 3133 2758 2420 2115 1840	0.1 0.6 zero1.9 -5.1 -9.8	1.6 1.4 zero -2.7 -6.9 -19.9 -39.8 0.533
300 Remington	PR300UM5.	150	Swift Scirocco Bonded	9½M	3450 3208 2980 2762 2556 2358	3964 3427 2956 2541 2175 1852	0.0 0.3 zero 12 -3.4 -6.7	. 17 (21 * 1.5 zero 2.6 -11.2 -25.3 0.435)
Ultra Mag	PR300UM3	180	Swift Scirocce Bonded	91/2M	3250 3048 2856 2672 2495 2325	4221 3714 3260 2853 2487 2160	0.0 0.4 zero 7 1.4 3.9 2 7.5 3	20 * 23 * 1.7 zero 28 -123 -273 0.500
POWER	PCS300UMB	165	Copper Soud Tipped	91/2 M	3260 3035 2821 2617 2422 2235	3893 ; 3373 2915 ⁷ 2617 * 2422 - 2235 -	0.0 zero 0.9 -29 5-5.9 1-10.1 s	*14**12* zero -23 -58 -167 -316 0.447
LEVEL III	PR300UM4	180	Core-Lold* Ultra Bonded**	91/2 M	3250 2988 2742 2508 2287 2076	4221 3568 3003 2513 2088 1721	0.0 0.4 zero -1.5 -4.2 -8.1	2.1 2.5 1.8 zero -3.1 -13.6 -30.7 0.382
	RS300UM2	200	Swift A-Frame PSP	9½M	3032 2791 2562 2345 2138 1942	40833 3459 2916 2442 2030 1675	0.1 0.6 zero 18 4.9 3-9.5	1.5 1.4 zero -27+ 6.8 -19.9 40.7 0.395
	Maria Sauti Audioni d	180	AT A DESCRIPTION OF THE PROPERTY OF THE PROPER	9 ½ M	24 mm of 18 and 4 cites Shipper at Carlo	Control of the second of the s	The state of the s	291 28 2 2 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
POWER Level (1	PR300UM2-P2 PR300UM3-P2	180	Core-Lokt* Ultra Bonded**	91/2 M		the state of the s	0.1 0.6 zero -1.9 -5.1 -9.9	·
	CR26-18-23-675	10.00	Swift Scirocca Bonded		2980 2793 2614 2442 2276 2116	3549 3118 2730 2382 2070 1790	01 06 zero -18 48 -92 -	1.5 1.3 zen -26 -66 -19.0 -38.1 0.507.
POWER	PRA300LM1-P1	150	Accordin Book I and	691/2ME	2910 2686 2473 2270 2077 1293	Section of the sectio	00.07 20, 40 400	10 10 50 40 40 40 40 40 40 40 40 40 40 40 40 40
LEVEL	R300UM1-P1	150	Core-Lokt* Pointed Soft Point	9 ½ M	2910 2617 2342 2083 1843 1622	2820 2281 1827 1445 1131 876	0.2 0.7 zero -2.2 -5.9 -11.4	1.8 1.6 zero -32 -8.2 -24.4 -50.9 0.314
22 20 115-	FRI 300UMI	150	Core-Loke Pointed Soft Point	9/2	2815 2578 2258 2005 1770 1556	2639 2127 1698 1139 1041 2 806 5	[08] (08] (Epi (42), (31) (422).	20 13 50 35 35 227 451 034
32-20 Win.	R32201	100	Lead	61/2	1210 1021 913 834 769 712	325 231 185 154 131 113	zero -5.7 -19.7 -43.1 -76.9 -122.2	zero -11.2 -31.7 -62.7 -105.2 -228.5 -410.8 0.166
32 Win. Special	R32WS2	170	Core-Lokt® Soft Point	91/2	2250 1921 1626 1372 1175 1044	1911 1393 998 710 521 411	0.3 zero -2.6 -8.0 -16.7 -29.3	1.7 zero -4.5 -12.4 -24.1 -62.1 -125.3 0.239
8mm Rem. Magnum	RS8MMRA	200	Swift A-Frame PSP	91/2 M	2900 2623 2361 2115 1885 1672	3734 3054 2476 1987 1577 1241	0.2 0.7 zero -2.1 -5.8 -11.2,	18 16 zero -3.1 -8.0 -23.9 -49.6 0.332
8mm Mauser	R8MSR	170	Core-Lokt® Soft Point	91/2	2360 1969 1622 1333 1123 997	2102 1463 993 671 476 375	0.2 zero -2.4 -7.6 -16.1 -28.6	1.6 zero -4.4 -12.0 -23.7 -62.8 -128.9 0.205
338 Martin Express	R338ME1	250	Soft Point	91/2	2189 1922 1676 1458 1273 1132	2659 2049 1560 1180 900 711	0.6 0.0 -2.9 -8.6 -17.3 -29.6	2.0 0.0 -4.7 -12.4 -23.7 -59.2 -116.2 0.291
338 Win, Mag.	RS338WA	225	Swift A-Frame* PSP	9½M	2785 2517 2266 2029 1808 1605	3871 3165 2565 2057 1633 1286	0.0 zero -1.24.0 -8.5 -14.8	20, 1.8 zero -3.5 -8.8 -26.1 -54.1 0.337
	R338W1	225	Core-Lokt* Pointed Soft Point	91/2 M	2780 2572 2374 2184 2003 1832	3860 3305 2815 2383 2004 1676	0.0 0.8 zero -2.2 -5.9 -11.4	1.9 1.7 zesto -3.2 -8.1 -23.4 -47.5 0.435
	PRC338WA	225	Core-Loid" Ultra Bonded'"	91/2 M	2780 2582 2392 2210 2036 1871	3860 3329 2858 2440 2071 1748	0.2 0.8 zero -2.2 -5.9 -11.2	1.9 1.6 zero -3.2 -7.9 -23.0 -46.5 0.456
	R338W2	250	Core-Lokt* Pointed Soft Point					1
338 Remington			COLC COME I GINEDE CONTI GIN	9½ M	2660 2456 2261 2075 1898 1731	3927 3348 2837 2389 1999 1663	0.0 zero -1.4 -4.3 -8.9 -15.4	2.1 1.9 zero -3.5 -8.9 -26.0 -52.7 0.431
	PR338UM2	250	Core-Lokt* Pointed Soft Point	9½M 9½M	2660 2456 2261 2075 1898 1731 2860 2647 2443 2249 2064 1887	3927 3348 2837 2389 1999 1663 4540 3888 3314 2807 2363 1977		2.1 1.9 zero -3.5 -8.9 -26.0 -52.7 0.431 1.7 1.5 zero -3.0 -7.6 -22.0 -44.7 0.431
Ultra Mag	PR338UM2 PR338UM1				· · · · · · · · · · · · · · · · · · ·		0.0 zero -1.4 -4.3 -8.9 -15.4	
ззя Lapua Мадпит	<u></u>	250	Core-Lokt® Pointed Soft Point	9½ M	2860 2647 2443 2249 2064 1887	4540 3888 3314 2807 2363 1977	0.0 zero -1.4 -4.3 -8.9 -15.4 0.2 0.7 zero -2.1 -5.6 -10.6	1.7 1.5 zero -3.0 -7.6 -22.0 -44.7 0.431
·	PR338UM1	250 250	Core-Lokt* Pointed Soft Point Swift A-Frame* PSP	9½M 9½M	2860 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960	0.0 zero -1.4 -4.3 -8.9 -15.4 0.2 0.7 zero -2.1 -5.6 -10.5 0.2 0.7 zero -2.0 -5.6 -10.7	1.7 1.5 zero -3.0 -7.6 -22.0 -44.7 0.431 1.7 1.5 zero -3.0 -7.5 -22.1 -44.9 0.427
338 Сариа Мадпит	PR338UMI RM338LMR1	250 250 250	Core-Lold* Pointed Soft Point Swift A-Frame* PSP Scenar	9½M 9½M 9½M	2860 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4863 4412 3996 3613 3759 2932	0.0 zero -1.4 -4.3 -8.9 -15.4 0.2 0.7 zero -2.1 -5.6 -10.6 0.2 0.7 zero -2.0 -5.6 -10.7 0.1 0.6 zero -1.7 -4.7 -8.9	1.7 1.5 zero -3.0 -7.6 -22.0 -44.7 0.431 1.7 1.5 zero -3.0 -7.6 -22.1 -44.9 0.427 1.4 1.3 zero -2.5 -6.3 -17.9 -35.4 0.675
338 Сариа Мадпит	PR338UM1 RM338LMR1 R35R1	250 250 250 250	Core-Lold® Pointed Soft Point Swift A-Frame® PSP® Scenar Core-Lold® Pointed Soft Point	9½ M 9½ M 9½ M 9½	2860 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 359 291	0.0 zen -1.4 -4.3 -8.9 -15.4 0.2 0.7 zero -2.1 -5.6 -10.5 0.2 0.7 zero -2.0 -5.6 -10.7 0.1 0.6 zero -1.7 -4.7 -8.9 0.3 zero -2.7 -8.6 -18.2 -32.6	1.7 1.5 zero -3.0 -7.6 -22.0 -44.7 0.431 1.7 1.5 zero -3.0 -7.6 -22.1 -44.9 0.427 1.4 1.3 zero -2.5 -6.3 -17.9 -35.4 0.675 1.8 zero -4.9 -13.7 -27.1 -73.0 -150.8 0.184
338 Lapua Magnum 35 Remington	PR338UM1 RM338LMR1 R35R1 R35R2	250 250 250 250 150 200 200	Core-Lold* Pointed Soft Point Swift A-Frame" PSP' Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point	9½ M 9½ M 9½ M 9½ 9½ 9½	2660 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2080 1698 1376 1140 1001 911 2675 2378 2100 1842 1606 1399	4549 3888 3314 2807 2363 1977 4549 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869	0.0 zen -1.4 -4.3 -8.9 -15.4 0.2 0.7 zer -2.1 -5.6 -10.5 0.2 0.7 zer -2.0 -5.6 -10.7 0.1 0.6 zer -1.7 -4.7 -8.9 0.3 zer -2.7 -8.6 -18.2 -32.6 0.5 zer -3.5 -10.7 -22.6 -40.1 0.0 zer -1.5 -4.7 -9.9 -17.3	1.7 1.5 zero -3.0 -7.6 -22.0 -44.7 0.431 1.7 1.5 zero -3.0 -7.5 -22.1 -44.9 0.427 1.4 1.3 zero -2.5 -6.3 -17.9 -35.4 0.675 1.8 zero -4.9 -13.7 -27.1 -73.0 -150.8 0.184 2.3 zero -6.1 -16.7 -33.0 -86.6 -174.8 0.192 2.3 2.0 zero -16.8 -33.1 -86.9 -175.4 0.294
338 Lapua Magnum 35 Remington 35 Whelen	PR338UM1 RM338LMR1 R35R1 R35R2 R35WH1	250 250 250 250 150 200	Core-Lold* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Pointed Soft Point Pointed Soft Point	9½ M 9½ M 9½ M 9½ 9½ 9½ 9½	2660 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2080 1698 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1552 1456	4549 3888 3314 2807 2363 1977 4549 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 889	0.0 zen -1.4 -4.3 -8.9 -15.4 0.2 0.7 zero -2.1 -5.6 -10.5 0.2 0.7 zero -2.0 -5.6 -10.7 0.1 0.6 zero -1.7 -4.7 -8.9 0.3 zero -2.7 -8.6 -18.2 -32.6 0.5 zero -3.5 -10.7 -22.6 -40.1 0.0 zero -1.5 -4.7 -9.9 -17.3 0.1 zero -1.9 -5.7 -11.8 -20.4	1.7 1.5 2200 -3.0 -7.6 -22.0 -44.7 0.431 1.7 1.5 2200 -3.0 -7.6 -22.1 -44.9 0.427 1.4 1.3 2200 -2.5 -6.3 -17.9 -35.4 0.675 1.8 2200 -4.9 -13.7 -27.1 -73.0 -150.8 0.184 2.3 2200 -6.1 -16.7 -33.0 -86.6 -174.8 0.192 2.3 2.0 2200 -16.8 -33.1 -86.9 -175.4 0.294 1.3 2200 -3.2 -8.6 -16.6 -40.0 -76.3 0.409
338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag	PR338UM1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R35WH3	250 250 250 150 200 200 250 200	Core-Lold* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Pointed Soft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point	9½ M 9½ M 9½ M 9½ 9½ 9½ 9½ 9½ M	2660 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2080 1698 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1552 1466 2775 2471 2186 1921 1678 1461	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2880 2230 1844 1515 1242 3419 2711 2122 1639 1250 947	0.0 280 -1.4 -4.3 -8.9 -15.4	1.7
338 Lapua Magnum 35 Remington 35 Whelen	PR338UM1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R35WH3 R35WH3 R35WH3	250 250 250 150 200 200 250 200 270	Core-Lold* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Pointed Soft Point Core-Lold* Pointed Soft Point Soft Point Soft Point	9½ M 9½ M 9½ M 9½ 9½ 9½ 9½ M 9½ M	2660 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2080 1698 1375 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1496 2775 2471 2186 1921 1678 1461 2690 2353 2060 1780 1530 1317	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2880 2230 1844 1515 1242 3419 2711 2122 1639 1250 447 4338 3347 2543 1900 1433 1039	0.0 2200 -1.4 -4.3 -8.9 -15.4 0.2 0.7 220 -2.1 -5.6 -10.5 0.2 0.7 2200 -2.0 -5.6 -10.7 0.1 0.6 2200 -1.7 -4.7 -8.9 0.3 2000 -2.7 -8.6 -18.2 -22.6 0.5 2200 -3.5 -10.7 -22.6 -40.1 0.0 2200 -1.5 -4.7 -9.9 -17.3 0.1 2200 -1.9 -5.7 -11.8 -20.4 -0.1 2200 -1.3 -4.2 -9.0 -15.8 0.4 1.0 2200 -2.8 -7.6 -14.8	1.7
338 Lapna Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag	PR338UM1 RM338LMR1 R35R1 R35R2 R35W11 R35W13 R35W13 R35W14 R35W14 R35W14 R35W14 R35W14 R35W14 R35W14 R35W14 R35W14	250 250 250 150 200 200 250 200 270 300	Core-Lold* Pointed Soft Point Swift A-France" PSP Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Pointed Soft Point Core-Lold* Pointed Soft Point Soft Point Soft Point Swift A-France" PSP	9½ M 9½ M 9½ M 9½ 9½ 9½ 9½ M 9½ M 9½ M	2660 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2080 1668 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1496 2775 2471 2186 1921 1678 1461 2690 2353 2060 1780 1530 1317 2522 2880 2061 1836 1637 1458	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 3419 2711 2122 1639 1250 947 4338 3347 2543 1900 1403 1039 4238 3462 2802 2245 1788 1415	0.0 220 -1.4 -4.3 -8.9 -15.4	1.7
338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag	PR338LMI RM338LMR1 R35R1 R35R1 R35W1 R35W13 R35W13 R35W1 R375M1 R375M1 R375MA PR375LM2	250 250 250 150 200 200 250 200 270 300 270	Core-Lold* Pointed Soft Point Swift A-France* PSP Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Soft Point Swift A-France* PSP Soft Point	9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M 9½ M 9½ M	2660 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2080 1668 1375 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1496 2775 2471 2185 1921 1678 1461 2690 2353 2060 1780 1530 1317 2522 2280 2061 1836 1637 1458 2900 2558 2241 1947 1678 1442	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 339 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 3419 2711 2122 1639 1250 947 4338 3347 2543 1900 1433 1039 4238 3462 2802 2745 1786 1415 5041 3922 3010 2772 1628 1246	0.0 2200 -1.4 -4.3 -8.9 -15.4 0.2 0.7 220 -2.1 -5.6 -10.5 0.2 0.7 220 -2.0 -5.6 -10.7 0.1 0.6 220 -1.7 -4.7 -8.9 0.3 200 -2.7 -8.6 -18.2 -22.6 0.5 220 -3.5 -10.7 -22.6 -40.1 0.0 220 -1.5 -4.7 -9.9 -17.3 0.1 220 -1.9 -5.7 -11.8 -20.4 0.1 220 -1.3 -4.2 -9.0 -15.8 0.4 1.0 220 -2.8 -7.6 -14.8 0.0 220 -1.7 -5.2 -10.8 -18.7 0.0 0.8 2200 -2.3 -6.3 -12.3 0.0 20 -1.7 -5.2 -10.8 -18.7 0.0 0.0 2200 -2.3 -6.3 -12.3 0.0 0.0 2200 -2.3 -6.3 -12.3 0.0 0.0 2200 -2.3 -6.3 -12.3 0.0 0.0 2200 -2.3 -6.3 -12.3 0.0 0.0 2200 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -6.3 -12.3 0.0 0.0 -2.0 -2.3 -2.3 -2.3 0.0 0.0 -2.0 -2.3 -2.3 -2.3 0.0 0.0 -2.0 -2.0 -2.0 0.0 0.0 0.0 -2.0 -2.0 -2.0 0.0 0.0 0.0 -2.0 -2.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	1.7
338 Lapua Magnum 35 Remington 35 Whelen 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Utra Mag	PR338LMI RA338LMI R35R1 R35R1 R35W1 R35W1 R35W1 R35W1 R35W1 R375M1 R375MA PR375LRI PR375LRI PR375LRI PR375LRI	250 250 250 150 200 200 250 200 270 300 270 300	Core-Lold* Pointed Soft Point Swift A-France* PSP Scenar Core-Lold* Pointed Soft Point Core-Lold* Pointed Core-Lold* Pointed Core-Lold* Point Core-Lold* Point Core-Lold* Point Core-Lold* Point Soft Point Swift A-France* PSP Soft Point Swift A-France* PSP	9½ M 9½ M 9½ M 9½ 9½ 9½ 9½ M 9½ M 9½ M 9	2660 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2080 1668 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1496 2775 2471 2186 1921 1678 1451 2690 2353 2060 1780 1530 1317 2522 2280 2061 1836 1637 1458 2900 2558 2241 1947 1678 1442 2760 2505 263 2035 1822 1624	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 339 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 3419 2711 2122 1639 1250 947 4338 3347 2543 1900 1403 1039 4238 3462 2802 2745 1786 1415 5041 3922 3010 2772 1623 1246 5073 4178 3412 2759 2210 1757	0.0 2em -1.4 -4.3 -8.9 -15.4 0.2 0.7 2em -2.1 -5.6 -10.6 0.2 0.7 2em -2.0 -5.6 -10.7 0.1 0.6 zem -1.7 -4.7 -8.9 0.3 zem -2.7 -8.6 -18.2 -32.6 0.5 zem -3.5 -10.7 -22.6 -40.1 0.0 zem -1.5 -4.7 -9.9 -17.3 0.1 zem -1.9 -5.7 -11.8 -20.4 0.1 zem -1.3 -4.2 -9.0 -15.8 0.4 1.0 zem -2.8 -7.6 -14.8 0.0 zem -1.7 -5.2 -10.8 -18.7 0.0 0.8 zem -2.4 -5.4 -12.4 0.0 0.0 0.0 -2.4 -5.4 -12.4 0.0 0.0 0.0 -2.4 -5.4 -12.4 0.0 0.0 0.0 0.0 -2.4 -5.4 -12.4 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	1.7
338 Lapua Magnum 35 Remington 35 Whelen 35 Whelen 360 Remington Mag 375 H&H Mag 375 Remington Utra Mag 416 Rem. Magnum	PR338UM1 RA338UM1 R35R1 R35R2 R35W11 R35W13 R35W13 R35W13 R35W14 R375M1 RS375MA PR375UM2 PR375UM3 RS41GRA	250 250 250 150 200 200 250 200 270 300 270 300 400	Core-Lold* Pointed Soft Point Swift A-Frame" PSP' Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Pointed Soft Point Soft Point Swift A-Frame" PSP Swift A-Frame" PSP Swift A-Frame" PSP Swift A-Frame" PSP	9½ M 9½ M 9½ 9½ 9½ 9½ 9½ M 9½ M 9½ M 9½	2860 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2000 1874 1506 1218 1039 334 2000 1698 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1469 2775 2471 2185 1921 1678 1451 2690 2353 2060 1780 1530 1317 2522 2280 2611 1836 1637 1438 2900 2538 2241 1947 1678 1442 2760 2905 263 2035 1821 1579 1814 2400 2175 1962 1763 1579 1814	4540 3888 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4863 4412 3996 3613 3259 2932 1762 1169 755 494 399 291 1921 1220 841 577 445 369 3177 2510 1958 1056 1145 869 3197 2680 2230 1844 1515 1242 4338 3347 2543 1900 1403 1039 4238 3462 2802 245 1786 1415 5041 3922 3010 2772 1683 1246 5073 4178 3412 2759 210 1757 5115 4201 3419 2760 2214 1775	0.0 2200 -1.4 -4.3 -8.9 -1.54 0.2 0.7 2270 -2.1 -5.6 -10.6 0.2 0.7 2270 -2.0 -5.6 -10.7 0.1 0.6 2270 -1.7 -4.7 -8.9 0.3 2270 -2.7 -8.6 -18.2 -32.6 0.5 2270 -3.5 -10.7 -22.6 -40.1 0.0 2270 -1.5 -4.7 -9.9 -1.7 0.1 2270 -1.5 -4.7 -9.9 -1.7 0.1 2270 -1.3 -4.2 -9.0 -1.8 0.1 2270 -1.3 -4.2 -9.0 -1.4 0.0 2270 -1.7 -5.2 -10.8 -12.1 0.1 2270 -1.9 -5.9 -1.21 -20.8 0.1 2270 -1.9 -5.9 -1.21 -20.8 0.1 2270 -1.9 -5.9 -1.21 -20.8 0.2 2270 -1.9 -5.9 -1.21 -20.8 0.3 0.8 2270 -2.4 -6.4 -1.24 0.1 2270 -1.9 -5.9 -1.21 -20.8 0.3 0.8 2270 -2.4 -6.4 -1.24 0.1 -1.5 -1.5 -1.5 -1.5 -1.5 0.1 -1.5 -1.5 -1.5 -1.5 0.2 -1.5 -1.5 -1.5 -1.5 0.3 0.8 2270 -2.4 -6.4 -1.24 0.1 -1.5 -1.5 -1.5 -1.5 0.2 -1.5 -1.5 -1.5 -1.5 0.3 0.8 2270 -2.4 -6.4 -1.24 0.1 -1.5 -1.5 -1.5 -1.5 0.2 -1.5 -1.5 -1.5 -1.5 0.3 0.8 2270 -2.4 -6.4 -1.24 0.1 -1.5 -1.5 -1.5 -1.5 0.1 -1.5 -1.5 -1.5 -1.5 0.2 -1.5 -1.5 -1.5 -1.5 0.3 0.8 2270 -2.4 -6.4 -1.24 0.1 -1.5 -1.5 -1.5 -1.5 0.1 -1.5 -1.5 -1.5 -1.5 0.2 -1.5 -1.5 -1.5 -1.5 0.3 0.8 -1.5 -1.5 -1.5 0.4 -1.5 -1.5 -1.5 0.5 -1.5 -1.5 -1.5 0.7 -1.5 -1.5 -1.5 0.7 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 -1.5 0.8 -1.5 -1.5 0.8 -1.5 -1.5 0.8	1.5 2270 -3.0 -7.6 -22.0 -44.7 0.431 1.7 1.5 2270 -3.0 -7.6 -22.1 -44.9 0.427 1.4 1.3 2270 -2.5 -6.3 1.7.9 -35.4 0.675 1.8 2270 -4.9 -13.7 -27.1 -73.0 -150.8 0.184 2.3 2290 -6.1 -16.7 -33.0 -86.6 -174.8 0.192 2.3 2.0 2270 -16.8 -33.1 -86.9 -175.4 0.294 1.3 2270 -3.2 -86.6 -166 -40.0 -76.3 0.409 2.1 1.8 2270 -3.5 -3.4 -28.3 -59.7 0.293 -2.4 2.1 2270 -4.1 -10.6 -32.3 -69.0 0.267 -2.6 2.2 2270 -4.3 -10.9 -32.2 -66.5 0.350 -1.9 1.7 2270 -3.5 -3.9 -27.0 -3.6 0.350 -3.3 -28.9 -17.0 -41.9 -30.8 0.356 -13.3 -3.9 -3.3 -3.9 -17.0 -41.9 -30.8 0.356 -3.5 -3.5 -3.8 -3.6 -3.5 -3.9 -3.5 -3.8 -3.6 -3.5 -3.9 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.5 -3.8 -3.6 -3.8 -3.6 -3.8 -3.6 -3.8 -3.6 -3.8 -3.6 -3.8 -3.6 -3.8 -3.
338 Lapua Magnum 35 Remington 35 Whelen 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Utra Mag	PR338UM1 RM338L MR1 R35R1 R35R2 R35W11 R35W13 R35W13 R35W13 R375M1 R375M1 R375M2 PR375UM2 R375UM3 R5416RA R44M62	250 250 250 150 200 200 250 200 270 300 270 300 400 249	Core-Lold* Pointed Soft Point Swift A-Frame" PSP Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Pointed Soft Point Core-Lold* Pointed Soft Point Swift A-Frame" PSP Soft Point Swift A-Frame" PSP Swift A-Frame" PSP Soft Point	9½ M 9½ M 9½ 9½ 9½ 9½ 9½ 9½ M 9½ M 9½ M	2860 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2900 1874 1506 1218 1039 334 2080 1698 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1462 2775 2471 2185 1921 1678 1461 2690 2353 2060 1780 1530 1317 2522 2260 2615 1823 1631 1442 2900 2538 2241 1947 1678 1442 2760 2505 263 2035 1822 1524 2400 2175 1962 1763 1579 1414 1760 1380 1114 <	4540 3883 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1220 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 3419 2711 212 319 1250 433 4438 3347 2543 1900 1403 3039 4238 3462 2802 2745 1786 1415 5041 3922 3010 2772 1623 1246 5073 4178 3412 2759 210 1757 5115 4201 3419 2760 2114 1775	0.0 2200 -1.4 -4.3 -8.9 -1.54	1.5 2270 -3.0 -7.6 -22.0 -44.7 0.431 1.7 1.5 2270 -3.0 -7.6 -22.1 -44.9 0.427 1.4 1.3 2270 -2.5 -6.3 1.7.9 -35.4 0.675 1.8 2270 -4.9 -13.7 -27.1 -7.30 -150.8 0.184 2.3 2290 -6.1 -16.7 -33.0 -86.6 -174.8 0.192 2.3 2.0 2270 -16.8 -33.1 -86.9 -175.4 0.294 1.3 2270 -3.2 -6.6 -6.6 -40.0 -76.3 0.409 2.1 1.8 2270 -3.5 -9.4 -28.3 -59.7 0.293 -24 2.1 2270 -4.1 -10.6 -32.3 -69.0 0.267 -26 -2.2 2270 -4.1 -10.6 -32.3 -69.0 0.267 -26 -2.2 2270 -4.3 -10.9 -32.2 -66.5 0.350 -1.9 -1.7 2270 -3.5 -8.9 -27.0 -3.6 0.267 -2.0 -1.8 2270 -3.5 -8.8 -26.1 -5.3.9 0.359 -3.3 -3.9 -17.0 -4.19 -30.8 0.367 -220 -5.6 -17.0 -3.54 -6.19 -143.8 -270.9 0.166 -2.2 -2
338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Utra Mag 416 Rem. Magnum 44 Rem. Magnum	PRG38UMI RM338LMRI R35RI R35R2 R35WHI R35WHI R35WHI R35WHI R35WHI R375MA PRG75WR2 PRG75WR2 R44WG2 R44WG2	250 250 250 150 200 200 200 270 300 270 300 240 240	Core-Lold* Pointed Soft Point Swift A-Frame" PSP Scenar Core-Lold* Pointed Soft Point Swift A-Frame" PSP Soft Point Swift A-Frame" PSP	9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M 9½ M 9½ M	2860 2647 2443 2249 2064 1837 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2605 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1456 2775 2471 2185 1921 1678 1631 1317 2690 2353 2601 1836 1637 1438 2900 2588 2241 1947 1678 1442 2760 2505 2632 2053 1521 1621 1624 2900 2538 2041 1947 1678 1442 2400 2175 1952 1763 1579 1414 1760 1330 1114 970 878 806 1760 <t< td=""><td>4540 3883 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 3419 2711 2122 1639 1250 947 4338 3347 2542 1528 1506 1403 1039 4338 3462 2802 2745 1786 1415 5504 1922 3010 2772 1523 1246 5073 4178 3412 2759 2210 1757 5115 4201 3419 2760 2214 1775 1650 1015 661 501 411 345</td><td> 0.0 2em -1.4 -4.3 -8.9 -15.4 0.2 0.7 2em -2.1 -5.6 -10.6 0.2 0.7 2em -2.0 -5.6 -10.7 0.1 0.6 2em -1.7 -4.7 -8.9 0.3 2em -2.7 -8.6 -18.2 -32.6 0.5 2em -3.5 -10.7 -22.6 -40.1 0.0 2em -1.5 -4.7 -9.9 -17.3 0.1 2em -1.9 -5.7 -11.8 -20.4 -0.1 2em -1.3 -4.2 -9.0 -18.4 0.0 2em -1.7 -5.2 -10.8 -18.7 0.0 0.0 2em -2.3 -6.3 -12.3 0.3 0.8 2em -2.4 -6.4 -12.4 0.1 2em -1.9 -5.9 -12.1 -20.8 2em -2.1 -8.7 -21.2 -40.6 -68.2 2em -2.1 -8.7 -21.2 -40.5 -68.2 -2.1 -2.1 -2.1 -40.5 -68.2 -2.1 </td><td> 1.7</td></t<>	4540 3883 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 3419 2711 2122 1639 1250 947 4338 3347 2542 1528 1506 1403 1039 4338 3462 2802 2745 1786 1415 5504 1922 3010 2772 1523 1246 5073 4178 3412 2759 2210 1757 5115 4201 3419 2760 2214 1775 1650 1015 661 501 411 345	0.0 2em -1.4 -4.3 -8.9 -15.4 0.2 0.7 2em -2.1 -5.6 -10.6 0.2 0.7 2em -2.0 -5.6 -10.7 0.1 0.6 2em -1.7 -4.7 -8.9 0.3 2em -2.7 -8.6 -18.2 -32.6 0.5 2em -3.5 -10.7 -22.6 -40.1 0.0 2em -1.5 -4.7 -9.9 -17.3 0.1 2em -1.9 -5.7 -11.8 -20.4 -0.1 2em -1.3 -4.2 -9.0 -18.4 0.0 2em -1.7 -5.2 -10.8 -18.7 0.0 0.0 2em -2.3 -6.3 -12.3 0.3 0.8 2em -2.4 -6.4 -12.4 0.1 2em -1.9 -5.9 -12.1 -20.8 2em -2.1 -8.7 -21.2 -40.6 -68.2 2em -2.1 -8.7 -21.2 -40.5 -68.2 -2.1 -2.1 -2.1 -40.5 -68.2 -2.1	1.7
338 Lapua Magnum 35 Remington 35 Whelen 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Utra Mag 416 Rem. Magnum 44 Rem. Magnum	PRG38UMI RM338LMR1 R35R1 R35R2 R35WH1 R35WH1 R35WH3 R35GM1 R375MA PRG75MA PRG75MA R44MG2 R44MG3 R44MG3	250 250 250 250 200 200 200 270 300 400 240 240 240 240	Core-Lold* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Pointed Soft Point Core-Lold* Pointed Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP	9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M	2860 2647 2443 2249 2064 1837 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2608 1698 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1496 2775 2471 2185 1921 1678 161 2692 2280 2060 1780 1530 1453 2722 2280 2061 1885 1637 1458 2790 2598 2241 1947 1678 1442 2760 2595 2623 2035 1822 1624 2760 2595 263 205 1822 1624 2400 2175 1962 <th< td=""><td>4540 3883 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 43419 2711 2122 1639 1250 1039 4338 3347 2502 2745 1786 1415 5041 3922 3010 2772 1638 1246 5073 4178 3412 2759 2210 1757 5115 4701 3419 2760 2214 1775 1650 1015 661 501 411 345 1650 1015 661 501 411 345 2842 1755 1010 630 472 331</td><td> 0.0 2200 -1.4 -4.3 -8.9 -1.54 </td><td> 1.7</td></th<>	4540 3883 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 43419 2711 2122 1639 1250 1039 4338 3347 2502 2745 1786 1415 5041 3922 3010 2772 1638 1246 5073 4178 3412 2759 2210 1757 5115 4701 3419 2760 2214 1775 1650 1015 661 501 411 345 1650 1015 661 501 411 345 2842 1755 1010 630 472 331	0.0 2200 -1.4 -4.3 -8.9 -1.54	1.7
338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Utra Mag 416 Rem. Magnum 44 Rem. Magnum	PRG38UMI RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R35WH3 R35MA1 R375MA PR375MA PR375MA R54MG2 R44MG2 R44MG3 R44MM R45FUL	250 250 250 150 200 200 250 200 270 300 400 240 240 240 300	Core-Lold* Pointed Soft Point Swift A-Frame" PSP Scenar Core-Lold* Pointed Soft Point Swift A-Frame" PSP Soft Point Swift A-Frame" PSP	9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M	2860 2647 2443 2249 2064 1837 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 334 2680 1688 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1496 2775 2471 2186 1921 1678 1461 2690 2353 2060 1780 1530 1314 2722 2280 2061 1836 1637 1452 2760 2595 2263 2025 1822 1624 2760 2595 2653 2025 1822 1624 2760 2595 2653 2025 1822 1624 2760 2765 2763	4540 3883 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 3419 2711 2122 1639 1250 947 4338 3347 2542 1528 1506 1403 1039 4338 3462 2802 2745 1786 1415 5504 1922 3010 2772 1523 1246 5073 4178 3412 2759 2210 1757 5115 4201 3419 2760 2214 1775 1650 1015 661 501 411 345	0.0 2em -1.4 -4.3 -8.9 -15.4 0.2 0.7 2em -2.1 -5.6 -10.6 0.2 0.7 2em -2.0 -5.6 -10.7 0.1 0.6 2em -1.7 -4.7 -8.9 0.3 2em -2.7 -8.6 -18.2 -32.6 0.5 2em -3.5 -10.7 -22.6 -40.1 0.0 2em -1.5 -4.7 -9.9 -17.3 0.1 2em -1.9 -5.7 -11.8 -20.4 -0.1 2em -1.3 -4.2 -9.0 -18.4 0.0 2em -1.7 -5.2 -10.8 -18.7 0.0 0.0 2em -2.3 -6.3 -12.3 0.3 0.8 2em -2.4 -6.4 -12.4 0.1 2em -1.9 -5.9 -12.1 -20.8 2em -2.1 -8.7 -21.2 -40.6 -68.2 2em -2.1 -8.7 -21.2 -40.5 -68.2 -2.1 -2.1 -2.1 -40.5 -68.2 -2.1	1.7
338 Lapua Magnum 35 Remington 35 Whelen 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Utra Mag 416 Rem. Magnum 44 Rem. Magnum	PRG38UMI RM338LMR1 R35R1 R35R2 R35WH1 R35WH1 R35WH3 R35GM1 R375MA PRG75MA PRG75MA R44MG2 R44MG3 R44MG3	250 250 250 250 200 200 200 270 300 400 240 240 240 240	Core-Lold* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Pointed Soft Point Core-Lold* Pointed Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP	9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M	2860 2647 2443 2249 2064 1837 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 934 2608 1698 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1496 2775 2471 2185 1921 1678 161 2692 2280 2060 1780 1530 1453 2722 2280 2061 1885 1637 1458 2790 2598 2241 1947 1678 1442 2760 2595 2623 2035 1822 1624 2760 2595 263 205 1822 1624 2400 2175 1962 <th< td=""><td>4540 3883 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 43419 2711 2122 1639 1250 1039 4338 3347 2502 2745 1786 1415 5041 3922 3010 2772 1638 1246 5073 4178 3412 2759 2210 1757 5115 4701 3419 2760 2214 1775 1650 1015 661 501 411 345 1650 1015 661 501 411 345 2842 1755 1010 630 472 331</td><td> 0.0 2200 -1.4 -4.3 -8.9 -1.54 </td><td> 1.7</td></th<>	4540 3883 3314 2807 2363 1977 4540 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869 3197 2680 2230 1844 1515 1242 43419 2711 2122 1639 1250 1039 4338 3347 2502 2745 1786 1415 5041 3922 3010 2772 1638 1246 5073 4178 3412 2759 2210 1757 5115 4701 3419 2760 2214 1775 1650 1015 661 501 411 345 1650 1015 661 501 411 345 2842 1755 1010 630 472 331	0.0 2200 -1.4 -4.3 -8.9 -1.54	1.7
338 Lapua Magnum 35 Remington 35 Whelen 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Utra Mag 416 Rem. Magnum 44 Rem. Magnum	PRG38UMI RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R35WH3 R35MA1 R375MA PR375MA PR375MA R54MG2 R44MG2 R44MG3 R44MM R45FUL	250 250 250 150 200 200 250 200 270 300 400 240 240 240 300	Core-Lold* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Soft Point Semi-Lacketed Hollow Point Soft Point Soft Point	9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M	2860 2647 2443 2249 2064 1837 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 334 2680 1688 1376 1140 1001 911 2675 2378 2100 1842 1606 1399 2400 2197 2005 1823 1652 1496 2775 2471 2186 1921 1678 1461 2690 2353 2060 1780 1530 1314 2722 2280 2061 1836 1637 1452 2760 2595 2263 2025 1822 1624 2760 2595 2653 2025 1822 1624 2760 2595 2653 2025 1822 1624 2760 2765 2763	4549 3888 3314 2807 2363 1977 4549 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1220 841 577 445 369 3177 2510 1958 1506 1145 859 3197 2680 2230 1844 1515 1242 3419 2711 2122 1639 1250 947 4338 3347 2543 1900 1403 1039 4238 3452 2802 2745 1786 1309 5073 4178 3412 2759 2210 1757 5115 4201 3419 2760 2214 1775 1650 1015 661 501 411 345 1650 1015 661 501 411 345 1650 1015 661 501 411 345 1650 1015 661 501 411 345 1650 1015 661 501 411 345	0.0 28m -1.4 -4.3 -8.9 -15.4 0.2 0.7 28m -2.1 -5.6 -10.5 0.2 0.7 28m -2.0 -5.6 -10.7 0.1 0.6 28m -1.7 -4.7 -8.9 0.3 28m -2.7 -8.6 -18.2 -32.6 0.5 28m -3.5 -10.7 -22.6 -40.1 0.0 28m -1.5 -4.7 -9.9 -17.3 0.1 28m -1.9 -5.7 -11.8 -20.4 -0.1 28m -1.9 -5.7 -11.8 -20.4 -0.1 28m -1.9 -5.7 -11.8 -20.4 -0.1 28m -1.9 -2.8 -7.6 -14.8 0.0 28m -1.7 -2.8 -7.6 -14.8 0.0 0.8 28m -2.2 -6.3 -12.3 0.3 0.8 28m -2.4 -6.4 -12.4 0.1 28m -1.9 -1.9 -1.21 -20.8 28m -2.1 -8.7 -21.2 -40.5 -68.2 0.3 28m -2.9 -3.3 -20.4 -37.4 28m -1.7 -7.3 -7.5 -3.5 -5.60	1.7
338 Lapia Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 H&H Mag 416 Rem. Magnum 444 Rem. Magnum 444 Mar. 45-70 Government	PRG38UMI RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R35WH3 R35JMH3 R375MA PRG75MA PRG75MA R54MG2 R44MG3 R44MG R45TGL R45TGL R45TGL	250 250 250 150 200 200 270 300 270 300 240 240 240 300 405	Core-Lold* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lold* Pointed Soft Point Core-Lold* Suft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Swift A-Frame* PSP Soft Point Semi-Lacketed Hollow Point Soft Point Soft Point Soft Point Soft Point Soft Point Soft Point	9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M	2860 2647 2443 2249 2064 1887 2860 2645 2440 2244 2057 1879 2960 2820 2683 2551 2423 2299 2300 1874 1506 1218 1039 334 2680 1668 1376 1140 1001 911 2675 2338 2100 1842 1605 1399 2400 2197 2005 1823 1652 1496 2775 2471 2186 1921 1678 1461 2690 2333 2060 1780 1530 1317 2522 2280 2061 1885 1637 1452 2900 258 2241 1947 1678 142 2760 2595 2623 2055 182 162 2760 2595 2624 2055 182 162 2400 2175 1962 17	4549 3888 3314 2807 2363 1977 4549 3882 3303 2794 2347 1960 4883 4412 3996 3613 3259 2932 1762 1169 755 494 359 291 1921 1220 841 577 445 369 3177 2510 1958 1506 1145 859 3197 2680 2230 1844 1515 1242 3419 2711 2122 1639 1250 947 4338 3347 2543 1900 1403 1039 4238 3462 2802 2245 1788 1325 5041 3322 3010 2727 1628 1256 5073 4178 3412 2759 2210 1757 5115 4201 3419 2760 2214 1775 1650 1015 661 501 411 345 1650 1015 661 501 411 345 2842 1755 1010 630 472 381 2882 1492 1031 767 625 533 1590 1227 1001 888 758 679	0.0 28m -1.4 -4.3 -8.9 -15.4 0.2 0.7 28m -2.1 -5.6 -10.5 0.2 0.7 28m -2.0 -5.6 -10.7 0.1 0.6 28m -1.7 -4.7 -8.9 0.3 28m -2.7 -8.6 -18.2 -32.6 0.5 28m -3.5 -10.7 -22.6 -40.1 0.0 28m -1.5 -4.7 -9.9 -17.3 0.1 28m -1.9 -5.7 -11.8 -20.4 -0.1 28m -1.9 -5.7 -11.8 -20.4 -0.1 28m -1.9 -5.7 -11.8 -20.4 -0.1 28m -1.9 -5.7 -14.8 0.0 28m -1.3 -4.2 -9.0 -15.8 0.0 28m -1.7 -2.2 -10.8 -13.2 0.0 0.8 28m -2.8 -5.6 -12.4 0.1 28m -1.9 -5.9 -12.1 -20.8 28m -1.9 -5.9 -12.1 -20.8 28m -2.1 -8.7 -21.2 -40.5 -68.2 28m -2.1 -8.7 -21.2 -40.5 -68.2 0.3 28m -2.9 -3.3 -20.4 -37.4 28m -1.7 -7.3 -7.5 -3.35 -5.0 28m -1.7 -7.3 -7.5 -3.55 -3.9	1.7

Note: These ballistics reflected a test barrel length of 24° except those for 30 Carbine and 44 Remington Magnum which are 20° barrels. Specifications are nominal. Ballistics figures established in test barrels. Individual rifles may vary from test barrel results. "zero" indicates yardage at which rifle was sighted in. * Inches above or below fine of sight. Hold low for positive numbers, high for negative numbers. † 280 Remington and Timm Express, Remington are interchangeable. † Brunn Remington and 244 Remington are interchangeable and the sight from muzzle to sighting-in range. † Bullet does not rise more than 1° above line of sight from muzzle to sighting-in range.

Managed-Recoil (pages 62-63)	Premier * AccuTip (pages 54-55)
Premier® Copper Solid (page 57)	Premier ² Scirocco Bonded (page 54)
Premier * Core-Lokt * Ultra Bonded * (page 52)	Swift A-Frame PSP
Premier® Disintegrator® Varmint (page 55)	UMC® (page 65)
Premier Match (pages 57)	Core-Lokt ² (pages 60)

SHOTGUN SPECIFICATIONS --

VODESEEZ NURÓ	M.G.Mai	na:iox	ENTOTAL	SIONS//AVERA	da Waldans								
MODEL	CAUGE	MAG. CAPACITY	BEL LENGTH/ Order No.	BARKEL TYPE	· SIGHTS	METAL FINISH	OVERALL Length	LEXGTH OF PULL	DROP (COMB)	DROP (HEEL)	STOCK Material	STOCK FINISH	AVEJWT. (LBS.)
887 Nitro Magnum SPS	12 (3 ½7)	4	267 82501	Solid Stepped Rib Rem' Chake	HiViz®	ArmorLokt '**	46 ½"	14*	11/5"	21/2"	Synthetic	Matte Black	71/4
887 Nitro Magnum SPS	12 (3 ½*)	4	28"/ 82500	Solid Stepped Rib RC ** Mod Choke	HiViz®	ArmorLokt (**	48*	14"	11/2"	21/2*	Synthetic	Matte Black	73%
387 Nitro Magnum SPS Waterfowl Camo	12	4	28"/ 82502	Solid Rib RC™ WF Choke	HiViz♥	Armortokt "	48'	14*	11/2"	21/2"	Synthetic	Realtree* Advantage* Max-4 HD	71/2
387" Nitro Magnum SPS Came Combo (22" Turkey Barrel)	12	4	28" / 22" 82530	Solid Rib Rifle Sight Rem™ Chake	HiViz®	ArmorLokt**	48" / 42"	14*	11/2"	21/:	Synthetic	Mossy Oak* Break-Up* Infinity	7-74
387 Nitro Magnum Camo 3one Collector Edition	12	4	26"/ 82503	Solid Rib Rem™ Choke	TruGlo®	ArmorLokt **	46"	14"	11/2"	21/2*	Synthetic	Realtree*	71/4
387 Nitro Magnum Tactical 2-Shot Ext. w/Picatinny Rail	12 (3 ½7)	4	18 1/2"/ 82540	Solid Steppet Rib Rem™ Choke	HiViz®	ArmorLokt'*	39"	14"	11/7"	21/2"	Synthetic	Matte Black	61/8

MODEL NEW SPORTS	MAN M	स्याणा	arpienn	DIMENSIONS/	AVERAGE WEIGHT								
ICOEL.	CYLLICE	MAG. CAPACITY	BBL LENGTH/ ORDER NO.	BARREL TYPE 3	ZTHDIZ	METAL FINISH	CYERALL LENGTH	LENGTH OF PULL	DROP (COMB)	SROP (HEEL)	STOCK Material	STOCK FINISH	AYE. WI. (LBS.)
1-87 "Sportsman" Field Walnut /Fleur-Di-Lis Checkering	12 20	4	28*/ 83700 26*/ 83704	Vent Rib Rem Choke Mod ²	Dual Bead	Matte Black, Non-Reflective	48 1/4"	14"	11/7	21/2*	Satin American Walnut	Satin	8¼ 7¼
1-87 * Sportsman * Synthetic	12 12 20 20	4	28"/ 29879 26"/ 29881 28"/ 29825 26"/ 29827	Vent Rib Rem* Choke Mod ^Z	Single Bead	Matte Black, Non-Reflective	48" 46" 48" 46"	14*	11//2*	2 1/2*	Synthetic	Matte Black	81/4 81/6 71/4 71/6
1-87 Sportsman Camo	i2 20	4	28"/ 29895 26"/ 29917	Vent Rib Rem [*] Choke Mod ²	Single Bead	Mossy Oak* New-Breakup*	46"	14"	11/2*	11/8"	Synthetic	Mossy Oak* New-Breakup*	8¼ 7¼
1-87 Sportsman Super Mag yothetic w/Overmolded Grips	12	4	28"/ 83620	Vent Rib Rem * Choke	HiViz® Bead Sight	Matte Black, Non-Reflective	48*	14"	11/2"	2 1/2*	Synthetic	Matte Black	81/4
1-87 Sportsman Super Mag 'aterfowl w/Overmolded Grips	12	4	28"/ 83617	Vent Rib Rem * Choke	HiViz® Bead Sight	Mossy Oak* Duck Blind*	48"	14"	1 1/2"	21/2"	Synthetic	Mossy Oak* Duck Blind*	81/4
1-87 Sportsman Super Mag ShurShot ukey Came w/Overmolded Grips	12	4	23*/ 83616	Fully Rifled Rem Choke	TruGia® Rifle Sights	Realtree*	43"	13¾"	11/2"	2*	Synthetic	Realtree* APG* HD*	7%
I-87 * Sportsman * Synthetic /ShurShot * Stock	ž 12	4	21*/ 83602	Fully Rifled	Cantilever Scope Mount	Realtree* Hardwoods HD	43"	13 3/4"	11//2"	2*	Synthetic	Realtree* Hardwoods*HD*	8
-87" Sportsman" Synthetic Deer	12 20	4	21"/29858 ¹ 21"/29877 ¹	Fully Rifled	Cantilever Scope Mount	Matte Black, Non-Reflective	41"	14"	11/2"	11/8"	Synthetic	Matte Black	8½ 7½
87 - Sportsman - Compact Synthetic ⁵	20	4	21"/83626	Vent Rib Rem * Choke Mod ²	Single Bead	Matte Black, Non-Reflective	40 1/4"	Adj.	11/2"	2 1/2"	Synthetic	Matte Black	61/2
-87" Sportsman" Compact Camo ⁵	20	4	21 / 83630	Vent Rib Rem Chake Mod ²	Single Bead	Mossy Oak® New Break-Up®	40 1/4	Adj.	11/2"	21/2"	Synthetic	Mossy Oak [®] New Break-Up®	61/2
Model 11-87 Deer barrels are not environed w	rith a pressure-co	moensating gas	system and will not fi	naction with tareet or light field	loads. 2 NOTE: All Model 11-87" S	nortsman* shoterins v	vith a Rem" Choke I	arrel come e	ruinned with	Modified Rem	Choke tubes		

Model II-3V Deer barrels are not europeed with a pressure-compensating gas system, and will not inscribe on wild target or light field loads. 2. NOUL: All Model II-3V Spatisms in Strigtures with a Remi' Choke barrel come equipment. Wheel II-3V Spatisms have 3° chamber and will vige II; and 3° shotshifts. 4. Supplied with Specialized looks Waterfood Hooke Waterfood Hooke Water food with seven adjustable III for II or load and quittered.

OEL.	GAUGE	MAG. Capacity	BBL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL Finesh	OVERALL LENGTH	DE PULL	DROP (COMB)	(HEEL)	STOCK MATERIAL	STOCK STOCK	AVG. WT. (LBS.)
0" Express® Tactical Camo '2 Shot Extension)	12	6	18 1/2/ 81204	Clean Barrel Rifle Sight Rem™ Choke	XS-Blade (Dove-tailed)	A-TACS® Camo	38 ½* 40 ½* (chake)	13 1/4"	1 1/7	2*	Synthetic	A-TACS [®] Camo	7 1/2
0° Express® Tactical 'Grey Powder Coat Finish)	- 12	7:	18 1/1/ 81202	Rem™ Choke ²	Single Bead	Grey Powder Coat	38 1/1	14"	1 1/7	2 1/2	Synthetic	Matte Black	71/2
0 Express® Tactical AS® Ghost Ring Sights)	: * 12	7	18 1/4/ 81198	Rem™ Choke ²	XS® Ghost Ring	Blasted Black Oxide	38 1/7	14"	11/1	2 1/2	Synthetic	Matte Black	7 1/2
O Express® Synthetic Tactical	. 12	7	18 1/1/ 25549	Rem™ Choke	⁷ Single Bead	Blasted Black Oxide	38 1/1	13 ¾*	1 1/2	2 1/2	Synthetic	Matte Black	.71/2
)" Express® Synthetic Tactical Round Capacity)	12	7	18 /// 25077	Rem™ Choke	Single Bead	Blasted Black Oxide	38 1/2	13 ¾*	l Vi	21/7	Synthetic	Matte Black	71/2
) Express* Synthetic Tactical Round w/Knoxx Spec-Ops Stock)	20	7	18 1/4/ 81180	Rem™ Choke	Single Bead	Blasted Black Oxide	38 1/7	Adj.	11/2	2	Synthetic	Matte Black	6
)" Express® Synthetic Tactical Round Capacity)	20	- 7	1: 18 1/.7 81100	Rem™ Choke	Single Bead	Blasted Black Oxide	38 1/1	13 ¾.	11/7	21/2	Synthetic	Matte Black	6
J TAC-2 SpecOps " Stock	12	6	187/81400	Fixed Cylinder	Single Bead	Blasted Black Oxide	Adj	Adj.	11/2	2 1/2	Synthetic (Matte Black	
7 TAC-2 Felding Stock	. 12	6	18"/81402	Fixed Cylinder	Single Bead	Blasted Black Oxide	Ādj	Adj.		÷	Synthetic	Matte Black	61/6
10" TAC-2 SFIV Stock	12	6	18"/82800	Fixed Imp. Cylinder	Single Bead	Blasted Black Oxide	38 1/7	14"	11/2	21/2	Synthetic	. Matte Black	7.16
10" TAC-4	12	8 -	22"/82801	› Rem** Choke1	HIVIZ*	Blasted Black Oxide	421/2	14°	-11/7	2 1/2	Synthetic	Matte Black	7.7%

<u> </u>	GAUGE	MAG. CAPACITY	BEL LENGTH/ DROEN NO.	BARKEL TYPE	2 SIGHTS	METAL FINISH	OVERNUL LENGTH LENGTH OF PULL	OROP DROP (COMB) (REEL)	STOCK	STOCK FINISH	AVG. WT.
0° Magnum²	10	2	30"/ 24808	Vent Rib Rem Choke ¹	Twin Bead	Matte Black Non Reflect.	51 1/2" 14"	11/1 21/1	Satin American Walnut	Satin	3 11
0" Thumbhole Camo ²	10	. 2	23"/81000	Rifle Sight Rem Choke 4	FireSights	Mossy Oak*, Obsession*	44 1/2 14 1/2	. 15/4 . 13/4	Laminate	. Mossy Oak? Obsession*	ـــ 11 ـــ
10" Waterfowl Camo ²	10	2	26 / 81001	Vent Rib Rem Choke 3	HIVO	Mossy Oak* Duck Blind "	+47 1/2	11/2 21/2	Synthetic	Mossy Oak* Duck Blind **	10%
10 Camo RC/VI ²	10	2	26"/ 24828	Vent Rib Rem Choke 1	Twin Bead	Mossy Oak* Obsession*	47 1/2" 14"	11/2 21/2	Synthetic	Mossy Oak* Obsession*	103/4

indistry of the Remarks of the Remar

SHOTGUN SPECIFICATIONS

MODEL	GAUGE/BURE ²	LAPACITY	BET LONGIN	BARREL TYPE	COURT COURT	METAL FIXISH	CALENCIA SA	OF PULL	OROP	(HEEL)	1215 MITTHE OF ST	STOCK	ANG WT
Wingmaster*		4 -	28 / 26927 26 / 26929	Light Contour Vent Rib Rem- Choke ¹	Twin Read	High Polish Blued	48 // 46 //	14 1/4	1%	21/2	American Walnut	Hi-Gloss	以旅
Wingmaster*	20	. 4	28 / 26947 26 / 26949	Vent Rib Rem Choke L	Twin Bead	High Polish Blued	48 VY. 46 VY.	14"	1 1/2	2 1/1"	American Walnut	Satin (28") Hi-Gloss (26")	614 614
Vingmaster*	28 (2 1/4")	4	25 / 24983 25	Vent Rib Rem Choke 1	Iwin Bead	High Polish Blued	炒 45 光製 、	-14"	1 %	21/2	American Walnut	Satin	(i) (6) (i)
Vingmaster*	410 Bore (3")	.4	257/24991	Vent Rib Modified	Twin Bead	High Polish Blued	45 16	14"	1 1/2	21/2"	American Walnut	Satin	5 N.M.

						· · · · · · · · · · · · · · · · · · ·							
MODEL 870 EXPR	ESS! SI	IOTGU	N DIMENSIO	NS / AVERAGE WE	GHTS-								
OOEL	GAUGE ^{1.7})	MAG. CAPACITY	BBL LENGTRY	BARREL TYPE	SACHTS 3	METAL FIXISH	OVERALL LENGTH	LENGTH OF PULL	DROP (DOMB)	DROP . (HEEL)	STOCK	STOCK FINISH	- AYG.
70 Express*	12	4	28 / 25568 26 / 25569	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	48 1/f 45 1/f	14"	1//	21/1	Laminate	Satin	13.73
70" Express* Magnum //ShurShot"	12 (3")	4 (2 ³ /2 & 3) 21 / 81114	Vent Rib Rem Choke (Turkey Extra Full)	Twin Bead	Mossy Oak* Obsession*	42 1/2	13 3/4	11//2*	2*	Synthetic '	Mossy Oak* Obsession*	7.7
70" Express* Magnum /ShurShot"	12	4	23 / 81118	Fully Rifled	Single Bead	Matte Black Non-Reflect	441/2	133/4*	11/2	27	Synthetic	Matte Black	71
70" Express*	20	4	.28"/ 25583 26"/ 25582	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	48.77. 46.77.	14"	11/1	21/1	Laminate	Satin	61
70" Express* Lami. Compact	. 20	4	217/255615	Vent Rib Rem* Choke (Mod)	Single Bead	Matte Black Non-Reflect	401/2	13°	11/7	21/4"	Laminate	Satin	5 63
70" Express* Synthetic	12	4	28 / 25587 · · · · · · · · · · · · · · · · · · ·	Vent Rib Rem* Choke (Mod)	Single Bead	Matte Black Non-Reflect	48 1/2" 3 46 1/2	14"	11/7	21/2	Synthetic	Matte Black	(-1) (-1)
70° Express* Turkey Camo	12	4 (23/4 & 3) 21 / 811 15	Vent Rib Rem® Choke (Mod)	Single Bead w/HiViz®	Mossy Oak [®] New Break-Up [®]	42 1/t	14*	11/2*	2 1/2"	Synthetic	Mossy Oak ^e New Break-Up [®]	7
70" Express® Compact	. 20	4	21781148	Vent Rib Rem ⁻ Choke (Mod)	Single Bead	Matte Black Non-Reflect	40 1/2	13" Adj.	11/2"	21/2"	Synthetic	Matte Black	7.
70° Express® Compact Came	20 .	4	21781166	Vent Rib Rem Choke (Mod)	Single Bead	Realtree® Hardwoods HD™	401/2	13" Adj.	11/2*	21/2"	Synthetic	Realtree® Hardwoods HD) ¹¹⁰
70" Express* Compact Ir.4	20-	4	18 1/4 / 81161	Vent Rib Rem* Choke (Mod)	Single Bead	Matte Black Non-Reflect	37 1/4	12° Adj.	11/2*	2*	. Synthetic -	Matte Black	· 5
70" Express* Compact ink Blaze Camo	20	4	217/81150	Vent Rib Rem ⁻ Choke (Mod)	Single Bead	Matte Black Non-Reflect	40.1/2	13" Adj.	11/2.	2 1/2"	Synthetic	Mossy Oak® Blaze Pink Camo	1-
70" Express* Synthetic ully Rifled Deer	12	4	207/25097	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	40 ½r.	14"	11/7	11/8	Monte Carle Synthetic	. Matte Black	
70" Express* Deer	12	4	20 / 25565	Fixed Imp. Cyt. Choke	Rifle Sights	Matte Black Non-Reflect	40 1/7	14"	1 1/2"	1 1/8"	Monte Carlo Laminate	Satin	. 1
70" Express* Fully Rifled Deer	12	4	20 / 25575	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	40 1/2	14"	1 1/2"	1 1/8	Monte Carlo Laminate	Satin	7
70" Express* Synthetic ully Rifled Cantilever	12 20	4	237/25090 187//25183	Fully Rifled Heavy Contour Fully Rifled	Cantilever Scope Mount	Matte Black Non-Reflect	43 ½* 38 ¾*	14	1 1/1	1 1/2	Monte Carlo Synthetic	Matte Black	. ,
70° Express* Synthetic hurShot Cantilever Slug	20	4	18 1/1/81120	Fully Rifled Heavy Contour Fully Rifled	Cantilever Scope Mount	Matte Black Non-Reflect	43 1/47	13 3/4"	11/2	2"	Synthetic	Matte Black	7
70" Express* Left Hand	12	4	28 / 25577	Vent Rib Rem" Choke (Mod)	Single Bead	Matte Black Non-Reflect	48 1/2	14"	1 1/2"	2 1/2"	Laminate	Satin	1
70" Express* Synthetic 18*	12	4.	18*/25549	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	38 1/2	14"	11/2	247	Synthetic	Matte Black	7
70" Express* Synthetic -Shot w/Knoxx SpecOps Stock	20	6	187/81180	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	Adj.	Adj.	1 1/2	2 1/2"	Synthetic	Matte Black	7
70" Express* Synthetic ith 7-Round Capacity ²	12 20	6	18 / 25077 18 / 81100	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	38 1/2	14"	1 1/2"	2 1/2"	Synthetic	Matte Black	· 7

MODEL.	GAUGE 2	MAG. CAPACITY	BBL LENGTH/ ORDER NO.	BARREL TYPE	ZTHENZ	METAL FINISH	OVERALL LENGTH	OF PULL	(COMB)	(HEELL)	STOCK Material	EDNISH 2100K	(LBS.)
870" Express* Super Mag Turkey/Watertowt Camo	12 (3 1/2")	3 (3 ½") 4 (2 ¾" & 3")	26*/81125	Vent Rib Rem Choke 4.5	HiViz®	Mossy Oak* Bottomland	46*	14*	11/2"	21/2*	Synthetic	Mossy Dak ² Bottomland	71/4
870" Express* Super Mag Waterfowl Camo ³	12 (3 1/2")	3 (3 ½*) 4 (2 ½* & 3*)	28*/81111	Vent Rib Rem [™] Choke ⁴	HiViz*	Mossy Oak* Duck Blind`	48"	14"	1 1/2"	21/2*	Synthetic	Mossy Oak? Ouck Blind	71/2
870° Express* Super Mag	12 (3 1/2")	3 (3 1/2) 4 (2 3/4 & 3")	28"/ 25100	Vent Rib Rem® Choke (Mod)	Single Bead	Matte Black Non-Reflect	48*	14"	11//2"	2 1/2"	Laminate	Satin	7 y 2
870" Express* Super Mag Synthetic	12 (3 1/27)	3 (3 ½°) 4 (2 ³½° & 3°)	26"/ 25102 28"/ 25103	Vent Rib Rem ⁻ Choke (Mod)	Single Bead	Matte Black Non-Reflect	46° 48°	14"	1 1/2	2 1/2*	Synthetic	Matte Black	7 1/4 7 1/2
870° Express* Super Mag Combo	12 (3 ½*) ¹	3 (3 ½") 4 (2 ¾" & 3")	26"/ ₂₅₁₁₄	Vent Rib Rem® Choke (Mod) Fully Rifled (Deer)	Single Bead (Vent Rib) Rifle Sights (Deer)	Matte Black Non-Reflect	46" (VR) 40 1/2" (Deer)	14"	1 1/2"	2 1/2*	Lanninate	Satin	7 1/4

MODEL 870 SPECIA	L PURP	OSE MAF	RINE MAGNI	UM" SHOTGÚN	DIMENSION	S / AVERAGE WEIGHT	S S			Am.			
MODEL	GAUGE	MAG. CAPACITY	BEL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	OVERMAL Length	LENGTH OF PULL	DEOP (COMB)	DROP (HEEL)	STOCK MATERIES	STOCK FINISH	EVG.NT. (LRS.)
870° Marine Magnum ^{e Z}	12 ¹	6	18"/ 25012	Cylinder Choke	Single Bead	Electroless Nickel-Plated	38 1//	14"	1%*	21/1"	Synthetic	Matte Black	71/2
870" XCS Marine Magnum*	121	6	187/81308	Cylinder Choke	Single Bead	Black TriNyte	38 1/2"	13¾	11/4*	21/2*	Synthetic	Matte Black	71/2

HOTGUN SPECIFICATIONS

10DEL 870	J EXP	RESS	COMBO SHOTGUN DIMEN	SIONS / AVERAGE V	VEIGHTS :								
)DEL	GAUGE ¹	MAG. CAPACITY	BBL LENGTH/ORDER NO.	BARBEL TYPE	SIGHTS	METAL FIXISH	OVERALL LENGTH	OF PULL	(COMB)	OROP (HEEL)	STOCK MATERIAL	STOCK FIXISH	AVG. WT. (LBS.)
'0 Express* unbo	12	4	26"(Vent Rib)/20" (Fully Rifled Deer)/25578	Vent Rib Rem Choke (Mod.) Fully Rifled Deer	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	48 1/4" (Vent Rib)	14"	17%	2 1/2	Laminate	Satin	7 1/4 (Deer BBL)
'O' Express*	20	4	26"(Vent Rib)/20" (Fully Rifled Deer)/25597	Vent Rib Rem Choke (Mod.) Futly Rifled Deer	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	46 1/2" (Vent Rib)	14*	11/2	21/2	Laminate	Satin	6 1/2 (Deer BBL)
'0" Express' Syn. impact Combo	20	4	21"(Vent Rib)/25659 20"(Fufly Rifled)/25659	Vent Rib Rem* Chake (Mod.) Fully Rifled Deer	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	40 1/2" (Vent Rib) 39 1/2" (Deer BBL)	13"	1 <i>V#</i>	21/4.	Synthetic	Matte Black	6 (Vent Rib) 6 (Deer BBL)
Model 870 Express	shotguns h	ave 3° chambe	ers, unless otherwise noted, and will cycle 2 1/1° and 3	r shotshells.									

NODEL 870 SPECIAL P	URPOSE	SHOTGUN,DIMI	ENSIONS/	AVERAGE WEIGH	16 ° 1								
Q EL	CALICE	MAE. CAPACITY	BBL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	OVERALL LENGTH	LENGTH OF PULL	OROP (COMB)	DROP (HEEL)	STOCK MATERIAL	STOCK FLIGSH	AVC. NT. (.281)
10" SP-1" Super Mag	12 (3 ½°) ¹	3(31/2"), 4(21/4"& 3")	23"/ 25189	Rifle Sight Rem ⁻ Choke ²	TruGlo®	Mossy Oak* Obsession*	44 1/4°	14 1/2"	1 1/4"	23/4"	Laminate	Mossy Oak* Obsession*	81/4
'0" SPS" Super Slug	12 (31)1	4(2¾* & 3*)	251/2*/82101	Fully Rifled Extra Heavy (Fluted)	Drilled & Tapped	Black	47"	13 1/1"	1 1/2"	2"	Synthetic	Mossy Oak* Treestand	11/4
"0" SPS" Super Mag Turkey/Predator Scope w/Overmolded Grips	12 (3 ½*)1	3 (3 ½") 4 (2¾" & 3")	20"/ 81062	Clean Barrel Bead Sight Rem ⁻ Choke	TruGlo® Red Dot	Mossy Oak* Obsession*	40 ½°	13 ¾*	1 1/2"	2*	Synthetic	Mossy Oak* Obsession*	71/4
6" SPS" Super Mag Turkey ShurShot" Stock	12 (3 ½*)	4(2¾* & 3*)	23 / 81061	Wingmaster HD Extended Rem ⁻ Choke	TruGlo®	Realtree* APG HD	44 1/6"	13 ¾°	1 1/2"	2ª	Synthetic	Realtree* APG ` HD ''	7½
O" SPS Super Mag Camo ³ &X Gobbler "	12 (3 1/2)1	3(3½7), 4(2¾*&37)	23 / 81060	Rifle Sight Rem® Choke 2	Fire Sights	Realtree* APG" HD"	44 1/2	Adj.	1 1/2"	2 1/2"	Synthetic	Realtree*	7%
0 ⁻ SPS-T Super Mag Camo ³	12 (3 ½")1	3(3½"), 4(2¾*&3")	23"/ 25007	Vent Rib Rem Chake 2	Twin Bead	Mossy Oak® Obsession®	44 1/1	14"	1 1/2"	21/2"	Synthetic	Massy Oak* Obsession*	7%
0" XCS (Xtreme Conditions)	12 (3 1/2")	3(3½*), 4(2¾*&3*)	28/81309	Vent Rib Rem ⁻ Choke ⁴	Twin Bead	Matte Black	48 1/1	131/	1 1/2"	21/2	Synthetic	Matte Black	7%
*** ****					2114								

ML	CAUGE/BORE	MAG. CAPACITY	BBL LENGTH/ ORDER NO.	BARREL TYPE ⁵	SIGHTS	RECEIVER FINISH	LENGTH	LENGTK OF PULL	DROP (COMB)	DROP (HEEL)	STOCK MATERIAL	STOCK	WG. WT.
10° Competition	12	4	30"/26919	Vent Rib ProBore® Choke	Twin Bead	Nickel	50 Vi	14 1/4"	11/2	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	8 Vr
)* Wingmaster* Classic Trap	12	4	30 / 24857	Lt. Contour Vent Rib Rem - Chake 1	Twin Bead	High Polish Blued	50 1/2 :	14 1/2"	1 1/15"	2*	Semi-Fancy Amer. Walnut	Hi-Gloss	814
10" Classic Trap	12	4	30 / 25333	Lt. Contour Vent Rib Rem * Chake 1	Twin Bead	High Polish Blued	50 1/2	14 1/2"	1 1/16*	2"	Semi-Fancy Amer. Walnut	Hi-Gloss	84
10" Premier Sporting 12	12	4	28"/ 82842	Lt. Contour Vent Rib Rem Chake 2	Twin Bead	High Polish Blued	49° · ·	143/16*	11/7	21/4"	Senti-Fancy Amer. Walnut	Hi-Gloss	. 8 a
10" Premier Sporting 20	20	4	28"/ 82846	Lt. Contour Vent Rib Rem - Chake 2	Twin Bead	High Polish Blued	. 49"	14*	11/7	21/2"	Semi-Fancy Amer, Walnut	Hi-Gloss	7.
10" Premier Sporting 28	- 28	4	27"/82854	Vent Rib Rem Choke 2	Twin Bead	High Polish Blued	47 34	14	1 1/2"	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	614_
10" Premier Sporting 418	410 bore	4	27!/82858	Vent Rib Rem Choke 2,6	Twin Bead	High Polish Blued	47 14	14"	1 1/7	2 1/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	614
10" Sporting 12	12	4 .	28"/ 25315	Lt. Contour Vent Rib Rem - Choke 2	Twin Bead	High Polish Blued	49"	14 1/15	1 1/2	21/4"	Semi-Fancy Amer. Walnut	Hi-Glass	, 8
10" Sporting 20 (LT)	20	4	28"/25399	Lt. Contour Vent Rib Rem - Choke 2	Twin Bead	High Polish Blued	49"	14"	11/2"	2 1/2"	Semi-Fancy Amer. Walnut	Hi-Closs	£ 7
10" Sporting 28	28	4 1	27"/29583	Vent Rib Rem Choke ²	Twin Bead	High Palish Blued	47 1/4	14"	11/2	21/2"	Semi-Fancy Amer. Walnut	Hi-Glass	61/2
10" Sporting 410	410 bore	4	27*/29549	Vent Rib Rem Choke 2,6	Twin Bead	High Polish Blued	47 1/2	14"	11/2"	2 1/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	614

hase gans are supplied with special Rem Chokes, Mid Handrag (0324), Singles (0277), and Long Handrag (0417). 2 MOTE Model 1100° Sporting Structures are equipped with four extended Briley Rem Choke Lubes (Skeet, Improved Cylinder, Light Modified and Modified). Added 1100° Subrups have 2 V Armbers, unless of the Model 1100° Subrups have 2 V Armbers, unless of the Model 1100° Subrups have 2 V Armbers and Structure 2 V Armbers, unless of the Model 1100° Subrups have 2 V Armbers and Structure 2 V Armbers, unless of the Model 1100° Subrups have 3 V Armbers, unless of the Model 1100° Subrups have 3 V Armbers, unless of the Model 1100° Subrups have 3 V Armbers, unless of the Model 1100° Subrups have 3 V Armbers, unless of the Model 1100° Subrups have 3 V Armbers, unless of the Model 1100° Subrups have 3 V Armbers, unless of the Model 1100° Subrups have 4 V Armbers, unless of the Model 1100° Subrups have 4 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers, unless of the Model 1100° Subrups have 5 V Armbers have 6 V

RIFLE SPECIFICATIONS -

	MODEL	700" XCR" II											
·	ORDER NO.	CALIBER	MAG. Capacity	BURREL TWIST — R-H Length 1 Turn di	DYFRALL	LENGTH OF PULL	DROP (COMB)	OROF (HEEL)	BARREL BARREL	BARREL FINISH	STOCK MATERIAL STOCK OF	LOUZE - ZLOCK	INC WIT
NEW	84520	25-06 Remington	-4	24" 10"	高 44// 23	- 13 W	1 %*	1%	Stainless w/Initivia	Black Triffyte* -	OD Green Synthetic w/Overmold	Matte	李河州
NEW	84521	- 270 Win 5	4 .	. 24" - 10"	第4MM	13 14*	- 1 1/4"	1 %	Stainless w/Trillyte	- Black Trillyte* -	OD Green Synthetic W/Overmald	- Matte :	736
NEW	84522	280 Remington	3	. 24° 10°	2 4 W 3	13 1/4"	1 W	1 1/8"	Stainless w/InNyte	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	F 775
NEW	84524	7mm Remington Mag	3	26° 9 W°	禄46 岁	13 1/4"	1 1/1	1 1/4	Stainless w/Triffyte	Black Trillyte	OD Green Synthetic W/Overmold	Matte	790
NEW	84527 .	7mm Remington Ultra Mag	3	26" 9 W.".	46 14	· 13 ¼ "	1 1/2"	1 3/8"	Stainless w/Inityte	Black TriNyte* -	OD Green Synthetic w/Overmold	Matte	774
NEW	84523 (B)	30-06 Springfield	4	24" 10"	44/7	13 1/4"	: 1 1/4"	136"	Stainless w/InNyte	Black TriNyte	00 Green Synthetic w/Overmold	Realtree® AP™ HD"	17 / 71/mg
NEW	84523	30-06 Springfield	4	24" 10"	44 1/2	13 1/4"	1 1/4"	1 1/8*	Stainless w/TriNyte	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	774
NEW	84525	300 WSM.	3	24" 10"	** '44 YE	13 😿	1 1/8"	1 36"	Stainless w/Trillyte*	Black TriNyte®	00 Green Synthetic w/Overmold	Matte `	7367
NEW	84526	300 Win Mag	3	26" 10"	46 1/1	13 ***	1 1/8"	1 1/4"	Staintess w/frillyte	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	75%
NEW	84540 (R).	300 Remington Ultra Mag-	3 ,-	26" 10"	46 1/1	13 1/6"	~ , 1 1/8°;	1 3%	Stainless w/TriNyte*	Black TriNyte®	OD Green Synthetic w/Overmold 🦠 I	Realtree® AP™ HD"	754
NEW	84528	300 Remington Ultra Mag	3	26" 10"	46 14	13 3/8"	1 1/8"	1 1/2	Stainless w/TriNyte	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	1. 7%
NEW	84530	338 Remington Ultra Mag	3	26° 10°	46 1/2	13 3/1	1 1/4"	1:34*	Stainless w/TriNyte	· Black TriNyte	OD Green Synthetic w/Overmold	Matte	₹7%
NEW	84529	338 Win Mag	3	26° 10°	46 1/2	13 1/4"	1 1/1"	1 36"	Stainless w/TriNyte*	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	798
NEW	84531.†	375 H&H	3 .	24" 12"	46 1/2	13 1/4"	1 W	1 34	Stainless w/TriNyte	Black TriNyte*	00 Green Synthetic w/Overmold	Matte	7%
NEW	84532 [†]	375 Remington Ultra Mag	3	24" 12"	46 1/2	13 1/4"	1 1/6"	1 34"	Stainless w/TriNyte*	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	7%
	† Equipped w	ith Iron Sights. (R) RMEF Rocky Mountain	Elk Foundation	(B) Bone Collector Edition									

MODE	L 700 BDL													
ORDER HO.	CAURÉR	MAG. Capacity	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL LENGTH	TE LEN		DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MAT	RIAL	STOCK FIXISH	AVG. WT.
25787	243 Win	4 .	22"	9 1/1	41 98	· 13	W 1	1 9/1"	Carbon Steel	Polished Blue	American V	/alnut	Gloss	774 7
25791	270 Win	4	22"	10	42 1/2	13	W 1°	1 1/8"	Carbon Steel	Polished Blue	American V	alnut "	Gloss	73%
25803	- 7mm Remington Mag	3	24*	9 14"	44 1/2	13	W i	154	Cartion Steel	Polished Blue	American V	/alnut	Gloss	71/2
25793	30-06 Springfield	4	22*	10*	42 1/2"	. 13	W I	15%	- Cartion Steel	Polished Blue	American V	/alnut	Gloss	· + 7.36 ,=
26410	300 Remington Ultra Mag	3	26*	10"	1 46 V2 ·	13	W 1	1 5/8"	Carbon Steel	Polished Blue	- American V	alnut	Gloss	7%

MODEL	700 CDL					- (6							- 4	
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL: Length	TWIST — R-H 1 TURN IN	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	BARREL Material	BARREL Finish		STOCK MATERIAL	STOCK	AYG. WT. (LBS.)
27101 (L)	223 Remington	5 .	24	12"	43 5%*	13 1/2"	1 1/8"	1 3/1	Cartion Steel	Satin Blue	:	American Walnut	Satin	73%
27007	243 Win	4	24"	9 1/8"	43 5%*.	13 1/2"	1 1/1	1 3/4"	Carbon Steel	Satin Blue	1	American Walnut	Satin	7%;
27103 (L)	243 Win	4	24"	9 1/2"	43.5%	13 1/2"	1 //	1 3/8*	Carbon Steel	Satin Blue		American Walnut	Satin	734,
27009	. 25-06 Remington	4	24	10"	44 1/2"	13 1/2"	1 1/8"	1 3/8"	Carbon Steel	Satin Blue	•	American Walnut	Satin	71/2
84080	270 Win	4	24"	10"	44 YT	13 1/2"	1 1/8"	1 3/6"	. Carbon Steel	Polished Blue		American Walnut	Satin	7 %
27011	270 Win	4 .	24"	10*	44 1/2"	13 1/5"	1 1/2"	1 3/8"	Carbon Steet	Satin Blue	3	American Walnut	Satin	71/2
27105 (L)	270 Win	4	24*	10*	44 1/2	13 1/2"	1 1/8"	1 3/8"	Carbon Steel	Satin Blue		American Walnut	Satin	71/2
27015	7mm-08 Remington	4	24*	9 1/4*	43 1/8"	13 14	1 1/4"	1 34"	Carbon Steel	Satin Blue	:	American Walnut	Satin	73%
84082	7mm Remington Mag	3	26*	9 1/4"	46 1/2"	13 1/2	1 1/2"	1 3%*	Carbon Steel	Polished Blue	7	American Walnut	Satin	7%
27047	7mm Remington Mag	3	26	9 1/0	45 1/2"	13 1/2"	1 1/8*	1 3/8"	Carbon Steel	Satin Blue		American Walnut	Satin	7%
27109 (L)	7mm Remington Mag	3	26*	9 1/1"	46 1/7"	13 1/2"	1 1/2"	1 1/4"	Carbon Steel	Satin Blue		American Walnut	Satin	71/6
27051	7mm Remington Ultra Mag	3	26*	9 1/2"	46 1/7"	13 1/2"	1 1/8"	1 3/6"	Carbon Steel	Satin Blue		American Walnut	Satin	7%
27017	30-06 Springfield	4	24*	10"	. 44 1/2	13 1/5"	1 1/8"	1 3/1"	Carbon Steet	Satin Blue		American Walnut	Satin	71/2
84081	30-06 Springfield	4	24"	10*	44 1/2"	13 1/2"	1 1/2"	1 3/8"	Carbon Steel	Polished Blue		American Walnut	Satin	71/2
27107 (L)	30-06 Springfield	4	24*	10"	44 1/2"	13 1/2*	1 1/4"	1 3/4"	Carbon Steel	Satin Blue		American Walnut	Satin	71/2
27049	300 Win Mag	3	26*	10	46 3/2"	13 1/2"	1 1/8"	i 3/1"	Carbon Steel	Satin Blue		American Walnut	Satin	75%
27053	300 Remington Ultra Mag	3	26*	10*	46 1/2"	13 1/2"	1 1/10*	1 3/8"	Carbon Steel	Satin Blue		American Walnut	Satin	71/2
27111 (L)	300 Remington Ultra Mag	3	26*	10*	46 <i>\/</i> *	13 1/2"	1 1/2"	1 3/6"	Carbon Steel	Satin Blue		American Walmut	Satin	75t
27019	35 Whelen **	4	24*	16*	44 1/2"	13 1/2"	11/2"	11/6"	Carbon Steel	Satin Blue		American Walnut	Satin	71/2
(L) Left-hand me	odel					-								

100	700 CDL SF	and the first	ALC: CA	A SECTION CASE OF			100	College.	Some and the state of the state	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	3.19.2 () X 4 () Y 3. ()		1
ORDER NO.	CUEER	MAG. CAPACITY	BARREL Length	TWIST — 9-H 1 Turn in	CVERALL LENGTH	LENGTH OF PULL	(COMB)	(HELL)	BARREL Material	BARREL FUNSH	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
84019	257 Weatherby Mag	3	26*	10"	46 1/2	13 1/7"	1 1/5"	1 ¾°	416 Stainless	Satin Stainless	American Walnut	Satin	7%
84014	270 Win	4	24*	10"	45 1/2	13 1/2"	11/2"	1 3/2"	416 Stainless	Satin Stainless	American Walnut	Satin	71/2
84013	270 WSM	3	24*	10"	43 1/2"	13 1/2"	1 1/2"	1 1/1"	416 Stainless	Satin Stainless	American Walnut	Satin	734
84012	7mm-08 Remington	4	24*	9 1/1"	43 1/4"	13 1/2	1 1/2"	1 3/4"	416 Stainless	Satin Stainless	American Walnut	Satin	7 1/2
84021*	280 Remington	3	24"	9 1/4"	46 V2"	13 1/2"	1 1/4"	1 1/4"	416 Stainless	Satin Stainless	American Walnut	Satin	7%
84015	7mm Remington Mag	3	26*	9 1/2"	46 1/7"	13 1/2"	1 1/2*	1 ¥t*	416 Stzinless	Satin Stainless	American Walnut	Satin	741
84015	30-06 Springfield	4	24"	10	44 1/2	13 1/2"	i ¼•	1 3/1"	416 Stainless	Satin Stainless	American Walnut	Satin	71/2
84017	300 WSM	3	24"	10"	43 1/2	13 1/2"	1 1/2"	1 3/5"	416 Stainless	Satin Stainless	American Walnut	Satin	73/1

NE

RIFLE SPECIFICATIONS

MODEL	700 SPS : :												
RIDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 TURN DI	OVERALL	LENGTH OF PULL	DROP (COMB)	DROP (KEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	ETAICK ETAICK	AYG. WT. (LBS.)
i4200	17 Remington Fireball	5	243	9"	43 1/4"	13 1/3"	1 1/3"	1 35*	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/4
:7351	223 Remington	5	24*	12"	43 1/4"	13 ₹8"	1 ½°	I 14"	Carbon Steef	Matte Blue	Black Synthetic	Matte	7
:7475 (C)	243 Win	4	20"	9 1/3"	39 5/1"	12 1/1	1 1/3"	1 ¾"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7
4150 (C) (L)	243 Win	4	20"	9 1/5"	39 1/8"	12 1/5"	1 1/3"	1 1/3°	Carbon Steel	Matte Blue	Black Synthetic	Matte	1
:7355	243 Win	4	24"	9 V:	43 1/8"	13 ⅓*	1 VY	1 15	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/4
:7351	270 Win	4	24"	10*	44 1/2"	13 3/1"	1 1/8"	1 1/1"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7⅓
:4177 (L)	270 Win	4	24°	10"	44 1/2	13 1/4"	1 1/4"	1 1/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71%
:7331	270 WSM	3	24"	10"	43 1/4"	13 1/5"	1 1/3"	1 1/4°	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/6
:7391 (C)	7mm-08 Remington	4	20"	9 1/4*	39 5%	12 3/4"	1 1/3"	1 ⅓*	Carbon Steel	Matte Blue	Black Synthetic	Matte	7
:4151 (C) (L)	7mm-08 Remington	4	20*	9 1/1	39 ₩*	12 ⅓*	1 W	1 1/3"	Carbon Steef	Matte Blue	Black Synthetic	Matte	1
:7357	7mm-08 Remington	4	24"	9 Vi*	43 1/6"	13 1/1	1 1/3"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7 1/4
:7385	7mm Remington Mag	3	26"	9 1/4"	46 1/2"	13 1/3"	1 1/8"	1 1/3"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7 %
:4179 (L)	7mm Remington Mag	3	26*	9 1/1	46 V/7"	13 3/3"	1 1/8"	1 14"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7 ⅓
:4152	7mm Remington Ultra Mag	3	26*	9 1/1"	46 1/2"	13 1/4"	1 1/8"	1 1/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:7363	30-06 Springfield	4	24"	10*	44 1/2"	13 1/5"	1 1/4"	1 1/1°	Carbon Steel	Matte Blue	Black Synthetic	Matte	71%
:4178 (L)	30-06 Springfield	4	24*	10"	44 1/2	13 1/8"	1 1/3"	1 35*	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:7333	300 WSM	3	24*	10"	43 5%	13 ₩	1 1/4"	1 1/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71%
:7387	300 Win Mag	3	26*	10"	46 1/2"	13 1⁄8"	1 1/3"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:4180 (L)	300 Win Mag	3	26*	10"	46 1/2"	13 1/1"	1 1/4"	1 3%*	- Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:7359	308 Win	4	24*	10"	43 5/1"	13 1/8"	1 1/a*	1 1%*	Carbon Steel	Matte Blue	Black Synthetic	Matte	14
:7389	300 Remington Ultra Mag	3	26*	10"	46 <i>Vt</i>	13 1/6"	1 1/5"	1 1/3"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
C) Compact mod	el (L) Left-hand model			<u></u>									

VA 0.31	700 SPS BUCKMA	СТЕОС	e Entri	ON.			100						
RBER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST R-H 1 TURN IN	OVERALL Length	LENGTH Of Pull	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FIXISH	AVC. WI.
14170	243 Win	4	24"	9 1/8"	43 %	13 1/8"	1 1/8"	1 ¾*	Carbon Steel	Matte Blue	s Synthetic	Realtree® Hardwoods® HD™	714
14176 (C)	243 Win	4	20"	9 1/3*	39 1/4"	12 1/8*	1 1/4"	1 1/8"	Carton Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD™	1
:4172	270 Win	4	24"	10"	.44 1/2	13 1/4"	11/6"	1 3/1*	Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD™	73%
:4171	7mm-08 Remington	4	24"	9 1/4*	43 5%	13 1/4"	1 1/4"	1 1/1	Carbon Steel	Matte Blue	Synthetic Synthetic	Realtree® Hardwoods® HD™	714
4174	7mm Remington Mag	4	26"	9 1/4"	46 1/7	13 3/8"	1 1/4"	1 3/8"	Carbon Steel	Matte Blue	. Synthetic	Realtree® Hardwoods® HD™	. 75%
:4173	30-06 Springfield	4	24*	10"	44 V7	13 1/8	1 1/1	1 3/1"	Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD™	73/8
:4175	300 Win Mag	3	26"	10°	46 1/2	13 1/8"	1 1/4"	1 1/1"	Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD™	75%
C) Compact m	odel												

Fire and Control													
MODE	L 700" SPS" STAINLE	SS											
ROER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	BARREL BLATERIAL	BARREL Finish	STOCK MATERIAL	STOCK FINISH	, TW "DVA (, ZR.)
7131	204 Ruger	5	24"	12	43 %	13 3/1"	1 1/8"	1 3/3*	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/4
7133	223 Remington	5 :	24"	12"	43 5%	13 3/8"	1 1/2"	1 3/5"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/4
7135	22-250 Remington 😕	4	24*	14*	43 1/8"	13 1/8"	1 1/8"	1 3/4*	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/4
7263	243 Win	4	24*	9 1/4"	43 1/8"	13 1/8"	1 1/3"	1 3/8"	. 416 Stainless	Matte Stainless	Black Synthetic	Matte	71/4
7251	25-06 Remington	4 .	24"	10"	44 1/2 6 5-2	13 1/8"	1 1/2*	1 1/4	416 Stainless	Matte Stainless	Black Synthetic	Matte	716
7267	270 Win 3 2 2 2 4 4 1	4	24"	10	44 1/2	13 1/8"	1 1/8	1 34	416 Stainless	Matte Stainless	Black Synthetic	Matte	734
7253	270 WSM	3	24*	10-	44 1/2	13 1/8"	1 1/1"	1 1/2"	416 Stainless	Matte Stainless	Black Synthetic	Matte	73%
7265 .	7mm-08 Remington	. 4	24"	9 1/4"	43 5%	. 13 1/8"	1 1/3"	1 1/4	416 Stainless	Matte Stainless	1 Black Synthetic	Matte	714
7271 .	7mm Remington Mag	3 .	26*	9 1/1	46 1/2	13 1/8"	1 1/1	1 1/1"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/8
4300	7mm Remington Ultra Mag	3	26"	91/4	46 1/2	13 1/8"	1 1/8"	1 1/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/8
7269	30-06 Springfield	4	24"	10"	44 1/2	13 1/1°	1 1/8"	1 1/1	2 416 Stainless	Matte Stainless	Black Synthetic	Matte	71/8
7255	300 WSM (55)	3	24*	. 10*	44 14	13 1/8"	1 1/8"	1 1/2"	416 Stainless	Matte Stainless	Black Synthetic	Matte	73%
7273	300 Wm Mag 🔑 🛵	. 3	26	10	46 1/7	13 1/8"	1 1/1"	11/1	416 Stainless	Matte Stainless	Black Synthetic	Matte	7%
7136	308 Wm	4	24"	10"	43 54	13 1/4"	.11%	1 3/6"	416 Stainless	Matte Stainless	Black Synthetic	Matte	714
7140	300 Remington Ultra Mag	3	26"	10"	46 1/2	13 1/8"	11/1	1 1/8"	416 Stäintess	Matte Stainless	Black Synthetic	Matte	7%

ODË	L 700 SPS DM			7		156.2									
E2 NO.	Ottor (11)		MAG. CAPACITY		BARREL LENGTH	TWIST — R-H 1 TURN IN	S LEBETH OVERALL	LEM OF P		ORCOP (REZEL)	BARREL MATERIAL	BARREL FIRISH	STOOK MATERIAL	STOCK FINISH	AME. WIT.
38	243 Win		4		24*	9 1/8"	43 14	13	1 1/4"	13/1"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71%
5 .	270 Win		- 4	: •	24"	10"	44 /	- 13	M* 1 1/1"	11/	Carbon Steel	Matte Blue	Black Synthetic	Matte	1.7%
1	7mm-08 Remington		4		24"	9 1/4*	43 1	W. W	W 1W	1 1/4"	Carbon Steel	Matte Blue	Harage Black Synthetic	Matte	7, 57.W
3	7min Remington Mag		3		26° ·	9 1/4"	46 14	13	W 1W	13%	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
37	30-06 Springfield	N.	4.		24*	10"	244 Yr	13	11/8"	1 1/8"	Carbon Steel 📜 😽	Matte Blue	Black Synthetic	Matte	7% (\$
19	SCO With (Maga		3	٠,	26"	10"	¥46 W	13	W 1W	1 3/1"	Carbon Steel	Matte Blue	Black Synthetic	Matte	5578 7
		- T-							•	7 772	(100)				

RIFLE SPECIFICATIONS

		NIA.	Button '	Trinet B.II	OVERALL DATE.	LENGTH "	DROP	DROP	AND DESCRIPTION OF THE PARTY OF	BURREL	· Control of the Cont		War View View View View View View View View
RDER NO.	CHER YES	DAPACITY	BARREL Length	TWIST — R-H . 1 Turn in .	OVERALL OF	OF PULL	(COMB)	(HED.)	BURET STATE	FINISH	STOCK MATERIAL	STOCK . FROSH	
4400 '	243 Win 148	4 :	24*	9 1/5"	1135	13 3/1 "	1 1/1"	137	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	11/1
4401	25-06 Remington	4 :	24"	107-	421/2	13 3/1"	1 1/1"	1 36"	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree* AP** HD**	IV.
14402	270 Win	4	24"	10"	42 1/2	13 1/4"	1 1/1"	1 3/8"	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	7/2
4403	7mm-08 Remington 1	4	24"	9 1/4"	41%	13 3/4"	11/6"	134*	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	23 IVE
4404	30-06 Springfield	4 .	24"	10*	42.15	13 34*	11/1	1 3/6"	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	21/2
4405	7mm Remington Mag	3 -	24"	9 1/4"	44V2	13 1/2	114	13%	Carbon Steel	Matte Blue ,	Synthetic w/Overmold	Realtree® AP™ HD™	176
34406	300 Win Mag	3	24*	10"	44.6	13 34*	1 1/1	11/1"	Carbon Steel	Matte Blue . `	Synthetic w/Overmold	Realtree® AP™ HD™	1/1
4407	7mm Remington Ultra Mag	· 3	26"	9 1/2"	46 14	13 1/1	1 1/4"	136	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	PE#79/1
4408	300 Remington Ultra Mag	3	26"	10"	46 1/	13 34"	11/1"	134	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	P 學j强

MODEL	700 MOUNTAIN RI	FLE LS	3										
ORDER NO.	CALIBOR	MAG. Capacity	RARRET. LENGTH	TWIST — R-H 1 Turn in	DENETH (LENGTH OF PULL	- DROP (COMB)	OROP (HEEL)	BARREL	BARREL FINISH	STOCK MATERIAL	STOCK FDRSH	EVE. WT.
26281	270 Win	4	22*	10*	42 1/2	13 34"	11/8*	1 1/4"	416 Stainless	Satin Stainless	Brown Laminated	Satin	674-6
84270	280 Remington	4	22*	10"	1 42 V2 1= 1	13 3/4"	1 1/8"	1 1/1"	416 Stainless 🐇 🛂	Satin Stainless	Brown Laminated	Satin	t - 6%
26285	7mm-08 Remington	4	22*	9 V	41 97	13 3/6"	1 1/1"	1 1/4"	416 Stainless	Satin Stainless	Brown Laminated	Satin	614
26287	30-06 Springfield	4.	22*	10	42 1/2	13 1/4"	1 1/4*	11/8	416 Stainless	Satin Stainless	Brown Laminated	Satin	6%

MODE	EL 700 TARGET TACTI	CAL							
ORDER NO.	CALIBER	MAG. BARR CAPACITY LEKE		OVERALL LENGTH LENGTH OF PULL	DROP E	DROP BARREL HEEL) MATERIAL	BARREI. Finish	STOCK MATERIAL	STOCK AVE. WT. FINISH (LBS.)
84456	308 Win	4 26	11 1/4"	47 1/2", 13 1/4"–15 1/4"	11/7	— Carbon Steel	Matte Blue	Aramid Fiber Reinf.	OD Green 11 3/4
Adjustable l	ength of Pull and Comb								<u> </u>

MOD	EL 700 XCR II COMP	ACT T	ACTICAL	RIFLE										
ORDER NO.	CAUBER	MAG. Capacity	BARNEL LENGTH	TWIST — R-H 1 TERN IN	OVERALL / LENGTH	LENCTH OF POLL	DROP (COMB)	DROP (HEEL)	BARREL	BARREL - Fixish	100	STOCK MATERIAL	STOCK FINISH	ANC. WI.
84466	223 Remington	5	20*	9"	39 //	13 3/8"	1 1/4"	1 1/2"	Stainless w/TriMyte®	Black TriNyte®	1	Aramid Fiber Reinf.	OD Green	71/2
84467	308 Win	4	20"	12"	39 ¾	13 3/8"	1 1/4*	1 1/2"	Stainless w/TriNyte*	Black TriNyte*	序記數	Aramid Fiber Reinf.	OD Green	7112

MODE	L 700 XCR TAC	ICAL LON	G RANG	E RIFLE												
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL Length	TRATST — R-H 1 Turk da	1	CVERALL LENGTH	LENGTH OF PURLL	DROP (COMB)	DROP (HEEL)	BARREE Material	BARREL FINISH	1	STOCK MATERIAL	(a.,	STOCK FINISH	AVE. WT.
84460	223 Remington	. 5	26*	9"		45 % · · · ·	13 3/18"	1 1/4"	1 1/2"	Stainless w/TriNyte*	Black TriNyte*	5, 5	Aramid Fiber Reinf.		OD Green	81/2
84451	308 Win	4	26	12"		45 %	13 3/2"	1 1/4"	1 1/2"	Stainless w/TriNyte®	Black TriNyte ^e	1 4.	Aramid Fiber Reinf.	14 to 1	OD Green	81/2
84462	300 Win Mag	3	26"	10"		45 ¾*	13 1/2"	11/4"	11/7	Stainless w/TriNyte*	Black TriNyte*		Aramid Fiber Reinf.		OD Green	. 81/2

34213 34225 (L)	17 Remington Fireball 17 Remington Fireball	5	26"	g•		OF PULL	(COMB)	(HEEL)	MATERIAL	FENISH	STOCK MATERIAL	FEXISH	(1BS.)
34225 (L)	17 Remington Fireball	<u> </u>		3	46 1/2"	13 ¾"	1 1/4"	1 %"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
		3	26*	9"	46 1/2"	13 1/2°	1 1/2"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
4214	204 Ruger	5	26*	12"	46 1/2"	13 3/4"	1 1/4*	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
34216	22-250 Remington	4	26"	14"	46 1/2"	13 14"	1 %*	1 1/1 "	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
34226 (L)	22-250 Remington	4	26*	14"	46 1/2"	13 14"	1 1/2"	1 1/4*	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
14215	223 Remington	5	26*	12"	46 1/2"	13 1/2"	1 ነላ"	1 3/1"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
4227 (L)	223 Remington	5	26*	12*	46 1/7	13 1/2"	1 1/4"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
34217	243 Win	4	26°	9 1/2"	46 1/2"	13 14	1 1/4"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
4228 (L)	243 Win	4	26*	9 W.	46 1/2"	13 1/4"	1 1/4"	1 14"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
4218	308 Win	4	26"	12"	46 1/2"	13 1/10"	1 1/1	1 %"	Carbon Steet	Matte Blue	Black Synthetic	Matte	81/2
4229 (L)	308 Win	4	26*	12"	46 1/2"	13 1/4"	1 1/2"	1 34"	. Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
L) Left-hand mod	del												

MODEL	700 VLSS THUI	MBHOLE-											
OPDER NO.	CALISER	NAG. CAPACITY	BARREL LEMGTH	TWIST — R-H 1 Turk Da	OVERALL Length	LENGTH OF PULL	DROP (COMS)	DROP (HEEL)	BARREL Material	BLRDEE FOXISH	STOCK MATERIAL	STOCK FINISH	ANG. WT. (185.)
27443	204 Ruger	5	26"	12"	45 ¾°	13 1/2"	1 1/4"	2 1/2*	416 Stainless	Polished Stainless	Brown Larrinated	Satin	91/2
27447	22-250 Remington	4	26*	14"	45 ¾*	13 1/2"	1 1/4"	2 3/2*	416 Stainless	Polished Stainless	Brown Laminated	Satin	91/8
27445	223 Remington	5	26*	12°	45 ¾"	13 1/2*	1 1/4"	2 ¾*	416 Stainless	Polished Stainless	Brown Laminated	Satin	91/1

RIFLE SPECIFICATIONS -

MODEL	700 VTR (VARM	INT TARG	ET RIF	LE)			10.1						
MOER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL Length	LEXGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREI. Material	BARREL Finish	STOOK MATERIAL	STOCK FIXISH	AVG. WT. (LBS.)
34367	17 Remington Fireball	5	22"	9°	41 1/8"	13 1/4"	1 1/6"	1 34"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	71/1
34369	204 Ruger	5	22"	12*	41 1/6"	13 1/3"	11/5	1 35"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	71/2
34362	223 Remington	5	22°	9"	41 1/8"	13 1/2"	1 1/5"	i 1/3°	Carbon Steel	Matte Blue	A-TACS® Digital Camo	Camo	71/2
34370	223 Remington	5	22"	9*	41 %*	13 1/3"	1 1/5"	1 1/4°	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	11/2
34373	22-250 Remington	4	22*	14"	41 %*	13 1/1"	1 1/3"	1 1/2"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	11/2
34368	243 Win	4	22"	9 1/3*	41 96*	13 1/3"	1 1/3"	1 1/3"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	11/2
34364	308 Win	. 5	22°	12"	41 1/6"	13 1/1"	11/4"	11%*	Carbon Steel	Matte Blue	A-TACS® Digital Camo	Camo	71/2
34371	308 Win	4	22°	12"	41 1/4"	13 14	1 1/3"	1 3/3"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	71/2

	700 VES (LAN			OČK)			1	10						
HOER NO.	CALLEER		MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 TURN IN	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL FUNISH	STUCK MATERIAL	STOCK FIXISH	AYE. WT. (LBS.)
27467	204 Ruger		5	26	12"	45 1/4"	13 1/2"	i*	1 3%"	Carbon Steel	Satin Blue	Brown Laminated	Satin	91/8
27491	223 Remington	•	5	26"	12*	45 ¾*	13 1/2"	l*	1 1/4"	Carbon Steel	Satin Blue	Brown Laminated	Satin	91/8
27489	22-250 Remington		4	26"	14"	45 1/4"	13 1/2"	1.	1 1/2"	Carbon Steel	Satin Blue	Brown Laminated	Satin	91/6
27495	243 Win		4	26"	9 1/8"	45 1/4"	13 1/2"	ľ	1 1/4"	Carbon Steel	Satin Blue	Brown Laminated	Satin	91/8
27499	308 Win		4	26"	12"	45 ¾*	13 1/2*	1*	1 3/8"	Carbon Steel	Satin Blue	Brown Laminated	Satin	· 93/8 ·

MODE	L 700 VS:SF II												
HOER NO.	CALIBER	MAG. Capacity	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL Length		ISTH DROP PULL (COMB)	DROP (HEEL)	BARREL Material	BARREL FIXISH	STOCK MATERIAL	STOCK FINISH	ANG. WT. (LBS.)
34352	17 Remington Fireball	5	26"	9*	45 ∛₁°	13	1/2" 1 Y/4"	1 1/2*	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
26333	204 Ruger	5	26"	12*	45 1/4] 13	1/4°	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
26339	220 Swift	4	26*	14"	45 1/4".	13	1/2" 1 W"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81⁄2
26337	223 Remington	5	26"	12"	45 1/1 -,	13	1/2" 1 W"	1 1/2	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
26335	22-250 Remington	4	26"	14"	45 1/4"	13	½" 1 ½"	1 1/2"	416 Stainless	Polished Stainless	.H.S. Precision Black Aramid Fiber Reinf	Matte	81/2

7000		18						1 (4 P. C.)					7.
KOER NO.	CALRES	HAG. CAPACITY	BARREL LENGTH	TWIST R-H 1 TURN IN	OVERALL LENGTH	LENGTH OF PULL	DROP (CONS)	DROP (HEEL)	BARDEL Material	BARREL Fixish	STOCK MATTERIAL	STOCK FIXISH	AME. WT. (LBS.)
27307	264 Win Mag.	3	26°	g•	45 X*	13 1/4"	1 W	11/2	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
27311	7mm Remington Mag	3	26"	9 1/4"	7' 45 W	13 3%"	1 1/4"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	≥√ 8½
27315	7 7mm Rem Ultra Mag	3	26"	9 1/2"	45 74	13 1/6"	1 1/4"	1 1/2"	416 Stainless	Pelished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
27313	300 Win Mag	3	26"	10"	45 1/4"	13 1/4"	1 1/1"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	.81/2
27318	300 Rem Ultra Mag	3	26"	10"	45 1/4"	13 1/1"	1 1/4"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2

MODE	L'700 VARMINT SE												
ROER NO.	CALLEGER	MAG. CAPACITY	SARREL LENGTH	THIST — R-H 1 TURN IN	OVERALL LENGTH	LEXIGTA OF PULL	DROP (COMB)	DROP (HEEL)	BARREL MATERIAL	BARREL FIXISH	STOCK MATERIAL	STOCK FINISH	AVC. WT.
34340	17 Remington Fireball	5	· 26"	.9"	€5.45 Vr 🏩	13 1/8"	1 1/1	-134"	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	81/2
34341	204 Ruger	5	26"	12"	45 1/7	13 1/4"	1 1/1*	1 37	1 × 416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	812
34342	22-250 Remington	5	26" -	14"	45 3/7	13 1/4"	1 1/1"	1 1/1	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	81/2
34343	223 Remington	- 5	26"	12*	45 W	13 3%*	1 1/1	1 7/	416 Stamless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	81/2
34344	\$ 220 Swift ***	4	26"	14"	45 W	13 3%	1 1/1	1 1/1	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	381/2-2.
34344	308 Win Mag	4	26"	14"	745 V 45	13 34	1 1/1	1 1/	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels 3	Matte	814

PDER NO.	(CURSO)	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn Di	OVERALL TO SE	LENGTH OF PULL	COMB)	DROP (HEEL)	EMERIE CONTRACTOR	BARREL Fransh	STOCK MATTERNAL	STOCK FOOSR	TAC MI. 7
5900	17/Remington Fireball	5	20"	g	39 Vr 3	13 3/8"	1 W	11/7	Carbon Stiel	Satin	Walnut	Satin	16 16 S
5417	243 Win	4	20"	9 1/1"	39 Vr. 37	13 %	1 W	11/1	3. Carbon Steel	Satin	Walnut Walnut	Satin	619
419	260 Remington	4 .	- 20" -	. 9" -	39 V.	13 38	. 1 1/1"	-11/1	Carbon Steel	. Satin	Walnut	Satin	64.30
361 .	270WSM	3 _^	22	10"	39 V	13 %	1 1/	1 1/1	Carbon Steel	Satin	Walnut	Satin	69.5
421	7min-08 Remington	4	20	9 1/1	39 V	13 3/	1 W	1 1/2"	Carbon Steel	Satin '	Walnut	Satin	64.4
367 -	800W8W)	3	· · 22	10"	39 V.	13 3%*	1 1/4"	11/2	Carbon Steel	Satin	Walnut State of the State of th	Satin	614 T
423	203 Win	4	·20°	10"	39 1/4	13 1/8*	1 W	11/	Carbon Steel	Satin	Walnut San Walnut	Satin	64
6369 ≠	350 Remingrap (Magraina)	. 4	20 ·	16	41000	13 34 -	11/	- 11/2	Carbon Steel	- Satin	Walnut Andrews	Satin	- 300

RIFLE SPECIFICATIONS

MODE	L SEVEN: PREDATOR												
ORDER NO.	CALIER BOARS	MAG. Capacity	BARREL Length	TWIST — R-H 1 TURN DI	OVERALL RANGE LENGTH	LENGTH: OF PULL	DROP (COMB)	DROP. (HEEL)	BARREL	BARREL FEMOSIA	TIOCS MUIBING SALE	STDCK) = *** FORSE	ANG. WI, W
85950	17 Remington Fireball	511	22	9"	391	· 13 ¾*	1 W*	11/2	Carbon Steel	Mossy Gak® Brush®	bake Synthetic 建筑	Mossy Oak® Brush®	器等7%
85951 -	204 Ruger	5	22"	12*	39	13 3/1	1 1/4"	11/2	Carbon Steel	Mossy Oak® Brush®	Synthetic Ser 3	Mossy Oake Brushe	· 经发7%
85952	223 Remington	5.	22	12"	39	13 34"	1 1/4"	IW.	Carbon Steel	Mossy Oak® Brush®	Synthetic Synthetic	Mossy Oak® Brush®	逐次7%
85953	22-250 Remington	4	22*	14"	39 14	- 13 🖖	1 1/1	11/2	Carbon Steel	Mossy Oak® Brush®	Synthetic Synthetic	Mossy Oak® Brush®	. 内罗万维
85954	243 Wind 2	4	- 22	9 1/8	39 🗸	13 1/1	1 1/4"	11/1	Carbon Steel	Mossy Oak® Brush®	な 以 Synthetic 書覧	Mossy Oak® Brush®	建 密码
,		·	1*					,	an a	-,	112 61 112 12	* . * . *	

MODEL	770 BOLT ACTION F	(IFLE											
ORDER NO.	CALIBER	MAG: CAPACITY	BARREL ·	TWIST R-19 ·	OVERALL LENGTH	LENGTH -	DROP (COMB)	DROP (HEEL)	MATERIAL .	BARREL - FIXISH	STOCK MATERIAL		AND WILES
85630	243 Win	4	22"	9 1/1"	42 1/2	13 14	1 1/4"	1 3/8"	Carbon Steel	Matte	Black Synthetic	Matte	81/2
85637 (C)	243 Win	. 4	20 .	9 1/2	39 14:57	12 34*	11/4	1 1/8"	Carbon Steel	Matte	Black Synthetic	Matte	28 8V.
85632	270 Win	4	22	10	42 /2	13 3/2	138	134"	Carbon Steel	Matte	Black Synthetic	Matte	₹ 812 ÷
85631	7mm-08 Remington	4	22*	9 W*	42 //	13 3/1"	1 1/8"	1 1/8"	Carbon Steel	Matte	Black Synthetic	Matte	814
85635	7mm Remington Mag	3 :	24"	9 1/4"	44 1/2	13 1/1	1 1/8"	1 3/8"	Carton Steel	Matte	Black Synthetic	Matte	8%
85633	30-06 Springfield	4	22°	10"	42 1/2	13 1/1	1 1/8"	1 34*	Carbon Steel	Matte	Black Synthetic	Matte	814
85636	300 Win Mag	3	24"	10	44 //	13 34*	1 1/8"	1 3/8"	Carbon Steel	Matte	- Black Synthetic	Matte.	854
85634	308 Win	4	. 22°	10*	42 1/2	I3 ¾	1 1/8"	1 3/1"	Carbon Steel	Matte	Black Synthetic	Matte	814
† Average we	ght includes scope (C) Compact model			,									

-	高级数数多单位	MAG.	BARREL	` TWAST — R-H	OVERALL	LENGTR	DROP	DROP	BARREL	BARREL	的产品交流的2000mg (STOCK	AVC. WT.
ORDER NO.	CALIBER	CAPACITY	LENGTH	I TURN IN	LENGTH AND S	OF PULL	(COMB)	(HEEL)	MATERIAL	FIRESH	STOCK MATERIAL (2)	FINISH	(LBS.) t _。
85655	270 Win	4	22"	10"	42 1/2	13 3/2"	1 1/2"	1 1/4"	416 Stainless Steel	 Matte 	Synthetic	Realtree® AP™ HD™	816
85657	7mm Remington Mag	- 3	24"	9 1/4*	44 1/2	13 1/8"	1 1/8"	1 3/8"	416 Stainless Steel	. Matte	Synthetic	Realtree® AP™ HD™	81/2
85656	30-06 Springfield	4	22* ·	10*	42 1/2	13 1/1	1 1/4"	1 3/8*	416 Stainless Steel	Matte	Synthetic	Realtree® AP™ HD™	81/2
85658	300 Win Mag	3	24"	10*	44 1/2"	13 1/8"	1 1/8"	1 3/8*	416 Stainless Steel	Matte	Synthetic	Realtree® AP™ HD™	81/2

MODEL 7600	PUMP ACT	ION RIFLE								
MODEL	ORDER NO.	CALIBER	MAG. BARREL TWIST — R-H CAPACRIT LEMSTH 1 TURN ON	OVERALL Length	OF PULL (COMB) (HEEL)	BARREL Material	BARREL FINISH	STOCK MATERIAL	STDCK FDBSH	AVG. WT. (LBS.)
7600-	24653	243 Win	7 : 4 · · · · · · · · · · · · · 9 1/8 · · ·	42 ½"	1317 176 219	Carbon Steel	Polished Blue	American Walnut	Satin 2	71/2
7600"	24655	270 Win	22" 10"	42 1/1	13 1/2 1 1/6 2 1/8	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600	24667	270 Win	4 22 10	42 11"	131/2 = 13/6 2 14	Carbon Steel	Palished Blue	American Walnut	High Gloss	7 1/2
7600 Carbine	24661	30-06 Springfield	4 18 ½ 10*	39 1/1"	13 ½", 1 9/6" 🚍 2 ¼";	Carbon Steel	Polished Blue	American Walnut	Satin	71/4
7600	24657	30-06 Springfield	22" 10"	42 55	13 12 1 1/6 2 1/2	Carbon Steel	Polished Blue	American Walnut	Satin	7⅓
7600~	24671	30-06 Springfield	4 22 10"	42 ⅓ "	13 13 13/6 2 14	Carbon Steel	Polished Blue -	American Walnut	High Gloss	7 1/2
7600	24659	308 Win	. 4 22 10	42 1/1	13 1/2" : 1 1/16" 2 1/4"	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600 Synthetic	25143	243 Win	4 22 91/8	42 5/1"	13 1/2 1 1/16" 2 1/4".	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600" Synthetic	25145	270 Win	4 22" 10"	42 5%	13 1/2 1 9/6 2 V	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600 Synthetic	25149	30-06 Springfield	4 22" 10"	42 ½*	13 1/2" 1 3/6" 2 1/4",	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600" Synthetic	25151	308 Win	4 22 10	42 ½°	13 V2 1 1/16 2 V4	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600 Synthetic Carbine	25153	30-06 Springfield	18 ½" 10"	39 1/1	131/2" 13/6" 21/4"	Carbon Steel	, Matte Blue	Black Synthetic	Matte	71/4
† Equipped with iron sights										

MODEL	ORDER NO.	CALIBER	MAG. CAPACITY	BARREL Length	TWIST — R-H 1-Turn un	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL MATERIAL	BARREL FINISH	STOCK MATERIAL	STOCK FBITSH	RVG. WT. (LBS.)
R-15 VTR Byron South Signature Edition	60009	223 Remington	5	18*	9*	36 1/4"	13 34"	1 1/8	1 1/1"	Carbon Steet	Matte	Synthetic	Advantage® MAX-1 HD**	7 1/4
R-15 VTR SS Varmint	60007	223 Remington	. 5	24"	9"	42 1/4"	13 34	1 1/4"	1 3/4"	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	7 ¾
R-15 VTR Thumbhole	60012	223 Remington	5	24"	9-	42 Ye*	13 1/1"	1 1/8"	1 3/1	Carbon Steel	Matte	Synthetic	, Advantage® MAX-1 HD™	7%
R-15 VTR Predator	60000	204 Ruger	. 5	22"	12"	40 ½°	13 34"	11/8"	1 1/1	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	7 ¾
R-15 VTR Predator	60001	223 Remington	5	22°	9*	40 1/4"	13 3/	11/4	1 3/8*	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	7 ¾
R-15 VTR Predator Carbine	60003	223 Remington	5	18"	9*	36 1/4*	13 3/	11/1	1 3/8"	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	6¾
R-15 VTR Predator Carbine - CS	60005	223 Remington	5	18"	9"	33 1/4" - 36 1/4"	11 37 - 14 37	11/4	1 1/4*	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD**	6 34
R-15	. 60100	30 Remington AR	4	22°	10"	40 1/4"	13 34"	1 1/6"	1 74"	Carbon Steel	Matte	Synthetic	Realtree® AP™ HD'"	7 ¾
R-15	60102	450 Bushmaster	4	18"	10"	36 1/4"	13 1/4"	1 1/8"	1 34"	Carbon Steet	Matte	Synthetic	Realtree® AP™ HD™	7 1/2

MODEL R	-25 MODULAR	REPEATING RIFL	E											
морец	ORDER NO.	CALIBER	MAG. Capacity	BARREL LENGTH	TWIST — R -11 1 Turns de	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BASEREL Finish	STOCK MATERIAL	STOCK FRESH	AYG. WT. (LES.)
R-25	60030	243 Win	4	20"	10"	38 1/4"	13 3/8"	1 1/8"	1 3/2"	Carbon Steel	Matte	Synthetic	Mossy Oak® Treestand™	7 34
R-25	60031	7mm-08 Remington	4	20"	9 1/4"	38 1/4*	13 1/1	11/8	1 3/	Carbon Steel	Matte	Synthetic	Mossy Oak® Treestand ***	7 ¾
R-25	60032	308 Win	4	20*	10"	38 1/2*	13 1/8"	1 1/8"	1 3/2"	Carbon Steel	Matte	Synthetic	Mossy Oak® Treestand**	7 1/4

RIFLE SPECIFICATIONS

rovolte	KATUKEURKE	णामः 🎨					10.00					
ORDER KO.	CALIBER	TWIST — R-H 1 TURN IN	BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	080P (00M3)	OROP (HEEL)	BARREL MATERIAL	BARREL Funish	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
27055	243 Win	9 1/8"	22"	42 1/3"	13 V:"	1 73*	2 V:*	Carbon Steel	Patished Blue	Walnut	Satin	7 1/2
27059	270 Win	9 1/3*	22"	42 5%	13 1/2"	1 35*	2 V:*	Carbon Steel	Polished Blue	Walnut	Satin	7 1/2
27061	30-06 Springfield	9 1/6"	22*	42 3/8"	13 1/2"	l ¥i*	2 1/5"	Carbon Steel	Polished Blue	Walnut	Satin	7 1/2
27057	308 Win	10'	22*	42 1/5"	131/:	l ¾"	2 35*	Carbon Steel	Potished Blue	Walnut	Satin	71/2
27063	35 Wheten	16*	22"	42 ¥1°	13 W.	1 55"	2 1/2"	Carbon Steel	Patished Blue	Walnut	Satin	7 1/2
27077	30-06 Springfield	10*	18 1/2"	39 1/8"	13 1/2"	1 1/3"	2 V:*	Carbon Steel	Palished Blue	Walnut	Satin	7 1/4
27075	308 Win	10'	18 1/2"	39 1/8*	13 1/2"	135	2 1/2"	Carbon Steel	Palished Blue	Walnut	Satin	7 1/4
27079	35 Whelen	16"	18 1/2"	39 1/8"	13 1/2*	1 1/4*	Z 1/5"	Carbon Steel	Pelished Blue	Walnut	Satin	7 1/4
85682	243 Viin	9 1/8"	22*	42 ¥8*	13 1/2"	1 %*	2 1/2*	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/2
85685	270 Win	9 1/8"	22"	42 1/8"	13 1/:*	1 ⅓*	2 V.*	Carbon Steel	Matte Blue	Synthetic	Matte Black	71/2
85686	30-06 Springfield	9 1/8"	22"	42 ¥3*	13 1/2"	151"	2 V:	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 V2
85687	30-06 Springfield	10*	18 1/6	39 1/3"	13 1⁄2*	1 1/5"	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/4
85683	308 Win	10*	22*	42 93"	13 1/2"	1 1/4"	2 ½*	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/2
85684	308 Win	10"	18 1/5"	39 1/8"	13 W.	1 ¥i*	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/4
	27055 27059 27061 27061 27063 27077 27075 27079 85682 85685 85686 85687	27055 243 Vin 27059 270 Win 27059 270 Win 27061 30-06 Springfield 27057 308 Vin 27063 35 Wheten 27077 30-06 Springfield 27075 308 Win 27079 35 Wheten 285682 243 Vin 85685 270 Win 85686 30-06 Springfield 85687 30-06 Springfield	ORDER NO. CALISER 1 TREN IN 27055 243 Vfin 9 ½* 27059 270 Win 9 ½* 27061 30-06 Springfield 9 ½* 27057 308 Vfin 10* 27063 35 Wheten 16* 27077 30-06 Springfield 10* 27075 308 Vfin 10* 27079 35 Wheten 16* 85682 243 Vfin 9 ¼* 85685 270 Vfin 9 ¼* 85686 30-06 Springfield 9 ¼* 85687 30-06 Springfield 10* 85683 308 Vfin 10*	CALLER THEN IN LENGTH THEN IN LENGTH	ORDER NO. CALBER THEST - e-H LEVER N CHERKE	CALLER	THE STATE SAME CHISTIA CHIST	College	CALBER	College Principle Princi	CALLEGE Paished Blue Paished B	CALLEGE PRIST PART PAR

MODELSON													
MDDEL	ORDER NO.	ACTION TYPE (CALIBER)	MAG. CAPACITY	BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	DROP (COM8)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVG. WI. (LBS.)
397 - TVP	80852	Auto (22 LR)	10	20"	40*	14"	1 1/2"	2 1/1"	Stainless Steel	Matte	Shady Camo Laminate	Satin	51/2
197 - FLX	80864	Auto (22 LR)	10	20"	40°	14"	1 1/2"	2 1/1"	Carbon Steel	Matte	Next® Digital FLX	Сато	51/2
ig7 - Blaze Camo	80853	Auto (22 LR)	10	20"	40*	14"	1 1/2"	2 1/1"	Carbon Steel	Matte	Mossy Oak® Blaze	Camo	51/2
i97 * Pink Camo	80854	Auto (22 LR)	10	20"	. 40"	14"	1 V2"	2 1/1"	. Carbon Steel	Matte	Mossy Oak® Pink	Camo	51/2
i97 -	26550	Auto (22 LR)	10	20"	40° .	14"	1 1/2"	2 1/4"	Carbon Steel	Matte	Gray Synthetic	Matte	51/2
i97 - Scope Combo	26513	Auto (22 LR)	10	20"	40"	14"	1 1/2"	2 V4*	Carbon Steel	Matte	Gray Synthetic	Matte	5¾
i97 * Magnum	26560	Auto (22 WMR)	8	20"	40"	14°	1 1/2"	2 1/4"	Carbon Steel	Matte	Black Synthetic	Matte	51/2
i97 - HB LS Magnum	26581	Auto (22 WMR)	8	: 20"	40"	14"	1 1/2"	2 1/4"	Carbon Steel	Matte	Brown Laminate	Satin	6

YODEL 697-Wi	O Wash		e a number			- No 17	1						
600E£	ORDER NO.	ACTION TYPE (CALIBER)	MAG. Capacity	BARREL LENGTH	OVERALL Length	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FIXISH	AVG. WT. (185.)
197" VTR" A-TACS CS	80888	Auto (22 LR)	10 :	16*	31 W - 35 W	14"	1 1/2"	2 1/1"	Carbon Steel	Matte	A-TACS Digital Camo	Camo	51/2
i97" VTR" Quad Rail CS	80882	Auto (22 LR)	10	16*	31 1/4" - 35 1/4"	14"	1 1/2"	2 1/4"	Carbon Steel	Matte	Synthetic	Matte	51/2
i97" VTR" A2 Fixed Stock	80900	Auto (22 LR)	10	16*	34 34	14°	1 1/2"	2 1/4"	Carbon Steel	Matte	Synthetic	Matte	51/2
i97 - VTR - A2 Fixed Stock	80896	Auto (22 LR)	30	16°	34 ¾*	14"	1 1/2"	2 V:	Carbon Steel	Matte	Synthetic	Matte	51/2
197 - VTR - CS	80901	Auto (22 LR)	10	16"	-31 ¼" - 35 W"	14"	1 1/2"	2 1/1"	Carbon Steel	Matte	Synthetic	Matte	5½

MODEL-552/5/2	33		548 1 1 54	4			100						Cig 1
100EL	ORDER MO.	ACTION TYPE (CALIBER)	MAG. CAPACITY	BARREL LENGTH	OVERALL Length	LENGTH OF PULL	OROP (COMB)	DROP (KEEL)	BARREL MATERIAL	BARREL FIXISH	STOCK MATERIAL	STOCK FINISH	AVG. WT.
52" BDL Deluxe Speedmaster*	25594	Auto (22, S, L, LR)	15*	21"	40*	13 1/8"	1 3%*	2 1/2"	← Carbon Steel	Polished Blue	American Walnut	Gloss	534
72" BDL Deluxe Fieldmaster*	25624	Pump (22, S, L, LR)	15*	21*	40"	13 1/4"	1 1/4"	2 1/3"	Carbon Steel	Polished Blue	American Walnut	Gloss	514

NTERCHANGEABILITY CHART. Cartridges within groups shown are interchangeable. Other substitutions should not be made

ithout specific recommendation of the firearms manufacturer since improper combinations could result in firearm damage or personal injury.

RIMFIRE	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)
22 W.R.F.	6.35mm Browning	32 Short Colt in 32 Long Colt but not conversely	38 Celt Special	38 Automatic in 38 Super +P'- but not conversely
22 Remington Special	7mm Express, Remington	(SEE NOTE C)	38 S&W Special	380 Automatic
22 Win. Model 1890 in a 22 Win. Mag. Rimfire	280 Remington	32 S&W in 32 S&W Long but not conversely	38 Special Targetmaster®	9mm Browning Short (Corto Kurz)
- but not conversely	30-30 Sav.	32 S&W Long	38 S&W Special Mid-Range (SEE NOTE D)	9mm Luger (SEE NOTE E)
CENTERFIRE	30-30 Win.	32 Coft New Police	38 Special + P (SEE NOTE B)	9mm Parabellum
25-20 Remington	30-30 Win. Accelerator* (SEE NOTEA)	32 Cott Police Positive	38-44 Special +P (SEE NOTE B)	44 S&W Special (SEE NOTE F)
25-20 W.C.F.	30-30 Marlin	32 W.C.F. (SEE NOTE A)	: 38 Special	44 Marfin
25-20 Wm.	30-30 Win, High Speed	32 Win. (SEE NOTE A)	38 Special Flat Point	44 Win.
25-20 Win. High Speed	30 W.C.F.	32-20 Win. High Speed (SEE NOTE A)	38 Short Coft in 38 Long Coft but not conversely.	44 Remington
25-20 Martin	32 Colt Automatic	32-20 Cott LMR	Both can be used in 38 Special	44-40 Win.
25 W.C.F.	32 Auto. Colt Pistol (ACP)	32-20 W.C.F (SEE NOTE G)	38 Martin	,44 W.C.F.
6mm Remington	32 (7.65mm) Automatic	32-20 Win.	38 Win. (SEE NOTE A)	45-70 Government
244 Remington	7.65mm Automatic Pistol	32-20 Martin	38 Remington (SEE NOTE A)	45-70 Martin
25 Automatic	7.65mm Browning (not interchangeable	38 S&W	38-40 Win.	45-70 Win.
25 Auto. Cott Pistol (ACP)	with 7.65mm Luger)	38 Cott New Police	38 W.C.F. (SEE NOTE A)	45-70-405
25 (6.35mm) Automatic		380 Webley		

NOTE A: High-speed cartridges must not be used in revolvers. They should be used only in ritles made especially for them.

NOTE B: Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cathidge and so recommended by the gun manufacturer NOTE C: Not for use in revolvers chambered for 32 S&W or 32 S&W Long

NOTE D: All 38 Special cartridges can be used in 357 Magnum revolvers but not conversely.

NOTE E: 9mm sub machine gun cartridges should not be used in handguns.

NOTE F: 44 Russian and 44 S&W Special can be used in 44 Remington Magnum revolvers but not conversely.

NOTE G: Not to be used in Win. M-66 and M-73.

RIFLE CHAMBERING

The part 1	MODEL 700	m C	ALIBE	RIS	TINGS			And Lot								*************************************				30.				National Control	**************************************
Part		MS.	BARREL TW	157 — R-IL	Marie Control	1 /3 T	m 9	TARCET		. SPS	SPS SPS	SPS	77.	SPS.	#27 T	RIATHUOM	ATAMOTICA.	, n.s	\$ 18.00 D	SEDIDERO	737	XXX	Svin a	XER TICTICAL	e cont
Part	100 m	5 .	22"	9"	Water S	_		_		_	4.—(1		4,228,23	- .		·- <u>-</u>	W-11	-		_	7		RW 42m.F.		
Second S	Fireball	5	26"	9"		_	<u> </u>	=		84200	(<u> </u>	_	Sugar Se	84213		. -		_	843521			=		=	
Second S	100000000000000000000000000000000000000	5	22°	12		_	\$4.703 							04223 (1)				_		_		. —	84369	_=_	
Part	204 Ruger	5		12 12	1 12 4 1			= ,	-	<u> </u>	5 m	<u> </u>	1 2 -	84214	27443	=	1			=	27.10-10-14 ————————————————————————————————————	_=:		<u> </u>	
The series of th	220 Swift	4						_=	*	. –				_	Jan. Vi. 4. 4		84344		26339		(C-3)) -			distant.
2		5	22"	9"		- .		_	虚	=,			84206	_		- =		<u> </u>		_		Ξ	84362 (AT)	84466	
1	223 Remingtoo	5	24	12	2.2	27101 (c)	e i	_	¥=4	27351	27133	=		=	墨	=	=	. =	(A)	_		= "	843/0	<u> </u>	9446
27. 1		5	26" 26"	12°	, <u> </u>	= .	<u> </u>	Ξ		_	=	=				- = -	84343	27491	26337	<u> </u>		Ξ			17.
The property of the property o		4	22*	14"			-			_				_	\$ 'mark	-			4		-		84373		100
4 27 51 75 75 75 75 75 75 7	Remington	4	26	14"	<u> </u>			=		_	2/135	-	=:		27447	=			26335	Ξ			- ==	=:-	門三
Marie		4	20*	91/				=					<u>; </u>	- 44220 (1)	<u> </u>		<u> </u>		<u>t. — </u>			<u> </u>	; — ; ; — ; ;		
1		4	22".	9 1/1	25787	_	Ξ.	_	; - - 5;	. —	=		; = :	_	p = 1	_	! = :	_		_			84368	_	
44 Finningen 2 2 9 W	243 Win	4	24"	9 14	_		· =	=	841/0	2/355	2/263	2/338			<u> </u> = !	_	ľŒ,	27405	多三	_		84400	∤ I i	·Ξ ·	E
Second Property Second Pro	·	4	26"		<u>: = </u>	_=_			<u>, </u>	=	<u> </u>		<u>. 5</u> 3.		<u> </u>				\$ 100 m	_			<u>, </u>	_=_	3 <u>3</u> /
19 Principal 1	25-06 Remington	4	22" 24"		<u> </u>	27009		_			27251				直車的	<u>-</u>			6 7 7	<u>-</u>	84520	84401			
## Windows 2	257 Weatherby	3			1 4.		84019	_			j. (=	_		_	· - ·		1:	_	1.3			_	, — :		译三
1966	260 Remington	4	24"	10"	<u> </u>		84018							_	<u> </u>		<u>: </u>) <u>-</u>						
179 Wind	264 Win Mag	3												_	5 >		<u> </u>			27307			<u> </u>		-
18	270 Win	4	24"	10*	-		84014	=	84172		27267	27335	· - .	_	$\frac{1}{2}$	26281	= ,	=	$=\frac{1}{2} \cdot \frac{1}{2} \cdot 1$	_	84521	84402	$\frac{1}{L} = \frac{1}{L}$	_	
18 Teminglini 18 Tem		4			<u>: -= :</u>		<u> </u>		<u> </u>	841// (L)	<u> </u>		; <u>E</u>		1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -		<u>;:-::</u>		<u> 본</u>		<u> </u>	=	<u>: =</u>	_=_	
See Assemble 1 2 4 10	270 WSM = 2	3 4			· =	_	84013	_	, • <u> </u>	27331	27253	_	[<u>=</u> -	_	<u> </u>	=	=:	_	$z \equiv z$	_	\equiv	_		=	=
Marting Mart	280 Remington	4	22°			_	84021 an	=	, <u> </u>	=	·	_	- =	=	= :	84270	= :	=	1,=	=	84522	=	K = .	Ξ	J
Marting Mart		4	20"	9 1/4"	1, =				, -		t. <u>+</u>];:		*	_			ÿ.,—*;.	_		.—	1. 1. 2.		
The Remisterior of the Remisserior of the Remisterior of the Remisserior of the Remisseri	Remington	4	22"	9 1/4"	\equiv	27015	84012	=	84171	· —	27265	27341	ΝĒ	=		26285	Ξ.			=	: = :	84403	# <u>=</u> 1,	_	
Second Column Second Colum		3	24"	91/4"	25803		_			· _	. –				-	_					84524		-	_	
Time Intendingtion 3	Mag	3	26"	9 1/4"		27109 (L)	. 84016	_	— ·		-2/2/1	2/343	=	_	=.	=	=	_	= =	2/311	<u> </u>	_	_	=	
19-96 Springfield 4 2½" 10" 25/93 27101 84015 84173 27333 27859 27337 2733 27339 27333 2	7mm Remington	3	26*	9 1/4"					041/4	84152	84300	=							-			84407			
19.46 Springfield 4 24' 10' - 27017 84015 - 84173 27363 27269 27337	Ultra Mag	3 .				27051	· <u> </u>	_	 6	<u> </u>					<u>} </u>	26287			<u> </u>	27315	84527				<u>نسر</u>
4 24° 10° 84881 69°	30-06 Springfield	4	24"	10"	· -	27017 27107 (t)	84015	=	84173		27269	27337	=	_	_		'	_		_		84404	, <u> </u>	_	, <u>_</u>
100 Wish Mag 3 26 10		4	24*	10*											_=				- -				 .		<u>· . —</u>
100 WSM	300 Win Mag	3	26"	10"	=	27049	_	Ξ	84175			27339	_	=	=	=		_	, <u> </u>	27313	84526	84406	=	=	84462
4 24 10	300 WCM		24"	10"			84017					=	-				-		:==	=	84525				
4 20" 12"		<u> </u>								27359	27136								<u> </u>		_=		<u> </u>		-:
108 Win 4 22" 12"		4	20" 22"	12" 12"			_		_	_	-	_			_	_		_		=	=				· —
4 26" 12"	308 Win	4	22 " 2 6 "	12° 11 %	_	_	_	84456			_	_	_	_	_	_	_		- .	_	_	_		_	
The Mag 3 26" 10" - 27111 (U		4	26"															27499							8446
100 mag 3 26" 10"	300 Remington		26"	10*	26410			_	_	27389	27140	_		_		_	_	=		27318		84408	=	_	=
33 26" 10"		3	26"	10"																		-			
	338 Win Mag		26"																						_=
3 24 12	338 Remington Ultra Mag	3	26"	10*								_									84529	_			
3 24" 12"	35 Whelen																								
																						-			
Stock Drop at Comb 1° 1½° <	Ultra Mag*	3																12.1/*							
Drop at Heel 196" 196" 196" 196" 196" 196" 196" 196"	Stock -																								13%
(L) Left-hand model (C) Compact model (AT) A-TACS (BC) Bone Collectus (LT) Limited Edition (HP) Poisshed Polish Blued (R) Rocky Mountain ER Foundation * Equipped with Iron Sights.	uimensions _																								1 1/2
	(L) Left-hand model	(C) Cc	ompact model	(UT) A	-TACS (B	C) Bone Calle	ctor (LT) L	imited Editio	on (HP) Po	dished Polish	Blued (R)	Rocky Moun	ntain Elk Four	ndation 1	Equipped wi	ith Iron Sight	ts.								

BARREL SPECIFICATIONS

LENGTH & CHOKE	12-cu	16-ca.	20-ca.*
	12-64	10-68.	20-64
Field Grade, Vent Rib, Wingmaster*			
30" Rem Choke, Light Contour	26215		
30" Rem - Choke	24576		
28° Rem * Choke, Light Contour	26217		
23° Rem * Choke	24580		24606
26° Rem Choke, Light Contour	26219		
26" Rem * Choke	24582		24608
Deer Barrel, Super Slug Cantilever Scope Mount, New Contour			
23° Fully Rifled	24551		
Deer Barrel, Cantilever Scope Mount, Wingmaster*			
20° Fully Rifled	24557	_	
Deer Barrel, Rifle Sights			
20" Rem Choke	24545 ²	244951	
20" Fully Rifled	24558		
20° imp. Cyl.			24578
SP* Deer Barrel, Cantilever Scope Mount			
20" Fully Rifled	26229		
20" Fully Rifled Camo	262037		
20" Rem ' Choke	262271		
SP Deer, Rifle Sights			
20* Rem : Choke	24549²		
Express® Bead Sights	24620		
Express* Vent Rib	24589		
Express* Deer, Rifle Sights (20*), Imp. Cyl.	24622		
Express* Deer, Fully Rifled, Rifle Sights (20*)	246113		246093
SP . Vent Rib			
30" Rem * Choke	24590		=, :
28" Rem * Chake	26225		
26° Rem` Choke	24592		

Model DTC each abarets with 3' chambers used on Super Magnum: and Magnum receivers will handle both 2 Ye and 3' shells only. Use only 2 Ye shells when these barrets are used on non-Magnum receivers. "20-gauge 810" Lightweight barrets will not it 20-gauge standard 810" guns. 1 Cambiver form: 'Choice Deer barrets supplied with improved Oplinder and Edmodel Rifled Oble Libbs. 2 Rifle-sighted Rem: 'Choice Deer barrets supplied with Rifled and Improved Oplinder Choke Libbs. 3 Express? "On-ga. Fully Rifled Deer barret has 2 Ye'c chamber. Model 870" edits barrets with 2 Ye'c chambers will fit both Magnum and 2 Ye'c receivers. Use only 2 Ye's hells in these barrets. 4 Rifle-sighted Rem: 'Choke Deer barrets supplied with Improved Oplinder Choke Libbs. 1 Carno Mossy Oth!" Break-Up" Atlatin.

LENGTH & CHOKE	12-sa	20-ga.*
Deer Barrel, Cantilever Scope Mount**		
21" Fully Rifled	29615	
Deer Barrel, Rifle Sights		
21" Fully Rifled	29606	295633
21" Rem * Choke ²	29623	
SP* Deer Barrel, Cantilever Scope Mount**	e e	
21" Fully Rifled	24645	
21" Fully Rifled Camo t	29537	
21" Rem Choke ¹	24647	
SP * Deer Barrel, Rifle Sights**		
21" Rem Choke ²	. 29627	
21" Fully Rifled	29609	
SP Magnum, Vent Rib	The grade of the second	
30" Rem" Choke ⁴	24638	
28" Rem Choke ⁴	29611	
26" Rem - Choke4	24640	
Premier* Vent Rib		
30" Rem Choke, Light Contaur	29600	_
28" Rem Choke, Light Contour	29602	
28" Rem Choke	- 24644	
26" Rem * Choke, Light Contour	29604	_
MODEL 11-	87" SUPER MAGNUM	
SP* Super Magnum Deer Barrel, Rifle Sights		
23" Fully Rifled w/Rifle Sights (3" chamber)	24629	. —
SP Super Magnum Deer Barrel, Cantilever Scope Mount	1. 1643. 重小机会部中的14.	· · · · · · · · · · · · · · · · · · ·
23" Fully Rifled (3" chamber)	80500	

Model 11-87: Deer barrets are not equipped with a pressure-compensating gas system, and will not function with target or light field leads.
"20-gaine 877: Uptiverigit barrets will not fit 20-gaine standard 877; gars, "Model 11-87". Deer barrets are compatible with Model 1100" G3 shotgans.
"Riting Standard Barrets on Light Control Stategams. The love-ends on our light Control Model 11-87" stotgans as shaped to fillow the curve of the starmer you liked LC barret, which means that a standard Year Rit or Over transic cannot be fitted to your gar unless you do one of two fings; have your Love are mod coperating up by a competent gursprist or stockinglet; or purchase a standard profile fore-end from our Arms Service Division by writing to. Arms Service Division, Remirigito.
Arms Co., P.O. Box 700, Medison, Nr. 27025-0700 or visit our website at www.remirigito.com.

1. Capitione Remit. Tokin Deer barrets supplied with interview of firms of toking the standard profile fore-end from our Arms. Service Division by writing to. Arms Service Service Division by writing to. Arms Service Servi

Rifled and Improved Chinder Choke tubes 3 2 1/2 chamber. 4.3 1/2 chamber. 1 Camo Mossy Oak Break-Up: Pattern

MODEL SP-10 MAGNUM EXTRA BARRELS / 3 1/1 CH	IAMBERS
ALENGTH & CHOICE	10 a 10 a
SP Magnum, Vent Rib	Maria de Maria
30 Rem Choke	27594
26 Rem Choke	27598 - Carlotte
the state of the second of the	್ರಾಲ್ ಬ್ರಾಪ್ ಮಾಡಿಕೆಯ ಮುಂದು ಬೆಳಗಳು ಬೆಳಗಳು

ENGTH & CHONE Tield Grade Deer, Cantilever Scope Mount	12-ca.	
		20-ca LT-201
21" Fully Rifled	26595	
ield Grade Deer, Rifle Sights		
21" Fully Rifled	29570	
21" Rem " Choke ²	29565	
21" lmp. Cyt.		24438
P ` Deer, Rifle Sights		
21" Rem Choke ²	29571	
iteel Shot Barrel, Vent Rib ³ (See ammunition note below)		
30* Rem * Choke	29505	
26" Rem - Choke	29509	
ield Grade, Vent Rib		
30" Rem Choke	24488	
28* Rem * Choke	24464	24484
26° Rem * Choke	24466	24486
keet, Vent Rib		
26" Rem * Choke	24490	

FOR MORE INFO, VISIT WWW.REMINGTON.com

OR CALL 1-800-243-9700

300. ADL. Accelerator, AWR, BDL, Bandit, BriteBore, Bronze Point, BuckHammer, Bullet, Bullet Design, CBEE 22, CDL, Classic, Conquest, Copper-Lokt, Copper Solid, Core-Lokt, Custom Carry, Cyclone, D-Series, Deer Hunter, Desert Recon, Disintegrator, DriLube, Driving Band, Drop-Dead Better, Duplex, Echo, Elite Hunter, Elite Skinner, . Elsag, E.R. Remington & Sons, Escape, ETA, EtranX, Excursion, Express, Express-Steel, EZ, F.A.S.T., Fast Action Soft Touch, Fieldmaster, Figure 8, Fireball, Flexitab, FLX, G3, Gamemaster, Genesis, Green Color, Golden, Golden Saber, Grizzly, Gun Club, Hi-Speed, Ideal, Insignia Edition, Kleanbore, Lead-Lokt, LV SF, M24, M24A2, M24A3, MAX Gobbler, M-Series, Managed-Recoil, Marine Magnum, MCS Picatinny, Model Five, Model Seven, Model 105 CTi, Model 11-87, Model 11-87P, Model 32, Model 332, Model 365, Model 40-X, Model 40-XB, Model 40-XBR, Model 40-XC Model 40-XR Model 40-XRRR Model 40-XS Model 412 Model 504 Model 504-T. Model 552 Model 572, Model 597, Model 673, Model 700, Model 700P, Model 700P USR, Model 710, Model 750, Model 770, Model 798, Model 799, Model 830, Model 870, Model 870 MCS, Model 870P, Model 870P MAX, Model 887, Model 1100, Model 7400, Model 7600, Model 7600P, Model 7615, Model 7615P, Model SP-10, MoistureGuard, Nitro 27, Nitro CLP, Nitro Mag, Nitro Turkey, Nitro-Steel, Parker, Peters, Pheasant, Power-Lokt, Power Piston, Predator, Premier, ProBore, Quick Look, R, R-15, R-25, R-P, Rangemaster, Ready, Realwood, Rem, Rem Dri 35, Rem DriLube, RemCloth, RemGrip, Rem-Line, Rem-Lite, Rem-Tech, Remington, Remington Fieldmaster, Remington Law Enforcement, Remington Leadless, Remington Racing, Remington Shooting School and Remington Shooting School logo, Remington Targetmaster, Remington Ultra, Rescue, Rustless, S.A.S.S., Sendero, Shoot Like A Girl ... If You Can!, ShurShot, Slugger, SP, SPS, SP-T, SPS-T, Speedmaster, Sportsman, STS, Subsonic, SuperCell, Super Magnum, Super Slug, SWIFT-LOKT, TAC 8, Tango, Targetmaster, The Deadliest Mushroom in the Woods, Thunderbolt, TorchCam, TriNyte, TVP, Ultra Bonded, Ultra Mag, UMC, Unibody, Viper, VLS, Vortex and Vortex logo, VS, VSF, VS SF, VTR, Weathermaster, Welproof, Wingmaster, Wingmaster HD, Woodsmaster, XCR Extreme, XHR, XM3, X-Mark Pro, XR-100, Yellow Jacket and Zulu are trademarks of RA Brands, L.L.C., Madison, NC 27025. Palusol is a trademark of BASF. Boy Scouts of America is a registered trademark of Boy Scouts of America. Briley is a trademark of Briley Manufacturing, Bushnell and Sharoshooter are trademarks of Bushnell, TORX is a trademark of Camcar LLC, Delrin, Kevlar, Teflon and Tyvek are trademarks of DuPont. Match King is a trademark of Sierra Bullet Co., LLC. Swift, A-Frame and Scirocco are trademarks of Swift Bullet Co. Break-Up, Brush, Duck Blind, Mossy Oak, New Break-Up, Treestand, and Obsession are trademarks of Haas Outdoors, Inc. V-Max is a trademark of Hornady Manufacturing Company. Hogue is a trademark of Hogue, Inc. Advantage, Advantage Max-4, Advantage Timber, AP, APG, HD and Realtree are trademarks of Jordan Outdoor Enterprises, Ltd. SpecOps is a trademark of Knoxx Industries, LLC., HIVIZ is a trademark of North Pass, Ltd. Kraton is a trademark of Shell. Sako is a trademark of Sako, Ltd., Shilen is a trademark of Shilen, Inc., Speedfeed is a trademark of Armory Accessories, Inc. LimbSaver is a trademark of Steven Sims, Inc. Digital Tiger is a trademark of Tiger Stripe Products. TRUGLO is a trademark of Truglo, Inc. Skyline, Excel and Fall Flight are trademarks of Skyline Cover, LLC. Weaver is a trademark of Weaver Outdoor Optics. Williams and Fire Sights are trademarks of Williams Gun Sight Co. A-TACS is a trademark of Digital Concealment Systems. Judge is a trademark of Taurus International. Pardus is a trademark of DPMS Panther Arms. The Bone Collector is a trademark of Michael Waddell, LLC. XS is a trademark of XS Sight Systems, Inc.

Weights, stock dimensions, checkering pattern and wood grain may vary according to the individual firearm. Remington reserves the right to change or modify its products without notice. Pricing may vary by model, specification, color, size and availability. Follow the safety rules printed in firearms instruction books and on ammunition boxes. It you do not have an instruction book for your Remington firearm, write to Remington Arms Company, Inc., 870 Remington Drive, PO Box 700, Madison, NC 27025, for a free copy or visit our website at www.cemington.com/manuals. Please specify the model and serial number. The firearms herein have been photographed with their actions closed to properly showcase their features. In actual practice, any firearm not in use must be left with ammunition removed, action open and safety on. Consumer Information, Arms Service, Parts and Repairs and Custom Shop. (800) 243-9700. Visit us on the web at: www.remington.com.

