

DO NOT SCALE THIS DRAWING. WORK TO DIMENSIONS UNLESS OTHERWISE NOTED. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

1 PLACE (.01) - TOLERANCE $\pm .010$

2 PLACE (.001) - TOLERANCE $\pm .005$

3 PLACE (.0001) - TOLERANCE $\pm .0005$

4 ON ANCHOR DIMENSIONS $\pm .001$

5 ON ANCHOR DIMENSIONS $\pm .0001$

SQUARE (R.M.S.) MICRO-INCH ROUGHNESS VALUE AND THE MAXIMUM ROUGHNESS ACCEPTABLE UNLESS OTHERWISE SPECIFIED.

FINISH ROUGHNESS TO BE $\sqrt{}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT


MATERIAL MAPLE

HEAT TREAT

HARDNESS

COLOR

HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

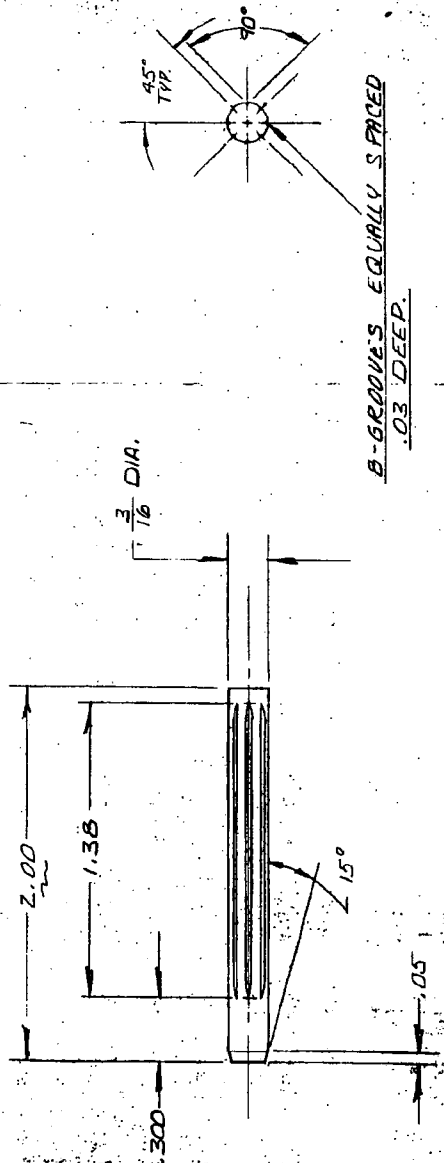

DATE	BY	DATE	BY

MODEL		PART NO.		DES. BY DATE		CHK. BY DATE		APP. BY DATE	
M-700		REINFORCING PIN		F. MARTIN - 30 NOV. 74					
TITLE									
REINFORCING PIN									
NUMBER		SCALE		SUPERSEDES		REFERENCE			
B-		Z X							
REMINGTON ARMS CO. INC. ELION RESEARCH DIV.									