


The ejector is of the spring loaded pin type that is recessed into the bolt face. (Photo #5)



The extractor is a non-rotary Mauser type that is mounted along the side of the bolt. It is attached to the bolt body by a ring that fits into grooves on the underside of the extractor. Further control of the extractor comes from a circular groove in the bolt head. (Photo #6)

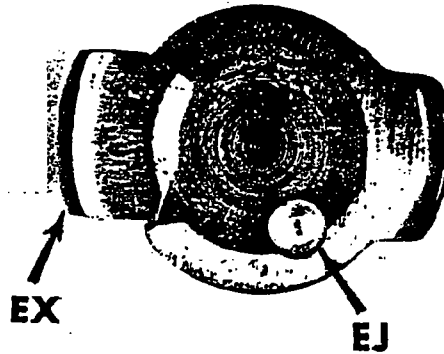