

TO ATTACH A MILITARY SLING TO YOUR RIFLE:



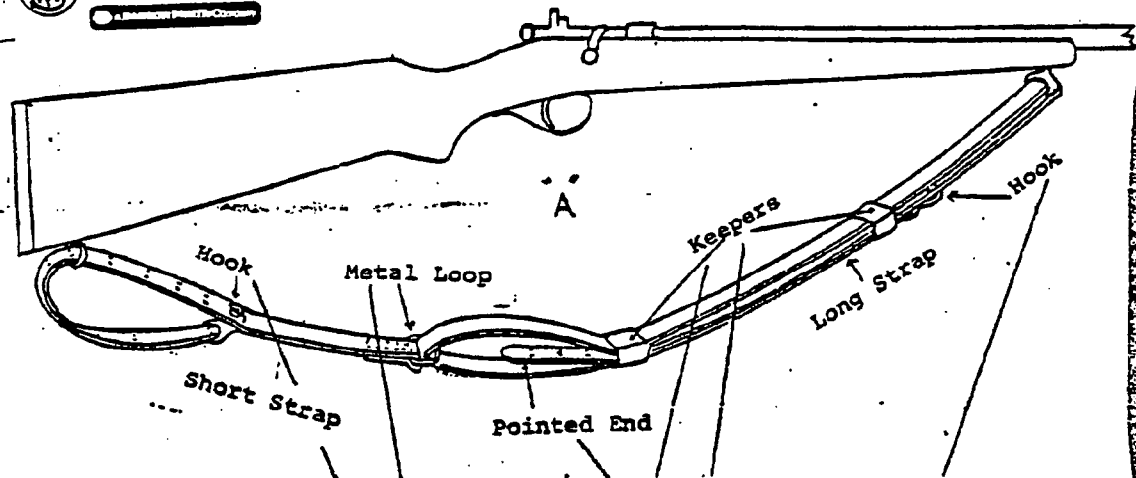


Diagram A shows adjustment and assembly for target shooting.

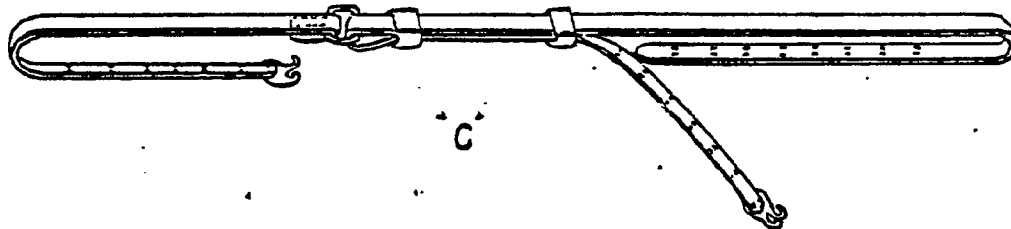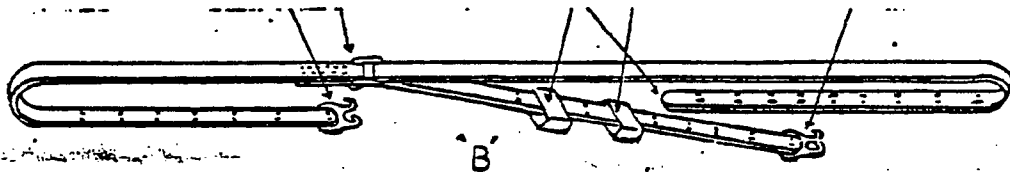

- 1) Slide the pointed end of the long strap through both keepers, then adjust keepers to approximate position of Diagram "C".
- 2) Slide short strap through the metal loop on the butt end of your rifle. Slide the long strap point through the muzzle end metal loop.
- 3) Slide the pointed end of the long strap through both keepers holding the pointed section between the upper and lower thirds of the long strap.
- 4) Insert long strap adjustment hook into one set of adjustment holes. Next slide keepers to approximate position of Diagram "A".
- 5) Insert hook on short strap into short strap adjustment holes. Sling is now located and assembled to resemble Diagram "A" with hooks adjusted to fit the individual shooter.
- 6) Short strap hook can be inserted in long strap adjustment holes to form a carrying strap.