


58592-8

RECOMMENDED MATERIAL AND HEAT TREAT
SEE - C-15370
MATERIAL B-15372
HEAT TREAT CARB. NITRIDE
HARDNESS R15N 881.92
COLOR BLACK OXIDE
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm .00430$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

ALTERATIONS				
LET.	WAR	REFERENCE	BY	DATE
1	700 A	4405	054	1-22-62
2	700 AOL	"	"	"
3	ADDED	"	"	"
4	ADD USE 40X-B	5720	"	1/11/63
5	REDRAWN	1/11/65	"	1/11/65
6	BRAZE	"	"	"
7	ADDED USE	6479	DD	3-14-66
8	B-15372	6956	T.K.B.	1/14/67
9	C-15370	11486	ST	1/14/67
10	PICTORIAL CHANGE	11486	ST	1/14/67

BUTTON C-91852
(8) (13)

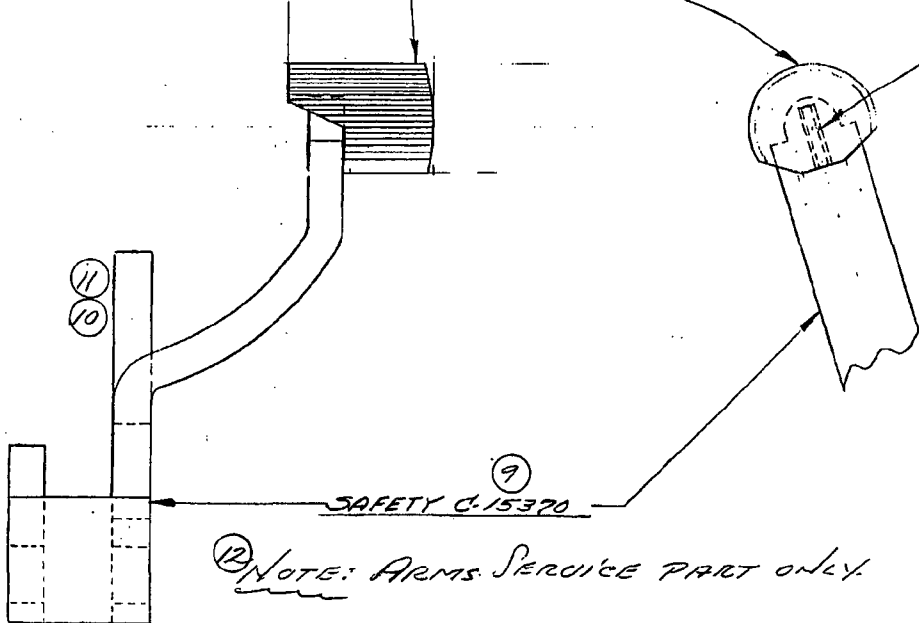

NOTE: ARMS SERVICE PART ONLY.

THIS DRAWING OR INFORMATION IS
PROPERTY OF REMINGTON ARMS COMPANY, INC.

B-26585

7	700VAR	SAFETY ASSY.	PL.	
	40X-B CF	SAFETY ASSEMBLY	D 27590	
4	40X-B	SAFETY ASSEMBLY	1 D-27590	
2	700BOL	SAFETY ASSEMBLY	1 D-26585	
1	700BOL	" "	1 "	
MODEL		PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE	
	7.11.61	11.3.7-12-61	7/11/61	
TITLE				
ASSEMBLY				
NUMBER		SCALE	SUPERSEDES-REFERENCE	
B-26585		4X	REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT.	

YPS-1 REV. 2