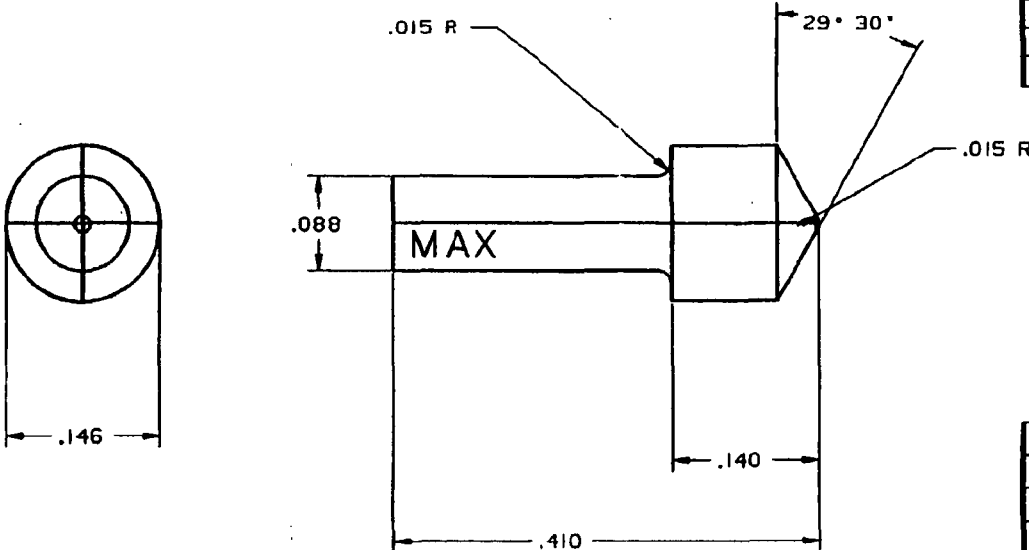


B-		THIS DRAWING OR INFORMATION IS PROPRIETARY INFORMATION TO THE REMINGTON ARMS COMPANY, INC.	DO NOT SCALE THIS DRAWING: WORK TO FIGURES UNLESS OTHERWISE NOTED. TOLERANCES ON DECIMAL DIMENSIONS ARE: 1 PLACE (.1) - TOLERANCE $\pm .015$ 2 PLACE (.01) - TOLERANCE $\pm .010$ 3 PLACE (.001) - TOLERANCE $\pm .005$ & ON FRACTIONAL DIMENSIONS $\pm .004$ FINISHES ARE DESIGNATED BY ROOT MEAN SQUARE (R.M.S.) MICRO-INCH ROUGHNESS VALUES AND ARE THE MAXIMUM ROUGHNESS ACCEPTABLE, UNLESS OTHERWISE SPECIFIED. FINISH ROUGHNESS TO BE $\sqrt{125}$ OR BETTER.	RECOMMENDED MATERIAL AND HEAT TREAT MATERIAL _____ HEAT TREAT _____ HARDNESS _____ COLOR _____ HEAT TREAT AND COLOR TO BE DONE BY REMINGTON	ALTERATIONS				
					ALT.	DATE	REF.	BY	DATE
									
CV FILENAME - RES.NBAR.TRIGGER-PLUNGER-MAX.EAK									
MODEL PART NO. PART USE DES. BY DATE DES. BY DATE CHG. BY DATE APP. BY DATE TITLE NUMBER B-93648 SCALE SUPERSEDES REFERENCE REMINGTON ARMS CO. INC. RESEARCH DIV.									

B-93648

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.


DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE .125 - TOLERANCE $\pm .015$
2 PLACE .010 - TOLERANCE $\pm .010$
3 PLACE .001 - TOLERANCE $\pm .005$
4 ON FRACTIONAL DIMENSIONS $\pm 1/64$
5 ON ANGULAR DIMENSIONS $\pm 30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{125}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL B-1112
HEAT TREAT .008-.012 CASE
HARDNESS FILE
COLOR NONE
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON


ALTERATIONS

ALT.	WH	REF.	BY	DATE

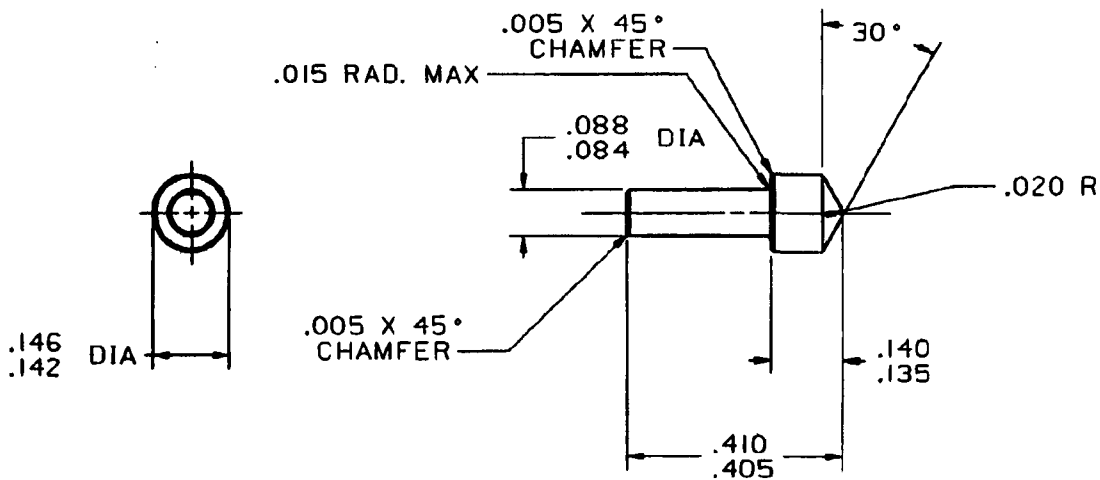

CV FILENAME - REG.NBAR.TRIGGER-BLK-PLUNGER

NBAR	93648	TRIGGER BLOCK PLUNGER
MODEL	PART NO.	PART USE
DES. BY DATE	DES. BY DATE	DES. BY DATE
	RAW 10-30-85	FEM 12-3-85
TITLE PLUNGER		
NUMBER	SCALE	DATE
B-93648	10X	
SUPERSEDES 0-3530		
REFERENCES REMINGTON ARMS CO. INC. BLKON RESEARCH DIV.		

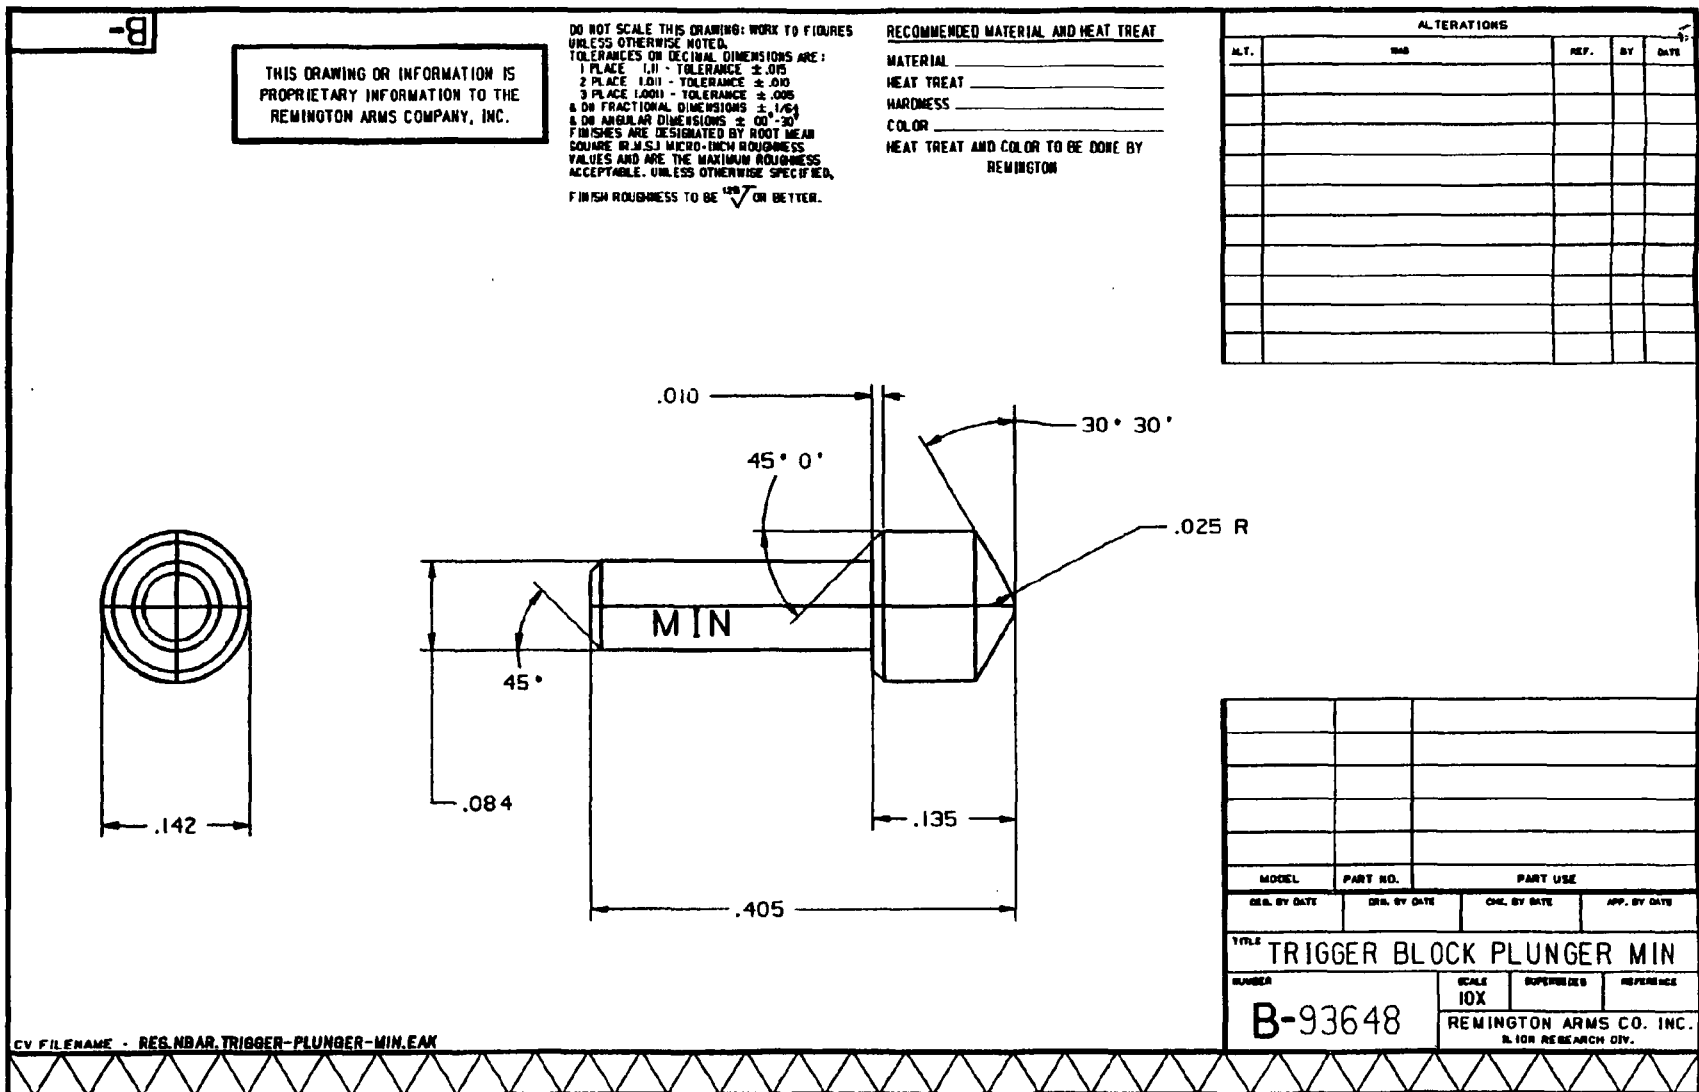

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.


DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (.1) - TOLERANCE $\pm .015$
2 PLACE (.01) - TOLERANCE $\pm .010$
3 PLACE (.001) - TOLERANCE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm .00^\circ - .30^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt[125]{}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL _____
HEAT TREAT _____
HARDNESS _____
COLOR _____
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALTERATIONS

ALT.	REASON	BY	DATE

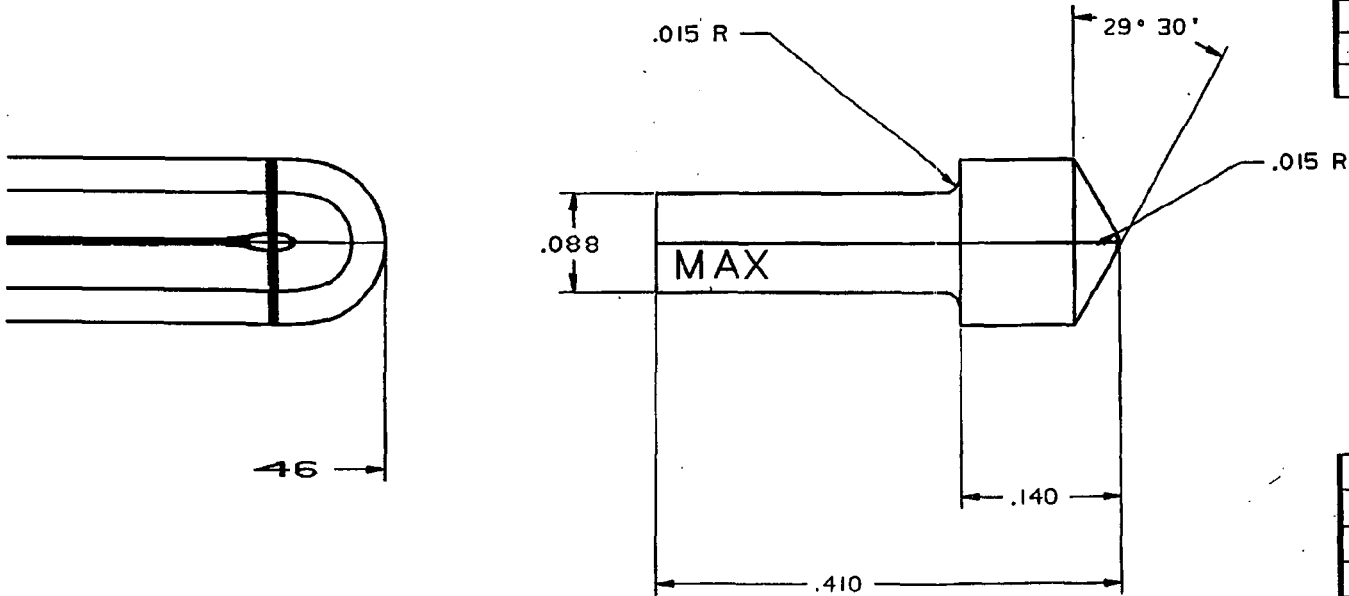

CREATED 1-13-88

MODEL	PART NO.	PART USE
DES. BY DATE	DRG. BY DATE	CHK. BY DATE
TITLE TRIGGER BLOCK PLUNGER MAX		
NUMBER	SCALE 10X	SUPERSEDES
B-93648	REMINGTON ARMS CO. INC.	REFERENCE
	ILION RESEARCH DIV.	


R-PLUNGER-MAX.EAK

R2522768

DO NOT SCALE THIS DRAWING: WORK TO FIT
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE .010 - TOLERANCE $\pm .010$
2 PLACE .001 - TOLERANCE $\pm .001$
3 PLACE .001 - TOLERANCE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm .003$ PER
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE. UNLESS OTHERWISE SPECIFIED,
FINISH ROUGHNESS TO BE $\sqrt{125}$ OR BETTER.

MATERIAL _____
HEAT TREAT _____
HARDNESS _____
COLOR _____
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

CREATED				1-13-88			
MODEL		PART NO.		PART USE			
DEL. BY DATE		DRN. BY DATE		CHK. BY DATE		APP. BY DATE	
TITLE TRIGGER BLOCK PLUNGER MAX							
NUMBER B-93648				SCALE 10X		SUPERSEDES	
						REFERENCE	
REMINGTON ARMS CO. INC. ILION RESEARCH DIV.							

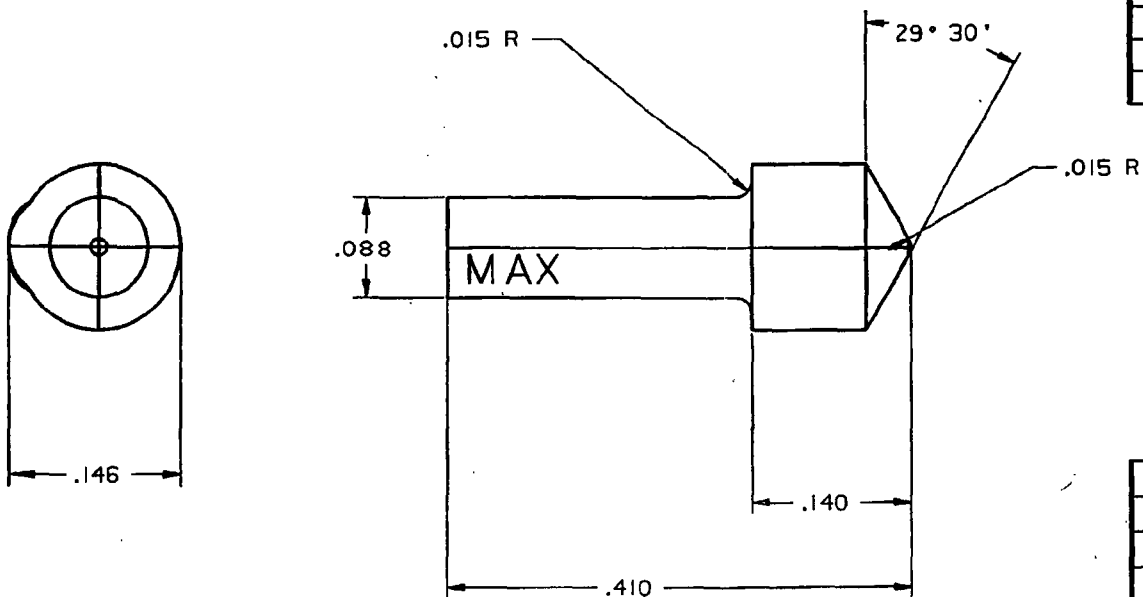

CV FILENAME - RES.NBA/R.TRIGGER-PLUNGER-MAX.EAK