


TLW 2645 11/18/08				TLW 2645 12/18/08				Current 770 Fire Control 1/12/09				DAT Average (2007)				Ilion Average X-Mark Pro			
	cycle	off	on		cycle	off	on		cycle	off	on		off	on		off	on	off	on
FC1	0	4.57	8.25		0	3.92	7.25		0	1.91	4.19		3.582			4.079		2.6	
	10	4.36	7.69		50	3.87	7.76		50	2.11	3.93		3.582			4.079		2.6	
	20	4.31	8.12		100	3.98	8.37		100	2.27	4.08		3.582			4.079		2.6	
	100	4.76	8.49		rev pin	3.75	8.11						3.582			4.079		2.6	
FC2	0				0	3.72	6.97		0				3.582			4.079		2.6	
	10	3.67	7.63		50	4.23	8.65		50	1.75	4.3		3.582			4.079		2.6	
	20	3.79	8.11		100	4.42	12.14		100	2.01	4.31								
	100	3.88	7.04		rev pin	4.42	12.14			2.37	4.19								
FC3	0	4.36	9.65			4.19	10.71												
	0	4.2	6.79		0	4.43	5.98		0	2.15	4.67								
	10	4.22	6.67		50	3.98	6.76		50	1.9	4.57								
	20	4.15	6.53		100	3.98	7.38		100	1.94	4.77								
FC4	0	4.43	7.69		rev pin	4.17	6.71												
	0	3.65	7.35		0	3.77	6.79		0	1.55	3.91								
	10	3.82	6.85		50	4.07	7.03		50	1.7	4.14								
	20	4.04	7.33		100	3.92	10.13		100	1.73	4.33								
FC5	0	4.16	8.96		rev pin	3.27	7.47												
	0	4.3	7.53		0	3.83	7.21		0	1.6	4.17								
	10	4.15	7.3		50	3.97	7.81		50	1.53	4.04								
	20	4.35	7.2		100	3.87	8.24		100	1.73	4.47								
FC6	0	4.49	7.84		rev pin	3.93	8.01												
	0	4.13	9.24		0	3.67	7.44												
	10	4.29	9.35		50	3.97	10.31												
	20	4.3	9.27		100	4.23	10.35												
FC6	0	4.73	9.33		rev pin	4.21	9.66												
	100																		

on 7.3 7.3 7.3 7.3 7.3

Safety On/Off Forces
E-Town Results (6 FC Assemblies)

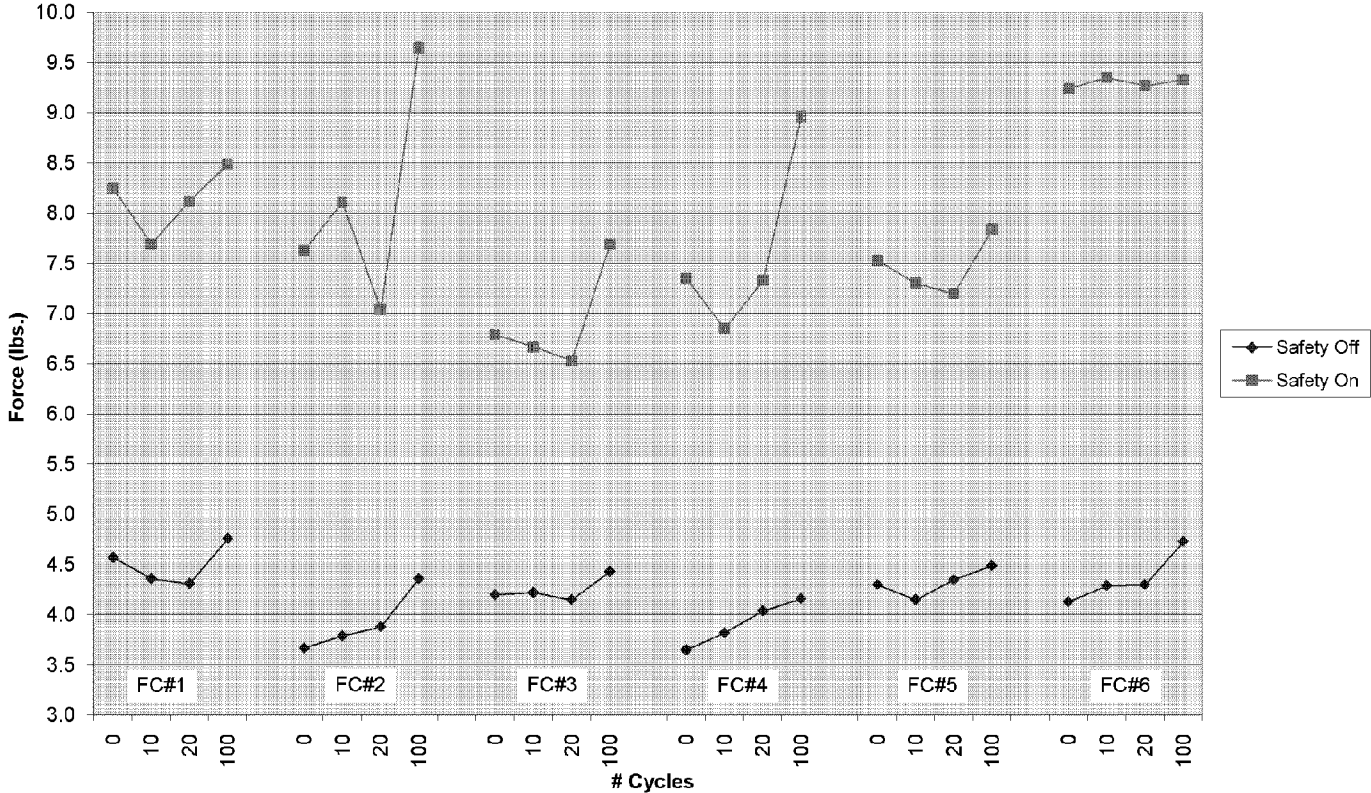

Safety On/Off Forces

