

Test Lab Work Request Form

Date Submitted: 10 March, 2000	Tracking #: TLW 0010AO
Project #: 241095	Engineer: J.R.SNEDEKER
Test Objective: <u>TLW0010AO - Rain Test:</u> Use Standard Remington Rain test procedure using the Salt Fog Chamber. Rifle must function without any safety related malfunctions.	
Test Description: See J.R.Snedeker (or Jeff Wade) for test procedure details.	
Resource Usage: Manpower Requirements - Facility Requirements -	Test Results Required: Formal Report: Data Only: X REQUESTED Completion Date:
Required Materials/Parts/Equipment (include quantities):	
Test Parts Availability Date:	
Start Date: 9-16-00 Completion Date: 9-16-00 Report Date:	Test Assigned To: Jeff Wade / Steve Wade

ET07192

Reesor, Phillip K.

From: Wade, Jeff L.
 Sent: Monday, September 18, 2000 4:35 PM
 To: Reesor, Phillip K.
 Subject: FW: TLW0010AO

GUN # B23 - Serial # 71001075 - Model 710 - 30.06


On 9/9/00 at 6:30am set salt fog (rain) chamber for six (6) hours at 35 C with grid and two trays of ice, two bags per tray. Put glass beaker in bottom of chamber to collect and measure amount of water falling on gun. Put primed case in chamber of gun, closed bolt with safety on and put gun in chamber. Closed lid and turned unit on for 6 hour cycle. At the end of completed cycle had 2-1/4" of water in beaker. Took gun out of chamber and put in shooti

From:
 Sent:
 To:
 Subject:

From:
 Sent:
 To:
 Subject:



TLW0010AO.DOC

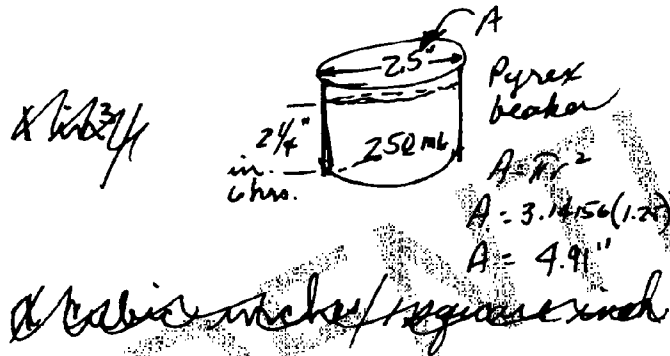

175 ml / 6 hours

= 29.17 ml / hour

Converted
= 1.78 in³ / hour

$$\frac{1.78 \text{ in}^3 / \text{hour}}{4.91 \text{ in}^2} = 0.36 \text{ in} / \text{hour}$$

$$= 0.36 \text{ in} / \text{in}^2 / \text{hour}$$

Reesor, Phillip K.

From: Wade, Jeff L.
Sent: Monday, September 18, 2000 4:35 PM
To: Reesor, Phillip K.
Subject: FW: TLW0010AO

GUN # B23 - Serial # 71001075 - Model 710 - 30.06
On 9/9/00 at 6:30am set salt fog (rain) chamber for six (6) hours at 35 C with grid and two trays of ice, two bags per tray. Put glass beaker in bottom of chamber to collect and measure amount of water falling on gun. Put primed case in chamber of gun, closed bolt with safety on and put gun in chamber. Closed lid and turned unit on for 6 hour cycle. At the end of completed cycle had 2-1/4" of water in beaker. Took gun out of chamber and put in shooting port in blow - up room. Primed case fired. - No problems.

From: Reesor, Phillip K.
Sent: Monday, September 18, 2000 3:34 PM
To: Wade, Jeff L.
Subject: FW: TLW0010AO

From: Snedeker, Jim
Sent: Thursday, August 10, 2000 9:12 AM
To: Reesor, Phillip K.
Subject: TLW0010AO



TLW0010AO.DOC

Page 1

ET07194