

05523343

MODEL 700TH M24

Model SWS TM

Action

Barrel Length

Capacity

Order No. 5715

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00137999

Serial: C6523343 Model M24 SWS Center Fire
Caliber: 7.62 NATO Produced: 12/19/1990

Repairman:

Status:

Closed 12/5/2007 1:04:02 PM

Verify Repair

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: HHC 2 -87 INF

HHC 2 -87 INF

Address 1:

Address 2:

PO Box:

PO Box:

City: FORT DRUM

FORT DRUM

State: NY

Zip Code: 13602

Country: US

State: NY

Zip Code: 13602

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
A057	Front and Rear Sgt Base	1
D000	MARS	1

Repair Search

Refresh

Close

nagletj

12/6/2007

10:17 AM

CAPS

NUM

INS

SCFL

start

6 Mi...

8 Int...

Part S...

Arms ...

Micros...

Stock ...

10:17 AM

Serial Number:

C6523343

Model: M24 SWS



RE00137999

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

DATE 12-12-07TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.30	2.86		2.89	
PULL #2	2.34	2.77		2.22	
PULL #3	2.34	2.64		2.14	
PULL #4	2.21	2.81		2.12	
PULL #5	2.22	2.62		2.15	
TOTAL	11.41	13.70		11.52	
AVERAGE	2.28	2.74		2.30	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.34	3.33		
PULL #2	3.09	3.25		
PULL #3	3.16	3.21		
PULL #4	3.10	3.28		
PULL #5	3.27	3.22		
TOTAL	15.96	16.29		
AVERAGE	3.19	3.25		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.26	4.08		4.39
PULL #2	4.48	3.99		4.40
PULL #3	4.33	4.03		4.34
PULL #4	4.05	4.05		4.38
PULL #5	4.07	4.05		4.34
TOTAL	21.19	20.20		21.85
AVERAGE	4.23	4.04		4.37

NMP COPY 2

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523343.__0
FILE DATE AND TIME: 01/10/2008 22:49

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.147
The Average Y Centroid of the Five Target Set:	0.080
The Average Point of Impact of the Five Target Set:	0.168
The Average Mean Radius of the Five Target Set:	0.753
The Distance from POA to Centroid Target #1:	0.415
The Distance from Centroid Target #2 to Centroid Target #1:	0.440
The Distance from Centroid Target #3 to Centroid Target #1:	0.495
The Distance from Centroid Target #4 to Centroid Target #1:	0.441
The Distance from Centroid Target #5 to Centroid Target #1:	0.431

SERIAL NUMBER: C6523343. __0

TARGET NUMBER: 1

FILE DATE: 01/10/2008

FILE TIME: 22:49

POINT#	X	Y
1:	0.332	1.917
2:	-0.004	1.457
3:	0.255	1.117
4:	-0.285	0.177
5:	0.519	0.200
6:	0.560	-0.701
7:	-0.577	-0.916
8:	-0.266	-1.816
9:	0.160	1.162
10:	0.013	1.488

X CENTROID: 0.071

Y CENTROID: 0.409

POA TO CENTROID: 0.415

HORZ SPREAD: 1.137

VERT SPREAD: 3.733

GROUP SPREAD: 3.781

MIN RADIUS: 0.424


MAX RADIUS: 2.250

MEAN RADIUS: 1.101

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 8

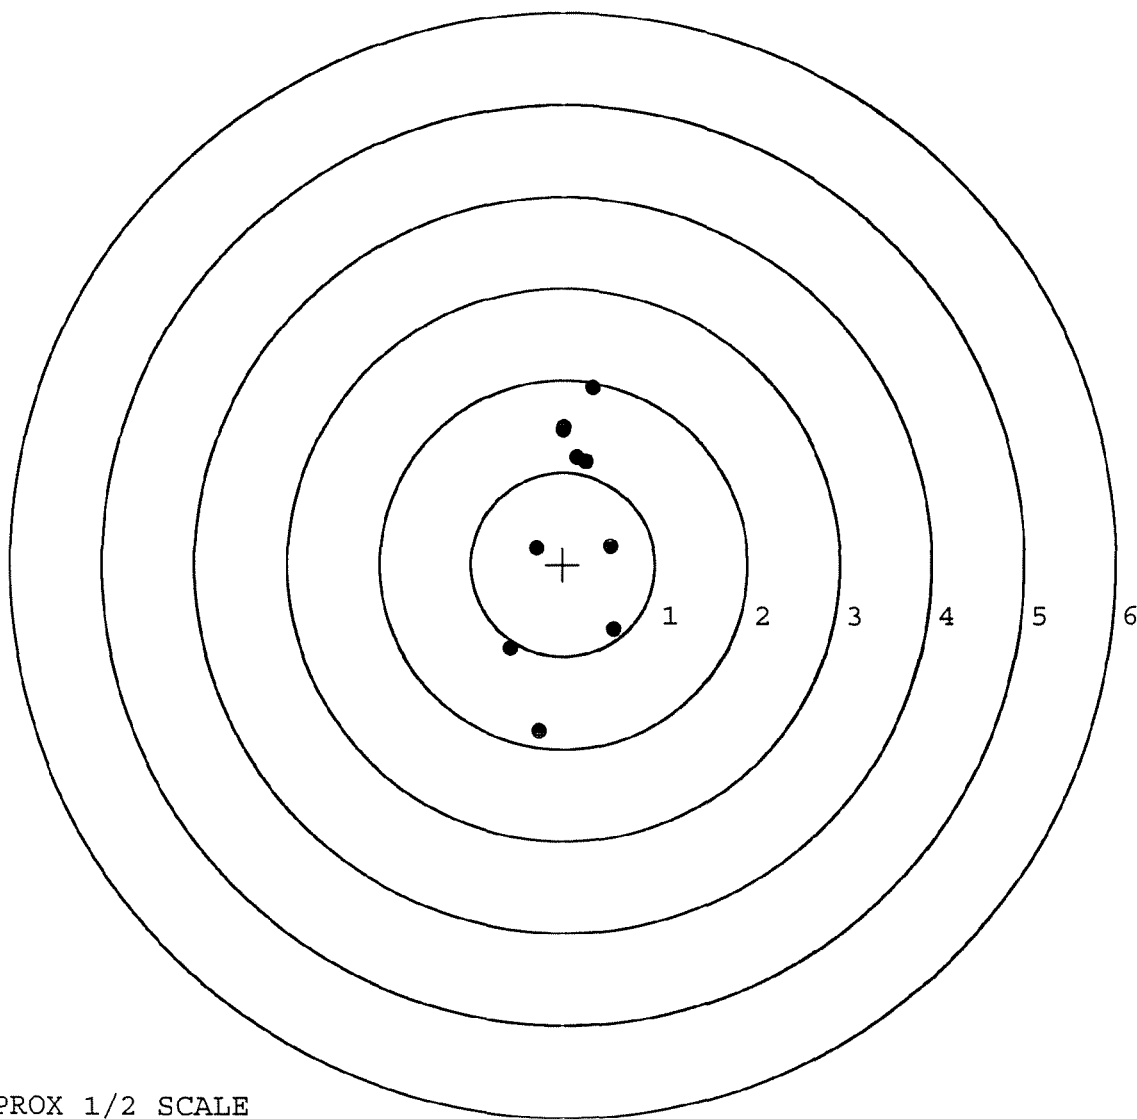

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. __0

TARGET NUMBER: 2

FILE DATE: 01/10/2008

FILE TIME: 22:49

X CENTROID: 0.112

Y CENTROID: -0.029

POA TO CENTROID: 0.116

HORZ SPREAD: 1.590

VERT SPREAD: 1.695

GROUP SPREAD: 1.787

MIN RADIUS: 0.226

MAX RADIUS: 1.051


MEAN RADIUS: 0.721

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.179	0.765
2:	0.296	0.948
3:	-0.295	0.533
4:	0.721	0.048
5:	0.705	-0.283
6:	0.623	-0.747
7:	0.324	-0.500
8:	-0.112	-0.063
9:	-0.454	-0.588
10:	-0.869	-0.407

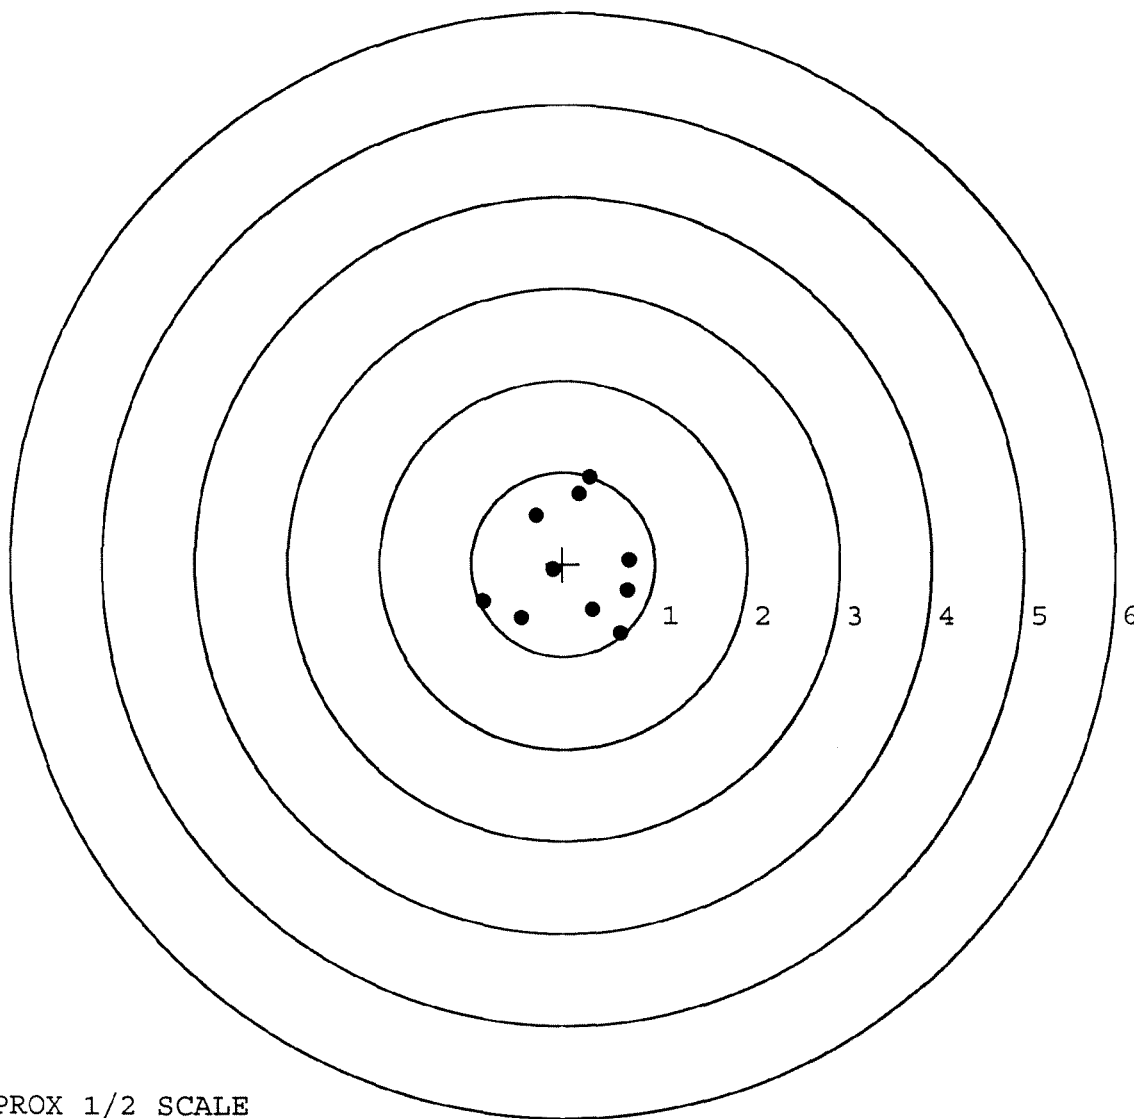

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. __ 0

TARGET NUMBER: 3

FILE DATE: 01/10/2008

FILE TIME: 22:49

POINT#	X	Y
1:	-0.625	0.099
2:	-0.534	-0.210
3:	0.212	-0.001
4:	0.458	-0.106
5:	0.606	-0.127
6:	0.465	0.111
7:	0.537	0.339
8:	0.490	0.500
9:	0.925	0.700
10:	1.818	-0.562

X CENTROID: 0.435

Y CENTROID: 0.074

POA TO CENTROID: 0.441

HORZ SPREAD: 2.443

VERT SPREAD: 1.262

GROUP SPREAD: 2.531

MIN RADIUS: 0.047


MAX RADIUS: 1.522

MEAN RADIUS: 0.583

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

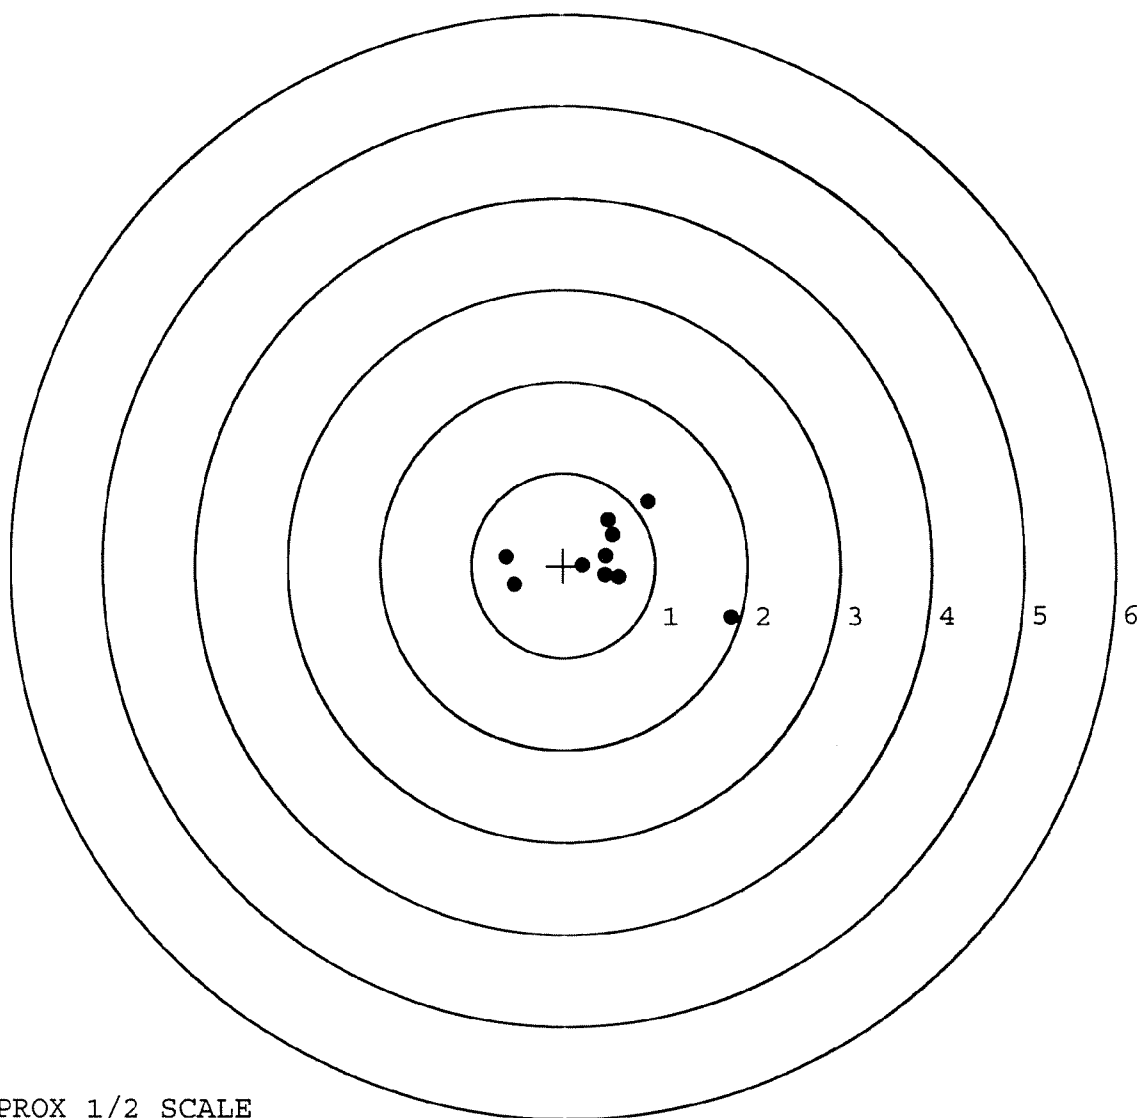

TARGET APPROX 1/2 SCALE

BARBER - M24 0006418

SERIAL NUMBER: C6523343. __0

TARGET NUMBER: 4

FILE DATE: 01/10/2008

FILE TIME: 22:49

POINT#	X	Y
1:	-0.464	0.795
2:	0.389	0.506
3:	0.714	-0.315
4:	0.319	-0.031
5:	-0.131	-0.084
6:	-0.452	0.284
7:	-0.469	-0.630
8:	0.305	-0.823
9:	0.310	0.052
10:	-0.152	-0.066

X CENTROID: 0.037

Y CENTROID: -0.031

POA TO CENTROID: 0.048

HORZ SPREAD: 1.183

VERT SPREAD: 1.618

GROUP SPREAD: 1.791

MIN RADIUS: 0.176


MAX RADIUS: 0.966

MEAN RADIUS: 0.548

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

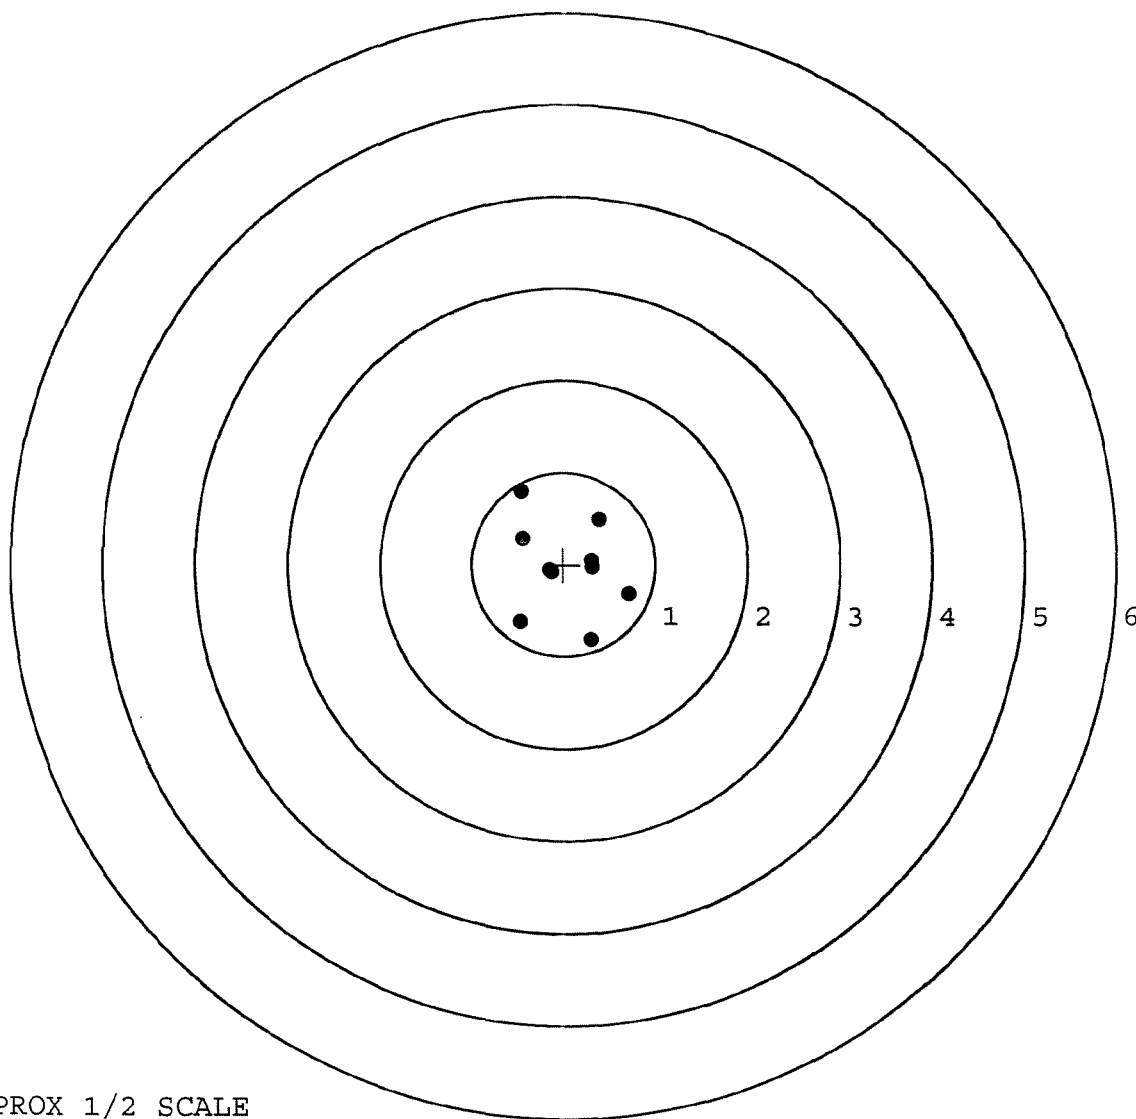

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. __0

TARGET NUMBER: 5

FILE DATE: 01/10/2008

FILE TIME: 22:49

POINT#	X	Y
1:	-0.581	0.705
2:	0.227	0.904
3:	0.434	0.397
4:	0.841	0.344
5:	1.221	-0.118
6:	0.091	0.087
7:	-0.129	-0.263
8:	-1.114	-0.623
9:	-0.567	-0.873
10:	0.396	-0.781

X CENTROID: 0.082

Y CENTROID: -0.022

POA TO CENTROID: 0.085

HORZ SPREAD: 2.335

VERT SPREAD: 1.777

GROUP SPREAD: 2.389

MIN RADIUS: 0.109


MAX RADIUS: 1.338

MEAN RADIUS: 0.811

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

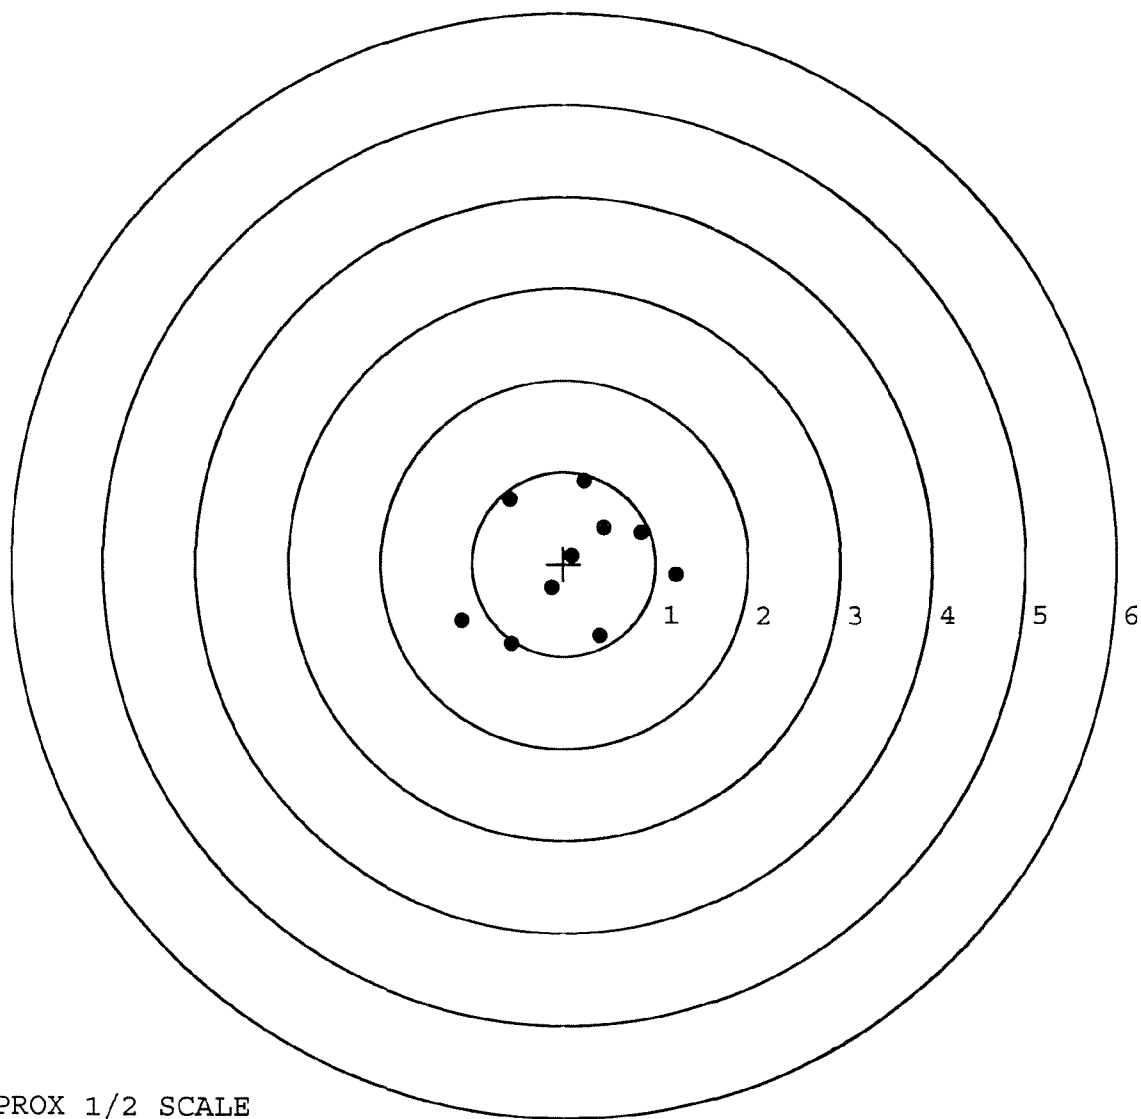

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER

137999

SERIAL NUMBER

CL523343

LOG-IN DATE

12-05-07

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	1-4-08	RTZ
505	RE-BARREL	1-7-07	RTZ
560	ASSEMBLE	1-7-07	RTZ
600	PROOF	1-7-08	TRW
605	CHECK HEADSPACE	1-7-08	TRW
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX	1-08-08	JB
510	DRILL AND TAP	1-7-08	TRW
615	ROLLMARK CALIBER	1-7-08	CW
618	ROTO-BLAST	1-8-08	LY
620	APPLY COATINGS	1-9-08	TRB
625	FINAL ASSEMBLY	1-10-08	RTZ
640	FUNCTION TEST AND	PASS FAIL 1/10/08	MM
650	TARGET	PASS FAIL 1/10/08	MM
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	1-10-08	SD
	A) HEADSPACE	PASS FAIL 1-14-08	RA
	B) TRIGGER PULL	250 2.45 255 247 245 1-14-08	RA
680	F) SAFETY ON FORCE	50 4.5 4.5 1-14-08	RA
	G) SAFETY OFF FORCE	2.5 2.5 2.5 1-14-08	RA
	I) FIRING PIN INDENT	.023 .023 .023 1-14-08	RA
690	PACK	1-15-08	RA

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Number: RE00135277
 Verify Repair **High Priority** Caliber: 7.62 NATO Status: Closed 10/11/2007 12:42:09 PM

Address Information

Customer: ☒ Received From Return To: ☐ Received From
 Name: US ARMY US ARMY
 Address 1: 10122 N RIVA RIDGE LP
 Address 2: PO Box: PO Box:
 City: FORT DRUM FORT DRUM
 State: NY Zip Code: 13602 Country: US State: NY Zip Code: 13602 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN
 Fax:
 Email:
 Comments:

Received Condition

Fair
 Condition Notes:
 CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

naglej 10/11/2007 12:55 PM CAPS NUM INS SCRL

start 0 Mic... 5 Int... 3 Mic... Arms S... Part S... 2 SA... 12:55 PM

Serial Number:

C6523343

Model: M24 SWS



RE00135277

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	135277			
SERIAL NUMBER	C6524343			
LOG-IN DATE	10-11-07			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN			
505	RE-BARREL			
560	ASSEMBLE			
600	PROOF			
605	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX	INSTALL MARKS		
510	DRILL AND TAP			
615	ROLLMARK CALIBER	Zero 200 yds		
618	ROTO-BLAST			
620	APPLY COATINGS			
625	FINAL ASSEMBLY			
640	FUNCTION TEST AND	PASS FAIL	10-11-07	TRW
650	TARGET Zeroed	PASS FAIL	10-11-07	TRW
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION	10-11-07	Fm
670	FINAL INSPECTION			
	A) HEADSPACE	PASS FAIL		
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS		
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX		
	G) SAFETY OFF FORCE	2 LBS MIN		
	I) FIRING PIN INDENT	.020		
690	PACK			

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00096576** Serial: C6523343 Model M24 SWS Center Fire Caliber 7.62 NATO Produced: 12/19/1990 Repairman: Status: Closed 5/3/2005 11:37:50 AM

Verify Repair

Address Information

Customer ☒ Received From Return To ☐ Received From

Name: HHC 2/87 INF DIV HHC 2/87 INF DIV

Address 1: ATTN BRIAN RICE ATTN BRIAN RICE

Address 2: 10130 N RIVA RIDGE PO Box: 10130 N RIVA RIDGE PO Box:

City: FORT DRUM FORT DRUM

State: NY Zip Code: 13602 Country: US State: NY Zip Code: 13602 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: 315 772 7070

Fax:

Email:

Comments: REM FILE #003242

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A003	Sling Strap	1
A007	With Stud	3
A008	With Swivel	2
A013	Scope Rings	2
A017	Scope Base	1
A026	Scope	1
A042	Adjustable Butt Pad	1
A045	Bi Pod	1

Repair Search Refresh Close

hagletj 5/5/2005 7:50 AM CAPS NUM LINE SCRL

start

Serial Number: **C6523343**

Model: **M24 SWS**



RE00096576

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523343.___1
FILE DATE AND TIME: 05/25/2005 08:39

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.035
The Average Y Centroid of the Five Target Set:	0.089
The Average Point of Impact of the Five Target Set:	0.095
The Average Mean Radius of the Five Target Set:	0.847
The Distance from POA to Centroid Target #1:	0.174
The Distance from Centroid Target #2 to Centroid Target #1:	0.283
The Distance from Centroid Target #3 to Centroid Target #1:	0.174
The Distance from Centroid Target #4 to Centroid Target #1:	0.369
The Distance from Centroid Target #5 to Centroid Target #1:	0.060

SERIAL NUMBER: C6523343. 1

TARGET NUMBER: 1

FILE DATE: 05/25/2005

FILE TIME: 08:39

X CENTROID: -0.067

Y CENTROID: 0.161

POA TO CENTROID: 0.174

HORZ SPREAD: 1.662

VERT SPREAD: 2.584

GROUP SPREAD: 2.587

MIN RADIUS: 0.268

MAX RADIUS: 1.580


MEAN RADIUS: 0.801

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.039	0.102
2:	0.220	0.858
3:	-0.097	0.871
4:	0.055	0.431
5:	0.084	-0.061
6:	-0.486	-0.248
7:	-0.311	-0.309
8:	-0.051	-0.813
9:	-0.623	-0.905
10:	-0.503	1.679

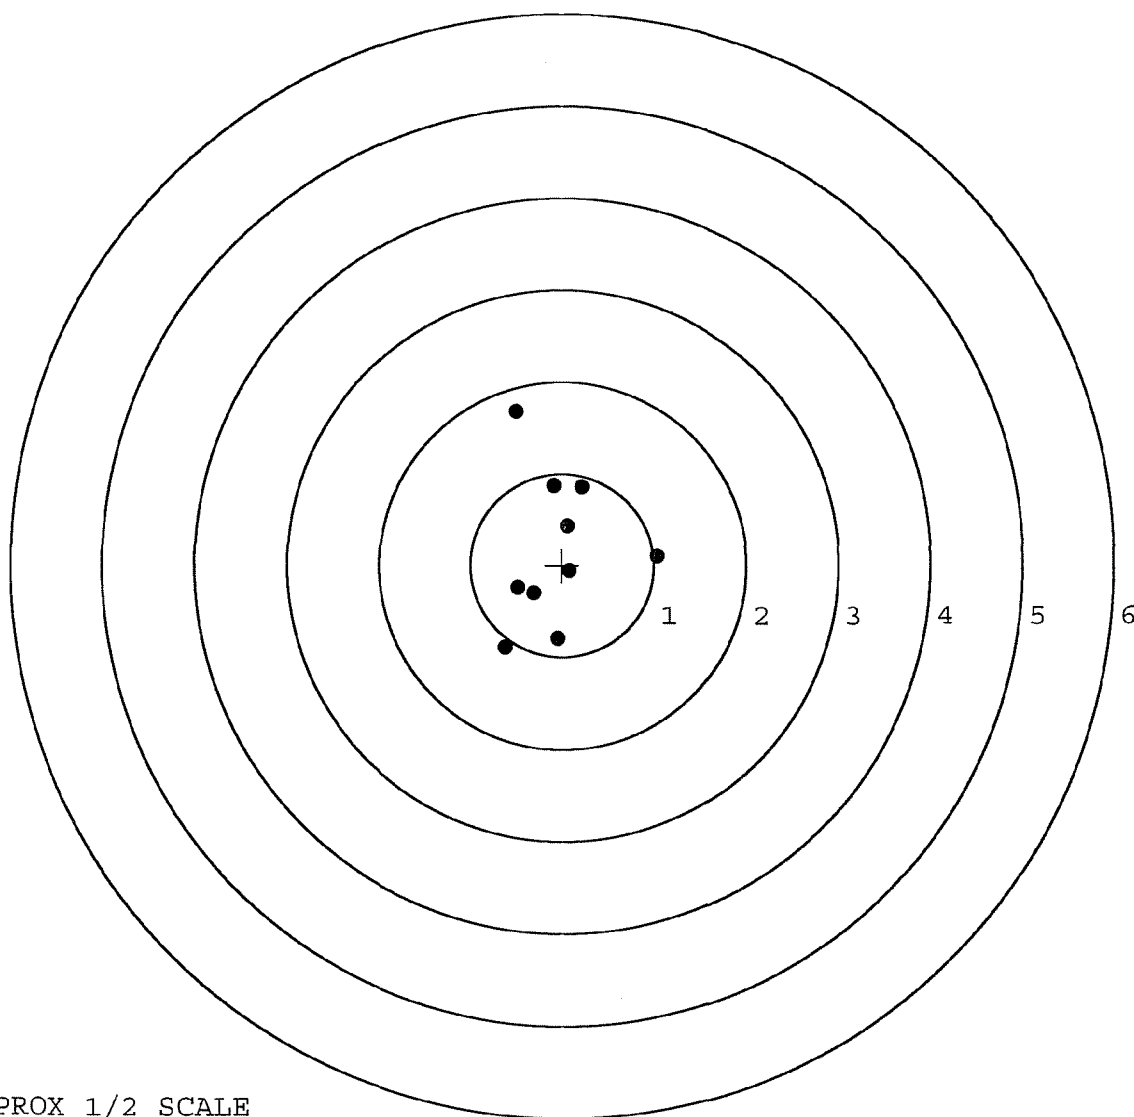

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. __1

TARGET NUMBER: 2

FILE DATE: 05/25/2005

FILE TIME: 08:39

POINT#	X	Y
1:	0.231	-0.627
2:	-0.186	-0.967
3:	-0.177	-0.701
4:	0.435	0.036
5:	0.732	0.649
6:	0.013	0.611
7:	-1.044	0.368
8:	-1.023	-0.515
9:	-0.997	-1.325
10:	0.512	1.375

X CENTROID: -0.150

Y CENTROID: -0.110

POA TO CENTROID: 0.186

HORZ SPREAD: 1.776

VERT SPREAD: 2.700

GROUP SPREAD: 3.093

MIN RADIUS: 0.592


MAX RADIUS: 1.626

MEAN RADIUS: 0.968

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

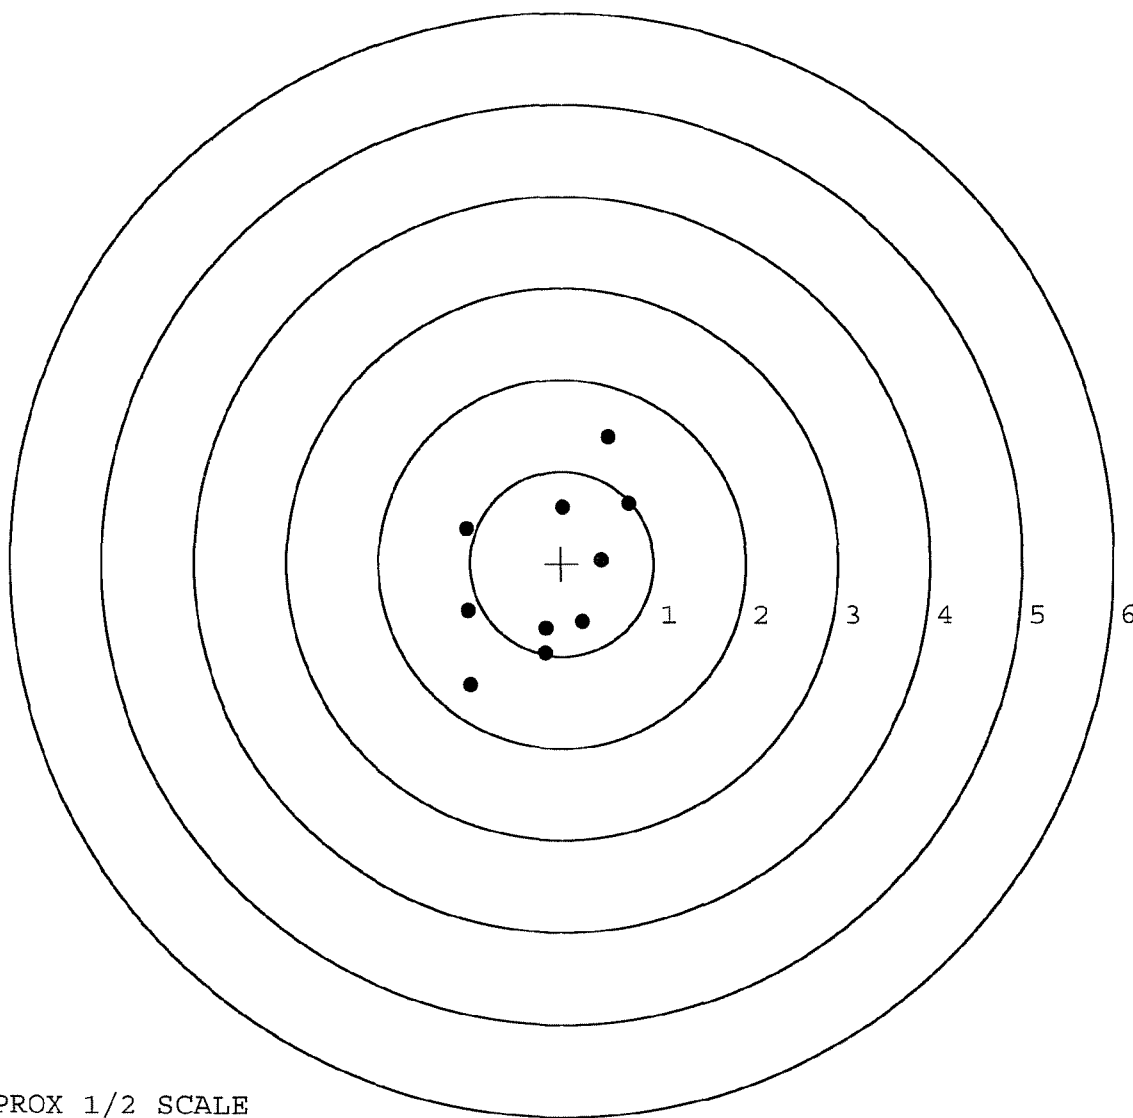

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. __1

TARGET NUMBER: 3

FILE DATE: 05/25/2005

FILE TIME: 08:39

X CENTROID: -0.007

Y CENTROID: 0.323

POA TO CENTROID: 0.323

HORZ SPREAD: 1.230

VERT SPREAD: 3.419

GROUP SPREAD: 3.420

MIN RADIUS: 0.386

MAX RADIUS: 2.103


MEAN RADIUS: 0.984

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.351	-0.731
2:	0.214	-0.469
3:	-0.053	-0.998
4:	-0.549	-0.625
5:	0.302	0.092
6:	0.572	0.541
7:	0.187	0.712
8:	-0.658	0.989
9:	-0.278	1.301
10:	-0.154	2.421

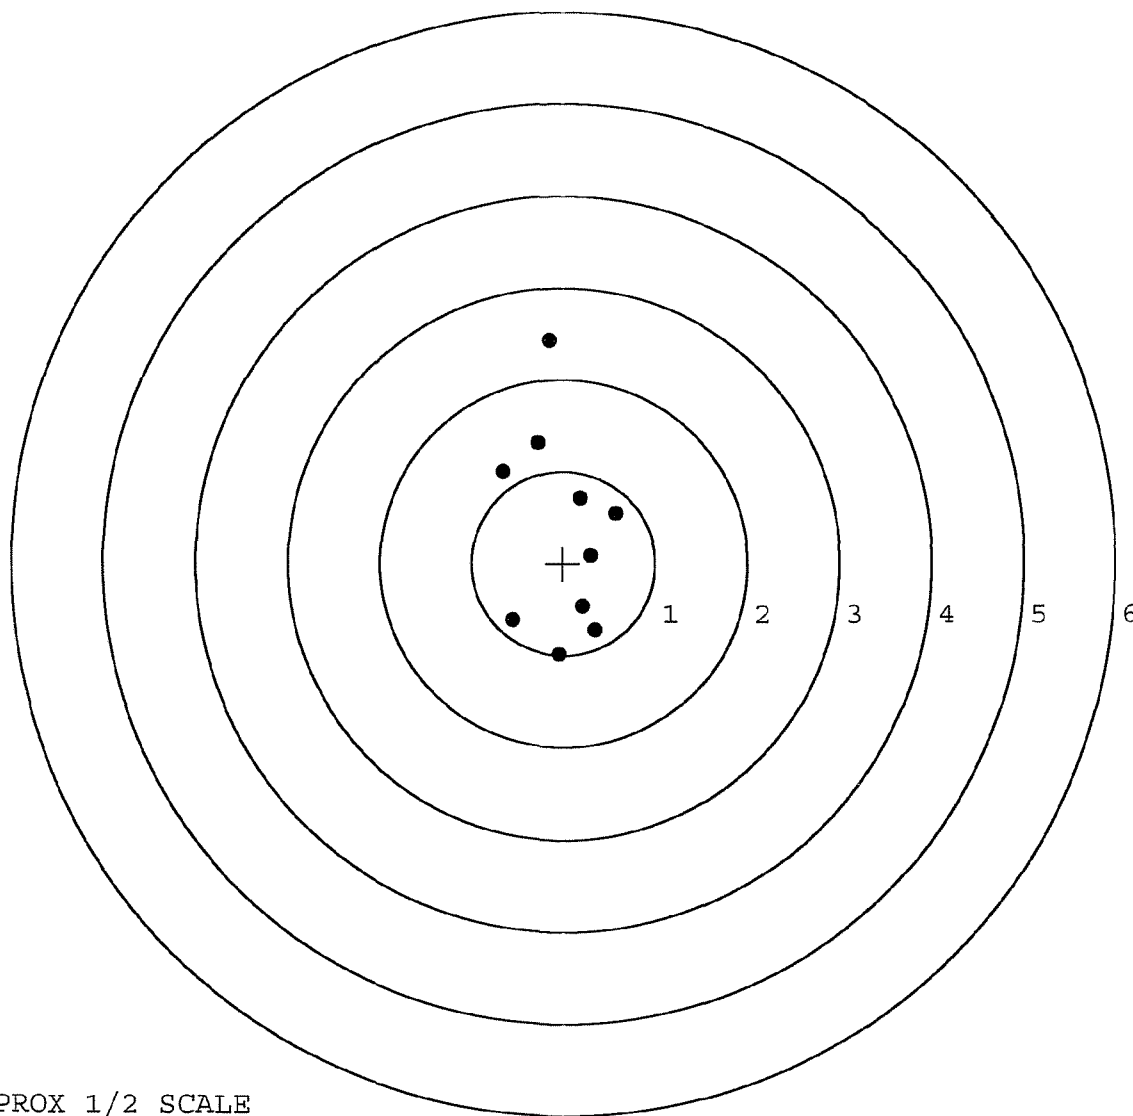

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. __1

TARGET NUMBER: 4

FILE DATE: 05/25/2005

FILE TIME: 08:39

POINT#	X	Y
1:	0.865	-0.793
2:	0.596	-0.516
3:	0.840	0.028
4:	0.537	0.030
5:	0.335	-0.075
6:	0.214	-0.331
7:	-0.244	-0.584
8:	-0.396	-0.089
9:	-0.845	0.379
10:	-0.227	0.706

X CENTROID: 0.167

Y CENTROID: -0.124

POA TO CENTROID: 0.209

HORZ SPREAD: 1.710

VERT SPREAD: 1.499

GROUP SPREAD: 2.073

MIN RADIUS: 0.175


MAX RADIUS: 1.131

MEAN RADIUS: 0.625

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

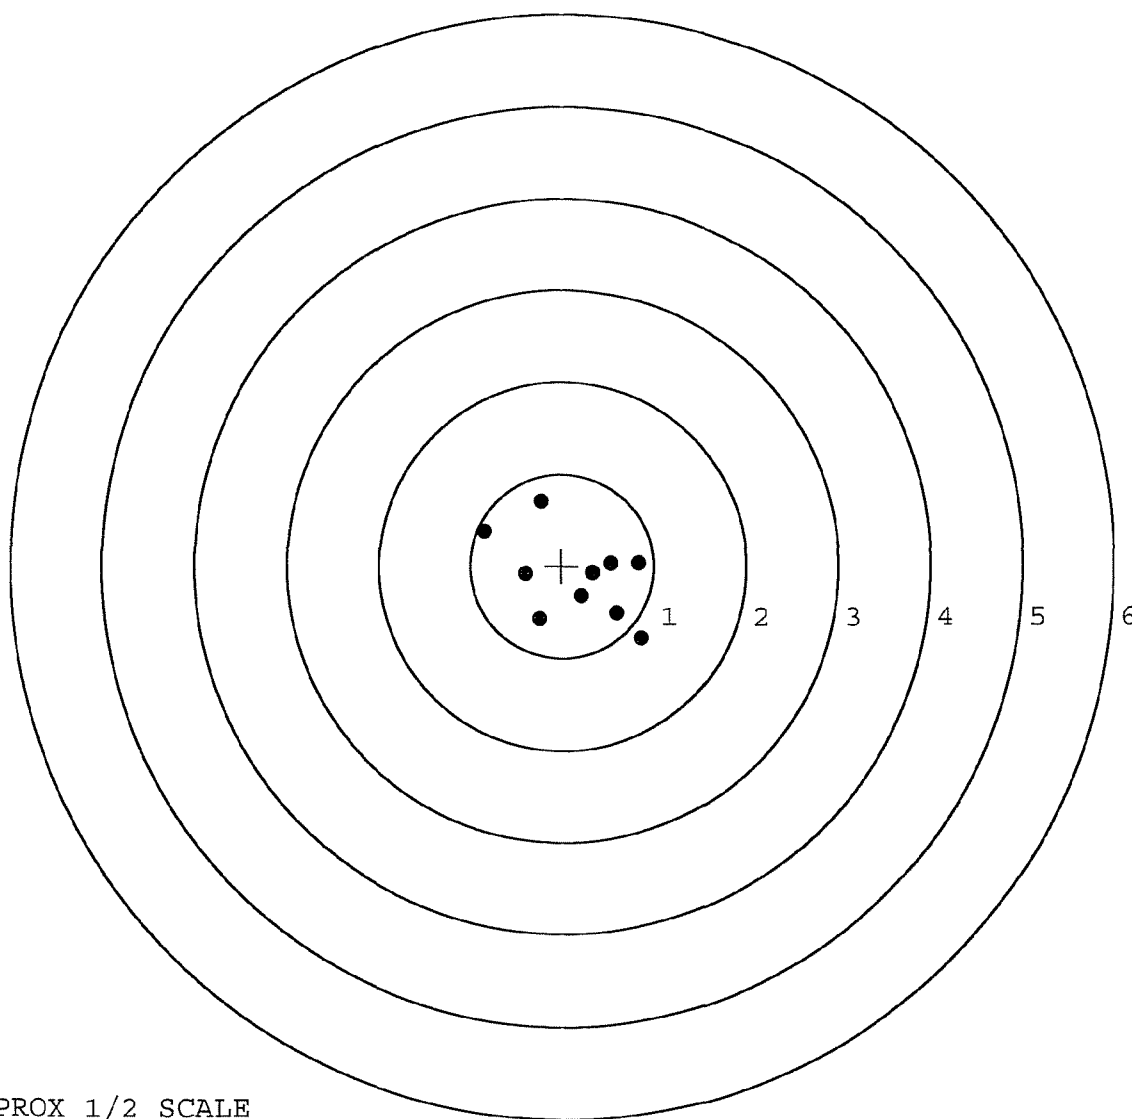

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. __1

TARGET NUMBER: 5

FILE DATE: 05/25/2005

FILE TIME: 08:39

POINT#	X	Y
1:	1.150	0.429
2:	0.573	0.054
3:	0.401	-0.346
4:	-0.182	-0.814
5:	0.135	0.309
6:	-0.050	-0.174
7:	-0.343	-0.187
8:	-1.210	0.116
9:	-0.335	0.889
10:	-1.306	1.675

X CENTROID: -0.117

Y CENTROID: 0.195

POA TO CENTROID: 0.227

HORZ SPREAD: 2.456

VERT SPREAD: 2.489

GROUP SPREAD: 2.754

MIN RADIUS: 0.276


MAX RADIUS: 1.899

MEAN RADIUS: 0.857

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

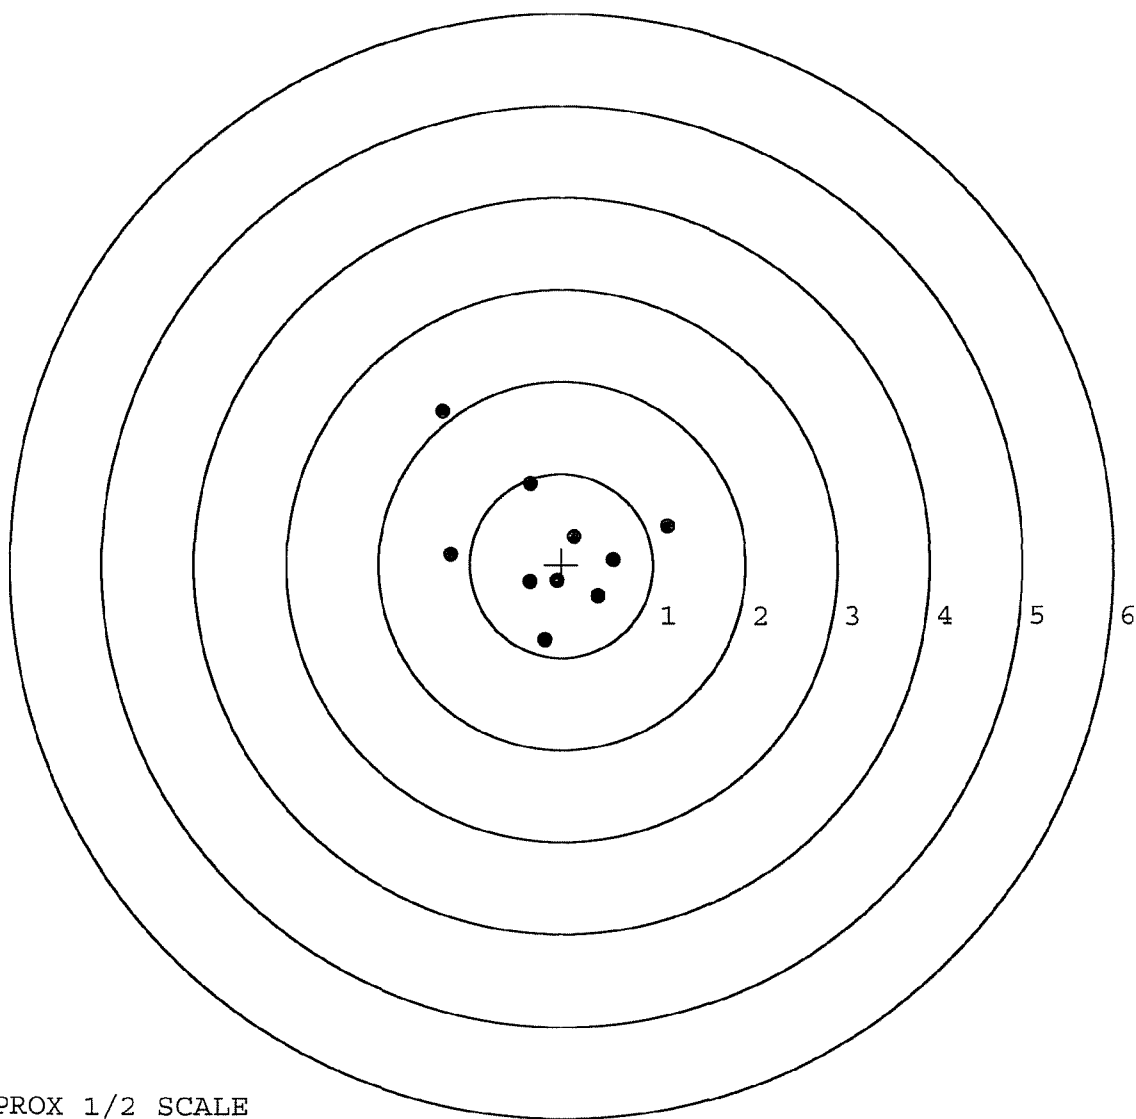

TARGET APPROX 1/2 SCALE

R & E NUMBER	96576		
SERIAL NUMBER	C6523343		
LOG-IN DATE	5-3-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	5-6-05	RL
560 A	RE-BARREL		
B	DRILL AND TAP	5-18-05	TRL
575	ASSEMBLE		
600	PROOF	5-18-05	AC
605	CHECK HEADSPACE	5-18-05	AC
610	DIS-ASSEMBLE GUN	5-18-05	AC
612	MAGNAFLUX	5-19-05	Wm
615	ROLLMARK CALIBER	5-19-05	CW
618	ROTO-BLAST	5-20-05	LB
620	APPLY COATINGS	5-22-05	W
625 A	FINAL ASSEMBLY	5-24-05	RL
B	TRIGGER PULL TEST	5-25-05	AC
C	SAFETY "ON" FORCE	5-25-05	AC
D	SAFETY "OFF" FORCE	5-25-05	AC
E	FIRING PIN INDENT	5-25-05	AC
640	TARGET	5-25-05	TRL
655	FINAL INSPECT	5-25-05	AC
660	PACK	5-25-05	DA
		SHIP DATE	
		QAR INSPECTION DATE	

AVERAGE PULL FORCE BETWEEN
INITIAL & 50 CYCLES **BARBER - M24 0006431**

SERIAL NO. 7

2.50 LBS (plus or minus 0.50 LBS)

DATE 5-3-05

3.00 LBS (plus or minus 0.75 LBS)

TESTER TRW

4.00 LBS (plus or minus 1.00 LBS)

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.55	2.73		2.80	
PULL #2	2.68	2.81		2.84	
PULL #3	2.70	2.57		2.48	
PULL #4	2.75	2.86		2.55	
PULL #5	2.78	2.92		2.78	
TOTAL	13.46	13.89		13.45	
AVERAGE	2.69	2.77		2.69	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.36	3.50		
PULL #2	3.55	3.29		
PULL #3	3.42	3.22		
PULL #4	3.67	3.19		
PULL #5	3.61	3.10		
TOTAL	17.61	16.30		
AVERAGE	3.52	3.26		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.29	4.23		4.17
PULL #2	4.31	4.28		4.19
PULL #3	4.34	4.15		4.07
PULL #4	4.23	4.20		4.00
PULL #5	4.21	4.10		3.99
TOTAL	21.38	20.96		20.42
AVERAGE	4.27	4.19		4.08

Repair Inquiry

Repair Number: RE00067001

Serial: C6523343 Model 700 Center Fire Caliber: 7
62 NATO M24 SWS

Repairman:

Verify Repair

Status:

New 6/24/2003 1:36:05 PM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: DEPT OF ARMY

DEPT OF ARMY

Address 1: ATTN DAVID CHRISTOPHER

ATTN DAVID CHRISTOPHER

Address 2: HHC 1-87

PO Box:

HHC 1-87

PO Box:

City: FORT DRUM

FORT DRUM

State: NY

Zip Code: 13602

Country: US

State: NY

Zip Code: 13602

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: 315 772 7070

Fax:

Email:

Comments: REM FILE #2973

Received Condition

Good

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A026	Scope	1
C000	FRT AND REAR SIGH	1

Repair Search

Refresh

Close

naglej

6/25/2003

8:14 AM

CAPS

NUM

INS

SCPL

start

3 M...

Start

My ID

Pat

3 10

ARMS...

PROC...

RETR...

8:14 AM

Serial Number: C6523343

Model: 700



RE00067001

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE

6-30-03

TESTER

TRLW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.26	2.03		2.39	
PULL #2	2.45	2.30		2.44	
PULL #3	2.08	2.21		2.55	
PULL #4	2.03	2.32		2.53	
PULL #5	2.09	2.22		2.55	
TOTAL	10.91	11.08		12.46	
AVERAGE	2.18	2.21		2.49	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.16	3.16		
PULL #2	3.27	3.12		
PULL #3	2.99	3.06		
PULL #4	3.12	3.04		
PULL #5	3.20	2.97		
TOTAL	15.74	15.35		
AVERAGE	3.14	3.07		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.27	4.22		4.03
PULL #2	4.15	4.15		4.38
PULL #3	4.20	4.34		4.49
PULL #4	4.23	4.26		4.36
PULL #5	4.18	4.19		4.35
TOTAL	21.03	21.16		21.61
AVERAGE	4.20	4.23		4.32

SERIAL # C6523343INSPECTED BY: RTLDATE REC'D: 6-24-03DATE RET'D: 7-3-03

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☒ SCOPE
☒ SCOPE RINGS
☒ MOUNTING SCREWS
☒ MOUNTING BASE
☒ SCREWS
☒ FINISH
☒ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☒ SCOPE CASE
☒ IRON SIGHTS
☒ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS: _____

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523343.___0
FILE DATE AND TIME: 07/03/2003 06:33

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.029
The Average Y Centroid of the Five Target Set:	0.029
The Average Point of Impact of the Five Target Set:	0.041
The Average Mean Radius of the Five Target Set:	0.615
The Distance from POA to Centroid Target #1:	0.090
The Distance from Centroid Target #2 to Centroid Target #1:	0.250
The Distance from Centroid Target #3 to Centroid Target #1:	0.062
The Distance from Centroid Target #4 to Centroid Target #1:	0.285
The Distance from Centroid Target #5 to Centroid Target #1:	0.059

SERIAL NUMBER: C6523343. 0

TARGET NUMBER: 1

FILE DATE: 07/03/2003

FILE TIME: 06:33

X CENTROID: 0.080

Y CENTROID: 0.042

POA TO CENTROID: 0.090

HORZ SPREAD: 1.305

VERT SPREAD: 2.360

GROUP SPREAD: 2.367

MIN RADIUS: 0.300

MAX RADIUS: 1.313


MEAN RADIUS: 0.759

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.086	1.355
2:	0.497	1.035
3:	0.565	0.639
4:	-0.740	-0.005
5:	-0.304	-0.073
6:	-0.319	-0.370
7:	0.212	-0.227
8:	0.492	-0.331
9:	0.398	-0.602
10:	-0.092	-1.005

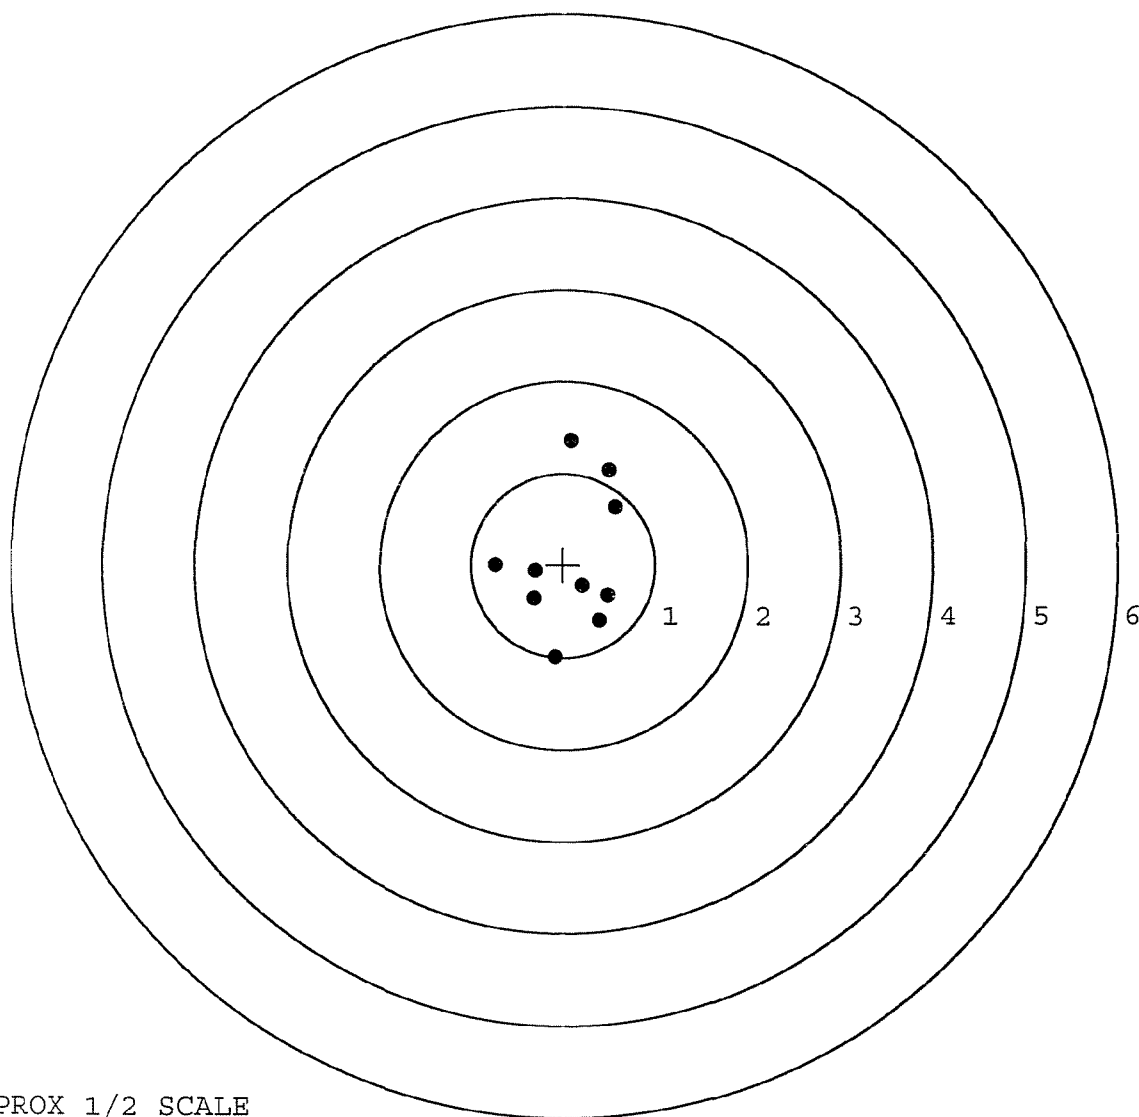

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. 0

TARGET NUMBER: 2

FILE DATE: 07/03/2003

FILE TIME: 06:33

X CENTROID: -0.142

Y CENTROID: -0.074

POA TO CENTROID: 0.160

HORZ SPREAD: 2.303

VERT SPREAD: 1.837

GROUP SPREAD: 2.349

MIN RADIUS: 0.326

MAX RADIUS: 1.324


MEAN RADIUS: 0.750

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.268	-0.082
2:	-0.859	1.039
3:	-0.678	0.020
4:	0.433	0.441
5:	1.035	-0.351
6:	0.448	-0.798
7:	-0.267	-0.375
8:	0.182	-0.272
9:	0.118	-0.424
10:	-0.568	0.063

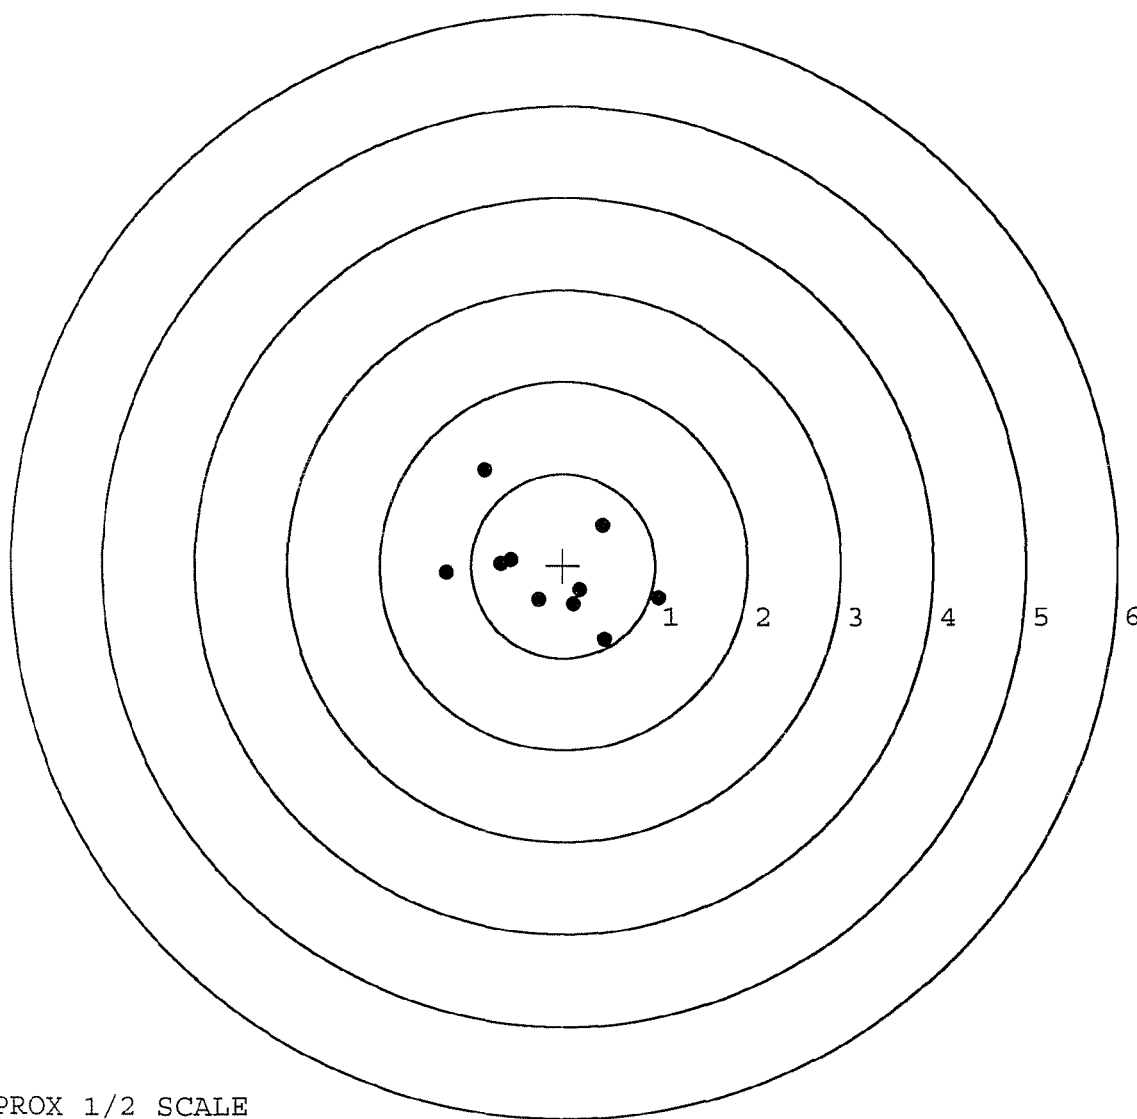

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. 0

TARGET NUMBER: 3

FILE DATE: 07/03/2003

FILE TIME: 06:33

POINT#	X	Y
1:	-0.464	0.792
2:	-0.409	0.533
3:	0.608	0.580
4:	0.504	0.068
5:	-0.013	-0.067
6:	0.115	0.111
7:	-0.528	-0.115
8:	-0.205	-0.319
9:	0.075	-0.785
10:	0.565	-0.680

X CENTROID: 0.025

Y CENTROID: 0.012

POA TO CENTROID: 0.027

HORZ SPREAD: 1.136

VERT SPREAD: 1.577

GROUP SPREAD: 1.796

MIN RADIUS: 0.087


MAX RADIUS: 0.921

MEAN RADIUS: 0.576

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

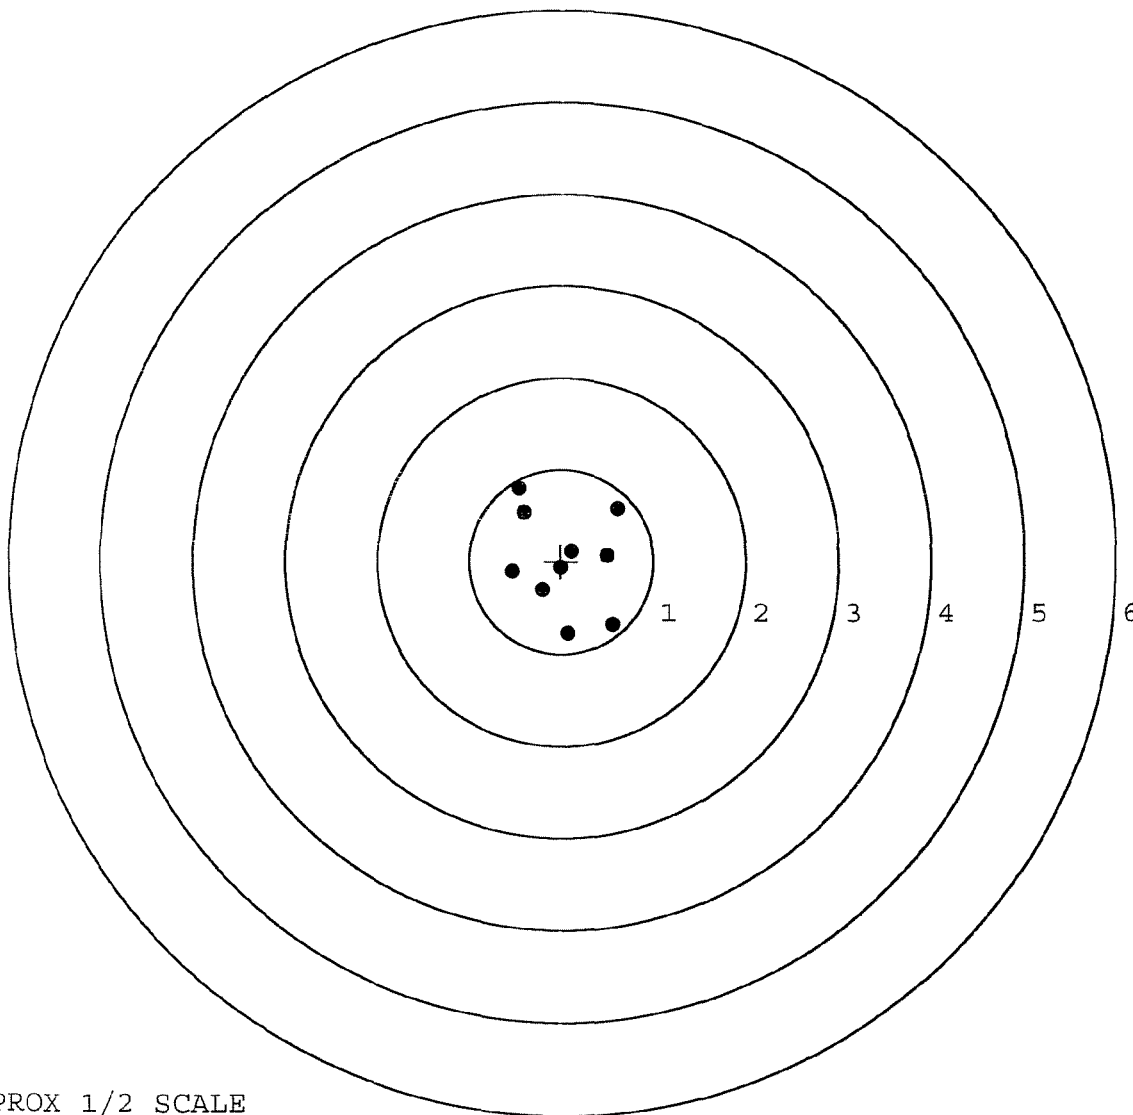

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. 0

TARGET NUMBER: 4

FILE DATE: 07/03/2003

FILE TIME: 06:33

X CENTROID: -0.170

Y CENTROID: 0.180

POA TO CENTROID: 0.248

HORZ SPREAD: 2.002

VERT SPREAD: 1.290

GROUP SPREAD: 2.045

MIN RADIUS: 0.061

MAX RADIUS: 1.240


MEAN RADIUS: 0.571

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.254	0.781
2:	-0.562	-0.509
3:	-0.646	-0.045
4:	-0.461	0.249
5:	-0.086	0.217
6:	0.499	0.453
7:	0.748	0.486
8:	0.550	-0.182
9:	-0.116	0.208
10:	-0.370	0.144

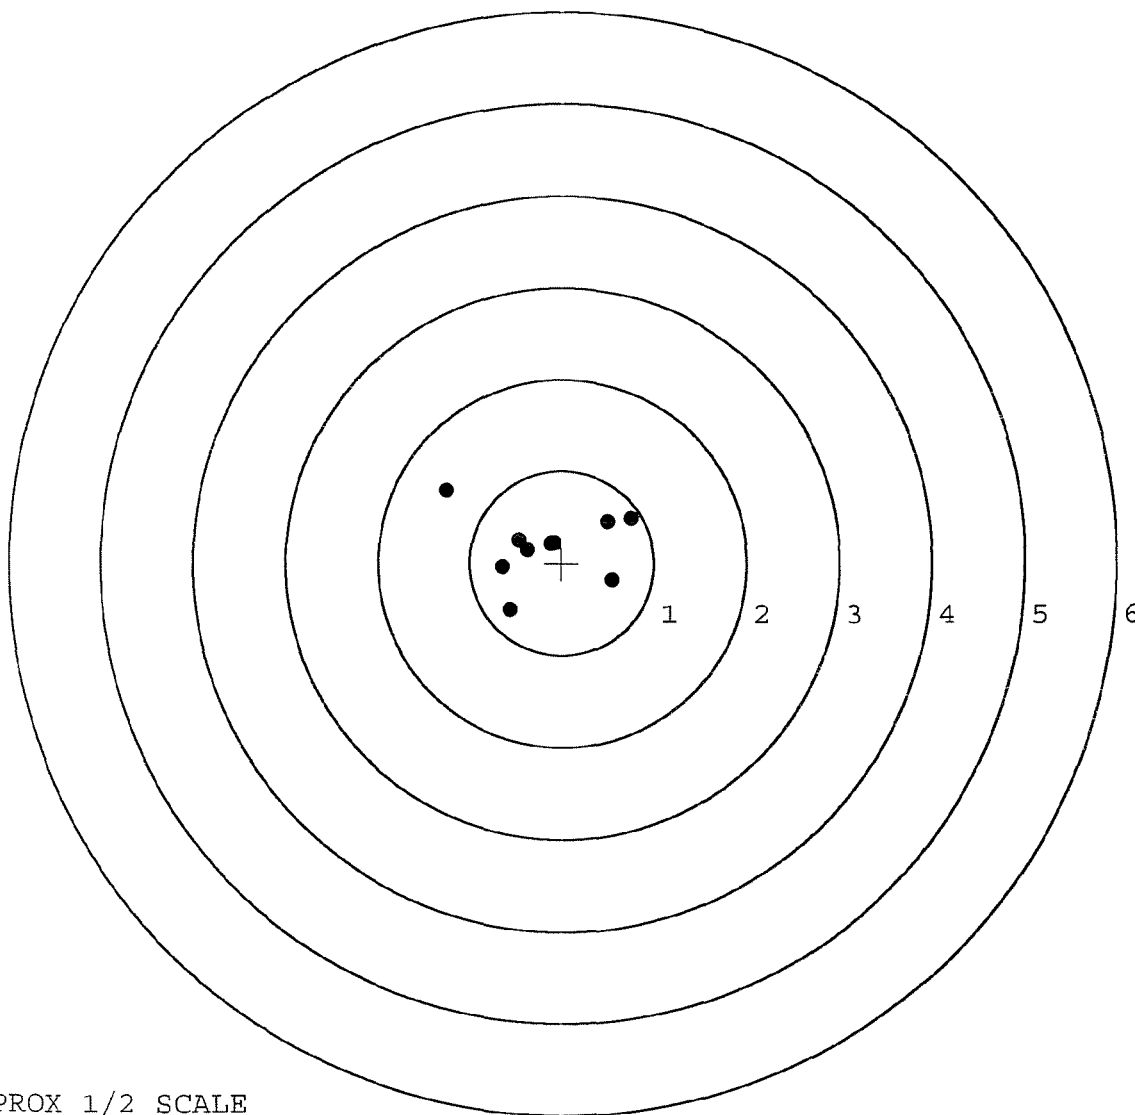

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523343. 0

TARGET NUMBER: 5

FILE DATE: 07/03/2003

FILE TIME: 06:33

POINT#	X	Y
1:	0.315	0.912
2:	0.305	0.470
3:	0.230	-0.787
4:	0.049	-0.600
5:	-0.065	-0.323
6:	-0.224	0.149
7:	0.205	0.117
8:	-0.029	0.063
9:	-0.155	-0.062
10:	0.004	-0.096

X CENTROID: 0.064

Y CENTROID: -0.016

POA TO CENTROID: 0.065

HORZ SPREAD: 0.539

VERT SPREAD: 1.699

GROUP SPREAD: 1.701

MIN RADIUS: 0.100


MAX RADIUS: 0.961

MEAN RADIUS: 0.418

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

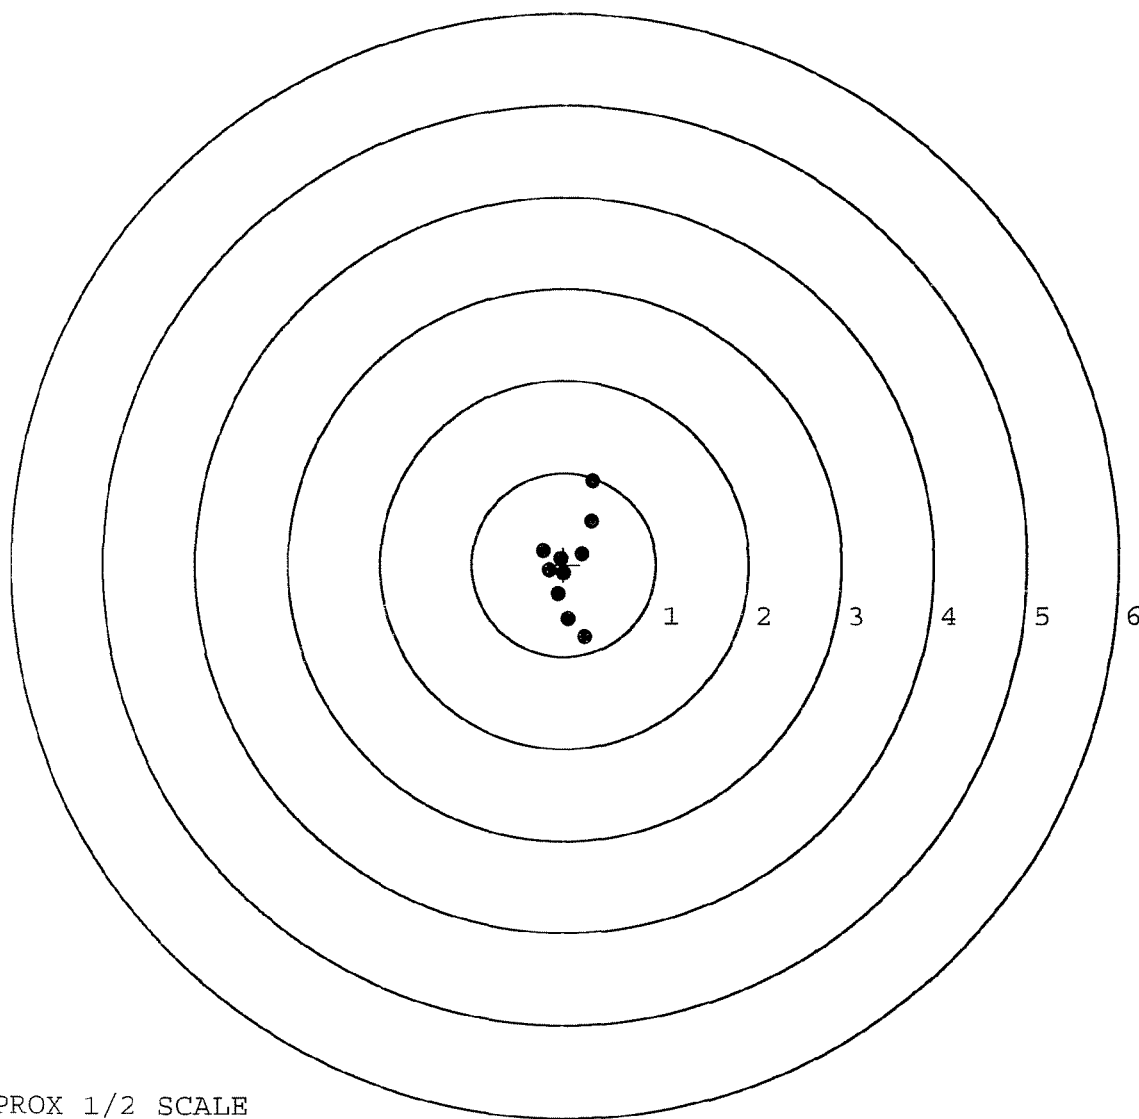

TARGET APPROX 1/2 SCALE

R & E NUMBER	67001		
SERIAL NUMBER	C 6523343		
LOG-IN DATE	6-24-03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	6-30-03	RTL
560 A	RE-BARREL	7-1-03	RTL
B	DRILL AND TAP		
575	ASSEMBLE MAGNA-FLUX	7-1-03	RTL
600	PROOF INSPECTED	7-1-03	RTL
605	CHECK HEADSPACE	7-1-03	RTL
610	DIS-ASSEMBLE GUN	7-1-03	RTL
612	MAGNAFLUX		
615	ROLLMARK CALIBER	7-1-03	RTL
618	ROTO-BLAST	7-1-03	OK
620	APPLY COATINGS	7-2-03	TA
625 A	FINAL ASSEMBLY	7-3-03	RTL
B	TRIGGER PULL TEST	7-3-03	OA
C	SAFETY "ON" FORCE	7-7-03	OA
D	SAFETY "OFF" FORCE	7-7-03	OA
E	FIRING PIN INDENT	7-7-03	OA
640	TARGET	7-8-03	AC
655	FINAL INSPECT	7-3-03	RTL
660	PACK	7-7-03	OA
		SHIP DATE	
QAR INSPECTION DATE			

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00027803** Serial: **C6523343** Model: **700** Center Fire Caliber: **7.62 NATO M-24 (SWS)** Repairman: Status: **Closed 5/23/01 11:19:53 AM**

Verify Repair

Address Information

Customer: **HHC 2/87 INF DIV** Received From: **HHC 2/87 INF DIV** Return To: **HHC 2/87 INF DIV**

Address 1: **ATTN MIO FRANCESCHI** Address 2: PO Box: City: **FORT DRUM** State: **NY** Zip Code: **13602** Country: **US**

FFL:

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: **315 772 7060** Fax: Email: Comments:

Received Condition

Condition: **Fair** Notes: CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A008	With Swivel	1
A016	Scope Mounts	1
A017	Scope Base	1
A026	Scope	1

Repair Search **Refresh** **Close**

maglet 5/24/01 7:22 AM CAPS NUM INS SCRL

Start Inb... Nag... RE... Swit... Part... SA... Ar... Micr... Expl... 7:22 AM

Serial Number: **C6523343**

Model: **700**



RE00027803

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

Remington[®]

REG. U.S. PAT. & TM. OFF.

DUPONT

MODEL 700[™] M24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

SERIAL NO.
C6520343

ORDER NO.
5716

5716 C6520343

UPC 0 47700 25716 7

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6523343

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		10/1/90	KL
600	Proof		10/1/90	KL
607	Check Headspace		10/1/90	KL
610	Dis-assemble Gun		10/1/90	KL
612	Magnaflux Barrel Action		10/5/90	KR
	Magnaflux Bolt		10/3/90	KR
615	Rollmark Caliber		10/5/90	SB
617	Drill and Tap Sight Holes		10/4/90	WB
618	Polish Barrel RB		10/5/90	WB
620	Apply Coatings (Barrel Action)		10-20-90	KL
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		10/21/90	WB
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/21/90	WB
	C) Inspect Ejector Hole for Chamfer		10/21/90	WB
	D) Oil Firing Pin Ass'y		10/21/90	WB
	E) Adjust Trigger Pull to Min Setting and Stake		10/29/90	KL

op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	4 1/2	4 1/2	4 1/2	10/30/90	WLB		
	G) Safety Off Force	2	2	2	10/30/90	WLB		
	H) Trigger Pull Test & Retainability				10/29/90	PSI		
	I) Firing Pin Indent	.0215	.0215	.021	10/30/90	WLB		
	J) Assemble Stock				10/31/90	KH		
	K) Assemble Swivel Studs				11/19/90	QD		
	L) Attach Front and Rear Sight Assemblies				10/31/90	KH		
	M) Iron Sight Alignment				10/31/90	KH		
	N) Detach Front & Rear Sights & place in numbered container				10/31/90	KH		
	O) Attach Scope to Rifle				10/31/90	KH		
	P) Detach & Attach Scope 20 Times				10/31/90	KH		
640	Gallery Target & Test				11/1/90	NF		
	A) Time				"	NF		
	B) Malfunctions				"	NF		
	C) Pierced Primers				"	NF		
	D) Optical Clarity of Scope				"	NF		
645	Inspect for Live Ammo				11/1/90	NF		
655	Final Inspection							
	A) Headspace				11/19/90	QD		
	B) Trigger Pull	248	250	248	241	236	11/19/90	QD
	C) Function						11/19/90	QD
660	Pack						12/18/90	NF

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06523343
2 Nov 1990

CENTROIDAL DISTANCES

0 TO 1	.326075
1 TO 2	.337617
1 TO 3	.354835
1 TO 4	.255801
1 TO 5	.333378


$\bar{x}_1$ <---- POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0524
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0594
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0792093
THE AMR FOR THIS RIFLE IS: .8834

2 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08523343

CENTERFIRE PATTERNS # 1

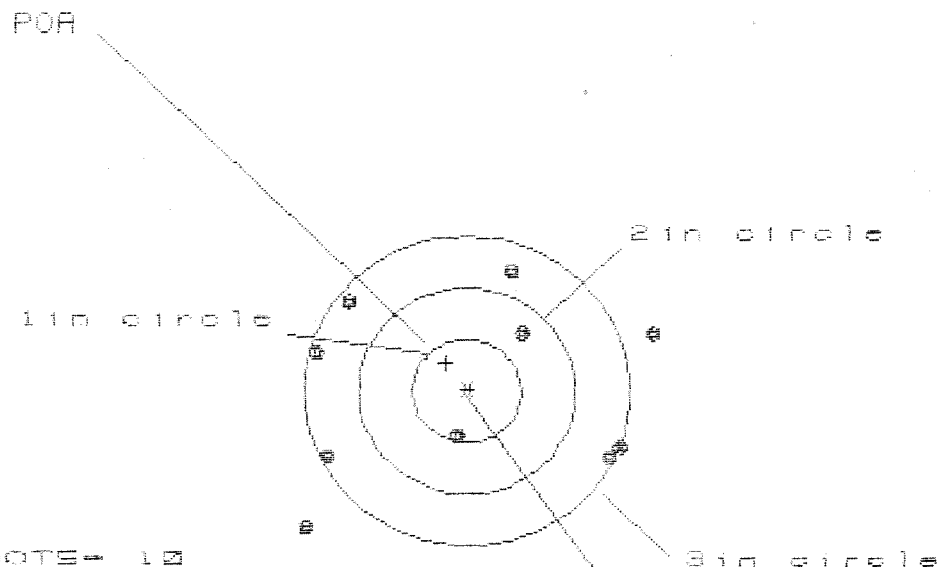

OF SHOTS= 10

IN CIR

1in = 1

2in = 2

3in = 8

HS= 3.273

VS= 2.405

GS= 3.762


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.748	1.578	1.435
MINIMUM X	-1.525	-1.541	-1.344
MAXIMUM Y	1.118	.975	1.028
MINIMUM Y	-1.287	-.792	-.739
CENTROID X	.190	.360	.163
CENTROID Y	-.265	-.122	-.175
POA TO CENTROID in.	.326	.380	.239
MIN RADIUS	.418	.520	.501
MEAN RADIUS	1.327	1.234	1.178
MAX RADIUS	1.996	1.634	1.554
HORIZONTAL SPREAD	3.273	3.119	2.779
VERTICAL SPREAD	2.405	1.767	1.767
EXTREME SPREAD	3.762	3.211	2.908
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	8		

2 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06523343

CENTERFIRE PATTERNS # 2

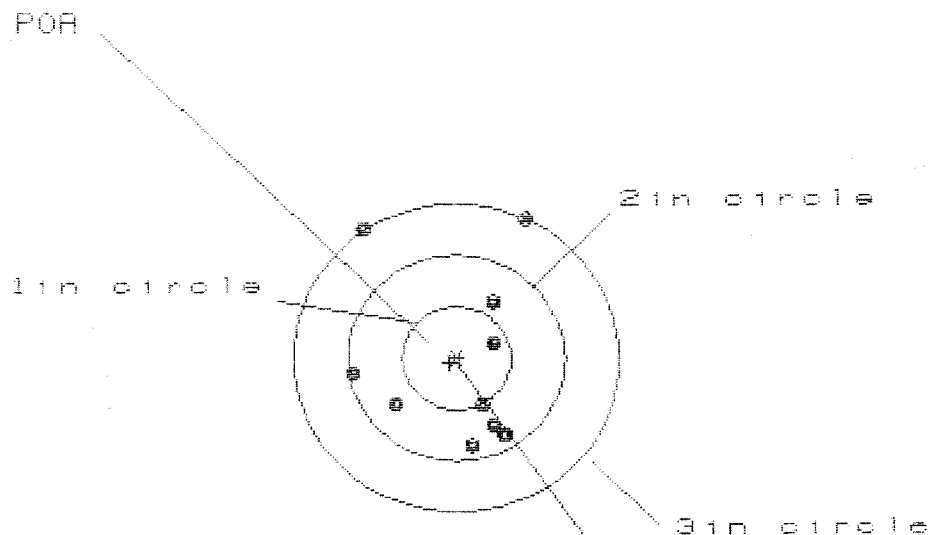

OF SHOTS= 10

IN CIR

1in = 1

2in = 8

3in = 10

HS= 1.562

VS= 2.235

GS= 2.327

CENTROID *

PATTERN #	2
SHOTS (BEST OF)	10
MAXIMUM X	.608
MINIMUM X	-.954
MAXIMUM Y	1.358
MINIMUM Y	-.877
CENTROID X	.061
CENTROID Y	.047
POA TO CENTROID in.	.077
MIN RADIUS	.408
MEAN RADIUS	.867
MAX RADIUS	1.494
HORIZONTAL SPREAD	1.562
VERTICAL SPREAD	2.235
EXTREME SPREAD	2.327
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	8
NUMBER IN THREE INCH CIRCLE =	10

2 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6523343

CENTERFIRE PATTERNS

3

POA

1in circle

2in circle

3in circle

OF SHOTS = 10

IN CIR

1in = 3

2in = 6

3in = 9

HS = 2.296

VS = 2.127

GS = 2.598

CENTROID #

PATTERN #	3		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.039	1.108	.959
MINIMUM X	-1.257	-1.188	-1.055
MAXIMUM Y	1.437	.457	.432
MINIMUM Y	-.690	-.531	-.556
CENTROID X	.082	.013	.162
CENTROID Y	.073	-.086	-.061
POA TO CENTROID in.	.110	.087	.173
MIN RADIUS	.295	.186	.154
MEAN RADIUS	.826	.719	.643
MAX RADIUS	1.563	1.206	1.117
HORIZONTAL SPREAD	2.296	2.296	2.014
VERTICAL SPREAD	2.127	.988	.988
EXTREME SPREAD	2.598	2.361	2.015
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

2 May 1990

FILE:/PATTERNING/CENTERFIRE_PATT/06523343

CENTERFIRE PATTERNS # 4

POA

1 in circle

2 in circle

3 in circle

CENTROID #

OF SHOTS- 10

IN CIR

1 in = 4

2 in = 9

3 in = 10

HS= 1.507

VS= 1.473

GS= 1.837

PATTERN #

4

SHOTS (BEST OF)

10

9

8

MAXIMUM X

.752

.675

.595

MINIMUM X

-.755

-.832

-.748

MAXIMUM Y

.719

.635

.672

MINIMUM Y

-.754

-.704

-.667

CENTROID X

-.015

.062

-.022

CENTROID Y

-.112

-.028

-.065

POA TO CENTROID in.

.113

.069

.068

MIN RADIUS

.042

.094

.084

MEAN RADIUS

.572

.510

.476

MAX RADIUS

1.027

.853

.855

HORIZONTAL SPREAD

1.507

1.507

1.343

VERTICAL SPREAD

1.473

1.339

1.339

EXTREME SPREAD

1.837

1.581

1.458

NUMBER IN ONE INCH CIRCLE =

4

NUMBER IN TWO INCH CIRCLE =

9

NUMBER IN THREE INCH CIRCLE =

10

2 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8523343

CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 1

2in = 7

3in = 10

HS= 2.220

VS= 1.779

GS= 2.255

CENTROID #

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.953	.812	.837
MINIMUM X	-1.267	-.710	-.685
MAXIMUM Y	.800	.806	.684
MINIMUM Y	-.979	-.973	-1.084
CENTROID X	-.056	.085	.061
CENTROID Y	-.040	-.046	.076
POA TO CENTROID in.	.069	.096	.097
MIN RADIUS	.494	.502	.378
MEAN RADIUS	.825	.773	.720
MAX RADIUS	1.268	.992	1.084
HORIZONTAL SPREAD	2.220	1.522	1.522
VERTICAL SPREAD	1.779	1.779	1.768
EXTREME SPREAD	2.255	1.847	1.785
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	10		

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6523343

DATE 10/29/90

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.50	2.49	2.48	2.48	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.45	2.41	2.45	2.50	
PULL #3	2.34	2.49	2.45	2.48	
PULL #4	2.46	2.46	2.36	2.41	
PULL #5	2.40	2.44	2.46	2.36	
TOTAL	12.15	12.29	12.20		
AVG.	2.43	2.458	2.44		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.48	3.49		
PULL #2	3.24	3.46		
PULL #3	3.51	3.30		
PULL #4	3.49	3.37		
PULL #5	3.50	3.44		
TOTAL	17.22	17.06		
AVG.	3.444	3.412		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.25	4.40		4.22
PULL #2	4.13	4.38		4.16
PULL #3	4.47	4.23		4.28
PULL #4	4.13	4.36		4.26
PULL #5	4.35	4.34		4.30
TOTAL	21.33	21.71		21.22
AVG.	4.266	4.342		4.244

BARBER - M24 0006453 RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 97-06912

INITIAL
JJM

CUSTOMER ORDER NO.

WOG 4 OF 4

DATE RECEIVED
03/20/97

DATE OPENED
03/24/97

DATE CODE
EK 10-90

SERIAL NUMBER
C6523343

NEW SERIAL NUMBER

MODEL AND GRADE
700 7.62

NATO

ACCESSORIES

W/STUDS

SCOPE BASE

FROM:

DEPT OF THE ARMY
CONSOL STA SUP OFC
BLDG P 4525 CAMP HALE RD
FORT DRUM NY 13602

SHIP TO:

DEPT OF THE ARMY
CONSOL STA SUP OFC
BLDG P 4525 CAMP HALE RD
FORT DRUM NY 13602

CUST NO: 164458 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

Day optic sight system Calibrations is OFFSET

Customer did NOT Return Scope

PARTS

COMMENTS

Safety Checks
Return to Customer

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 6/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0006453 06492

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA		
1a. UIC CUSTOMER 481, E3, 8	1b. CUSTOMER UNIT NAME MHC 2-87 INF	1c. PHONE NO 2-2666	3a. WORK ORDER NUMBER (WON)		3b. SHOP	3c. PHONE NO
2a. SAMS-2 UIC/SAMS-I/TDA W6, B, R, T, O	2b. UTILIZATION CODE	2c. MCSR	4a. UIC SUPPORT UNIT		4b. SUPPORT UNIT NAME	
SECTION III - EQUIPMENT DATA						
5. TYPE MNT REQ CODE	6. ID	7. NSN	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751			
8. MODEL M24	9. NOUN Sniper Weapon System		15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M K	
10a. ORG WON/DOC NO	10b. EIC		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N)
11. SERIAL NUMBER 6583343	12. QTY 1	13. PD 12	21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		20. ADMIN NO	
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			22. LEVEL OF WORK		23. SIGNATURE	
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) Day Sight optic system calibrations are off set.						
25. REMARKS P.O.C. Sgt BeField 2-2666						
PREPARATION INSTRUCTIONS FOR THIS PAGE						
SECTION I			SECTION III (Cont'd)			
Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.			Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.			
SECTION II						
Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.						
SECTION III						
Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.						
34a. SUBMITTED BY	35a. ACCEPTED BY	35c. DATE	Block 34a. Enter first initial and last name of submitter. Block 34b. Enter ordinal date submitted (YYDDD). Block 35a. Enter first initial and last name of person accepting maint. request. Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751. Block 35c. Enter ordinal date accepted (YYDDD). Block 35d. Enter military time.			
34b. DATE	35b. STATUS	35d. TIME				

DA FORM 2407, JUL 94

PREVIOUS EDITIONS OF DA FORM 2407 AND DA FORM 5504 ARE OBSOLETE

RECEIPT COPY 1

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

Replaces edition of 1 Jan 64, which will be used

1000