

C6498748

MODEL 700TM M24

Model **SWS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Remington®  REG. U.S. PAT. & TM. OFF.

MODEL 700™ M24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO.
C6498748


ORDER NO.
5716

Ø 1



5716 C6498748

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6498748

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	5 2	90	RW
600	Proof	5 2	90	RW
607	Check Headspace	5 2	90	RW
610	Dis-assemble Gun	5 2	90	RW
612	Magnaflux Barrel Action	5-8-90		KCR
	Magnaflux Bolt	5-8-90		KCR
615	Rollmark Caliber		5-8/90	GS
617	Drill and Tap Sight Holes		5-9-90	LB
618	Polish Barrel <i>RCB</i>		5-10-90	WLS
620	Apply Coatings (Barrel Action)		5-16-90	TH
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		5/18/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/18/90	RW
	C) Inspect Ejector Hole for Chamfer		5/18/90	RW
	D) Oil Firing Pin Ass'y		5/18/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		5/23/90	RCF

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			5/23/90	WB
	G) Safety Off Force	2	2	2			5/23/90	WB
	H) Trigger Pull Test & Retainability						5/23/90	JH
	I) Firing Pin Indent	.023	.0225	.0225			5/23/90	WB
	J) Assemble Stock						5/24/90	RW
	K) Assemble Swivel Studs						6/15/90	JH
	L) Attach Front and Rear Sight Assemblies						5/24/90	RW
	M) Iron Sight Alignment						5/24/90	RW
	N) Detach Front & Rear Sights & place in numbered container						5/24/90	RW
	O) Attach Scope to Rifle						5/25/90	JH
	P) Detach & Attach Scope 20 Times						5/25/90	JH
640	Gallery Target & Test						5-30-90	DH
	A) Time						5-30-90	DH
	B) Malfunctions						5-30-90	DH
	C) Pierced Primers						5-30-90	DH
	D) Optical Clarity of Scope						5-30-90	DH
645	Inspect for Live Ammo						5-30-90	DH
655	Final Inspection							
	A) Headspace						6/15/90	JH
	B) Trigger Pull	2.73	2.68	2.80	2.68	2.70	6/14/90	JH
	C) Function	2.73	2.16	2.21	2.18	2.73	6/14/90	WB
660	Pack						6-20-90	DH

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6498748DATE 5/23/90TESTER JU

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.29	2.16	2.33	2.23 2.65	MIN. SETTING,
PULL #2	2.26	2.39	2.41	2.16 2.68	NO AVG. OF 5
PULL #3	2.21	2.38	2.51	2.80 2.71	READINGS ACCEPT-
PULL #4	2.33	2.39	2.50	2.68 2.18	ABLE LESS THAN 2#
PULL #5	2.34	2.36	2.20	2.70 2.23	
TOTAL	10.43	11.68	11.95		
AVG.	2.286	2.336	2.39		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.21 3.2	3.17		
PULL #2	3.31	3.28		
PULL #3	3.35	3.30		
PULL #4	3.29	3.36		
PULL #5	3.35	3.31		
TOTAL	16.51	16.42		
AVG.	3.302	3.284		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.34	4.21		4.42
PULL #2	4.24	4.19		4.20
PULL #3	4.21	4.22		4.50
PULL #4	4.22	4.22		4.52
PULL #5	4.26	4.28		4.40
TOTAL	21.27	21.12		22.04
AVG.	4.254	4.224		4.408

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6498748
31 May 1990

CENTROIDAL DISTANCES

0 TO 1	.496107
1 TO 2	.0280179
1 TO 3	.540431
1 TO 4	.273562
1 TO 5	.378613

1.7 (----POA
3.4

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .286
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1918
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .344359
THE AMR FOR THIS RIFLE IS: .8402

31 May 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08496748

CENTERFIRE PATTERNS

1

POA

1 in circle

2 in circle

3 in circle

OF SHOTS = 10

IN CIR

1 in = 3

2 in = 7

3 in = 10

HS = 2.144

VS = 2.268

GS = 2.410

CENTROID #

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.167	1.144	1.217
MINIMUM X	-.976	-1.000	-.927
MAXIMUM Y	1.018	.879	.645
MINIMUM Y	-1.250	-.501	-.391
CENTROID X	.491	.515	.442
CENTROID Y	-.071	.068	-.042
POA TO CENTROID in.	.497	.519	.444
MIN RADIUS	.091	.051	.095
MEAN RADIUS	.713	.649	.583
MAX RADIUS	1.267	1.148	1.217
HORIZONTAL SPREAD	2.144	2.144	2.144
VERTICAL SPREAD	2.268	1.380	1.036
EXTREME SPREAD	2.410	2.144	2.144
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		10	

31 May 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C849B748

CENTERFIRE PATTERNS

2

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS- 10

IN CIR

1in = 3

2in = 5

3in = 8

HS= 1.360

VS= 3.105

GS= 3.193

PATTERN #	2		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.451	.494	.488
MINIMUM X	-.909	-.866	-.872
MAXIMUM Y	1.973	1.407	.842
MINIMUM Y	-1.132	-.913	-.737
CENTROID X	.475	.432	.438
CENTROID Y	-.048	-.267	-.443
POA TO CENTROID in.	.478	.508	.623
MIN RADIUS	.224	.348	.411
MEAN RADIUS	.907	.776	.685
MAX RADIUS	2.010	1.408	.874
HORIZONTAL SPREAD	1.360	1.360	1.360
VERTICAL SPREAD	3.105	2.320	1.579
EXTREME SPREAD	3.193	2.336	1.622
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

31 May 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6498748

CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

OF SHOTS = 10

IN CIR

1in = 2

2in = 6

3in = 9

HS = 1.884

VS = 2.449

CS = 2.621

CENTROID #

PATTERN #

3

SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.830	.809	.909
MINIMUM X	:	-1.034	-1.055	-.955
MAXIMUM Y	:	1.494	1.177	1.092
MINIMUM Y	:	-.955	-.789	-.884
CENTROID X	:	.020	.041	-.059
CENTROID Y	:	-.336	-.502	-.407
POA TO CENTROID in.	:	.336	.503	.411
MIN RADIUS	:	.065	.228	.133
MEAN RADIUS	:	.869	.787	.741
MAX RADIUS	:	1.505	1.232	1.113
HORIZONTAL SPREAD	:	1.864	1.864	1.864
VERTICAL SPREAD	:	2.449	1.966	1.966
EXTREME SPREAD	:	2.621	2.261	1.994
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

31 May 1980

FILE: PATTERNING/CENTERFIRE_PATT/08498748

CENTERFIRE PATTERNS

4

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS = 10

IN CIR

1in = 1

2in = 6

3in = 10

HS = 1.229

VS = 2.441

GS = 2.509


PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.684	.623	.620
MINIMUM X	-.545	-.602	-.605
MAXIMUM Y	1.179	1.269	1.128
MINIMUM Y	-1.262	-1.131	-.971
CENTROID X	.285	.346	.349
CENTROID Y	-.251	-.382	-.241
POA TO CENTROID in.	.380	.515	.424
MIN RADIUS	.494	.424	.445
MEAN RADIUS	.867	.804	.760
MAX RADIUS	1.299	1.302	1.164
HORIZONTAL SPREAD	1.229	1.225	1.225
VERTICAL SPREAD	2.441	2.400	2.099
EXTREME SPREAD	2.509	2.421	2.257
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

31 May 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C8498748

CENTERFIRE PATTERNS # 5

POA

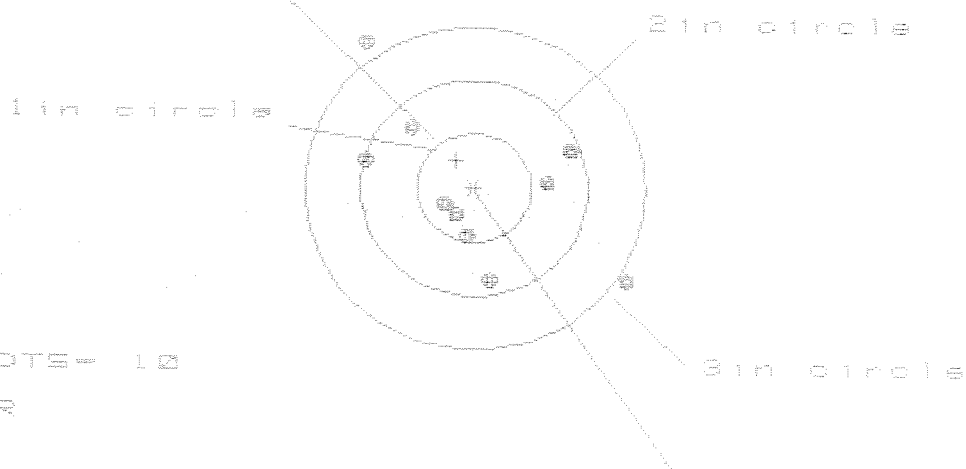

OF SHOTS- 10

IN CIR

1in = 3

2in = 7

3in = 8

HS= 2.355

VS= 2.192

GS= 3.182

CENTROID #

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.352
MINIMUM X	-1.003
MAXIMUM Y	1.325
MINIMUM Y	-0.867
CENTROID X	.159
CENTROID Y	-.253
POA TO CENTROID in.	.299
MIN RADIUS	.245
MEAN RADIUS	.845
MAX RADIUS	1.633
HORIZONTAL SPREAD	2.355
VERTICAL SPREAD	2.192
EXTREME SPREAD	3.182
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	7
NUMBER IN THREE INCH CIRCLE =	8

MAINTENANCE REQUEST				PAGE NO 1		NO OF PAGES 1		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
SECTION I - EQUIPMENT DATA											
CONTROL NUMBER		WORK ORDER NO.			WESDC		ORG. PD 03		PD AUTHENTICATION <i>[Signature]</i>		
☒ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION <i>Consolidated Equip Pool</i>			B. LOCATION <i>Ft. Benning GA</i>				C. UNIT IDENT CODE <i>31905 W04255</i>		
2. SERIAL NO. <i>C6498748</i>		3. NOUN NOMENCLATURE <i>Rifle Snipe</i>			4. LINE NO.		5. MODEL <i>M24</i>		6. NATIONAL STOCK NUMBER <i>1005-01-240-2136</i>		
7A. MAINTENANCE ACTIVITY <i>Remington</i>		B. LEVEL <i>H</i>	8. UTILIZATION CODE <i>Q</i>	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS	11. MILES	12. ROUNDS	13. STARTS	
14. FAILURE DETECTED DURING (Select one - use ☒ or X)						15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)					
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 068 Inoperative		☐ 258 Overheating	
☐ B Handling		☒ D Normal Op		☐ F Inspection		☐ H Other		☐ 008 Noisy		☒ 387 Low Performance	
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). <i>SEE ATTACHED DA FORM 2404</i>											
B. REMARKS											
SECTION II - WORK ACCOMPLISHED											
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)				19. AMS ACCT CODE	
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor					
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST	
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE							
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					I. TOTAL MANHOURS	J. TOTAL MANHOURS COST \$		K. TOTAL PARTS COST \$			
21. DELAY (Select One)					☐ 1 Parts	☐ 2 Manpower	☐ 3 Facilities	☐ 4 Funds	☐ 5 Tools	22. Data Transcribed	
23. SUBMITTED BY <i>[Signature]</i>		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)	
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged	

BARBER - M24 M24009907010

DD Form 1348-1, SEP 87 Jun 86 edition may be used. FORM APPROVED, OMB NO. 0704-0188 DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

Dim: 175 x 50 x 13

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C64 98748

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		7/9/92	RW
600	Proof		7/9/92	RW
607	Check Headspace		7/9/92	RW
610	Dis-assemble Gun		7/9/92	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes		7/9/92	RW
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

Op. #	BARBER M24 0000973	REMARKS			
625 cont.	F) Safety On Force				
	G) Safety Off Force				
	H) Trigger Pull Test & Retainability				
	I) Firing Pin Indent				
	J) Assemble Stock				
	K) Assemble Swivel Studs				
	L) Attach Front and Rear Sight Assemblies				
	M) Iron Sight Alignment				
	N) Detach Front & Rear Sights & place in numbered container				
	O) Attach Scope to Rifle				
	P) Detach & Attach Scope 20 Times				
640	Gallery Target & Test			7-27-92	<i>[Signature]</i>
	A) Time			7-27-92	<i>[Signature]</i>
	B) Malfunctions			7-27-92	<i>[Signature]</i>
	C) Pierced Primers			7-27-92	<i>[Signature]</i>
	D) Optical Clarity of Scope			7-27-92	<i>[Signature]</i>
645	Inspect for Live Ammo			7-27-92	<i>[Signature]</i>
655	Final Inspection				
	A) Headspace				
	B) Trigger Pull				
	C) Function				
660	Pack				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6498748
27 Jul 1992

CENTROIDAL DISTANCES

0 TO	1	.101833
1 TO	2	.067624
1 TO	3	.31683
1 TO	4	.313818
1 TO	5	.374144

48 <----FOR


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.113
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.191
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .5155

THE AMP FOR THIS RIFLE IS: 1.074

27 Jul 1992

FILE:/PATTERNING/CENTERFIRE_PATT/C6498748

CENTERFIRE PATTERNS # 1

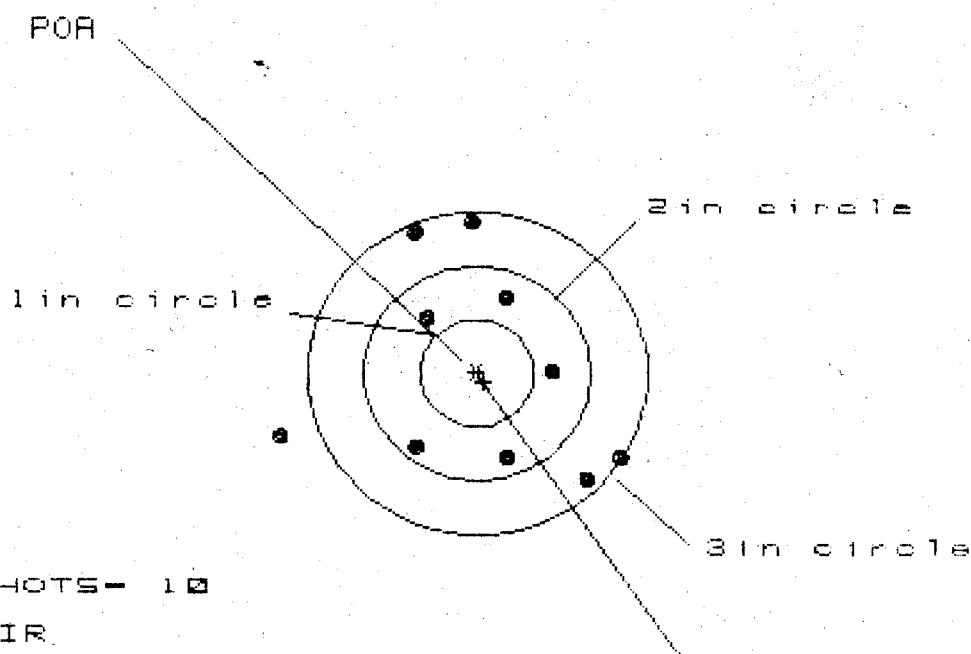

OF SHOTS- 10

IN CIR

1 in - 0

2 in - 5

3 in - 9

HS- 2.963

VS- 2.427


GS- 2.967

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.234	1.042	.893
MINIMUM X	:	-1.729	-.767	-.636
MAXIMUM Y	:	1.410	1.340	1.234
MINIMUM Y	:	-1.017	-1.087	-1.193
CENTROID X	:	-.059	.133	.002
CENTROID Y	:	.083	.153	.259
POA TO CENTROID in.	:	.102	.202	.259
MIN RADIUS	:	.610	.430	.558
MEAN RADIUS	:	1.135	1.035	.987
MAX RADIUS	:	1.840	1.460	1.490
HORIZONTAL SPREAD	:	2.963	1.809	1.529
VERTICAL SPREAD	:	2.427	2.427	2.427
EXTREME SPREAD	:	2.967	2.783	2.783
NUMBER IN ONE INCH CIRCLE	=	0		
NUMBER IN TWO INCH CIRCLE	=	5		
NUMBER IN THREE INCH CIRCLE	=	9		

27 Jul 1992

FILE:/PATTERNING/CENTERFIRE_PATT/C6498748

CENTERFIRE PATTERNS # 2

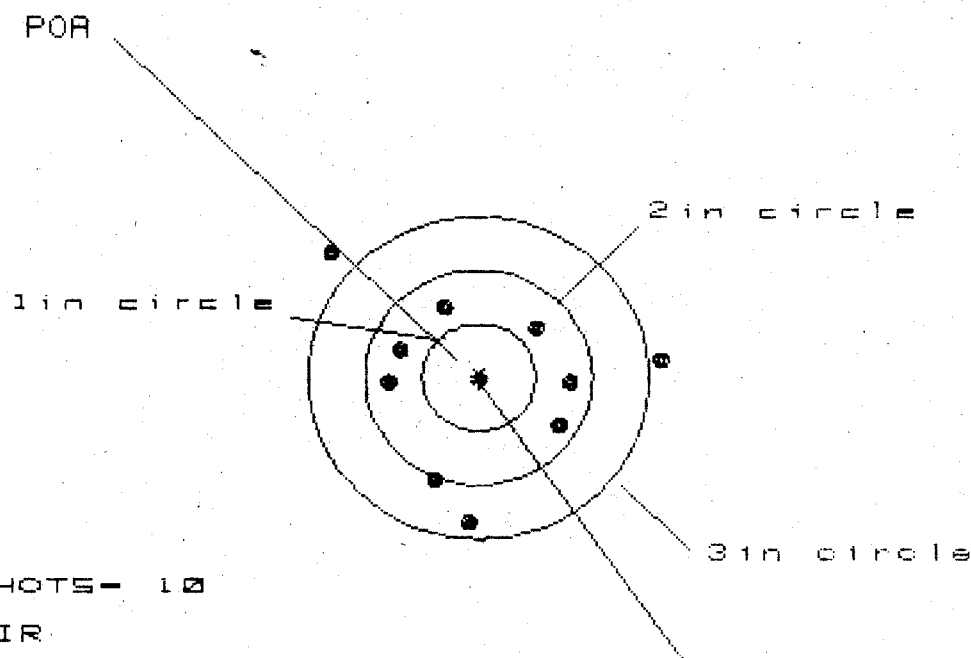

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 6

3 in = 8

HS= 2.913

VS= 2.422


GS= 3.057

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.650	1.510	.861
MINIMUM X	:	-1.263	-.978	-.790
MAXIMUM Y	:	1.127	.775	.816
MINIMUM Y	:	-1.295	-1.170	-1.129
CENTROID X	:	-.006	.134	-.054
CENTROID Y	:	.041	-.084	-.125
POA TO CENTROID in.	:	.041	.159	.136
MIN RADIUS	:	.688	.633	.795
MEAN RADIUS	:	1.036	.956	.874
MAX RADIUS	:	1.693	1.544	1.130
HORIZONTAL SPREAD	:	2.913	2.488	1.651
VERTICAL SPREAD	:	2.422	1.945	1.945
EXTREME SPREAD	:	3.057	2.499	1.960
NUMBER IN ONE INCH CIRCLE	=	0		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	8		

27 Jul 1992

FILE:/PATTERNING/CENTERFIRE_PATT/C6498748

CENTERFIRE PATTERNS # 3

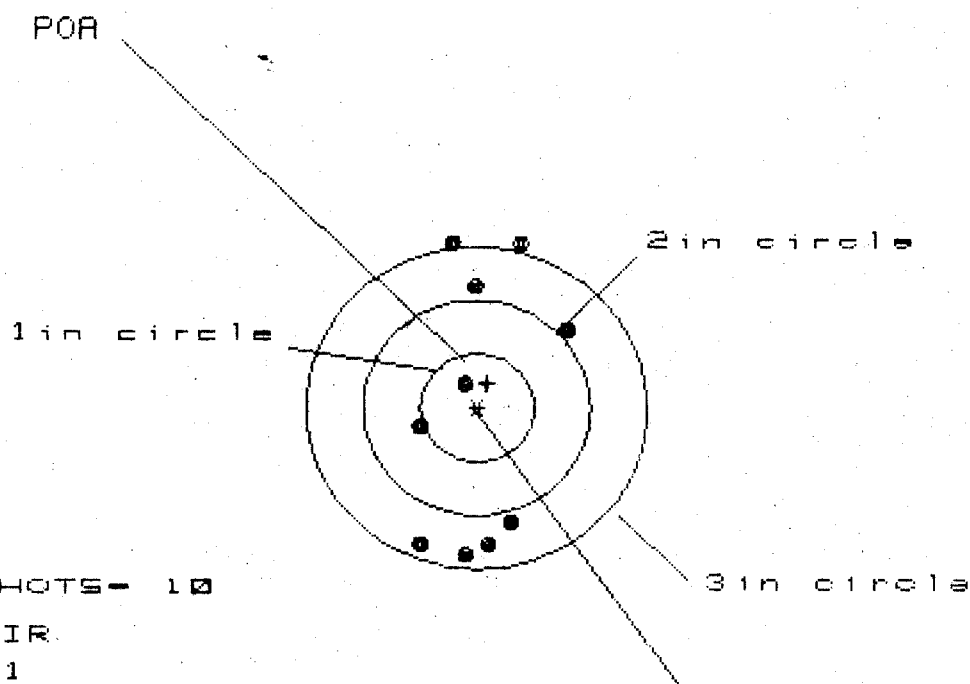

OF SHOTS - 10

IN CIR

1 in = 1

2 in = 2

3 in = 8

HS = 1.331

VS = 2.854

GS = 2.930

PATTERN #

SHOTS (BEST OF)


	10	9	8
MAXIMUM X	.809	.852	.830
MINIMUM X	-.522	-.479	-.501
MAXIMUM Y	1.515	1.681	1.558
MINIMUM Y	-1.339	-1.173	-.962
CENTROID X	-.093	-.136	-.114
CENTROID Y	-.232	-.398	-.609
POA TO CENTROID in.	.250	.421	.619
MIN RADIUS	.285	.431	.535
MEAN RADIUS	1.133	1.076	.977
MAX RADIUS	1.544	1.691	1.558
HORIZONTAL SPREAD	1.331	1.331	1.331
VERTICAL SPREAD	2.854	2.854	2.520
EXTREME SPREAD	2.930	2.855	2.522
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	8		

27 Jul 1992

FILE:/PATTERNING/CENTERFIRE_PATT/C643B748

CENTERFIRE PATTERNS

4

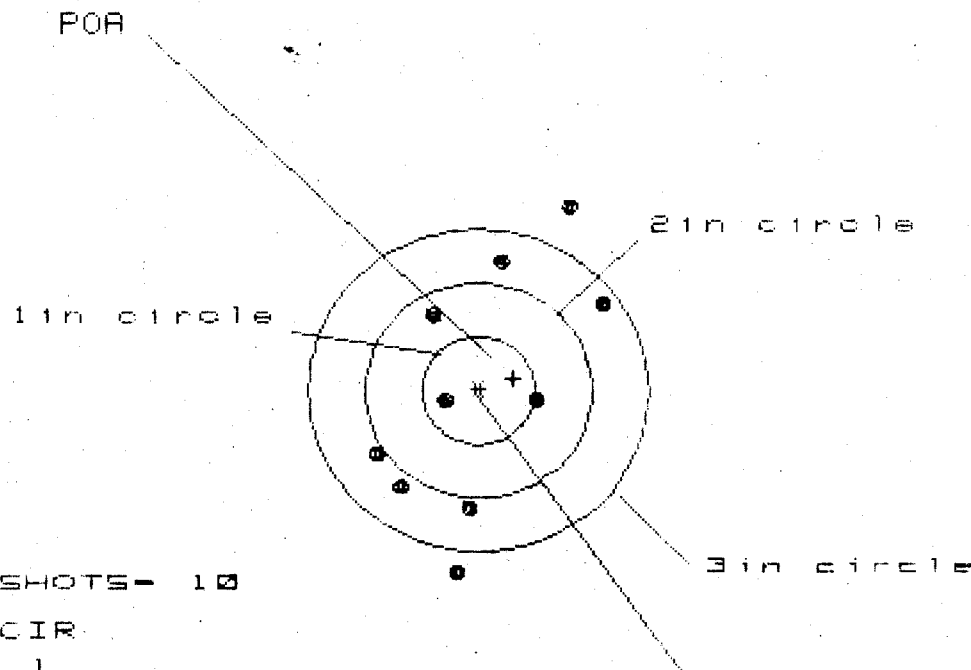

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.061	1.152	1.142
MINIMUM X	:	-.937	-.846	-.856
MAXIMUM Y	:	1.722	1.410	1.320
MINIMUM Y	:	-1.710	-1.518	-1.119
CENTROID X	:	-.308	-.399	-.189
CENTROID Y	:	-.108	-.300	-.110
POA TO CENTROID in.	:	.326	.499	.404
MIN RADIUS	:	.261	.202	.184
MEAN RADIUS	:	1.116	1.005	.933
MAX RADIUS	:	1.909	1.547	1.419
HORIZONTAL SPREAD	:	1.998	1.998	1.908
VERTICAL SPREAD	:	3.432	2.928	2.339
EXTREME SPREAD	:	3.574	2.948	2.404
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	3		
NUMBER IN THREE INCH CIRCLE	=	8		

27 Jul 1982

FILE: PATTERNING/CENTERFIRE_PATT/08498740

CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS - 10

IN CIR.

1in = 3

2in = 5

3in = 9

HS = 1.880

VS = 2.862

ES = 2.916

PATTERN #

SHOTS (BEST OF)

	10	9	8
MAXIMUM X	.798	.812	.898
MINIMUM X	-1.082	-1.068	-1.982
MAXIMUM Y	1.211	1.027	1.097
MINIMUM Y	-1.651	-1.257	-1.128
CENTROID X	-.099	-.113	-.199
CENTROID Y	-.286	-.102	-.231
POA TO CENTROID in.	.302	.152	.285
MIN RADIUS	.318	.256	.274
MEAN RADIUS	.952	.840	.794
MAX RADIUS	1.656	1.392	1.240
HORIZONTAL SPREAD	1.880	1.980	1.480
VERTICAL SPREAD	2.862	2.284	2.225
EXTREME SPREAD	2.916	2.624	2.250
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		9	

MAINTENANCE REQUEST				PAGE NO. <u>1</u>		NO. OF PAGES <u>1</u>		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG											
SECTION I - EQUIPMENT DATA											
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD <u>03</u>		PD AUTHENTICATION <u>Longman</u>			
☒ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION <u>Consolidated Equip Pool</u>		B. LOCATION <u>Ft. Benning GA</u>			C. UNIT IDENT CODE <u>31905 W04255</u>				
2. SERIAL NO. <u>C6498748</u>		3. NOUN NOMENCLATURE <u>Rifle Snipe</u>		4. LINE NO.		5. MODEL <u>M24</u>		6. NATIONAL STOCK NUMBER <u>1005-01-240-2136</u>			
7A. MAINTENANCE ACTIVITY <u>Remington</u>		B. LEVEL <u>H</u>		8. UTILIZATION CODE <u>Q</u>		9A. MCSR ITEM		9B. ERC			
						9C. PACING ITEM		10. HOURS			
								11. MILES			
								12. ROUNDS			
								13. STARTS			
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)						
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 068 Inoperative			
☐ B Handling		☒ D Normal Op		☐ F Inspection		☐ H Other		☐ 258 Overheating			
								☐ 790 Out of Adjustment			
								☒ 387 Low Performance			
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). <u>SEE ATTACHED DA FORM 2404</u>											
B. REMARKS											
SECTION II - WORK ACCOMPLISHED											
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)			19. AMS ACCT. CODE		
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor					
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST	
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE							
										\$	
										\$	
										\$	
										\$	
										\$	
										\$	
										\$	
										\$	
										\$	
										\$	
I. TOTAL MANHOURS					J. TOTAL MANHOURS COST			K. TOTAL PARTS COST			
					\$			\$			
21. DELAY (Select One)		☐ 1 Parts		☐ 2 Manpower		☐ 3 Facilities		☐ 4 Funds		☐ 5 Tools	
										22. Data Transcribed	
23. SUBMITTED BY <u>Longman</u>		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)	
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged	

8a. SIGNATURE (Person(s) performing inspection) SSC Pullizzi 	8b. TIME	9a. SIGNATURE (Maintenance Supervisor)	9b. TIME	10. MANHOURS REQUIRED
--	----------	--	----------	-----------------------

[illegible]

[illegible]