

C6225231

MODEL 700™ M24

Model 700 M24™

Action

Barrel Length

Capacity

Order No. 5716

*Includes 1 in chamber.



BARBER - M24 0011084

88299

[illegible]

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225231

OPERATION		DATE	INT
#	NAME		
575-580	ASSEMBLY	2/1	FB
600	PROOF	2/2/88	KW
615	MAGNAFLUX BARREL	2/18/88	PJC
	MAGNAFLUX BOLT	2/25/88	PJC
620	COATING	3/21/88	TJA
625-630	FINAL ASSEMBLY		
635	TEST		
640	TARGET		
	FIRING PIN INDENT		
660	PACK		

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coatings (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		9/13/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		9/13/88	RW
	C) Inspect Ejector Hole for Chamfer		9/13/88	RW

OVER

OP.#		READINGS	DATE	INITIAL
625 cont.	D) Oil Firing Pin Ass'y		9/13/88	RW
	E) Adjust Trigger Pull to Min. Setting and Stake		13 Sept 88	JS
	F) Safety on Force	5.75 5.75 5.75	13 Sept 88	JG
	G) Safety off Force	3# 3# 3#	13 Sept 88	JG
	H) Trigger Pull Test & Retainability		13 Sept 88	JS
	I) Firing Pin Indent	.022 .022 .022	13 Sept 88	JU
	J) Assemble Stock		9/14/88	RW
	K) Assemble Swivel Studs		10-13-88	JS
	L) Attach Front & Rear Sight Assemblies		9/14/88	RW
	M) Iron Sight Alignment		9/14/88	RW
	N) Detach Front & Rear Sights & place in numbered container		9/14/88	RW
	O) Attach Scope to Rifle		10/5/88	RW
	P) Detach & Attach Scope 20 times	66 R 89L	10-5-88	JS
640	Gallery Target & Test	RES NOT 10/12/88	10-10-88	AC
	A) Optical Clarity of Scope	OK	10-10-88	AC
645	Inspect for Live Ammo	NONE	10-10-88	AC
655	Final Inspection			
	A) Headspace		10-13-88	JS
	B) Trigger Pull		10-14-88	JS
	C) Function		10-13-88	JS
660	Pack		10-21-88	Y.S.

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C-6225231

DATE 13-SEP-88

TESTER J.V.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.66	2.40	2.58 / 2.55	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.56	2.41	2.59 / 2.52	
PULL #3	2.58	2.42	2.62 / 2.55	
PULL #4	2.52	2.40	2.63 / 2.50	
PULL #5	2.54	2.44	2.63 / 2.60	
TOTAL	12.86	12.07	13.05 / 12.72	
AVG.	2.572	2.414	2.61 / 2.544	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.25	3.24	
PULL #2	3.24	3.24	
PULL #3	3.30	3.24	
PULL #4	3.27	3.26	
PULL #5	3.28	3.19	
TOTAL	16.34	16.17	
AVG.	3.268	3.234	


	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.40	4.29		4.20
PULL #2	4.37	4.32		4.28
PULL #3	4.33	4.33		4.31
PULL #4	4.37	4.37		4.25
PULL #5	4.39	4.34		4.27
TOTAL	21.86	21.65		21.31
AVG.	4.372	4.33		4.262

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225231

Lelet

CENTROIDAL DISTANCES


0	TO	1	1.19746
1	TO	2	.971249
1	TO	3	1.05873
1	TO	4	.326435
1	TO	5	1.09139



 4 ---- POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0914
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.6398
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .646296

THE AMR FOR THIS RIFLE IS: 1.046

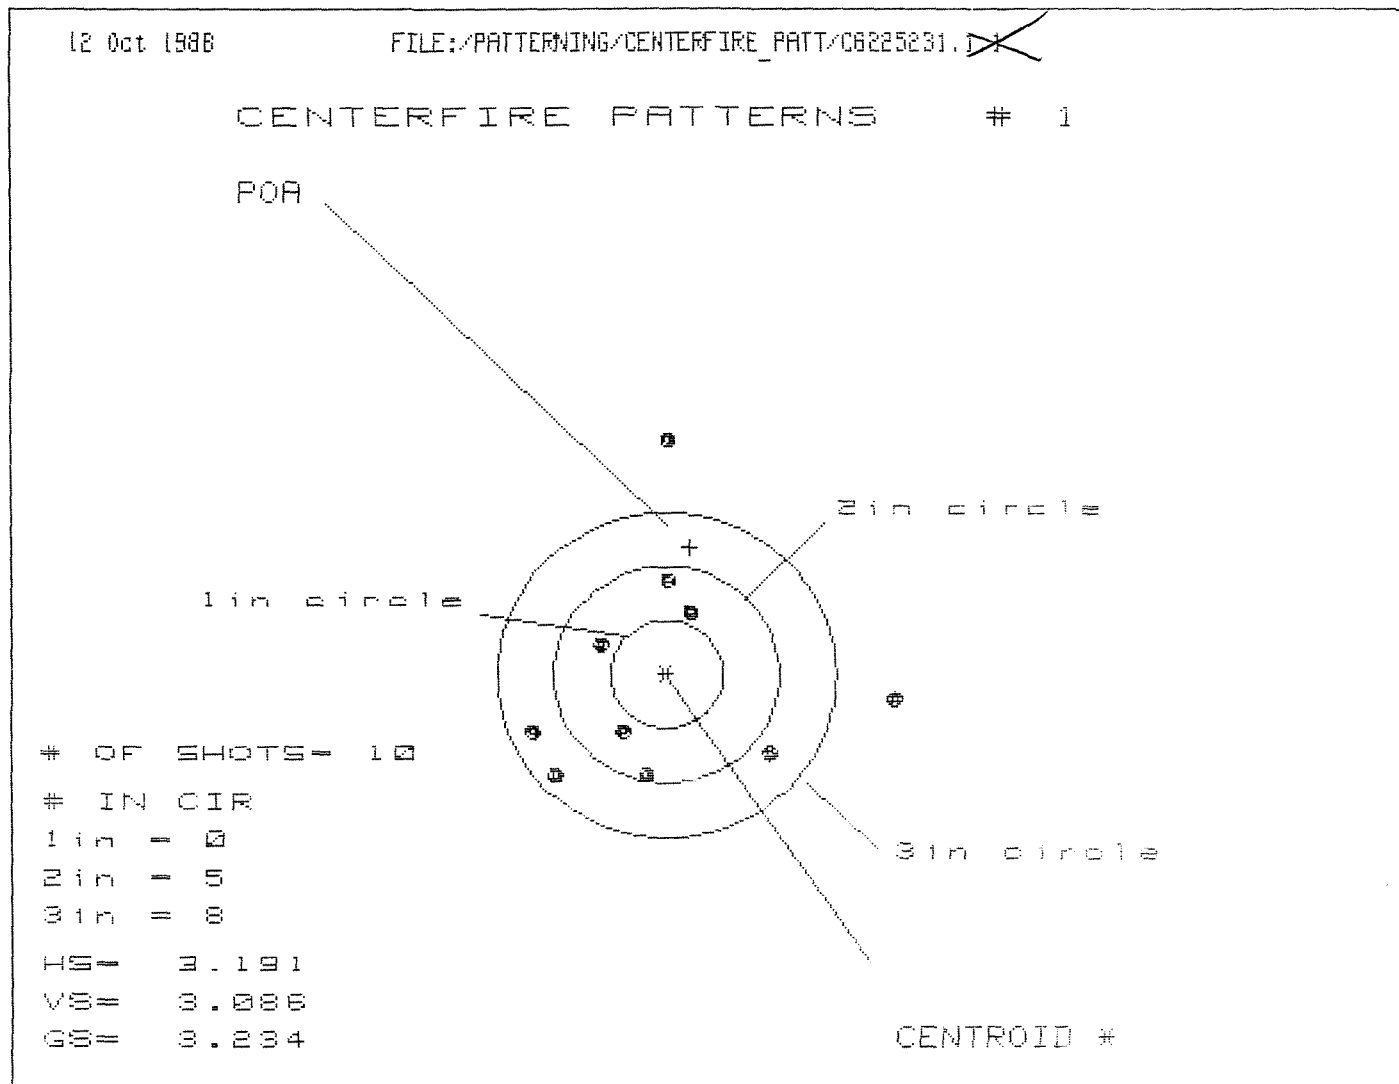Retest

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.045	2.046	1.210
MINIMUM X	-1.146	-1.145	-.989
MAXIMUM Y	2.153	1.152	1.148
MINIMUM Y	-.933	-.694	-.698
CENTROID X	-.215	-.216	-.472
CENTROID Y	-1.178	-1.417	-1.413
POA TO CENTROID in.	1.197	1.433	1.490
MIN RADIUS	.623	.458	.315
MEAN RADIUS	1.183	1.053	.878
MAX RADIUS	2.153	2.047	1.299
HORIZONTAL SPREAD	3.191	3.191	2.099
VERTICAL SPREAD	3.086	1.846	1.846
EXTREME SPREAD	3.234	3.203	2.111
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

Retest

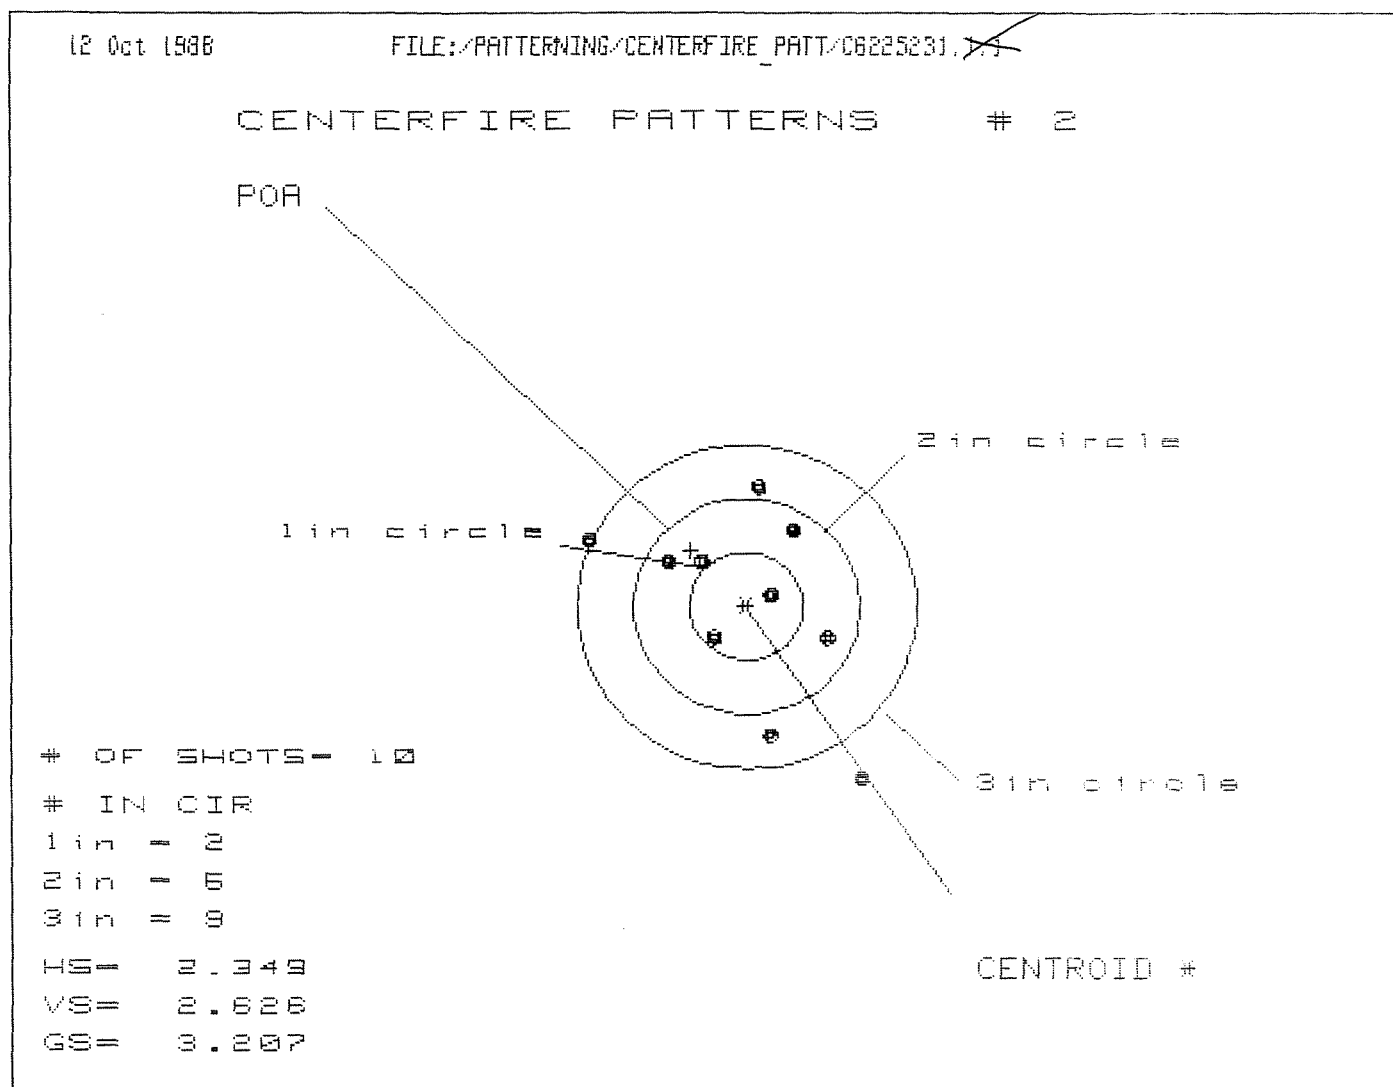

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.005	.816	.662
MINIMUM X	:	-1.344	-1.232	-.720
MAXIMUM Y	:	1.063	.890	.946
MINIMUM Y	:	-1.563	-1.348	-1.292
CENTROID X	:	.491	.379	.533
CENTROID Y	:	-.511	-.338	-.394
POA TO CENTROID in.	:	.709	.508	.663
MIN RADIUS	:	.234	.330	.183
MEAN RADIUS	:	.913	.785	.710
MAX RADIUS	:	1.858	1.387	1.304
HORIZONTAL SPREAD	:	2.349	2.048	1.382
VERTICAL SPREAD	:	2.626	2.238	2.238
EXTREME SPREAD	:	3.207	2.377	2.240
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	


Relest

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225231.1

CENTERFIRE PATTERNS # 3

POA

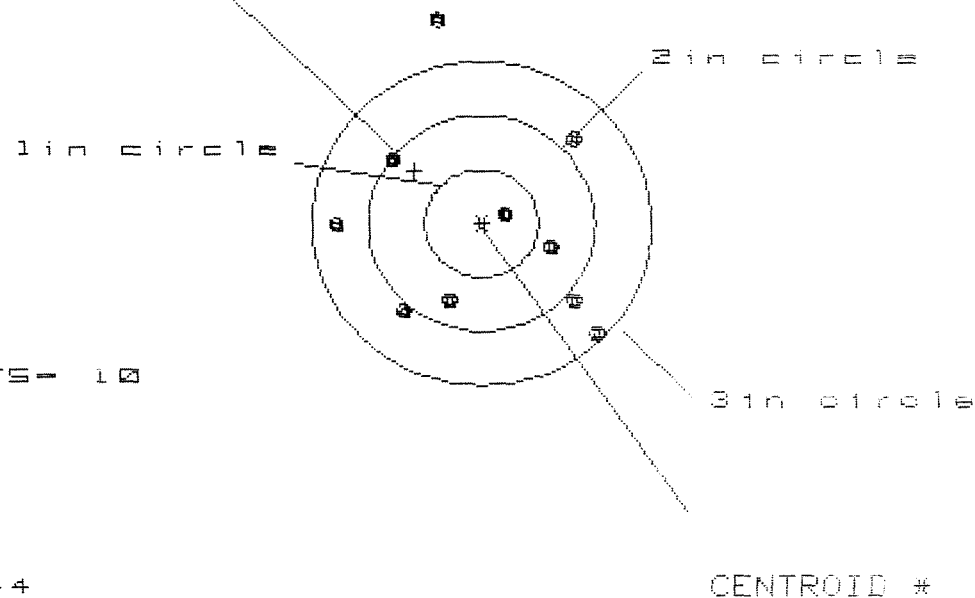

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 4

3 in = 5

HS = 2.344

VS = 2.843

GS = 3.195

CENTROID *

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.020	.971	.915
MINIMUM X	:	-1.324	-1.373	-1.251
MAXIMUM Y	:	1.842	1.014	.914
MINIMUM Y	:	-1.001	-.796	-.691
CENTROID X	:	.588	.637	.515
CENTROID Y	:	-.488	-.693	-.593
POA TO CENTROID in.	:	.764	.941	.786
MIN RADIUS	:	.263	.339	.369
MEAN RADIUS	:	1.057	.937	.902
MAX RADIUS	:	1.893	1.392	1.293
HORIZONTAL SPREAD	:	2.344	2.344	2.166
VERTICAL SPREAD	:	2.843	1.810	1.595
EXTREME SPREAD	:	3.195	2.558	2.304
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		9	


Retest

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225231.2.1

CENTERFIRE PATTERNS

4

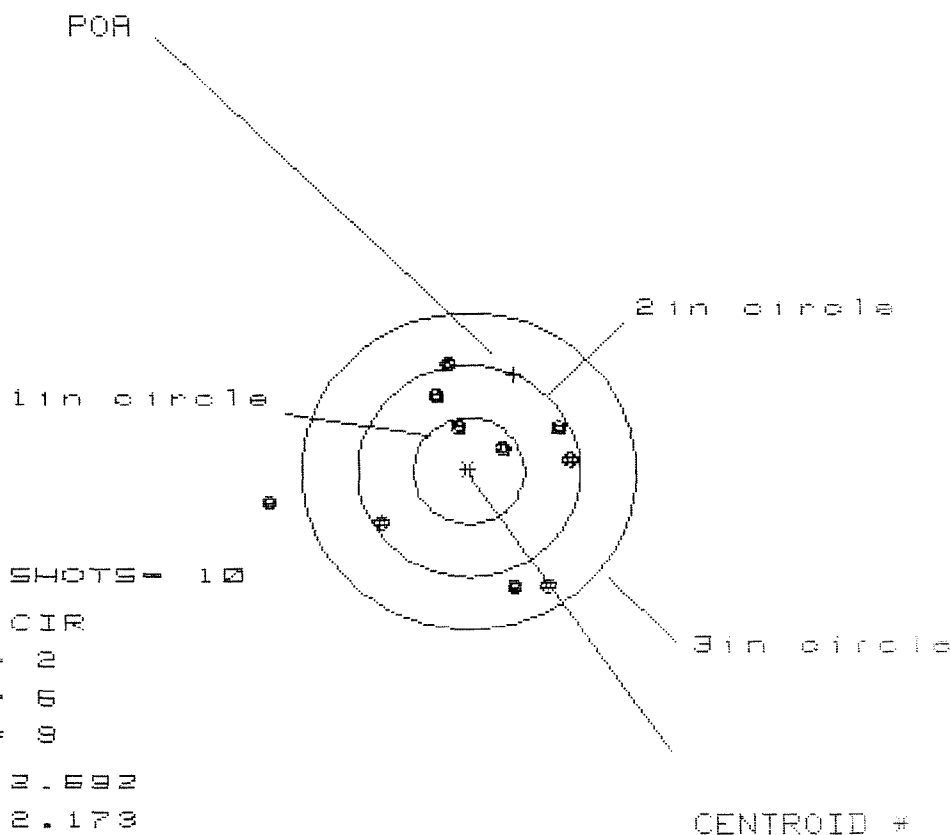

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.880	.679	.742
MINIMUM X	:	-1.812	-.959	-.897
MAXIMUM Y	:	1.048	1.020	.876
MINIMUM Y	:	-1.125	-1.153	-1.228
CENTROID X	:	-.407	-.206	-.269
CENTROID Y	:	-.914	-.886	-.742
POA TO CENTROID in.	:	1.000	.910	.789
MIN RADIUS	:	.331	.188	.125
MEAN RADIUS	:	.965	.834	.744
MAX RADIUS	:	1.829	1.258	1.265
HORIZONTAL SPREAD	:	2.692	1.638	1.638
VERTICAL SPREAD	:	2.173	2.173	2.104
EXTREME SPREAD	:	2.716	2.335	2.185
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

Letest

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225231.2

CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle

OF SHOTS - 10

IN CIR

1in = 2

2in = 5

3in = 8

HS = 3.453

VS = 2.931

GS = 4.203

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	2.279	.782	.722
MINIMUM X	:	-1.174	-.921	-.981
MAXIMUM Y	:	1.429	1.262	1.334
MINIMUM Y	:	-1.502	-1.081	-.923
CENTROID X	:	-.108	-.361	-.301
CENTROID Y	:	-.980	-.813	-.971
POA TO CENTROID in.	:	.986	.890	1.017
MIN RADIUS	:	.397	.595	.547
MEAN RADIUS	:	1.111	.938	.851
MAX RADIUS	:	2.729	1.412	1.517
HORIZONTAL SPREAD	:	3.453	1.703	1.703
VERTICAL SPREAD	:	2.931	2.343	2.257
EXTREME SPREAD	:	4.203	2.754	2.754
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 6225231

CENTROIDAL DISTANCES

0 TO	1	.44776
1 TO	2	1.49988
1 TO	3	2.36767
1 TO	4	2.05354
1 TO	5	.746676

1
t₅ <----POA


2
4
3

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .2334
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.8746
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .905208
THE AMR FOR THIS RIFLE IS: 1.04

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225231

CENTERFIRE PATTERNS # 1

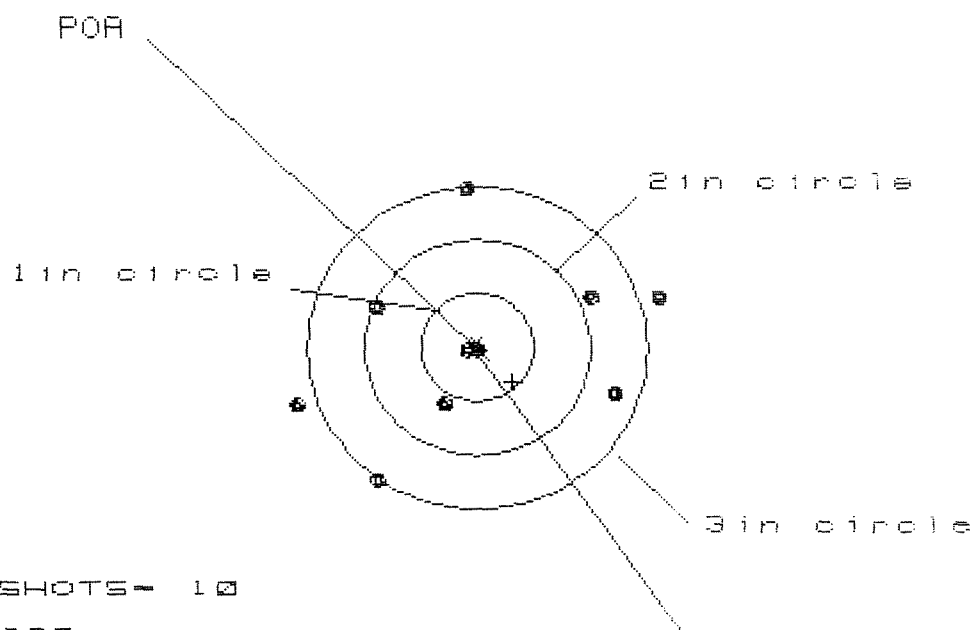

OF SHOTS - 10

IN CIR

1in = 2

2in = 4

3in = 8


HS = 3.161

VS = 2.655

GS = 3.322

CENTROID *

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.601	1.418	1.246
MINIMUM X	:	-1.560	-1.383	-1.894
MAXIMUM Y	:	1.444	1.496	1.434
MINIMUM Y	:	-1.211	-1.159	-1.221
CENTROID X	:	-0.308	-0.485	-0.313
CENTROID Y	:	0.325	0.273	0.335
POA TO CENTROID in.	:	0.447	0.557	0.458
MIN RADIUS	:	0.016	0.153	0.016
MEAN RADIUS	:	1.036	0.973	0.878
MAX RADIUS	:	1.668	1.499	1.502
HORIZONTAL SPREAD	:	3.161	2.801	2.140
VERTICAL SPREAD	:	2.655	2.655	2.655
EXTREME SPREAD	:	3.322	2.803	2.769
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	4		
NUMBER IN THREE INCH CIRCLE	=	8		

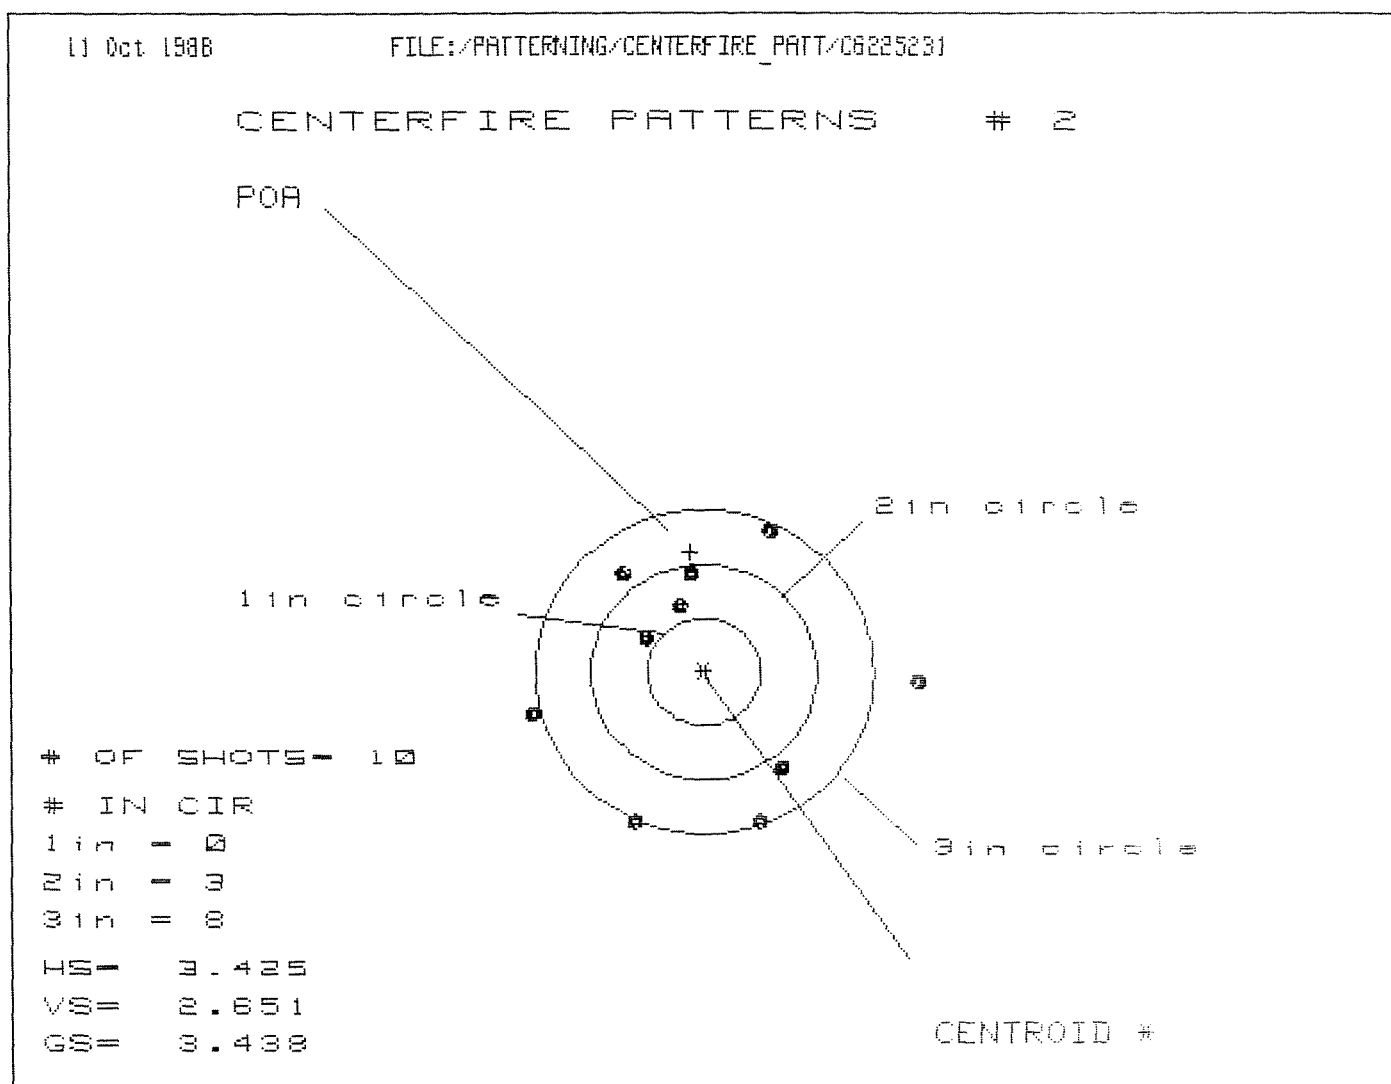

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.920	.898	.737
MINIMUM X	:	-1.505	-1.292	-.673
MAXIMUM Y	:	1.272	1.262	1.213
MINIMUM Y	:	-1.379	-1.389	-1.438
CENTROID X	:	.115	-.098	.063
CENTROID Y	:	-1.114	-1.104	-1.055
POA TO CENTROID in.	:	1.120	1.108	1.057
MIN RADIUS	:	.648	.468	.574
MEAN RADIUS	:	1.231	1.123	1.088
MAX RADIUS	:	1.922	1.521	1.531
HORIZONTAL SPREAD	:	3.425	2.190	1.410
VERTICAL SPREAD	:	2.651	2.651	2.651
EXTREME SPREAD	:	3.438	2.904	2.904
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		8	

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225231

CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 7

HS= 3.592

VS= 3.273

GS= 4.211

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	2.287	.648	.640
MINIMUM X	:	-1.305	-1.051	-1.970
MAXIMUM Y	:	1.579	1.391	1.520
MINIMUM Y	:	-1.694	-1.593	-1.419
CENTROID X	:	.557	.303	.222
CENTROID Y	:	-1.879	-1.691	-1.865
POA TO CENTROID in.	:	1.960	1.718	1.878
MIN RADIUS	:	.239	.194	.346
MEAN RADIUS	:	1.284	1.045	.992
MAX RADIUS	:	2.846	1.597	1.649
HORIZONTAL SPREAD	:	3.592	1.699	1.610
VERTICAL SPREAD	:	3.273	2.984	2.939
EXTREME SPREAD	:	4.211	3.100	3.029
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225231

CENTERFIRE PATTERNS

4

POA

1 in circle

2 in circle

3 in circle

OF SHOTS = 10

IN CIR

1 in = 3

2 in = 5

3 in = 9

HS = 2.989

VS = 2.302

GS = 3.039


CENTROID A

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.288	1.099	1.080
MINIMUM X	:	-1.701	-1.467	-1.486
MAXIMUM Y	:	.879	.965	.798
MINIMUM Y	:	-1.423	-1.337	-1.479
CENTROID X	:	.545	.734	.753
CENTROID Y	:	-1.543	-1.629	-1.462
POA TO CENTROID in.	:	1.636	1.787	1.644
MIN RADIUS	:	.074	.180	.149
MEAN RADIUS	:	.954	.824	.757
MAX RADIUS	:	1.870	1.482	1.533
HORIZONTAL SPREAD	:	2.989	2.566	2.566
VERTICAL SPREAD	:	2.302	2.302	1.277
EXTREME SPREAD	:	3.039	2.619	2.619
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225231

CENTERFIRE PATTERNS # 5

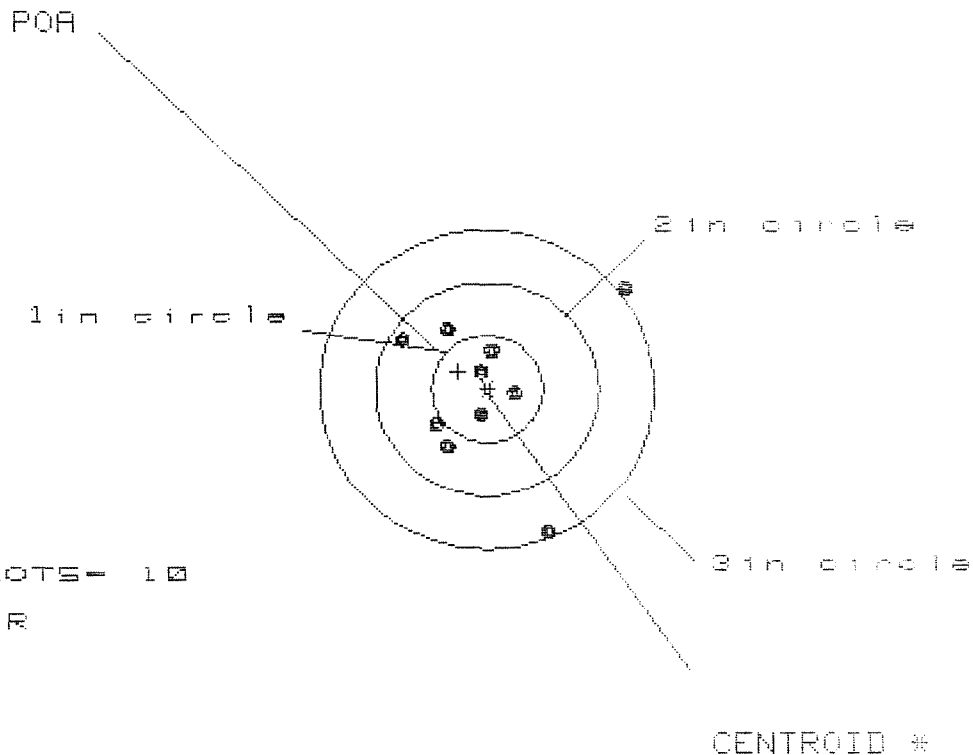

OF SHOTS- 10

IN CIR

1in = 4

2in = 8

3in = 9

HS= 2.057

VS= 2.333

GS= 2.438

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.277	.710	.432
MINIMUM X	:	-.780	-.638	-.549
MAXIMUM Y	:	.965	.679	.521
MINIMUM Y	:	-1.368	-1.261	-.575
CENTROID X	:	.258	.116	.027
CENTROID Y	:	-.162	-.269	-.111
POA TO CENTROID in.	:	.305	.293	.114
MIN RADIUS	:	.206	.201	.221
MEAN RADIUS	:	.696	.586	.467
MAX RADIUS	:	1.600	1.447	.680
HORIZONTAL SPREAD	:	2.057	1.348	.982
VERTICAL SPREAD	:	2.333	1.940	1.096
EXTREME SPREAD	:	2.438	2.264	1.097
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

BBL - 96003

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00009406** Serial: C6225231 Model 700 Center Fire Caliber: 7.62 NATO M-24 (SWS) Repairman: Status: New 5/18/00 8:45:58 AM

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: DEF DIST DEPOT ANNISTON DEF DIST DEPOT ANNISTON

Address 1: Address 2: PO Box: PO Box:

City: ANNISTON ANNISTON

State: AL Zip Code: 362014199 Country: US State: AL Zip Code: 362014199 Country: US

FFL:

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: Fax: Email: Comments:

Received Condition

Condition: Poor

Condition Notes: CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	2
A008	With Swivel	2
A010	Hard Case	1
A017	Scope Base	1

Repair Search Refresh Close

Start Inb... Micr... SA... Nag... Audit R&... Ar... Prin... Re... 12:14 PM

Serial: C6225231

Model: 700



RE00009406

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER			
SERIAL NUMBER		C6225231	
LOG-IN DATE		5-11-00	
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	5-15-00	RW
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL AND TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	5-22-00	RW
605	CHECK HEADSPACE	5-22-00	RW
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	7-18-00	RW
655	FINAL INSPECT	7-25-00	RW
660	PACK		
		SHIP DATE	
OAR INSPECTION DATE			

Final Inspection

Sn:

DATE REC'D:

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☐ SCOPE☐ SCOPE RINGS☐ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☒ FINISH☐ LOOSENESS☐ CLARITY

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ SCOPE CASE☐ IRON SIGHTS☐ DEPLOYMENT KIT

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

BARBER - M24 0011104

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225231
22 Jul 2006

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0188
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1092
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .110807
THE AVERAGE POI RADIUS FOR THIS RIFLE IS: 1.101

CENTROIDAL DISTANCES

0	TC	1	.418888
1	TC	2	.672581
1	TC	3	.557585
1	TC	4	.343283
1	TC	5	.898645

4
+32 <----POA

BARBER - M24 0011105

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .49

MIN RADIUS : .107

MEAN RADIUS : .907


MAX RADIUS : 2.541

CENTROID X : -.363

CENTROID Y : .209

21 Jul 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225231.1

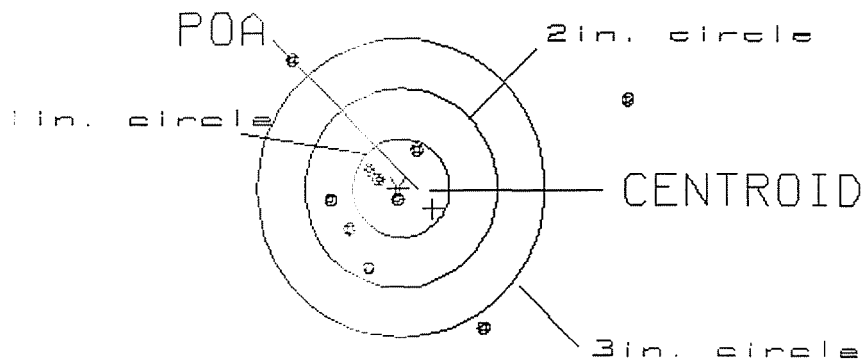CENTERFIRE PATTERN # 1

OF SHOTS= 10

IN CIRCLE

HS= 3.51

4

VS= 2.68

7

GS= 3.55

7

BARBER - M24 0011106

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .280

MIN RADIUS : .190

MEAN RADIUS : 1.117


MAX RADIUS : 2.142

CENTROID X : .280

CENTROID Y : .012

21 Jul 2000

FILE:/Hplasic/Accuracy/Patterning/Centerfire_Patt/c6225231.1

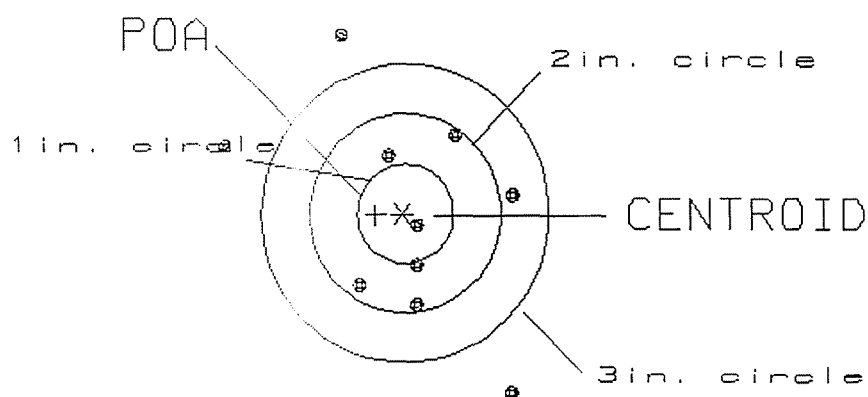CENTERFIRE PATTERN # 2

OF SHOTS= 10

IN CIRCLE

HS= 3.00

1

VS= 3.59

6

GS= 4.04

7

BARBER - M24 0011107

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 3 ☐

POA TO CENTROID: .164
MIN RADIUS : .092
MEAN RADIUS : .828
MAX RADIUS : 1.610
CENTROID X : .163
CENTROID Y : .024

21 Jul 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225231.1

CENTERFIRE PATTERN # 3

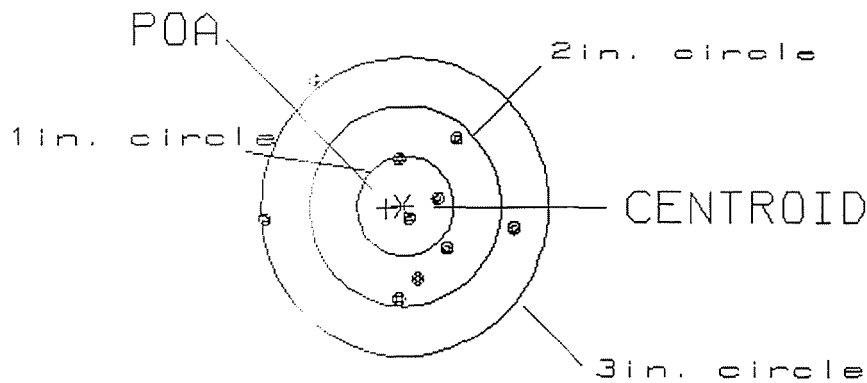

OF SHOTS= 10

IN CIRCLE

HS= 2.63
VS= 2.19
GS= 2.63

3
7
8

BARBER - M24 0011108

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .359

MIN RADIUS : .706

MEAN RADIUS : 1.291


MAX RADIUS : 2.002

CENTROID X : -.049

CENTROID Y : .355

21 Jul 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225231.1

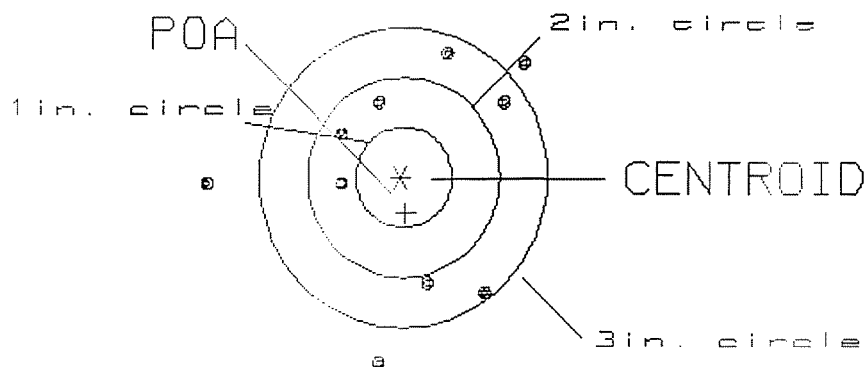CENTERFIRE PATTERN # 4

OF SHOTS= 10

IN CIRCLE

HS= 3.21

0

VS= 3.02

3

GS= 3.41

7

BARBER - M24 0011109

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .083
MIN RADIUS : .315
MEAN RADIUS : 1.324
MAX RADIUS : 2.451
CENTROID X : .063
CENTROID Y : -.054

21 Jul 2000

FILE:/Hptbasic/Accuracy/Patterning/Centerfire_Patt/c6225231.1

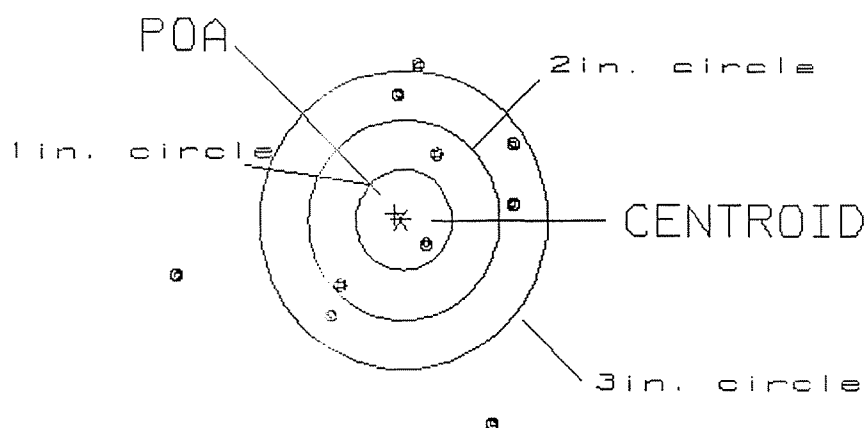CENTERFIRE PATTERN # 5

OF SHOTS= 10

IN CIRCLE

HS= 3.53

1

VS= 3.64

3

GS= 3.74

7