

C6611797

MODEL 700<sup>TM</sup> M24

Model **SMS** <sup>TM</sup>

Action

Barrel Length

Capacity

Order No. **5715**

\*Includes 1 in chamber.

*Remington*

|                                                                                                                                                                        |  |                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------|
|   |  | <p>VERY IMPORTANT:<br/>Instruction Book<br/>enclosed to assure<br/>safe use of this<br/>firearm.</p> |
| <p><b>MODEL 700™ H24</b></p>                                                                                                                                           |  | <p><b>SERIAL NO.</b><br/>C6611797</p>                                                                |
| <p>MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat &amp; Tm. Off, Marca Registrada Marque Deposee.</p>                                                                        |  | <p><b>ORDER NO.</b><br/><b>5716</b></p>                                                              |



CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6611797

| OP. #        | OP. NAME                                                       | READINGS | DATE    | INIT |
|--------------|----------------------------------------------------------------|----------|---------|------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   |          | 1/22/91 | KS   |
| 600          | Proof                                                          |          | 1/22/91 | KS   |
| 607          | Check Headspace                                                |          | 1/22/91 | KS   |
| 610          | Dis-assemble Gun                                               |          | 1/22/91 | KS   |
| 612          | Magnaflux Barrel<br>Action                                     |          | 1/24/91 | KR   |
|              | Magnaflux Bolt                                                 |          | 11      | KR   |
| 615          | Rollmark Caliber                                               |          | 11      | GH   |
| 617          | Drill and Tap Sight Holes                                      | 2 2 91   |         | FB   |
| 618          | Polish Barrel RBB                                              | 2 2 91   |         | WB   |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 2-11-91 | TH   |
|              | Apply Coating (Bolt)                                           |          |         |      |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 2/18/91 | KA   |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 2/18/91 | KA   |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 2/18/91 | KA   |
|              | D) Oil Firing Pin Ass'y                                        |          | 2/18/91 | KA   |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 2/19/91 | FD   |

| op. #        | BARBER AM24 0036125                                         | READINGS |       |       | DATE    | INIT |
|--------------|-------------------------------------------------------------|----------|-------|-------|---------|------|
| 625<br>cont. | F) Safety On Force                                          | 5 1/4    | 5 1/4 | 5 1/4 | 2/19/91 | WLB  |
|              | G) Safety Off Force                                         | 3 1/4    | 3 1/4 | 3     | 2/19/91 | WLB  |
|              | H) Trigger Pull Test & Retainability                        |          |       |       | 2/19/91 | WLB  |
|              | I) Firing Pin Indent                                        | .0217    | .0217 | .0217 | 2/19/91 | WLB  |
|              | J) Assemble Stock                                           |          |       |       | 2/20/91 | Kel  |
|              | K) Assemble Swivel Studs                                    |          |       |       | 2-25-91 | K    |
|              | L) Attach Front and Rear Sight Assemblies                   |          |       |       | 2/20/91 | Kel  |
|              | M) Iron Sight Alignment                                     |          |       |       | 2/20/91 | Kel  |
|              | N) Detach Front & Rear Sights & place in numbered container |          |       |       | 2/20/91 | Kel  |
|              | O) Attach Scope to Rifle                                    |          |       |       | 2/20/91 | Kel  |
|              | P) Detach & Attach Scope 20 Times                           |          |       |       | 2/20/91 | Kel  |
| 640          | Gallery Target & Test                                       |          |       |       | 2-22-91 | NF   |
|              | A) Time                                                     |          |       |       | "       | NF   |
|              | B) Malfunctions                                             |          |       |       | "       | NF   |
|              | C) Pierced Primers                                          |          |       |       | "       | NF   |
|              | D) Optical Clarity of Scope                                 |          |       |       | "       | NF   |
| 645          | Inspect for Live Ammo                                       |          |       |       | 2-22-91 | NF   |
| 655          | Final Inspection                                            |          |       |       |         |      |
|              | A) Headspace                                                |          |       |       | 2-25-91 | AC   |
|              | B) Trigger Pull                                             | 2.34     | 2.40  | 2.29  | 2/25/91 | WLB  |
|              | C) Function                                                 |          |       |       | 2-25-91 | AC   |
| 660          | Pack                                                        |          |       |       | 3-12-91 | NF   |

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6611797

DATE 2/19/91

TESTER XX

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |      | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------|------------------------------------------------------------------------|
| PULL #1 | 2.31             | 2.40                     | 2.41                           | 2.34 | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.28             | 2.42                     | 2.42                           | 2.48 |                                                                        |
| PULL #3 | 2.21             | 2.45                     | 2.40                           | 2.29 |                                                                        |
| PULL #4 | 2.44             | 2.42                     | 2.43                           | 2.25 |                                                                        |
| PULL #5 | 2.34             | 2.42                     | 2.44                           | 2.24 |                                                                        |
| TOTAL   |                  |                          |                                |      |                                                                        |
| AVG.    |                  |                          |                                |      |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.37             | 3.32                     |  |          |
| PULL #2 | 3.31             | 3.21                     |  |          |
| PULL #3 | 3.23             | 3.32                     |  |          |
| PULL #4 | 3.26             | 3.36                     |  |          |
| PULL #5 | 3.31             | 3.32                     |  |          |
| TOTAL   |                  |                          |  |          |
| AVG.    |                  |                          |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.31             | 4.18                     |                                | 4.27                                 |
| PULL #2 | 4.23             | 4.22                     |                                | 4.26                                 |
| PULL #3 | 4.29             | 4.23                     |                                | 4.14                                 |
| PULL #4 | 4.27             | 4.21                     |                                | 4.26                                 |
| PULL #5 | 4.28             | 4.15                     |                                | 4.19                                 |
| TOTAL   |                  |                          |                                |                                      |
| AVG.    |                  |                          |                                |                                      |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # 06611797  
22 Feb 1991

CENTROIDAL DISTANCES

|      |   |          |
|------|---|----------|
| 0 TO | 1 | .0893588 |
| 1 TO | 2 | .252745  |
| 1 TO | 3 | .115572  |
| 1 TO | 4 | .0636003 |
| 1 TO | 5 | .102201  |


100# <----POR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0864  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0872  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .122755  
THE AMP FOR THIS RIFLE IS: .9196

22 Feb 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/ 06611797

## CENTERFIRE PATTERNS # 1

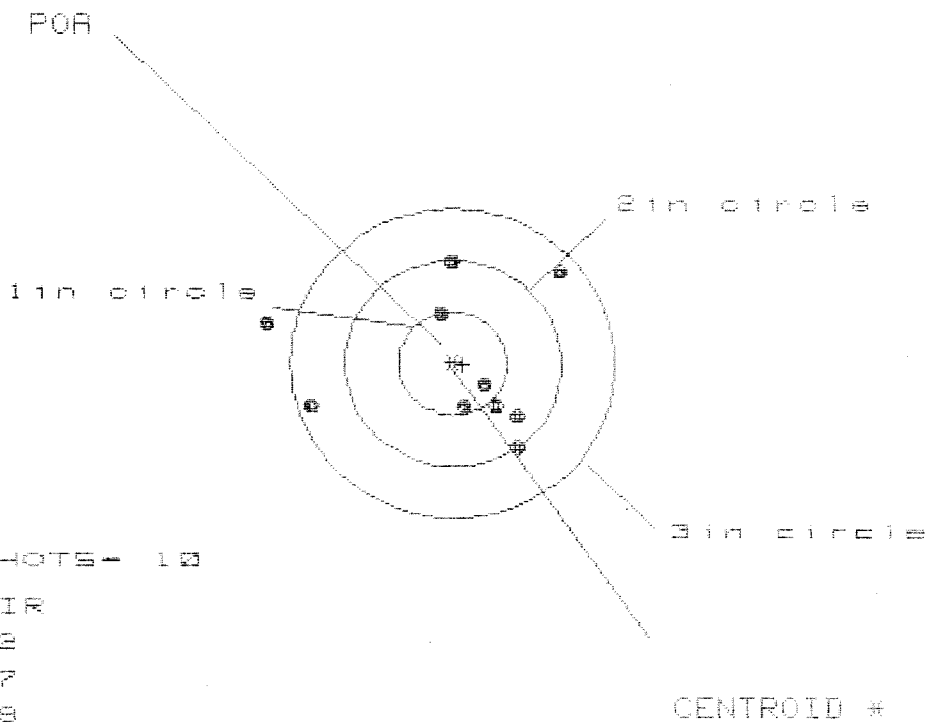

# OF SHOTS - 10

# IN CIR

1in = 2

2in = 7

3in = 9

HS = 2.702

VS = 1.763

GS = 2.760

| PATTERN #           | 1      | 2      | 3      |
|---------------------|--------|--------|--------|
| SHOTS (BEST OF)     | 10     | 9      | 8      |
| MAXIMUM X           | .992   | .802   | .527   |
| MINIMUM X           | -1.710 | -1.493 | -1.393 |
| MAXIMUM Y           | .947   | .989   | 1.112  |
| MINIMUM Y           | -.816  | -.774  | -.651  |
| CENTROID X          | -.089  | .101   | .001   |
| CENTROID Y          | .008   | -.034  | -.157  |
| POA TO CENTROID in. | .089   | .107   | .157   |
| MIN RADIUS          | .392   | .221   | .234   |
| MEAN RADIUS         | .916   | .774   | .697   |
| MAX RADIUS          | 1.751  | 1.527  | 1.407  |
| HORIZONTAL SPREAD   | 2.702  | 2.295  | 1.920  |
| VERTICAL SPREAD     | 1.763  | 1.763  | 1.763  |
| EXTREME SPREAD      | 2.760  | 2.639  | 1.929  |

|                             |   |   |
|-----------------------------|---|---|
| NUMBER IN ONE INCH CIRCLE   | = | 2 |
| NUMBER IN TWO INCH CIRCLE   | = | 7 |
| NUMBER IN THREE INCH CIRCLE | = | 9 |

**BARBER - M24 0036129**

|                 |             |   |   |
|-----------------|-------------|---|---|
| NUMBER IN ONE   | INCH CIRCLE | = | 2 |
| NUMBER IN TWO   | INCH CIRCLE | = | 7 |
| NUMBER IN THREE | INCH CIRCLE | = | 9 |



22 Feb 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/ CB611737

## CENTERFIRE PATTERNS # 2

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS = 10

# IN CIR

1 in = 1

2 in = 5

3 in = 9

HS = 2.705

VS = 2.728

GS = 3.213


CENTROID #

| PATTERN #                     | 1      | 2      | 3      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | 1.343  | 1.191  | .563   |
| MINIMUM X                     | -1.362 | -1.165 | -1.016 |
| MAXIMUM Y                     | 1.271  | 1.109  | 1.124  |
| MINIMUM Y                     | -1.457 | -.658  | -.643  |
| CENTROID X                    | -.147  | .005   | -.144  |
| CENTROID Y                    | -.238  | -.076  | -.091  |
| POA TO CENTROID in.           | .280   | .076   | .171   |
| MIN RADIUS                    | .400   | .546   | .546   |
| MEAN RADIUS                   | 1.008  | .891   | .847   |
| MAX RADIUS                    | 1.994  | 1.337  | 1.202  |
| HORIZONTAL SPREAD             | 2.705  | 2.356  | 1.579  |
| VERTICAL SPREAD               | 2.728  | 1.767  | 1.767  |
| EXTREME SPREAD                | 3.213  | 2.480  | 2.213  |
| NUMBER IN ONE INCH CIRCLE =   |        | 1      |        |
| NUMBER IN TWO INCH CIRCLE =   |        | 5      |        |
| NUMBER IN THREE INCH CIRCLE = |        | 9      |        |

22 Feb 1991

FILE: PATTERNING/CENTERFIRE\_PATT/ 06611737

## CENTERFIRE PATTERNS # 3

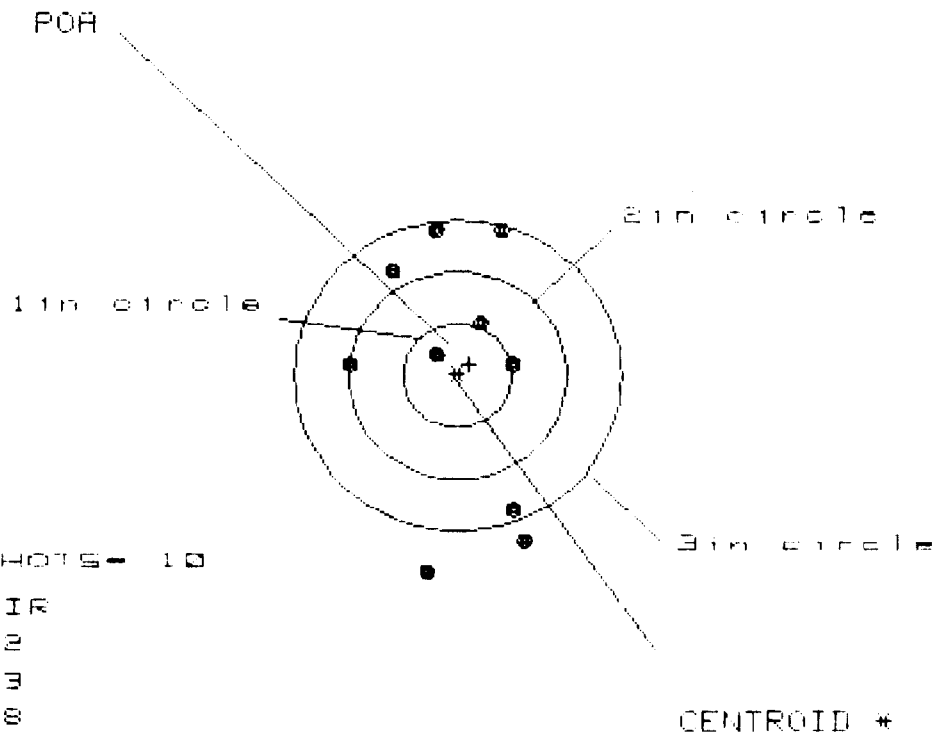

# OF SHOTS - 10

# IN CIR

1in - 2

2in - 3

3in - 8

AS= 1.613

VS= 3.291

SS= 3.368

| PATTERN #                   | : | 3      | 9      | 8      |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | .601   | .571   | .533   |
| MINIMUM X                   | : | -1.012 | -1.042 | -1.970 |
| MAXIMUM Y                   | : | 1.429  | 1.222  | 1.000  |
| MINIMUM Y                   | : | -1.862 | -1.771 | -1.684 |
| CENTROID X                  | : | -.108  | -.079  | -.151  |
| CENTROID Y                  | : | -.106  | .101   | .323   |
| POA TO CENTROID in.         | : | .151   | .129   | .356   |
| MIN RADIUS                  | : | .214   | .182   | .220   |
| MEAN RADIUS                 | : | 1.121  | .990   | .848   |
| MAX RADIUS                  | : | 1.881  | 1.861  | 1.765  |
| HORIZONTAL SPREAD           | : | 1.613  | 1.613  | 1.503  |
| VERTICAL SPREAD             | : | 3.291  | 2.993  | 2.684  |
| EXTREME SPREAD              | : | 3.368  | 3.044  | 2.717  |
| NUMBER IN ONE INCH CIRCLE   | = | 2      |        |        |
| NUMBER IN TWO INCH CIRCLE   | = | 3      |        |        |
| NUMBER IN THREE INCH CIRCLE | = | 8      |        |        |

22 Feb 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/ 06811797

## CENTERFIRE PATTERNS

# 4

POA

1in circle

2in circle

3in circle

# OF SHOTS- 10

# IN CIR

1in = 2

2in = 9

3in = 10

HS= 2.035

VS= 1.661

GS= 2.064

CENTROID \*

PATTERN #

:

4

SHOTS (BEST OF)

:

10

9

8

MAXIMUM X

:

1.332

.997

1.032

MINIMUM X

:

-.703

-.555

-.520

MAXIMUM Y

:

.677

.623

.490

MINIMUM Y

:

-.984

-1.038

-.604

CENTROID X

:

-.028

-.176

-.211

CENTROID Y

:

-.010

.044

.174

POA TO CENTROID in.

:

.030

.182

.273

MIN RADIUS

:

.338

.333

.382

MEAN RADIUS

:

.753

.644

.572

MAX RADIUS

:

1.418

1.074

1.032

HORIZONTAL SPREAD

:

2.035

1.552

1.552

VERTICAL SPREAD

:

1.661

1.661

1.097


EXTREME SPREAD

:

2.084

1.706

1.673

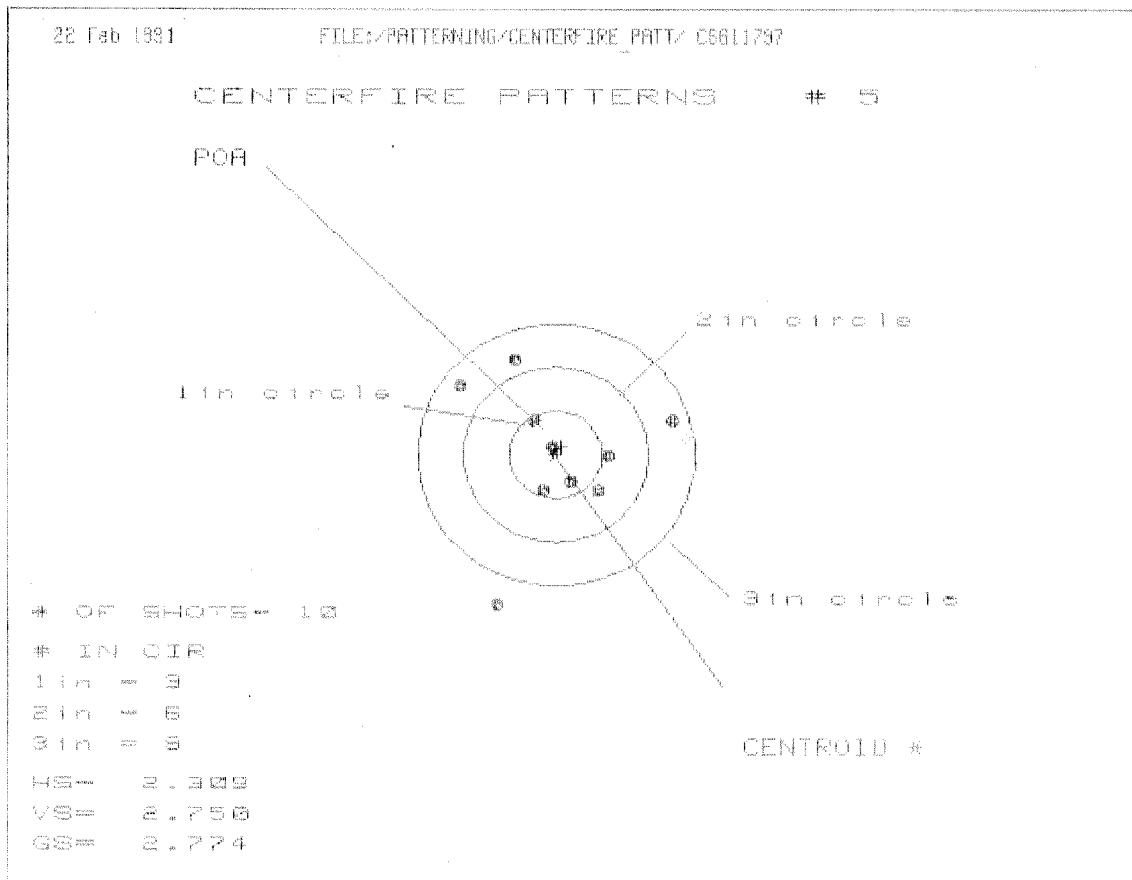

|                             |   |        |        |       |
|-----------------------------|---|--------|--------|-------|
| PATTERN #                   | : | 5      |        |       |
| SHOTS (BEST OF)             | : | 10     | 9      | 8     |
| MAXIMUM X                   | : | 1.267  | 1.200  | .627  |
| MINIMUM X                   | : | -1.042 | -1.109 | -.960 |
| MAXIMUM Y                   | : | 1.068  | .882   | .903  |
| MINIMUM Y                   | : | -1.682 | -.562  | -.541 |
| CENTROID X                  | : | -.060  | .007   | -.143 |
| CENTROID Y                  | : | -.090  | .096   | .075  |
| POA TO CENTROID in:         | : | .109   | .097   | .161  |
| MIN RADIUS                  | : | .084   | .119   | .123  |
| MEAN RADIUS                 | : | .800   | .697   | .626  |
| MAX RADIUS                  | : | 1.788  | 1.243  | 1.123 |
| HORIZONTAL SPREAD           | : | 2.309  | 2.309  | 1.586 |
| VERTICAL SPREAD             | : | 2.750  | 1.444  | 1.444 |
| EXTREME SPREAD              | : | 2.774  | 2.341  | 1.906 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 3      |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 6      |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 1      |       |

## RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-18828

INITIAL  
JJM

CUSTOMER ORDER NO.

DAAA09-92-C-0834

W/10X SCOPE M-24 SNIPER W/DEPLOYMENT KIT  
ATTN FRED MARTIN

Scope 90-1073

| DATE RECEIVED                                           | DATE OPENED | DATE CODE | SERIAL NUMBER | NEW SERIAL NUMBER | MODEL AND GRADE |
|---------------------------------------------------------|-------------|-----------|---------------|-------------------|-----------------|
| 06/14/94                                                | 06/15/94    |           | C6611797      |                   | 700 7.62 NATO   |
| ACCESSORIES HARD CASE SCOPE MNTS SCOPE BASE SLING STRAP |             |           |               |                   |                 |

FROM:

SHIP TO:

COMMANDER (W52H094138H226)  
DEFENSE DIST DEPOT ANNISTON  
ATTN DDAA-UR BLDG 112  
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)  
DEFENSE DIST DEPOT ANNISTON  
ATTN DDAA-UR BLDG 112  
ANNISTON

AL

36201-5025

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW  
☐ LIGHTLY WORN  
☐ WORN  
☐ VERY WORN  
☐ UNREPAIRABLE  
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

| CUSTOMER CONCERN | AMMO | FUNCTION | FINISH | ACCURACY | FIT | INSPECT |
|------------------|------|----------|--------|----------|-----|---------|
| CYCLE            | A1   | B1       |        |          |     |         |
| TRIGGER GROUP    |      | B2       |        |          | E1  | F1      |
| BOLT ASSY.       |      | B3       |        |          | E2  | F2      |
| BARREL ASSY.     |      | B4       |        | D1       | E3  | F3      |
| REC. ASSY.       |      | B5       |        | D2       | E4  | F4      |
| WOOD             |      |          | C1     | D3       | E5  | F5      |
| METAL            |      |          | C2     |          |     |         |

MAIN FAULT

PARTS

COMMENTS

Trigger Assy \$173.31  
Front Sight Assy 56.75  
Rear Sight Assy 231.01  
Clean/Inspect/Test 50.00  
\$511.07

REPAIRMAN PROOF CLEAN TEST TARGET PATTERN

GALLERY TESTER DATE DATE DATE DATE DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

BARBER - M24 0036173

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6611797

DATE 2-17-96

TESTER DA

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------------------------------------------------------------------------|
| PULL #1 | 2.68             | 2.61                     | 2.78                           | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.80             | 2.74                     | 2.83                           |                                                                        |
| PULL #3 | 2.79             | 2.74                     | 2.72                           |                                                                        |
| PULL #4 | 2.83             | 2.82                     | 2.90                           |                                                                        |
| PULL #5 | 2.83             | 2.83                     | 2.90                           |                                                                        |
| TOTAL   | 13.93            | 13.74                    | 14.13                          |                                                                        |
| AVG.    | 2.78             | 2.74                     | 2.82                           |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES | COMMENTS |
|---------|------------------|--------------------------|----------|
| PULL #1 | 3.29             | 3.17                     |          |
| PULL #2 | 3.22             | 3.13                     |          |
| PULL #3 | 3.20             | 3.18                     |          |
| PULL #4 | 3.24             | 3.17                     |          |
| PULL #5 | 3.11             | 3.20                     |          |
| TOTAL   | 16.06            | 15.85                    |          |
| AVG.    | 3.21             | 3.17                     |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.23             | 4.22                     |                                | 4.25                                 |
| PULL #2 | 4.29             | 4.31                     |                                | 4.25                                 |
| PULL #3 | 4.24             | 4.24                     |                                | 4.27                                 |
| PULL #4 | 4.30             | 4.34                     |                                | 4.31                                 |
| PULL #5 | 4.30             | 4.19                     |                                | 4.28                                 |
| TOTAL   | 21.38            | 21.30                    |                                | 21.36                                |
| AVG.    | 4.27             | 4.26                     |                                | 4.27                                 |

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6611797

| OP. #        | OP. NAME                                                       | READINGS | DATE | INITIAL |
|--------------|----------------------------------------------------------------|----------|------|---------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   |          |      |         |
| 600          | Proof                                                          |          |      |         |
| 607.         | Check Headspace                                                |          |      |         |
| 610          | Dis-assemble Gun                                               |          |      |         |
| 612          | Magnaflux Barrel<br>Action                                     |          |      |         |
|              | Magnaflux Bolt                                                 |          |      |         |
| 615          | Rollmark Caliber                                               |          |      |         |
| 617          | Drill and Tap Sight Holes                                      |          |      |         |
| 618          | Polish Barrel                                                  |          |      |         |
| 620          | Apply Coatings<br>(Barrel Action)                              |          |      |         |
|              | Apply Coating (Bolt)                                           |          |      |         |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          |      |         |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          |      |         |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          |      |         |
|              | D) Oil Firing Pin Ass'y                                        |          |      |         |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          |      |         |

**BARBER - M24 0036137**

| op. #        | OP. NAME                                                    | READINGS |      |      |      |      | DATE   | INIT |
|--------------|-------------------------------------------------------------|----------|------|------|------|------|--------|------|
| 625<br>cont. | F) Safety On Force                                          | 7        | 7    | 7    |      |      | 3/7    | A    |
|              | G) Safety Off Force                                         | 3½       | 3½   | 3½   |      |      | 3/7    | A    |
|              | H) Trigger Pull Test & Retainability                        |          |      |      |      |      |        |      |
|              | I) Firing Pin Indent                                        |          |      |      |      |      |        |      |
|              | J) Assemble Stock                                           |          |      |      |      |      |        |      |
|              | K) Assemble Swivel Studs                                    |          |      |      |      |      |        |      |
|              | L) Attach Front and Rear Sight Assemblies                   |          |      |      |      |      |        |      |
|              | M) Iron Sight Alignment                                     |          |      |      |      |      |        |      |
|              | N) Detach Front & Rear Sights & place in numbered container |          |      |      |      |      |        |      |
|              | O) Attach Scope to Rifle                                    |          |      |      |      |      |        |      |
|              | P) Detach & Attach Scope 20 Times                           |          |      |      |      |      |        |      |
| 640          | Gallery Target & Test                                       |          |      |      |      |      |        |      |
|              | A) Time                                                     |          |      |      |      |      |        |      |
|              | B) Malfunctions                                             |          |      |      |      |      |        |      |
|              | C) Pierced Primers                                          |          |      |      |      |      |        |      |
|              | D) Optical Clarity of Scope                                 |          |      |      |      |      |        |      |
| 645          | Inspect for Live Ammo                                       |          |      |      |      |      |        |      |
| 655          | Final Inspection                                            |          |      |      |      |      |        |      |
|              | A) Headspace                                                |          |      |      |      |      |        |      |
|              | B) Trigger Pull                                             | 2.74     | 2.73 | 2.73 | 2.72 | 2.72 | 3/7/96 | WLB  |
|              | C) Function                                                 |          |      |      |      |      |        |      |
| 660          | Pack                                                        |          |      |      |      |      |        |      |