

BARBER - M24 0044575

UPC



06666038

ORDER NO. 25705
BARREL LENGTH 24"
CAPACITY * 6
*INCLUDES 1 IN CHAMBER

Do Not Use

Remington®		VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.
MODEL 700™ M24 BOLT ACTION CENTERFIRE RIFLE 24" BARREL 7.62 NATO 6*		SERIAL NO C6666038
Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.		46 ORDER NO 25705
 5705 C6666038		23PR

Do Not Use

SERIAL NO.



06666038

ORDER 25705
MODEL 700™ M24
UPC



0 47700 25705 1

ORDER 25705
MODEL 700™ M24
UPC



0 47700 25705 1

MOE
BOLT
24"
- -
- P -
- M -
- R -
GREEN


MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINS:


- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



owner registration sticker



ISRAELI GUNS

IS-B-YLS

GUN SERIAL # C 6666038

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		3/1/97	AP
600	Proof		3-5-97	L.M.M.
607	Check Headspace		3/5/97	AP
610	Dis-assemble Gun		3/6/97	AP
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes		3/3/97	WJT
618	Polish Barrel		3/3/97	WJT
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

OP. #	OP. NAME	READINGS	DATE	INITIAL
625 CONT.	F) SAFETY ON FORCE	<u>6</u> <u>6</u> <u>6</u>	5-5-97	9W
	G) SAFETY OFF FORCE	<u>3.5</u> <u>3</u> <u>3</u>	5-5-97	9W
	H) TRIGGER PULL TEST & RETAINABILITY		4-18-97	ER
	I) FIRING PIN INDENT	<u>23.5</u> <u>23.5</u> <u>23</u>	5-5-97	9W
	J) ASSEMBLE STOCK		5/24/97	RW
	K) ASSEMBLE SWIVEL STUDS		6-12-97	RP
	L) ATTACH FRONT AND REAR SIGHT ASSEMBLIES		5-28-97	9W
	M) IRON SIGHT ALIGNMENT		5-28-97	9W
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERER CONTAINER		5-28-97	9W
640	GALLERY TEST AND TARGET	R 90 L 60	6-7-97	WB
	A) MALFUNCTIONS		6-7-97	WB
	B) PIERCED PRIMERS		6-7-97	WB
645	INSPECT FOR LIVE AMMO		6-7-97	9W
655	FINAL INSPECTION		6-12-97	RP
	A) HEADSPACE			
	B) TRIGGER PULL	<u>2.91</u> <u>2.67</u> <u>2.63</u> <u>2.60</u> <u>2.61</u>	6-11-97	CR
	FUNCTION		6-12-97	RP
660	PACK			

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6666038
9 Jun 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0343333
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.035
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0490283

THE AMR FOR THIS RIFLE IS: 1.032

CENTROIDAL DISTANCES

Ø TO 1 .466495
1 TO 2 .855818
1 TO 3 .557983

2
+ 3 <----POA
1

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 1
 POA TO CENTROID: .466
 MIN RADIUS : .189
 MEAN RADIUS : 1.052
 MAX RADIUS : 2.069
 CENTROID X : -.293
 CENTROID Y : -.363

9 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6666038

CENTERFIRE PATTERN # 1

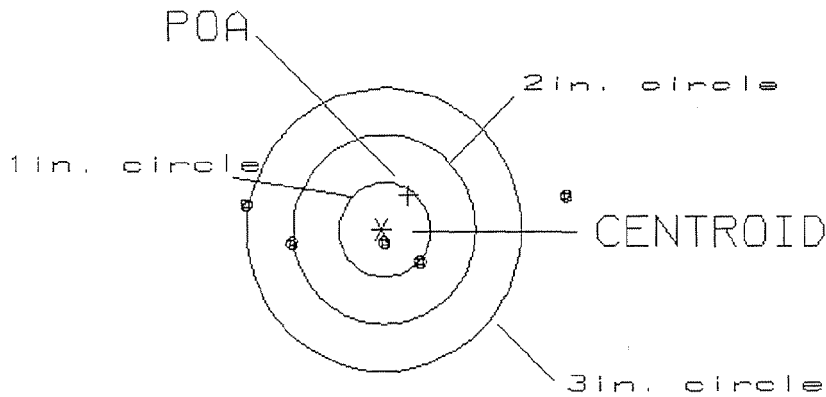

OF SHOTS= 5

IN CIRCLE

HS= 3.52

1

VS= .70

3

GS= 3.53


3

PATTERN #: 2
 POA TO CENTROID: .390
 MIN RADIUS : .446
 MEAN RADIUS : 1.015
 MAX RADIUS : 1.610
 CENTROID X : .216
 CENTROID Y : .325

9 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6666038

CENTERFIRE PATTERN # 2

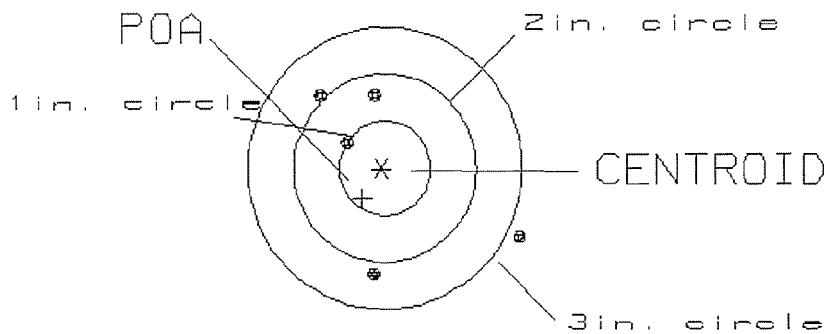

# OF SHOTS= 5	# IN CIRCLE
HS= 2.19	1
VS= 1.90	2
GS= 2.67	4

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 3

POA TO CENTROID: .192
 MIN RADIUS : .763
 MEAN RADIUS : 1.028
 MAX RADIUS : 1.294
 CENTROID X : .180
 CENTROID Y : -.067

9 Jun 1997

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/C6666038

CENTERFIRE PATTERN # 3

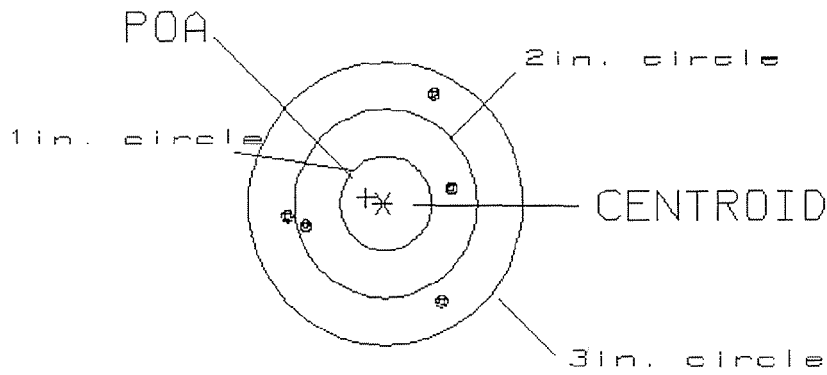

OF SHOTS= 5

IN CIRCLE

HS= 1.79

0

VS= 2.17

2

GS= 2.17


5

PATTERN #: 4
 POA TO CENTROID: .392
 MIN RADIUS : .895
 MEAN RADIUS : 1.304
 MAX RADIUS : 1.618
 CENTROID X : .282
 CENTROID Y : .272

9 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6666038

CENTERFIRE PATTERN # 4

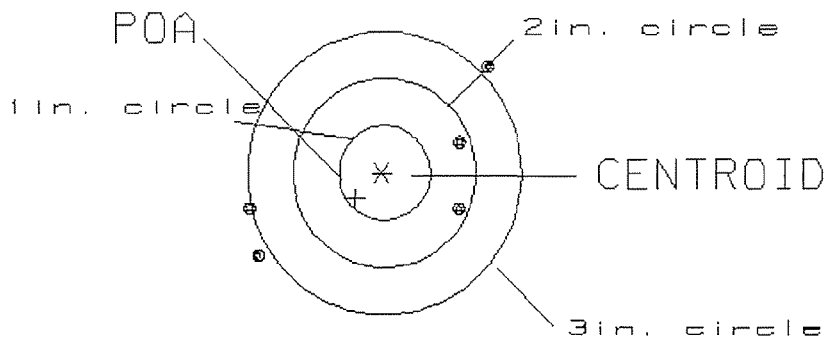

OF SHOTS= 5

IN CIRCLE

HS= 2.56

0

VS= 2.00

2

GS= 3.19

3

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6666038

DATE 4-18-97

TESTER EK

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.55	2.42	2.51		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.59	2.44	2.48		
PULL #3	2.55	2.50	2.34		
PULL #4	2.56	2.50	2.52		
PULL #5	2.56	2.52	2.56		
TOTAL	12.81	12.38	12.41		
AVG.	2.56	2.48	2.48		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.08	3.11		
PULL #2	3.00	3.12		
PULL #3	3.05	3.14		
PULL #4	3.10	3.16		
PULL #5	3.05	3.21		
TOTAL	15.28	15.74		
AVG.	3.06	3.15		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.96	3.95		3.96
PULL #2	3.71	3.86		4.27
PULL #3	3.64	3.86		4.21
PULL #4	3.92	3.61		4.29
PULL #5	3.60	3.93		4.27
TOTAL	18.83	19.21		21.00
AVG.	3.77	3.84		4.20