

UPC



C6702940

ORDER NO.	25705
BARREL LENGTH	24"
CAPACITY *	6

KINZ V. REMINGTON

BARBER - M24 0046950

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6702940

7 Oct 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .270333

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .084

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .283083

THE AMR FOR THIS RIFLE IS: 1.237

CENTROIDAL DISTANCES

Ø TO 1 .0914166
1 TO 2 .799203
1 TO 3 .487562

3

† ←-2--POA

BARBER - M24 0046951


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐
POA TO CENTROID: .091
MIN RADIUS : .662
MEAN RADIUS : 1.090
MAX RADIUS : 1.868
CENTROID X : .046
CENTROID Y : -.079

7 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6702940

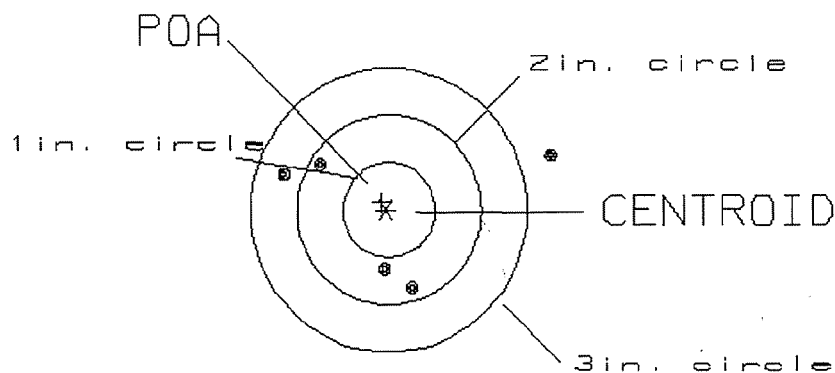CENTERFIRE PATTERN # 1

OF SHOTS= 5

IN CIRCLE

HS= 2.91

0

VS= 1.39

3

GS= 2.92

4

BARBER - M24 0046952

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .847

MIN RADIUS : .281

MEAN RADIUS : 1.383


MAX RADIUS : 1.794

CENTROID X : .845

CENTROID Y : -.061

7 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/CG702940

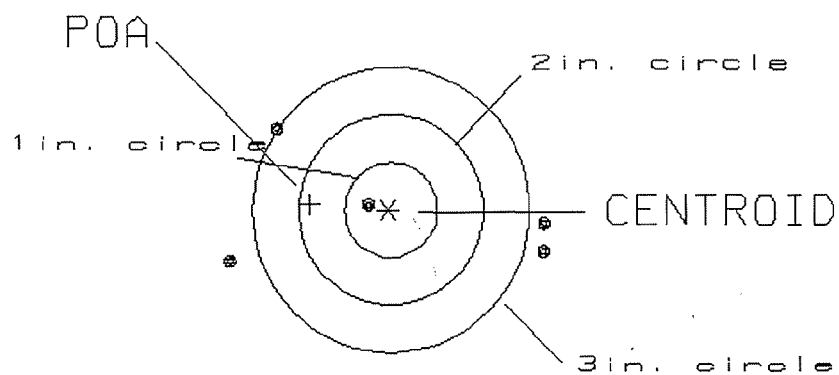CENTERFIRE PATTERN # 2

OF SHOTS= 5

IN CIRCLE

HS= 3.36

1

VS= 1.39

1

GS= 3.36


1

PATTERN #: 030
 POA TO CENTROID: .400
 MIN RADIUS : .673
 MEAN RADIUS : 1.238
 MAX RADIUS : 1.941
 CENTROID X : -.080
 CENTROID Y : .392

7 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6702940

CENTERFIRE PATTERN # 3

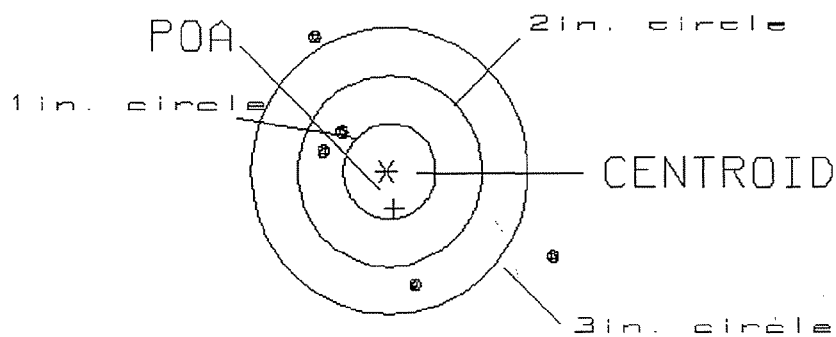

OF SHOTS= 5

IN CIRCLE

HS= 2.60

0

VS= 2.56

2

GS= 3.43

3

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # C 670 2940

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

BARBER - M24 0046955

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>5</u> <u>5</u> <u>5</u>	10-8-97	CIC
CONT.	G) SAFETY OFF FORCE	<u>2</u> <u>2</u> <u>2</u>	10-8-97	CIC
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.021</u> <u>.022</u> <u>.021</u>	10-8-97	CIC
	J) ASSEMBLE STOCK		9-29-97	RW
	K) ASSEMBLE SWIVEL STUDS		10-29-97	CIC
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		9-29-97	RW
	M) IRON SIGHT ALIGNMENT		9-29-97	RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		9-29-97	RW
640	GALLERY TEST AND TARGET		10/6/97	LT
	A) MALFUNCTIONS		10/6/97	LT
	B) PIERCED PRIMERS		10/6/97	LT
645	INSPECT FOR LIVE AMMO		10/6/97	P.B.
655	FINAL INSPECTION A) HEADSPACE		10-29-97	CIC
	B) TRIGGER PULL	<u>2.34</u> <u>2.32</u> <u>2.34</u> <u>2.35</u> <u>2.36</u>	10-3-97	CR
	C) FUNCTION		10-29-97	CIC

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 00469946994

Do Not Use

Do Not Use

SERIAL NO.



C6702940

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

REG. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee

46

C6702940

ORDER NO. 25705


10RR

5705 C6702940

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS



46 FORM