

C6225090

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

* Includes 1 in chamber.



Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00105765** Serial: C6225090 Model M24 SWS Center Fire Caliber 7.62 NATO Produced: 06/21/1989 Repairman: Status: Closed 12/27/2005 2:06:10 PM

Verify Repair

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: **HHC 1 12 CAV** **HHC 1 12 CAV**

Address 1: Address 2: PO Box: PO Box:

City: **FORT HOOD** **FORT HOOD**

State: **TX** Zip Code: **76544** Country: **US** State: **TX** Zip Code: **76544** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: **254 288 6204**

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Studs	3
A008	With Swivels	2
A010	Hard Case	1
A017	Scope Base	1
A042	Adjustable Butt Pad	1
A057	Front and Rear Sqt Base	2

Repair Search Refresh Close

neglty 12/28/2005 8:11 AM CAPS NUM INS SCPL

start 2 4 Arms Services R...

Serial Number:

C6225090Model: **M24 SWS****RE00105765**

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225090.___0

FILE DATE AND TIME: 01/18/2006 14:42


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.082
The Average Y Centroid of the Five Target Set:	0.078
The Average Point of Impact of the Five Target Set:	0.113
The Average Mean Radius of the Five Target Set:	0.743
The Distance from POA to Centroid Target #1:	0.452
The Distance from Centroid Target #2 to Centroid Target #1:	0.508
The Distance from Centroid Target #3 to Centroid Target #1:	0.469
The Distance from Centroid Target #4 to Centroid Target #1:	0.365
The Distance from Centroid Target #5 to Centroid Target #1:	0.422

SERIAL NUMBER: C6225090. 0
 TARGET NUMBER: 1
 FILE DATE: 01/18/2006
 FILE TIME: 14:42

X CENTROID: -0.234
 Y CENTROID: 0.386
 POA TO CENTROID: 0.452
 HORZ SPREAD: 2.083
 VERT SPREAD: 1.859
 GROUP SPREAD: 2.611
 MIN RADIUS: 0.062
 MAX RADIUS: 1.409
 MEAN RADIUS: 0.926
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 4
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.433	-0.683
2:	-0.376	-0.641
3:	0.557	-0.159
4:	0.642	0.324
5:	-0.191	0.430
6:	-0.558	0.244
7:	0.682	1.155
8:	-1.143	0.872
9:	-0.989	1.143
10:	-1.401	1.176

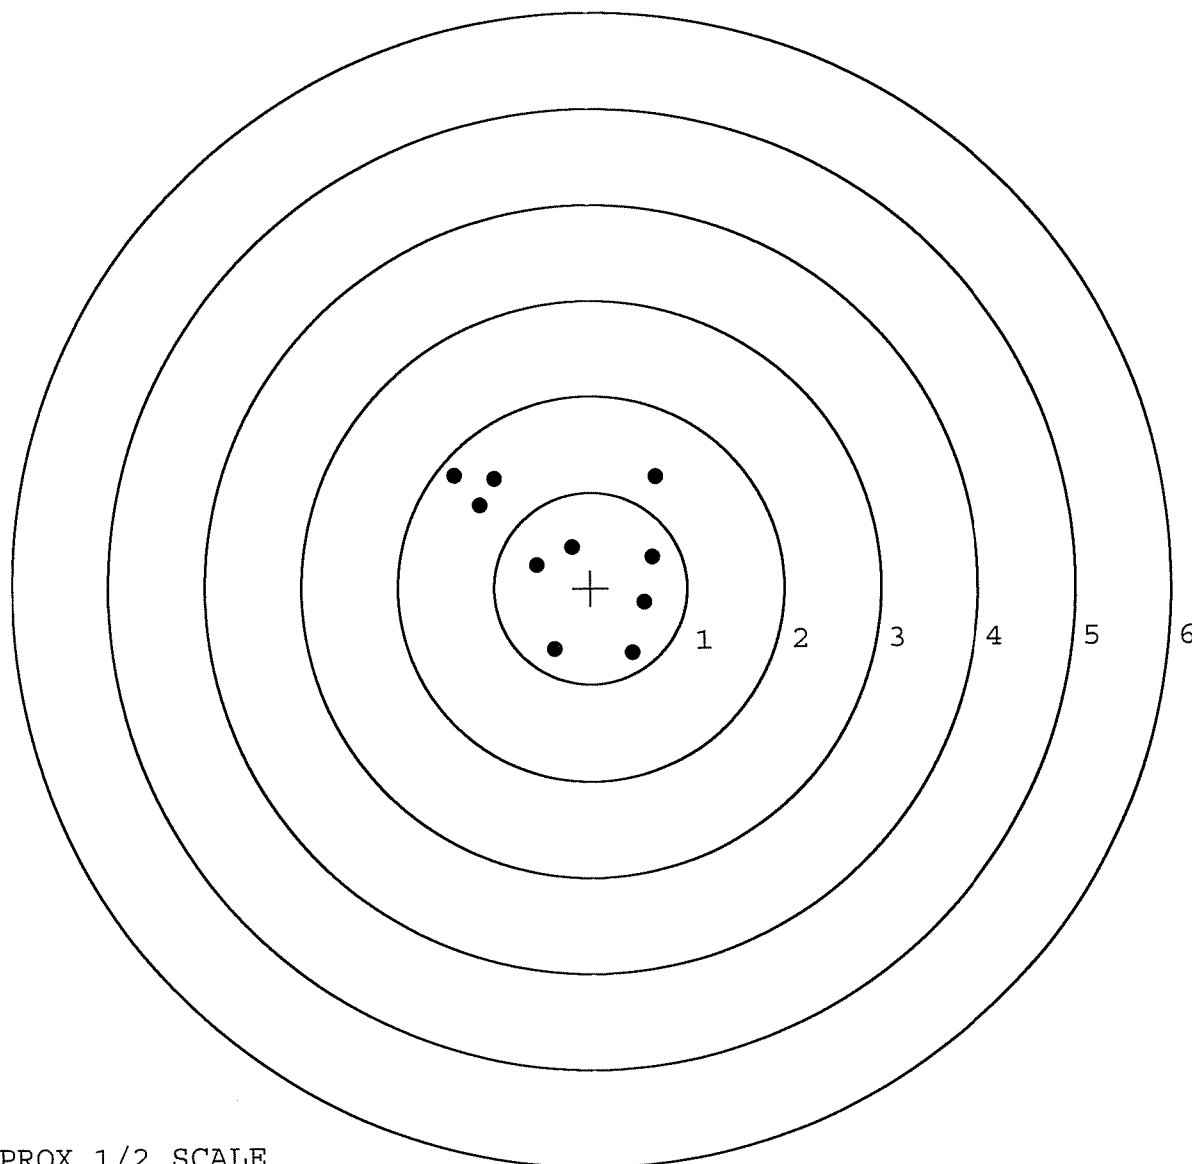


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225090. __0
 TARGET NUMBER: 2
 FILE DATE: 01/18/2006
 FILE TIME: 14:42

X CENTROID: 0.075
 Y CENTROID: -0.018
 POA TO CENTROID: 0.077
 HORZ SPREAD: 1.106
 VERT SPREAD: 1.085
 GROUP SPREAD: 1.219
 MIN RADIUS: 0.320
 MAX RADIUS: 0.787
 MEAN RADIUS: 0.491
 # IN 1 IN DIAMETER: 6
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.495	-0.553
2:	0.455	-0.072
3:	-0.093	-0.331
4:	-0.611	-0.405
5:	-0.459	-0.152
6:	-0.228	0.314
7:	0.094	0.532
8:	0.227	0.264
9:	0.399	0.277
10:	0.466	-0.052

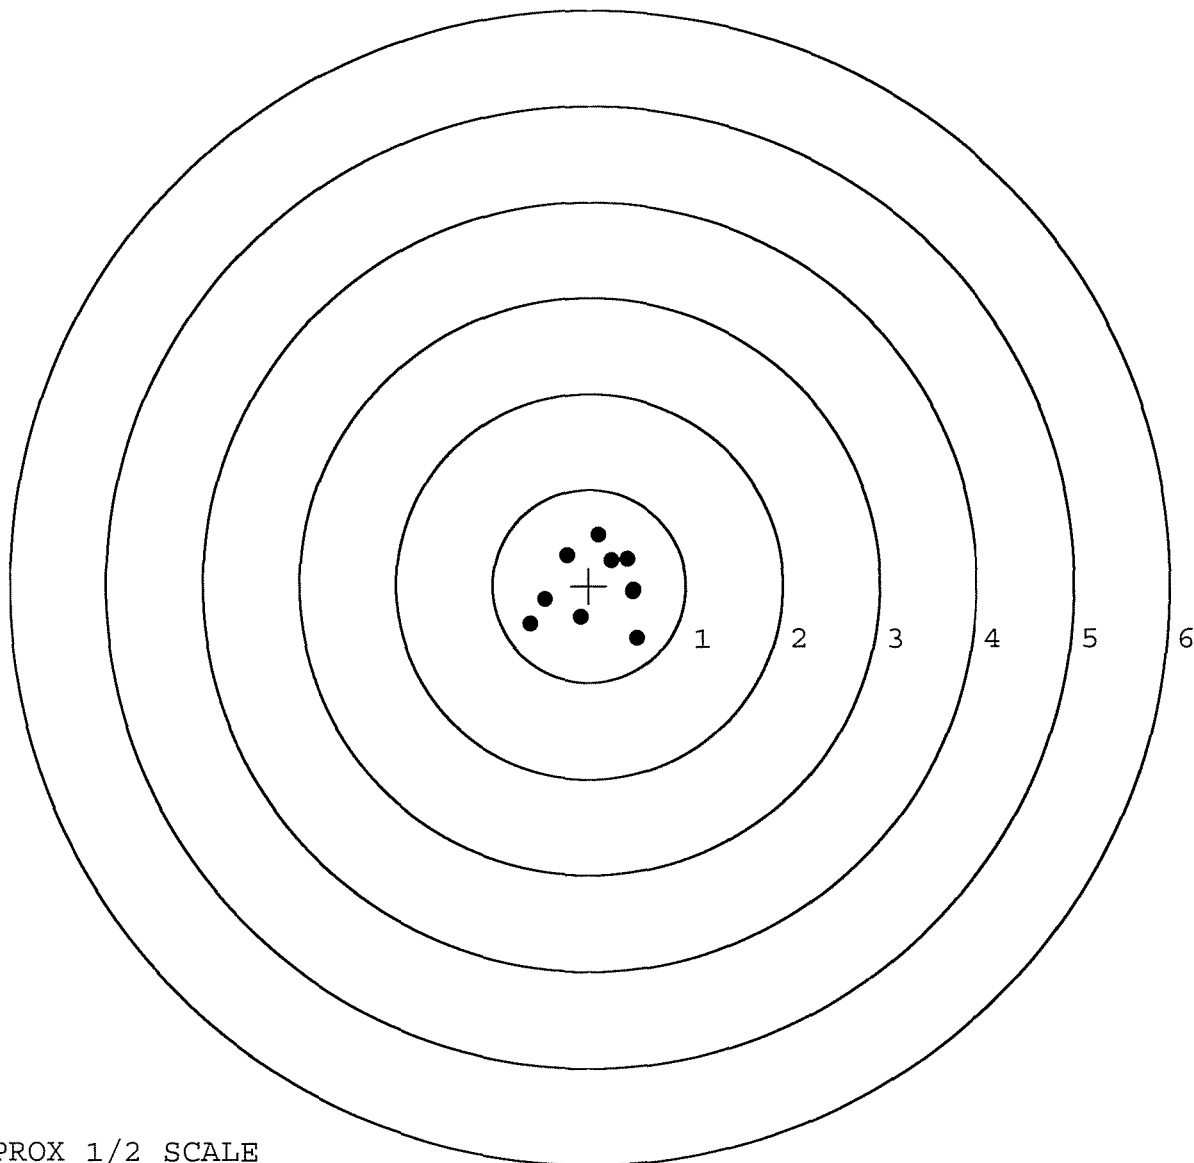


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225090. 0
 TARGET NUMBER: 3
 FILE DATE: 01/18/2006
 FILE TIME: 14:42

X CENTROID: -0.130
 Y CENTROID: -0.072
 POA TO CENTROID: 0.148
 HORZ SPREAD: 2.794
 VERT SPREAD: 1.426
 GROUP SPREAD: 2.910
 MIN RADIUS: 0.183
 MAX RADIUS: 1.511
 MEAN RADIUS: 0.786

IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.455	-0.725
2:	1.372	-0.240
3:	0.374	0.584
4:	-0.373	0.701
5:	-1.422	0.573
6:	-1.088	-0.362
7:	-0.412	-0.517
8:	-0.304	-0.224
9:	0.047	-0.026
10:	0.051	-0.480

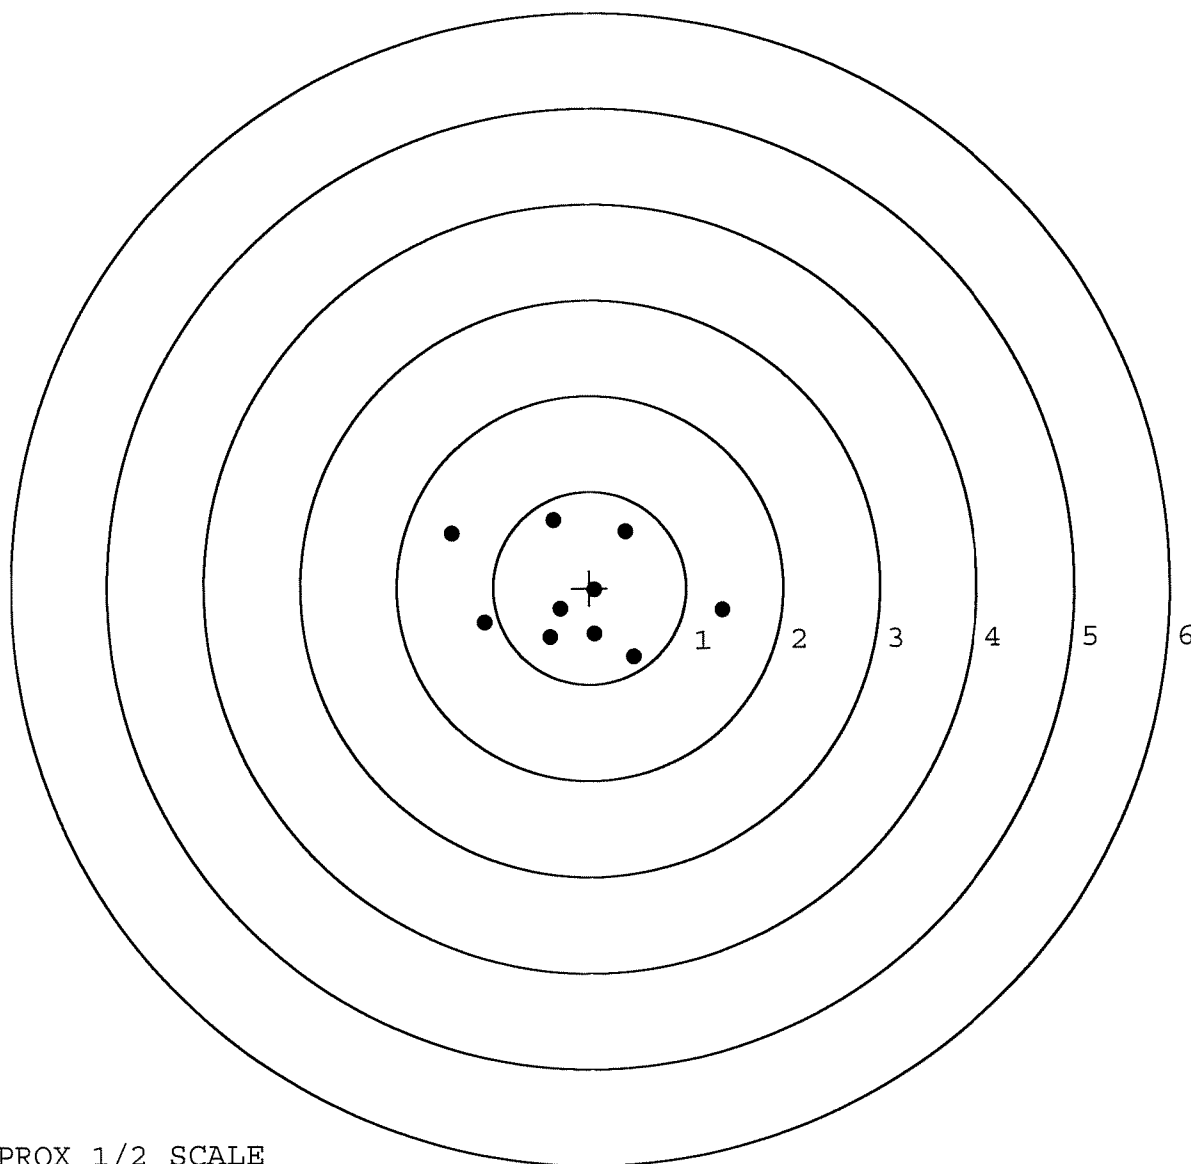


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225090. __0
 TARGET NUMBER: 4
 FILE DATE: 01/18/2006
 FILE TIME: 14:42

X CENTROID: -0.161
 Y CENTROID: 0.028
 POA TO CENTROID: 0.164
 HORZ SPREAD: 1.678
 VERT SPREAD: 1.382
 GROUP SPREAD: 1.889
 MIN RADIUS: 0.063
 MAX RADIUS: 1.148
 MEAN RADIUS: 0.620
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.453	0.593
2:	0.288	0.204
3:	-0.529	0.087
4:	-1.225	0.288
5:	-1.013	0.797
6:	-0.108	-0.006
7:	-0.053	-0.182
8:	0.414	-0.441
9:	0.153	-0.474
10:	0.009	-0.585

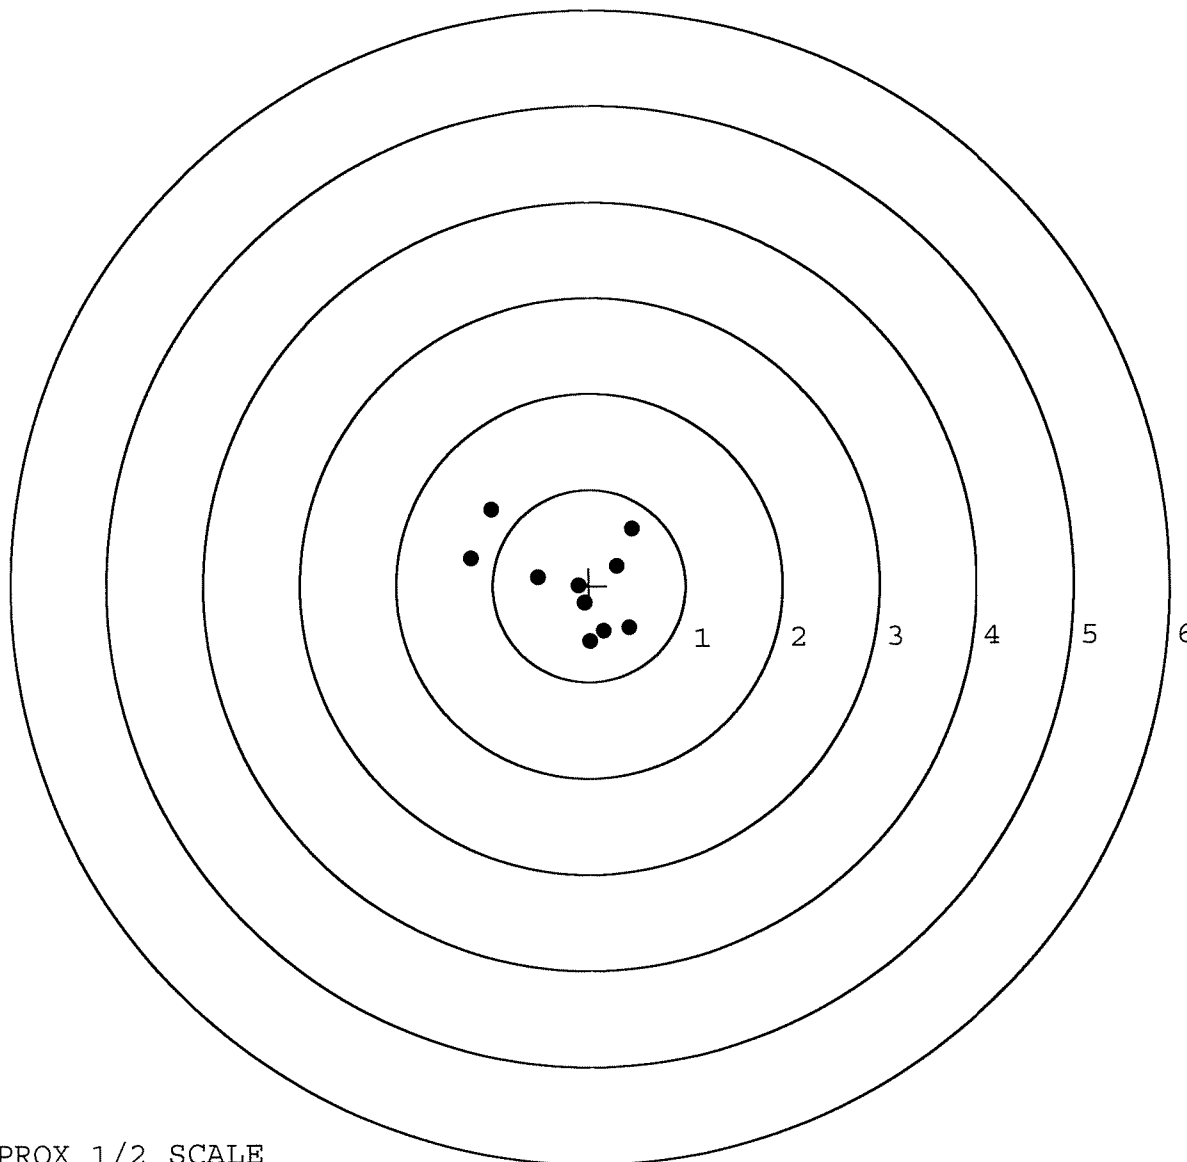


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225090. __0
 TARGET NUMBER: 5
 FILE DATE: 01/18/2006
 FILE TIME: 14:42

POINT#	X	Y
1:	1.041	0.297
2:	0.775	-0.253
3:	1.251	1.134
4:	0.352	0.284
5:	-0.134	0.486
6:	-0.419	0.864
7:	-0.117	-0.628
8:	-0.581	-0.158
9:	-0.812	-0.466
10:	-0.945	-0.891

X CENTROID: 0.041
 Y CENTROID: 0.067
 POA TO CENTROID: 0.079
 HORZ SPREAD: 2.196
 VERT SPREAD: 2.025
 GROUP SPREAD: 2.987
 MIN RADIUS: 0.379
 MAX RADIUS: 1.613
 MEAN RADIUS: 0.895
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 9

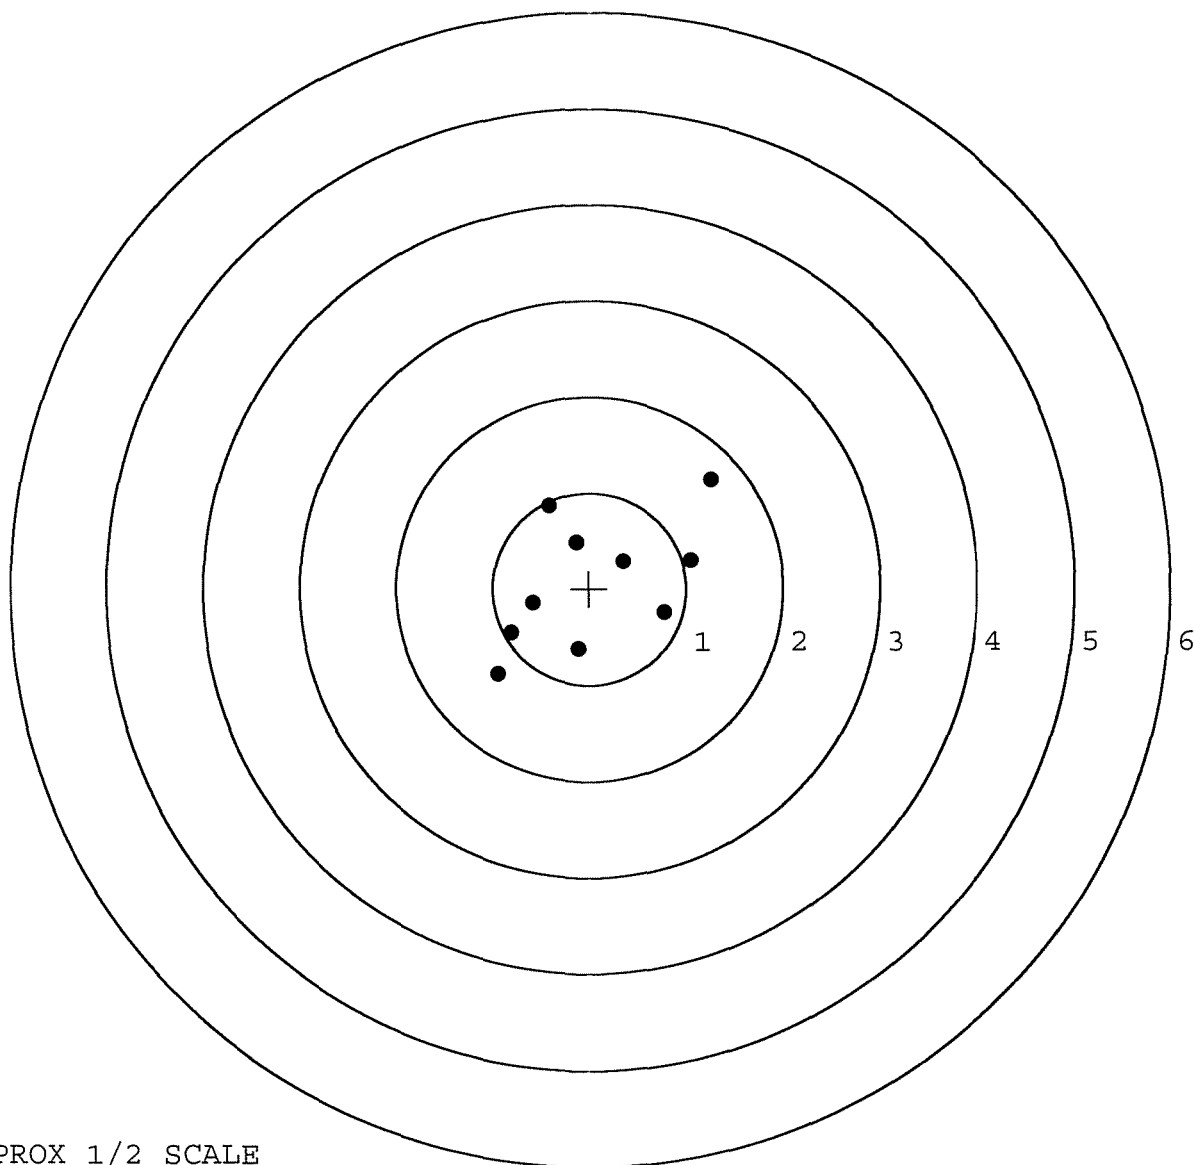

TARGET APPROX 1/2 SCALE

R & E NUMBER	105765		
SERIAL NUMBER	C16225098		
LOG-IN DATE	12-27-05		
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	1-3-06	RTZ
505	RE-BARREL	1-4-06	RTZ
560	ASSEMBLE	1-4-06	RTZ
600	PROOF	1-4-06	F
605	CHECK HEADSPACE	1-4-06	F
610	DIS-ASSEMBLE GUN	1-4-06	F
612	MAGNAFLUX	1-6-06	lemb
510	DRILL AND TAP	1-5-06	TRW
615	ROLLMARK CALIBER	1-6-06	CW
618	ROTO-BLAST	1-6-06	LB
620	APPLY COATINGS	1-10-06	HP
625	FINAL ASSEMBLY	1-11-06	RTZ
640	FUNCTION TEST AND	PASS FAIL	1-18-06 TRW
650	TARGET	PASS FAIL	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION		1-18-06 TRW
	A) HEADSPACE	PASS FAIL	2-7-06 AC
	B) TRIGGER PULL	2.85 2.87 2.87 2.85 2.85	2-7-06 OA
680	F) SAFETY ON FORCE	4.0 3.5 4.0	2-7-06 OA
	G) SAFETY OFF FORCE	2.0 2.0 2.0	2-7-06 OA
	I) FIRING PIN INDENT	.020	
690	PACK		3-13-06 OA

Remington[®]


REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700TM H24

01


MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

SERIAL NO.
C6225090

ORDER NO.
5716



5716 C6225090

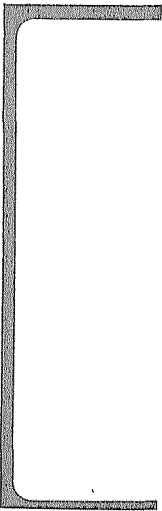

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225090

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	3 17	89	RW
600	Proof	3 17	89	RW
607	Check Headspace	3 17	89	RW
610	Dis-assemble Gun	3 17	89	RW
612	Magnaflux Barrel Action		3/21	KCR
	Magnaflux Bolt		3/21	KCR
615	Rollmark Caliber		3/21	G.S.
617	Drill and Tap Sight Holes	3 22	89	FB
618	Polish Barrel	3 22	89	BT.
620	Apply Coatings (Barrel Action)		3/31/89	TSA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/7/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/7/89	RW
	C) Inspect Ejector Hole for Chamfer		4/7/89	RW
	D) Oil Firing Pin Ass'y		4/7/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		4/10/89	G.S.

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			4/10/89	gq
	G) Safety Off Force	3	3	3			4/10/89	gq
	H) Trigger Pull Test & Retainability						4/10/89	g.s.
	I) Firing Pin Indent	.021	.021	.022			4/10/89	gq
	J) Assemble Stock						4/11/89	RW
	K) Assemble Swivel Studs						14 April 89	DS
	L) Attach Front and Rear Sight Assemblies						4/11/89	RW
	M) Iron Sight Alignment						4/11/89	RW
	N) Detach Front & Rear Sights & place in numbered container						4/11/89	RW
	O) Attach Scope to Rifle						4/11/89	gq
	P) Detach & Attach Scope 20 Times						4/11/89	gq
640	Gallery Target & Test	60 R	gq				4/11/89	gq
	A) Time						4/11/89	DH
	B) Malfunctions						4/11/89	DH
	C) Pierced Primers						4/11/89	DH
	D) Optical Clarity of Scope						4/11/89	DH
645	Inspect for Live Ammo						4/11/89	DH
655	Final Inspection							
	A) Headspace						14 April 89	DS
	B) Trigger Pull	2.34	2.22	2.29	2.26	2.36	14 April 89	DS
	C) Function						14 April 89	DS
660	Pack						21 June 89	DS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6318927DATE 26 Sept. 87TESTER JS

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.12	2.51	2.52	2.65	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.11	2.39	2.58	2.65	
PULL #3	2.34	2.36	2.58	2.51	
PULL #4	2.46	2.37	2.71	2.63	
PULL #5	2.36	2.50	2.59	2.54	
TOTAL	11.39	12.13	12.98	12.98	
AVG.	2.278	2.426	2.596	2.596	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	2.99	3.08		
PULL #2	3.02	3.02		
PULL #3	3.10	3.10		
PULL #4	2.88	2.97		
PULL #5	3.14	3.04		
TOTAL	15.13	15.21		
AVG.	3.026	3.042		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.99	3.98		4.11
PULL #2	4.01	4.05		4.08
PULL #3	3.91	4.04		4.07
PULL #4	4.01	3.98		4.07
PULL #5	4.08	4.07		4.06
TOTAL	20.00	20.12		20.39
AVG.	4.00	4.024		4.078

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225090
12 Apr 1989

CENTROIDAL DISTANCES

0 TO	1	.596471
1 TO	2	.390744
1 TO	3	.164347
1 TO	4	.730658
1 TO	5	.137201

$\frac{2}{4}$ $\frac{3}{4}$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .413
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0914
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .422993

THE AMR FOR THIS RIFLE IS: .9584


12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225090

CENTERFIRE PATTERNS

1

POA

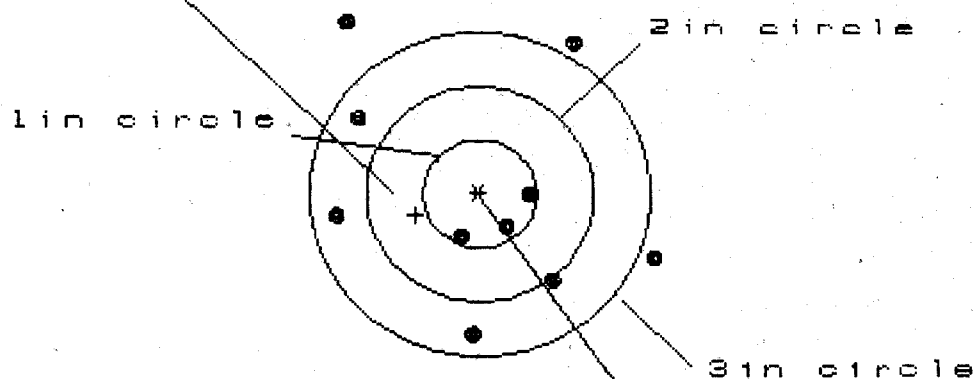

OF SHOTS - 10

IN CIR

1 in = 3

2 in = 3

3 in = 7

HS = 2.842

VS = 2.837


GS = 3.529

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.571	1.438	.899
MINIMUM X	-1.271	-1.404	-1.224
MAXIMUM Y	1.553	1.578	1.520
MINIMUM Y	-1.284	-1.111	-1.169
CENTROID X	.563	.696	.516
CENTROID Y	.197	.024	.083
POA TO CENTROID in.	.596	.696	.522
MIN RADIUS	.374	.157	.300
MEAN RADIUS	1.140	.992	.944
MAX RADIUS	1.958	1.734	1.766
HORIZONTAL SPREAD	2.842	2.842	2.123
VERTICAL SPREAD	2.837	2.689	2.689
EXTREME SPREAD	3.529	2.947	2.835
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	7		

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225090

CENTERFIRE PATTERNS # 2

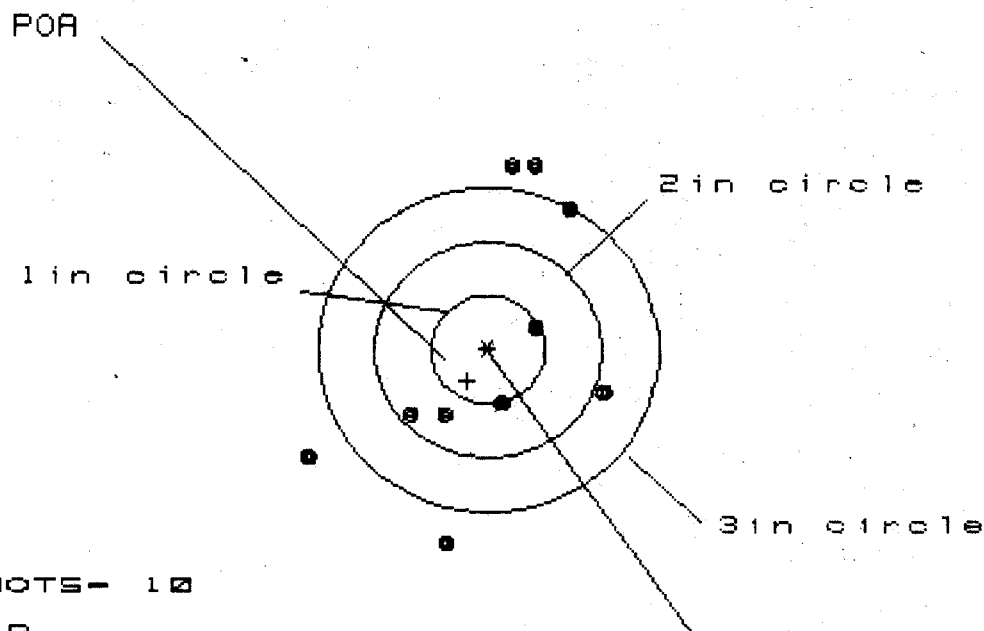

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 6

HS= 2.540

VS= 3.585

GS= 3.695


CENTROID *

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.061	1.013	.810
MINIMUM X	:	-1.579	-1.627	-.935
MAXIMUM Y	:	1.756	1.553	1.403
MINIMUM Y	:	-1.829	-1.196	-.942
CENTROID X	:	.183	.231	.434
CENTROID Y	:	.288	.491	.641
POA TO CENTROID in.	:	.341	.543	.774
MIN RADIUS	:	.449	.362	.230
MEAN RADIUS	:	1.241	1.177	1.052
MAX RADIUS	:	1.879	2.019	1.419
HORIZONTAL SPREAD	:	2.640	2.640	1.745
VERTICAL SPREAD	:	3.585	2.749	2.345
EXTREME SPREAD	:	3.695	3.424	2.602
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	4		
NUMBER IN THREE INCH CIRCLE	=	6		

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225090

CENTERFIRE PATTERNS # 3

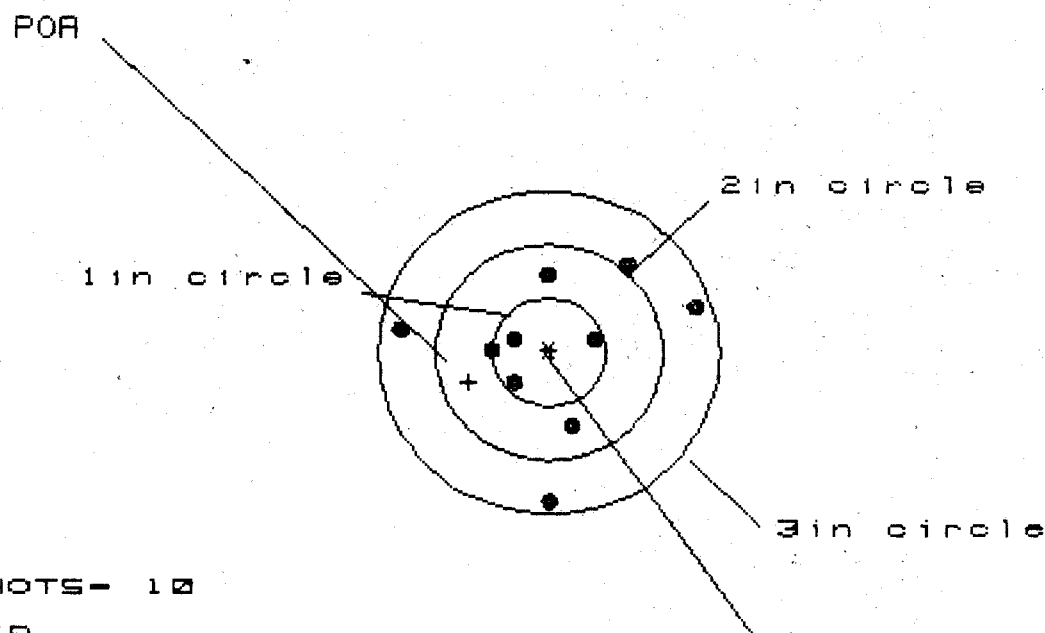

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 6

3 in = 10

HS= 2.654

VS= 2.112

GS= 2.659


CENTROID *

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.298	1.148	.683
MINIMUM X	-1.355	-.690	-.547
MAXIMUM Y	.784	.809	.862
MINIMUM Y	-1.328	-1.303	-1.251
CENTROID X	.706	.857	.714
CENTROID Y	.278	.253	.201
POA TO CENTROID in.	.759	.894	.741
MIN RADIUS	.340	.255	.359
MEAN RADIUS	.813	.755	.675
MAX RADIUS	1.374	1.317	1.251
HORIZONTAL SPREAD	2.654	1.838	1.230
VERTICAL SPREAD	2.112	2.112	2.112
EXTREME SPREAD	2.659	2.236	2.236
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08225080

CENTERFIRE PATTERNS # 4

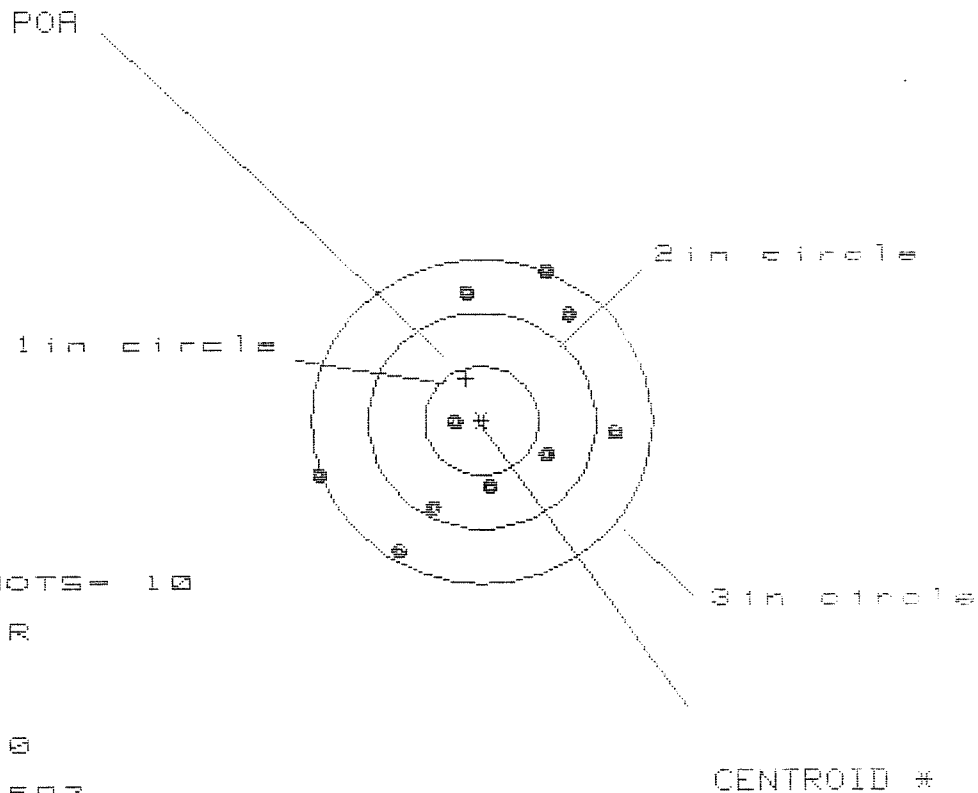

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 4

3 in = 10

HS = 2.587

VS = 2.638

GS = 2.932

CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.172	1.014	1.060
MINIMUM X	:	-1.415	-.916	-.870
MAXIMUM Y	:	1.384	1.329	1.332
MINIMUM Y	:	-1.254	-1.309	-1.142
CENTROID X	:	.132	.290	.244
CENTROID Y	:	-.393	-.338	-.505
POA TO CENTROID in.	:	.415	.445	.561
MIN RADIUS	:	.278	.436	.411
MEAN RADIUS	:	1.053	1.001	.927
MAX RADIUS	:	1.498	1.597	1.436
HORIZONTAL SPREAD	:	2.587	1.930	1.930
VERTICAL SPREAD	:	2.638	2.638	2.474
EXTREME SPREAD	:	2.932	2.932	2.674
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		10	

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225090

CENTERFIRE PATTERNS

5

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 5

2 in = 9

3 in = 10

HS= 1.475

VS= 1.959

GS= 2.056

PATTERN #

5

SHOTS (BEST OF)

10

9

8

MAXIMUM X

.686

.668

.363

MINIMUM X

-.789

-.807

-.724

MAXIMUM Y

1.331

.593

.544

MINIMUM Y

-.628

-.480

-.529

CENTROID X

.481

.499

.416

CENTROID Y

.087

-.061

-.012

POA TO CENTROID in.

.489

.503

.416

MIN RADIUS

.095

.123

.037

MEAN RADIUS

.545

.447

.397

MAX RADIUS

1.341

.815

.741

HORIZONTAL SPREAD

1.475

1.475

1.087

VERTICAL SPREAD

1.959

1.073

1.073

EXTREME SPREAD

2.056

1.502

1.295

NUMBER IN ONE INCH CIRCLE =

5

NUMBER IN TWO INCH CIRCLE =

9

NUMBER IN THREE INCH CIRCLE =


10

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225090
27 Oct 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0986
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1132
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .150121

THE AMR FOR THIS RIFLE IS: 1.086

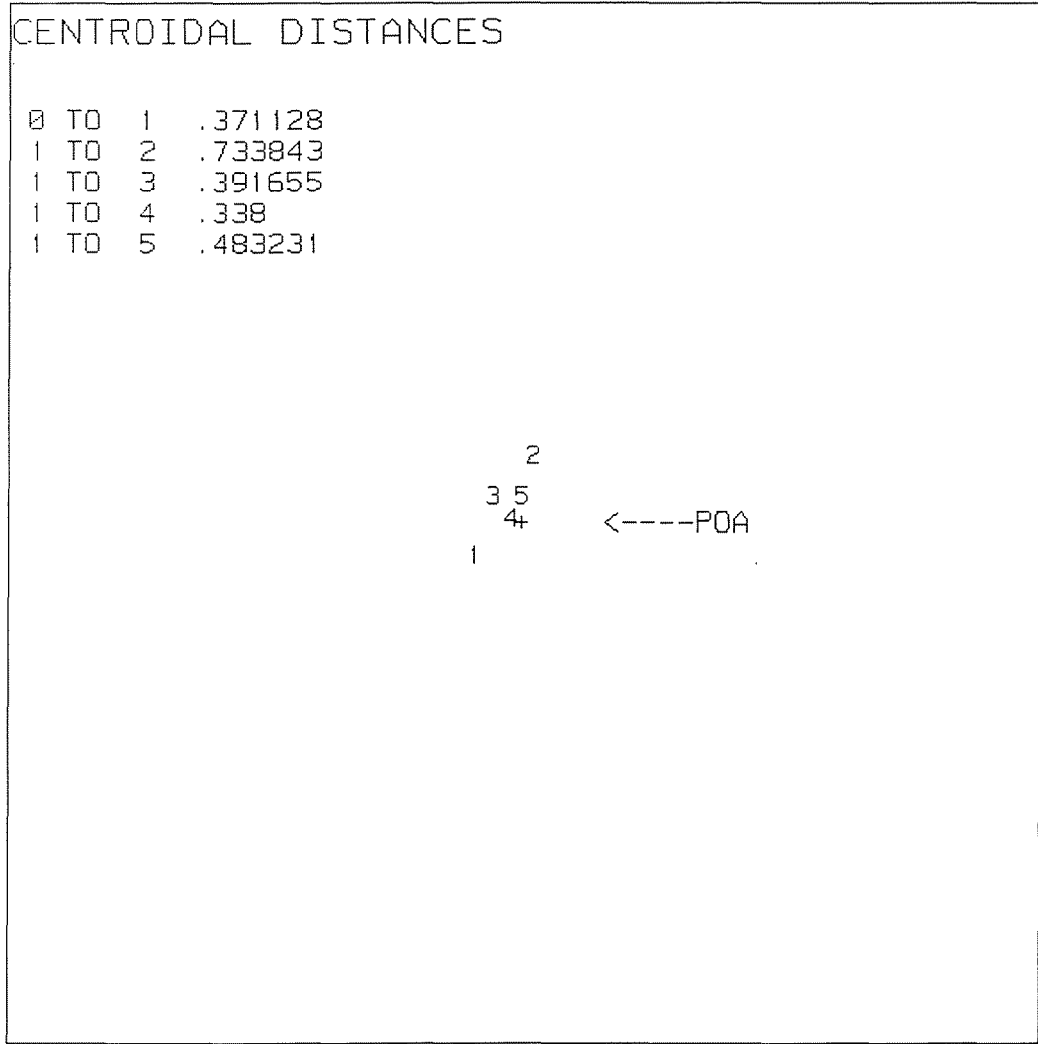

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .371

MIN RADIUS : .120

MEAN RADIUS : 1.119

MAX RADIUS : 1.850


CENTROID X : -.306

CENTROID Y : -.210

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225090

CENTERFIRE PATTERN # 1

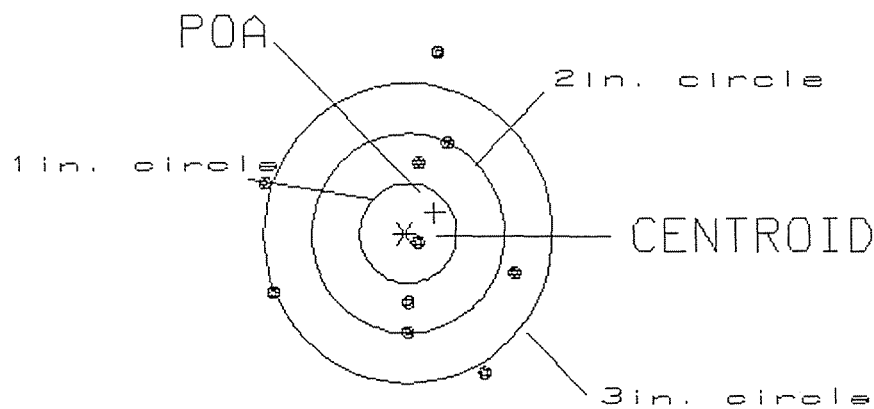

OF SHOTS= 10

IN CIRCLE

HS= 2.62

1

VS= 3.19

4

GS= 3.23


6

PATTERN #: ☐ 2 ☐
POA TO CENTROID: .425
MIN RADIUS : .207
MEAN RADIUS : .894
MAX RADIUS : 1.954
CENTROID X : .072
CENTROID Y : .419

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225098

CENTERFIRE PATTERN # 2

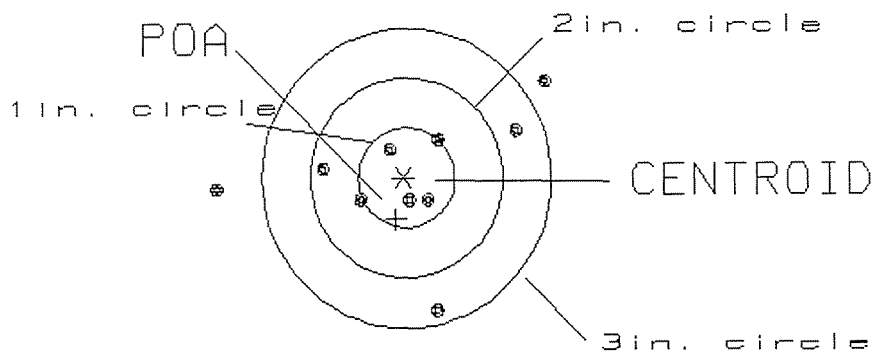

OF SHOTS= 10

IN CIRCLE

HS= 3.38

4

VS= 2.26

6

GS= 3.54

8

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .254

MIN RADIUS : .525

MEAN RADIUS : .855

MAX RADIUS : 1.454


CENTROID X : -.193

CENTROID Y : .165

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225090

CENTERFIRE PATTERN # 3

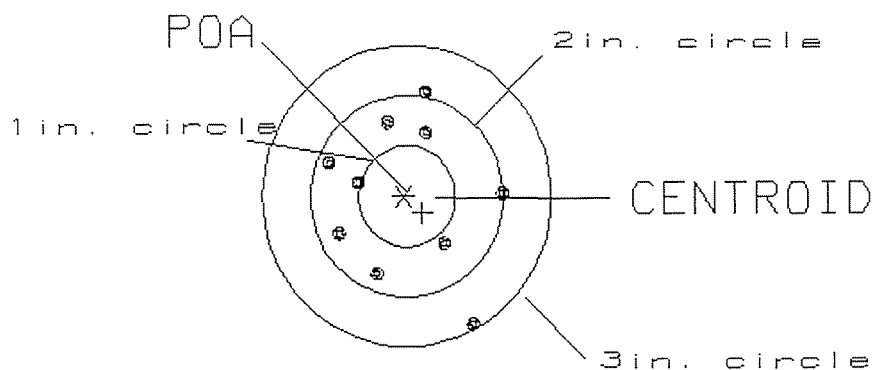

OF SHOTS= 10

IN CIRCLE

HS= 1.79

0

VS= 2.33

7

GS= 2.37

10

PATTERN #: 4

POA TO CENTROID: .071

MIN RADIUS : .325

MEAN RADIUS : .988

MAX RADIUS : 2.573


CENTROID X : -.066

CENTROID Y : .028

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225098

CENTERFIRE PATTERN # 4

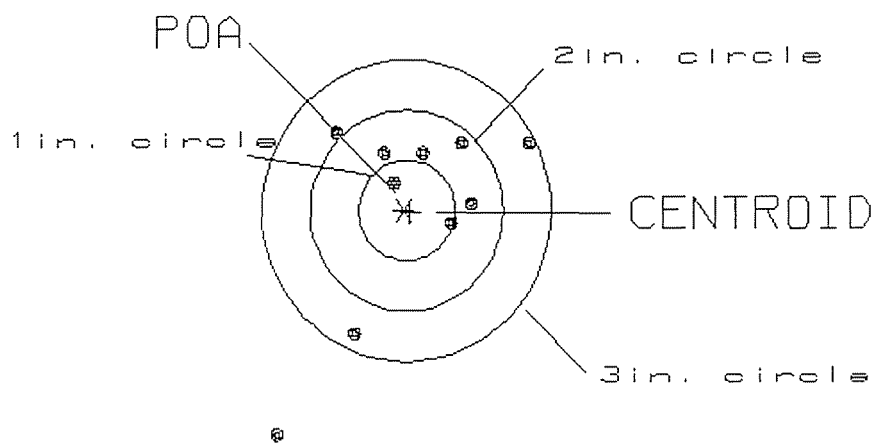

OF SHOTS= 10

IN CIRCLE

HS= 2.61

2

VS= 2.95

6

GS= 3.88

9

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .164

MIN RADIUS : 1.009

MEAN RADIUS : ~~1.575~~

MAX RADIUS : 2.557


CENTROID X : 0.000

CENTROID Y : .164

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225090

CENTERFIRE PATTERN # 5

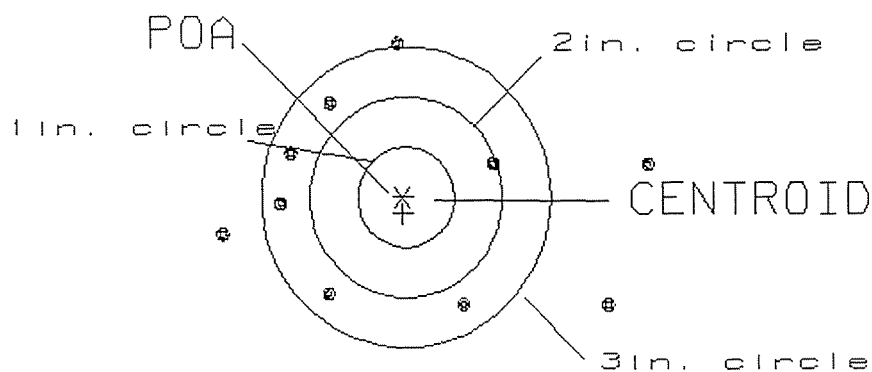

OF SHOTS= 10

IN CIRCLE

HS= 4.49

0

VS= 2.67

0

GS= 4.54

6

98-17002

INITIAL	CUSTOMER ORDER NO.
---------	--------------------

ΣΩΣ

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE		
08/25/98	08/25/98	QJ 7-89	C6225090		700	7.62	NATO
ACCESSORIES	HARD CASE	SCOPE MNTS	SCOPE BASE	W/STUDS	W/SWIVELS		

FROM:

SHIP TO:

TRANSPORTATION OFFICER MI
BLDG 49015
FORT HOOD TX 76544

TRANSPORTATION OFFICER MI
BLDG 49015
FORT HOOD TX
76544

CUST NO:191677 C.O.D.

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	----------------

GUN CONDITION

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

SPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	D1	E1			
TRIGGER GROUP	S2			E1	F1
BOLT ASSY.	B3			E2	F2
BARREL ASSY.	B4		D1	E3	F3
REC. ASSY.	B5		D2	E4	F4
WOOD		C1	D3	E5	F5
METAL		C2			
MAIN FAULT					

ARTS

COMMENTS

REPAIRMAN <i>Riv</i>	PROOF <i>✓</i>	CLEAN <i>✓</i>	TEST <i>✓</i>	TARGET <i>✓</i>	PATTERN
GALLERY TESTER <i>Riv</i>	DATE	DATE	DATE <i>10/26/58</i>	DATE <i>10/26/58</i>	DATE

OFFICE COPY

BD6925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARBER - M24 M2400048741



DATE OF SHIPMENT 082098	ORIGIN JAL	SHIPMENT NUMBER 163 825																																																																			
3 SERVICES U.S., Puerto Rico, & Canada ☐ *EXPE (First) ☐ *09:30 ☐ AM ☒ OVERNIGHT For Definition of Services "X" One Box See Back of Air Waybill International Int'l Door-To-Door ☐ EXPRESS ☐ STANDARD PLUS ☒ CUSTOMS CLEARANCE REQUESTED *EXTRA CHARGES Int'l Airport-To-Airport ☐ PREFERRED ☐ STANDARD Prolated and Standard Add'l Services ☐ *DELIVERY REQUESTED																																																																					
4 SHIPMENT DETAILS ☐ *DANGEROUS GOODS ☐ *PERISHABLE ☐ EMERY PACKAGING ☐ ENVELOPE ☐ URGENT PACK 1 SKID(S), SAID TO CONTAIN: 1 TOTAL PIECES <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <thead> <tr> <th style="width: 10%;">DIMENSIONS</th> <th style="width: 10%;">PIECES</th> <th style="width: 10%;">LENGTH</th> <th style="width: 10%;">WIDTH</th> <th style="width: 10%;">HEIGHT</th> <th style="width: 50%;">DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>54</td> <td>18</td> <td>13</td> <td></td> <td>SNIPER RIFLE</td> </tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table> TOTAL PIECES TOTAL WEIGHT ☐ lbs. ☐ kg. ("X" one) SPECIAL INSTRUCTIONS				DIMENSIONS	PIECES	LENGTH	WIDTH	HEIGHT	DESCRIPTION	1	54	18	13		SNIPER RIFLE																																																						
DIMENSIONS	PIECES	LENGTH	WIDTH	HEIGHT	DESCRIPTION																																																																
1	54	18	13		SNIPER RIFLE																																																																
5 METHOD OF PAYMENT ☐ BILL SHIPPER ☐ BILL CONSIGNEE ☐ BILL THIRD PARTY EMERY ACCOUNT ☐ GFL (Character GBL # Required) Tariff Test. 1																																																																					
CHECK TO SHIPPER ONLY IN U.S./P.R./CANADA \$																																																																					
Emery Driver: Place Label Here. If Pallets, Thermal Labels to HAZARDOUS ☐ *HAZARDOUS ☐ *POISON ☐ *FLAMMABLE ☐ *CORROSIVE ☐ *OTHER PIECES / WEIGHT FOR INFO CALL (1-800-828-8288) http://www.emery.com SHIPPER'S AUTHORIZATION AND SIGNATURE 9-20-98																																																																					

LABEL COPY - 4

SERVICE

SIGNATURE AND TALLY RECORD

FORM APPROVED
OMB No. 0702-0027
Expires Oct 31, 1988

DISTRIBUTION INSTRUCTIONS

- * The SHIPPER will prepare copies 1 through 4, retain copy 4 and deliver copies 1 through 3 to the Origin Carrier.
- * The CARRIER will deliver copies 1 through 3 to the Destination Carrier.
- * The DESTINATION CARRIER will attach copy 1 (reflecting all signatures) and Standard Form 1113 (Public Voucher for Transportation Charges) to the original Government Bill of Lading, and forward for payment. Copy 2 will be delivered to the Consignee. Copy 3 will be retained.
- * The CONSIGNEE will ensure Destination Carrier surrenders copy 2.

SECTION A - To be completed by the SHIPPER

1. SHIPPER		2. PROTECTIVE SERVICE REQUESTED	
a. NAME III COPRS AND FORT HOOD W45QRE		CS DOD CONSTANT SURVEILLANCE SERVICE	
b. ORIGIN TRANSPORTATION OFFICER, W45QRE III CORPS AND FORT HOOD ATTN: AFZF-DL-TNS FORT HOOD, TX 76544-5062		3. GBL OR CBL NUMBER M-1469526	
4. CONSIGNEE		5. PERMIT NUMBER (if any)	
a. NAME REMINGTON ARMS, ILION, NY REMING			
b. DESTINATION REMINGTON ARMS CO., INC. ATTN: FABRICATED PRODUCTS DEPT. 14 HOEFLER AVE. ILION, NY 13357-1816		6. TRANSPORTATION CONTROL NUMBER (HBAT-07-8223013 -01) W810GG81959801XXX	
7. ROUTING EMERY WORLDWIDE		8. WEIGHT 80 POUNDS	9. CUBE 7.3
10. SPECIAL INSTRUCTIONS		11. DATE SHIPMENT TENDERED TO CARRIER 98.08.20	12. NAME OF CARRIER EWCF
13. NUMBER OF PIECES 1	14. TYPE OF PACKAGE(S) (For unsealed loads only) OR CONVEYANCE IDENTIFICATION & SEAL NUMBERS (for sealed loads only) CS	15. FREIGHT CLASSIFICATION DESCRIPTION 069300 FIREARMS OR PARTS, NOI, IN BOXES, SEE NOTE, ITEM 69302	

SECTION B - To be completed by each person accepting custody of classified or protected material requiring the use of transportation protective service during transit.

16. CUSTODY RECORD				
a. PRINT NAME OF PERSON AND COMPANY REPRESENTED	b. STATION INTERCHANGE POINT DESTINATION	c. SIGNATURE OF PERSON ACCEPTING CUSTODY	d. TIME ACCEPTED	e. DATE ACCEPTED
BRUCE DUMLER EMERY WORLDWIDE	FT. HOOD, TX 76544-5062	<i>[Signature]</i>	13:30	20 AUG 98
SUE POSTELLE EMERY WORLDWIDE	FT. HOOD, TX 76544-5062	<i>[Signature]</i>	13:30	20 AUG 98
<i>[Signature]</i> EWW/AS	EWW/AS	<i>[Signature]</i>	1600	20 AUG 98
<i>[Signature]</i> AERL	TPS - HAV	<i>[Signature]</i>	0200	8-21
J. FRAZER	SGR - EWW	<i>[Signature]</i>	950A	8/21/98
J. Youworski	Remains 2211	<i>[Signature]</i>	1310	8/21/98

DD FORM 1348-1A, SEP 87 (BLUE) Jun 86 edition may be used. FORM APPROVED OMB NO 0704-0188 DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

SENSITIVE ITEMS TRANSACTION LIST

(FT HOOD REG 700-3)

1-3 DIC	4-6 DIC	7 DIC	8-22 STOCK NUMBER	DOCUMENT NUMBER 30-43 AAC	DATE / SERIAL	45-50 AAC TO
			1005-01-240 2136	W81G66	81959801	Lat. Trans.

51-56 ACCISD FORT HOOD	68-73 OWNER AAC	76-80 TRANS DATE
M24 Sniper rifle	Remington Arms Co Inc ATTN: Fabricated Products	Dept. 14 Hooper Ave Hion, NY

SENSITIVE ITEMS SERIAL NUMBERS

1	C6225090	21		41	
2		22		42	
3		23		43	
4		24		44	
5		25		45	
6		26		46	
7		27		47	
8		28		48	
9		29		49	
10		30		50	
11		31		51	
12		32		52	
13		33		53	
14		34		54	
15		35		55	
16		36		56	
17		37		57	
18		38		58	
19		39		59	
20		40		60	

FT HOOD FORM 700-X-2

CC 225090 15 JUNE 98 TI	
7. APPLICABLE REFERENCE	
TM NUMBER TM 9-1005-300-10	TM DATE
COLUMN a — Enter TM item number. COLUMN b — Enter the applicable condition status symbol. COLUMN c — Enter deficiencies and shortcomings.	COLUMN d — Show corrective action for deficiency or shortcoming listed in Column c. COLUMN e — Individual ascertaining completed corrective action initial in this column.
STATUS SYMBOLS	
"X"—Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"—Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "—"—Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.	DIAGONAL "(/)"—Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL—Indicates that a completely satisfactory condition exists. FOR AIRCRAFT—Status symbols will be recorded in red.

ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.

8a. SIGNATURE (Person(s) performing inspection) Miller JAMES R col JAMES R Miller	8b. TIME 0745	9a. SIGNATURE (Maintenance Supervisor) MAISENBACHER Kim	9b. TIME	10. MANHOURS REQUIRED
---	------------------	--	----------	-----------------------

TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e
1	X	crack in pistol grip	HIGHER MAINTENANCE REQUIRED Kim	
2	X	Barrel touching stock	HIGHER MAINTENANCE REQUIRED Kim	
3	X	Knicks in barrel	HIGHER MAINTENANCE REQUIRED Kim	
4	X	crown worn out	HIGHER MAINTENANCE REQUIRED Kim	
5	X	pits in barrel	HIGHER MAINTENANCE REQUIRED Kim	
6	X	pits in bolt face	HIGHER MAINTENANCE REQUIRED Kim	
6	X	Firing pin worn down	HIGHER MAINTENANCE REQUIRED Kim	
7	X	left side of chamber gouged	HIGHER MAINTENANCE REQUIRED Kim	
8	X	m3A gauge windage knob	HIGHER MAINTENANCE REQUIRED Kim	

a	b	c	d	e
9	X	end of stock is cracked on left side	HIGHER MAINTENANCE REQUIRED KIM	
10	X	hand + grooves worn down	HIGHER MAINTENANCE REQUIRED KIM	
11	X	flaw in left bottom of scope.	HIGHER MAINTENANCE REQUIRED KIM	
			T.I. PERFORMED BY C	
		NRCS		
		COND CODE F	215TH Forward Support Battalion	
		INW DA PAM 725-250	SPC, USA 45K10	
		NRCS CODE J	1/9 MST	
		INW AR 725-50	215TH FORWARD SUPPORT BATTALION	
			1ST CAVALRY DIVISION	