

MODEL 700™ M24

Model **70 MZ-T**

Action

Barrel Length

Capacity

Order No. 5716

*Includes 1 in chamber.

Remington

GFM

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225111

New Barrel

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		3/22/93	RW
600	Proof		3/22/93	RW
607	Check Headspace		3/22/93	RW
610	Dis-assemble Gun		3/22/93	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/2/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/2/93	RW
	C) Inspect Ejector Hole for Chamfer		4/2/93	RW
	D) Oil Firing Pin Ass'y		4/2/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	BARBER - M24 0049223 OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock			
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
0	Gallery Target & Test		4/2/93	RW
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo		4/2/93	RW
655	Final Inspection			
	A) Headspace		4/3/93	RW
	B) Trigger Pull			
	C) Function		4/2/93	RW
660	Pack			

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225111
3 Apr 1993

CENTROIDAL DISTANCES

0 TO	1	.112294
1 TO	2	.247923
1 TO	3	.104637
1 TO	4	.193065
1 TO	5	.25266

5
#2 <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1052
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0184
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .106797

THE AMR FOR THIS RIFLE IS: .82

3 Apr 1993

FILE:/PATTERNING/CENTERFIRE_PATT/08225111

CENTERFIRE PATTERNS # 1

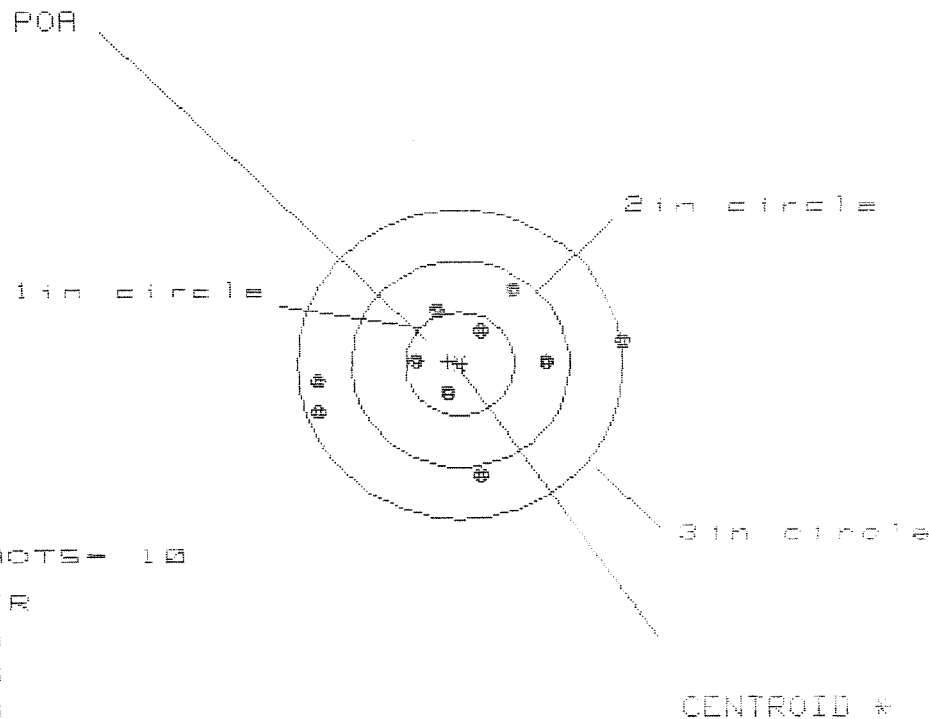

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 6

3 in = 9

HS= 2.751

VS= 1.734

GS= 2.862


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.488	1.002	.864
MINIMUM X	-1.271	-1.107	-1.237
MAXIMUM Y	.700	.730	.668
MINIMUM Y	-1.034	-1.004	-1.066
CENTROID X	.109	-.055	.083
CENTROID Y	-.027	-.057	.085
POA TO CENTROID in.	.112	.079	.083
MIN RADIUS	.244	.209	.266
MEAN RADIUS	.848	.766	.698
MAX RADIUS	1.504	1.211	1.247
HORIZONTAL SPREAD	2.751	2.109	2.101
VERTICAL SPREAD	1.734	1.734	1.734
EXTREME SPREAD	2.862	2.192	2.111
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	9		

3 Apr 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225111

CENTERFIRE PATTERNS # 2

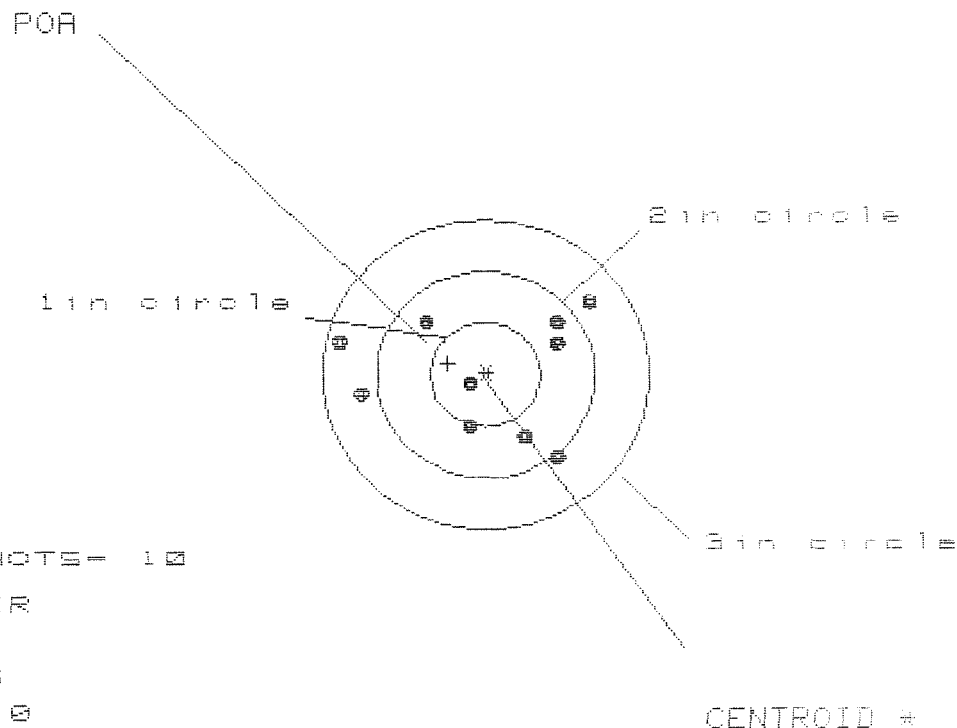

OF SHOTS- 10

IN CIR

1in = 1

2in = 6

3in = 10

HS= 2.234

VS= 1.524


GS= 2.320

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.933	.788	.623
MINIMUM X	:	-1.301	-1.325	-.873
MAXIMUM Y	:	.721	.754	.728
MINIMUM Y	:	-.803	-.770	-.796
CENTROID X	:	.344	.489	.654
CENTROID Y	:	-.106	-.139	-.113
POA TO CENTROID in.	:	.360	.508	.664
MIN RADIUS	:	.151	.258	.424
MEAN RADIUS	:	.839	.774	.694
MAX RADIUS	:	1.333	1.340	1.003
HORIZONTAL SPREAD	:	2.234	2.113	1.496
VERTICAL SPREAD	:	1.524	1.524	1.524
EXTREME SPREAD	:	2.320	2.320	1.803
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			6	
NUMBER IN THREE INCH CIRCLE =			10	

3 Apr 1993

FILE:/PATTERNING/CENTERFIRE_PATT/08225111

CENTERFIRE PATTERNS # 3

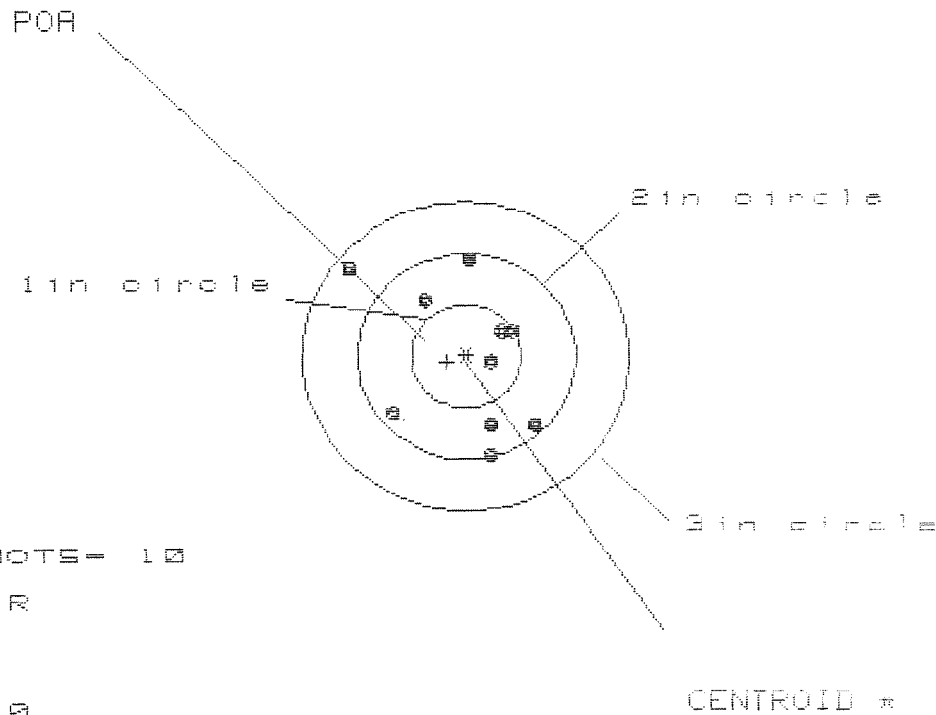

OF SHOTS= 10

IN CIR

1in = 3

2in = 8

3in = 10

HS= 1.670

VS= 1.943

GS= 2.282


PATTERN #	:	3	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.638	.524	.542
MINIMUM X	:	-1.032	-.824	-.606
MAXIMUM Y	:	.957	1.054	.943
MINIMUM Y	:	-.987	-.889	-.692
CENTROID X	:	.174	.288	.270
CENTROID Y	:	.055	-.042	.069
POA TO CENTROID in.	:	.182	.291	.279
MIN RADIUS	:	.185	.115	.090
MEAN RADIUS	:	.757	.666	.623
MAX RADIUS	:	1.354	1.055	1.012
HORIZONTAL SPREAD	:	1.670	1.348	1.348
VERTICAL SPREAD	:	1.943	1.943	1.635
EXTREME SPREAD	:	2.282	1.952	1.739
NUMBER IN ONE INCH CIRCLE =	:	3		
NUMBER IN TWO INCH CIRCLE =	:	8		
NUMBER IN THREE INCH CIRCLE =	:	10		

3 Apr 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225111

CENTERFIRE PATTERNS

4

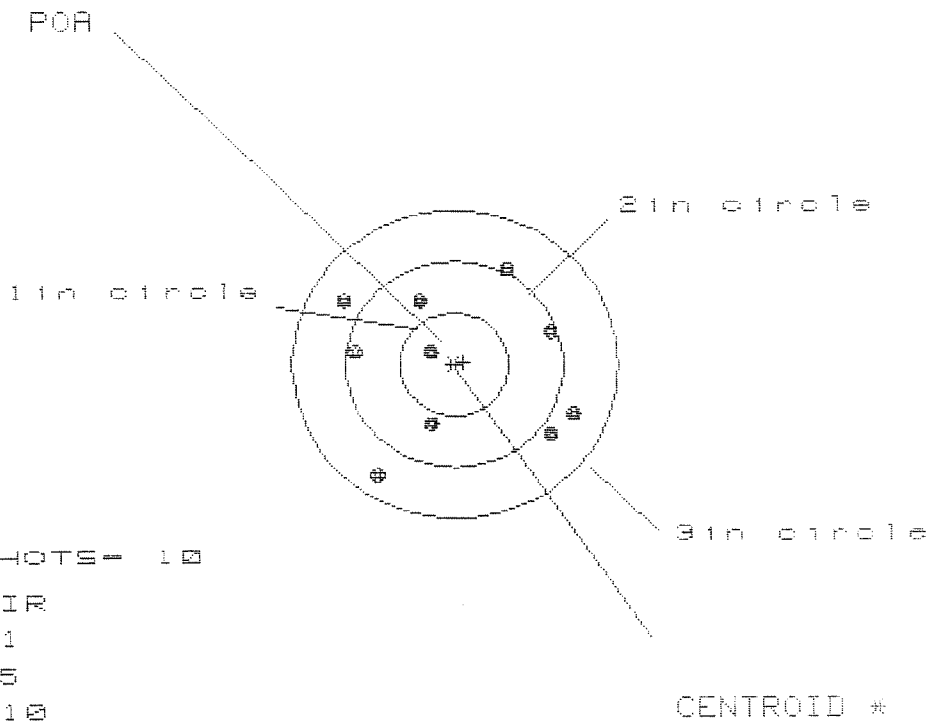

OF SHOTS= 10

IN CIR

1in = 1

2in = 5

3in = 10

HS= 2.059

VS= 1.992


GS= 2.322

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.045	.971	.835
MINIMUM X	:	-1.014	-1.088	-1.157
MAXIMUM Y	:	.941	.825	.884
MINIMUM Y	:	-1.051	-.771	-.712
CENTROID X	:	-.084	-.010	.126
CENTROID Y	:	-.022	.094	.035
POA TO CENTROID in.	:	.087	.095	.131
MIN RADIUS	:	.194	.243	.380
MEAN RADIUS	:	.920	.879	.845
MAX RADIUS	:	1.247	1.188	1.160
HORIZONTAL SPREAD	:	2.059	2.059	1.992
VERTICAL SPREAD	:	1.992	1.596	1.596
EXTREME SPREAD	:	2.322	2.322	2.086
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

3 Apr 1993

FILE:/PATTERNING/CENTERFIRE_PATT/06225111

CENTERFIRE PATTERNS # 5

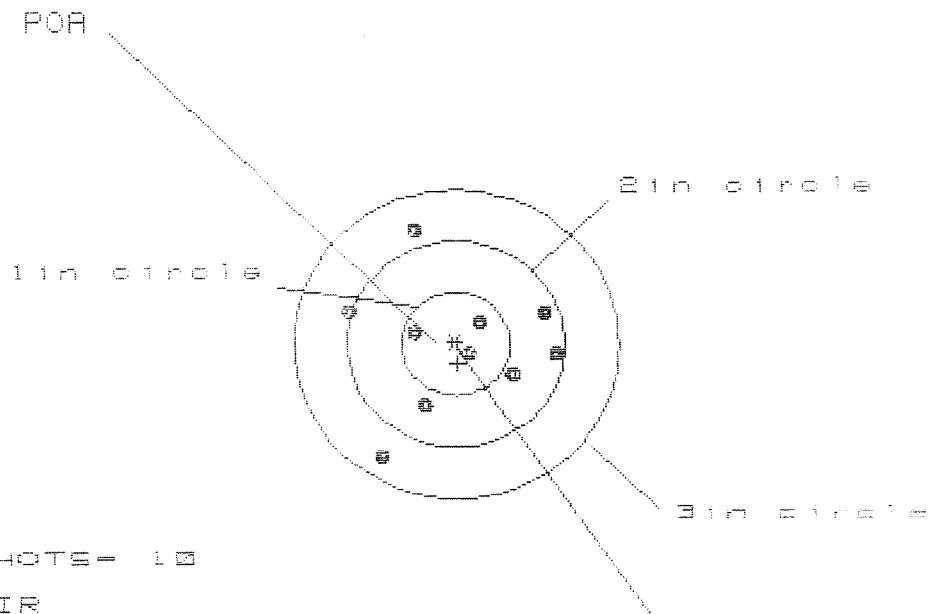

OF SHOTS = 10

IN CIR

1in = 3

2in = 7

3in = 10

HS = 1.823

VS = 2.131

GS = 2.143

CENTROID *

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.962	.890	.830
MINIMUM X	-.961	-1.033	-1.093
MAXIMUM Y	1.887	.970	.349
MINIMUM Y	-1.044	-.740	-.618
CENTROID X	-.017	.055	.115
CENTROID Y	.192	.308	.186
POA TO CENTROID in.	.192	.312	.219
MIN RADIUS	.151	.193	.060
MEAN RADIUS	.736	.672	.592
MAX RADIUS	1.226	1.084	1.147
HORIZONTAL SPREAD	1.923	1.923	1.923
VERTICAL SPREAD	2.131	1.710	.967
EXTREME SPREAD	2.143	1.964	1.964
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		10	

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # *C6225711*

OPERATION		DATE	INT
#	NAME		
575- 580	ASSEMBLY <i>2 26</i>		<i>FC</i>
600	PROOF		<i>SLC</i>
615	MAGNAFLUX BARREL	<i>5/13/88</i>	<i>PJC</i>
	MAGNAFLUX BOLT	<i>5/13/88</i>	<i>PJC</i>
620	COATING	<i>8/11/88</i>	<i>JA</i>
625- 630	FINAL ASSEMBLY		
635	TEST		
640	TARGET		
	FIRING PIN INDENT		
660	PACK		

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coatings (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		8/19/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/19/88	RW
	C) Inspect Ejector Hole for Chamfer		8/19/88	RW

OVER

OP.#		READINGS	DATE	INITIAL
625 cont.	D) Oil Firing Pin Ass'y		8/19/88	RW
	E) Adjust Trigger Pull to Min. Setting and Stake	2.48 2.53 2.37 2.42 2.53	19 aug 88	J.H. + J.S.
	F) Safety on Force	5 5 5	19 aug 88	J.H. + J.S.
	G) Safety off Force	3 3 3	19 aug 88	J.H. + J.S.
	H) Trigger Pull Test & Retainability		19 aug 88	J.H. + J.S.
	I) Firing Pin Indent	23 22 22.5	19 aug 88	J.H. + J.S.
	J) Assemble Stock		8/23/88	RW
	K) Assemble Swivel Studs			
	L) Attach Front & Rear Sight Assemblies		9/6/88	RW
	M) Iron Sight Alignment		9/6/88	RW
	N) Detach Front & Rear Sights & place in numbered container		9/6/88	RW
	O) Attach Scope to Rifle		9/13/88	RW
	P) Detach & Attach Scope 20 times		9/13/88	W.B.
640	Gallery Target & Test	42 R 114L	9/15/88	A.C.
	A) Optical Clarity of Scope		9/15/88	W.B.
645	Inspect for Live Ammo		9/15/88	W.B.
655	Final Inspection			
	A) Headspace	OK	9/30/88	J.S.
	B) Trigger Pull	OK	9/30/88	J.S.
	C) Function	OK	9/30/88	J.S.
660	Pack		10-20-88	R.S.

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6225111

DATE 19 Aug. 88

TESTER J. J. + K. S.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.48	2.37	2.86	2.77	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.37	2.41	2.56	2.72	
PULL #3	2.53	2.36	2.63	2.70	
PULL #4	2.53	2.38	2.61	2.73	
PULL #5	2.42	2.39	2.65	2.84	
TOTAL	12.33	11.91	13.31	13.76	
AVG.	2.466	2.382	2.662	2.752	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.18	3.20		
PULL #2	3.11	3.20		
PULL #3	3.16	3.18		
PULL #4	3.17	3.23		
PULL #5	3.20	3.23		
TOTAL	15.82	16.04		
AVG.	3.164	3.208		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.18	4.06		4.01
PULL #2	4.15	4.21		4.10
PULL #3	4.24	4.21		4.03
PULL #4	4.22	4.20		4.03
PULL #5	4.22	4.22		4.03
TOTAL	21.01	20.90		20.20
AVG.	4.202	4.18		4.04

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225111

CENTROIDAL DISTANCES

0 TO	1	2.24772
1 TO	2	1.33701
1 TO	3	.203578
1 TO	4	.837082
1 TO	5	.841193

3¹
6
2
+ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: 1.1746
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: 1.258
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: 1.72112
THE AMR FOR THIS RIFLE IS: .8736

16 Sep 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225111

CENTERFIRE PATTERNS

1

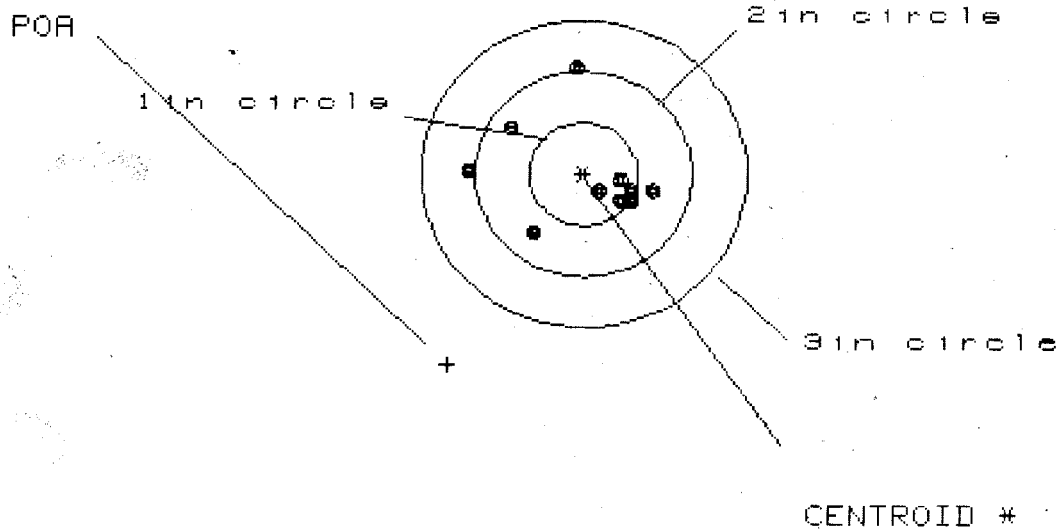

OF SHOTS- 10

IN CIR.

1in = 4

2in = 8

3in = 10

HS= 1.747

VS= 1.591


GS= 1.762

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.660	.540	.516
MINIMUM X	-1.087	-.787	-.811
MAXIMUM Y	1.017	1.024	.581
MINIMUM Y	-.574	-.567	-.439
CENTROID X	1.262	1.382	1.406
CENTROID Y	1.860	1.853	1.725
POA TO CENTROID in.	2.247	2.311	2.225
MIN RADIUS	.148	.106	.052
MEAN RADIUS	.615	.518	.414
MAX RADIUS	1.088	1.042	.998
HORIZONTAL SPREAD	1.747	1.327	1.327
VERTICAL SPREAD	1.591	1.591	1.020
EXTREME SPREAD	1.762	1.635	1.462
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	10		

16 Sep 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225111

CENTERFIRE PATTERNS # 2

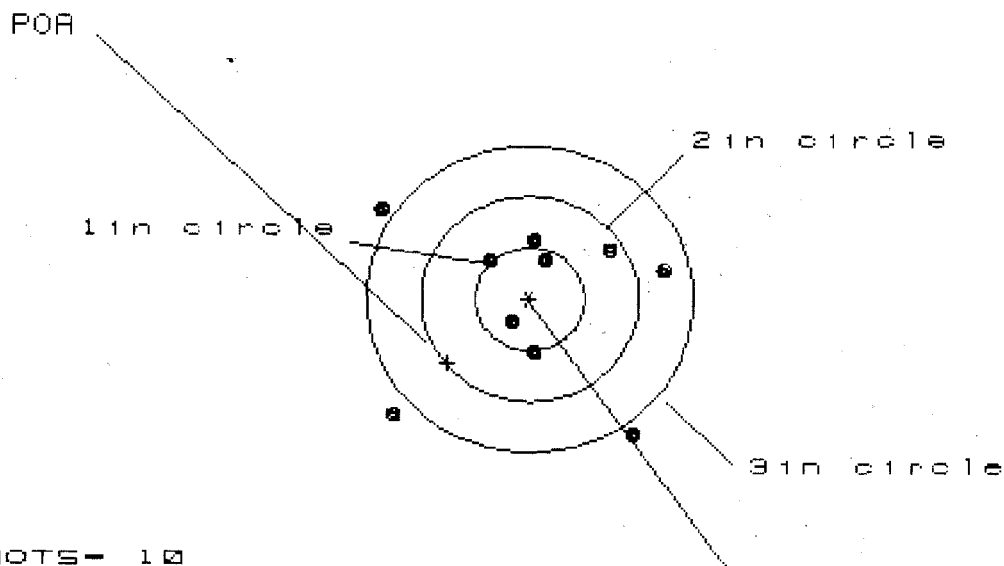

OF SHOTS- 10

IN CIR

1in = 3

2in = 6

3in = 7

HS= 2.616

VS= 2.199

GS= 3.153

CENTROID *


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.284	1.141	.957
MINIMUM X	-1.332	-1.475	-.678
MAXIMUM Y	.926	.804	.580
MINIMUM Y	-1.273	-1.395	-1.295
CENTROID X	.762	.905	1.089
CENTROID Y	.620	.742	.642
POA TO CENTROID in.	.982	1.170	1.264
MIN RADIUS	.257	.262	.422
MEAN RADIUS	.933	.829	.743
MAX RADIUS	1.693	1.679	1.427
HORIZONTAL SPREAD	2.616	2.616	1.635
VERTICAL SPREAD	2.199	2.199	1.875
EXTREME SPREAD	3.153	3.153	2.126
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		7	

16 Sep 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225111

CENTERFIRE PATTERNS

3

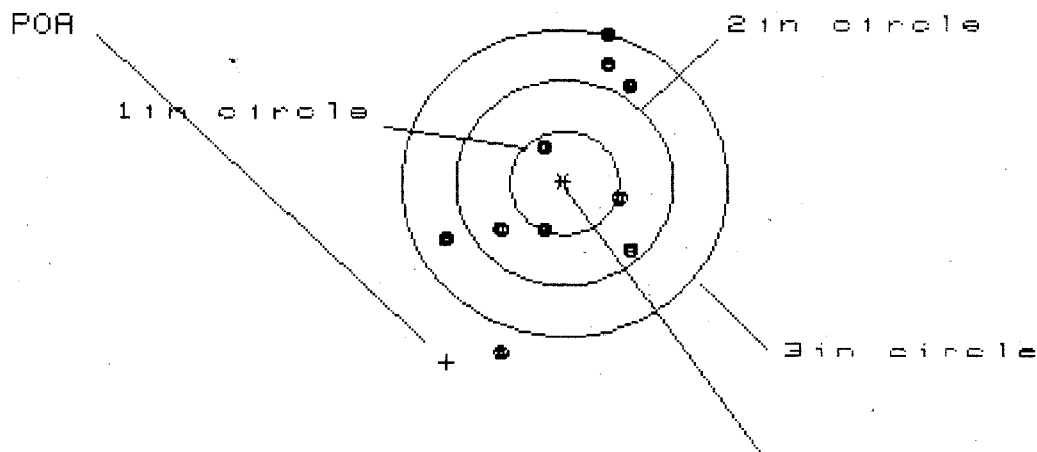

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 8

HS= 1.749

VS= 3.129

GS= 3.285

PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.656	.594	.640
MINIMUM X	-1.093	-1.155	-1.109
MAXIMUM Y	1.468	1.284	1.137
MINIMUM Y	-1.661	-.855	-.695
CENTROID X	1.092	1.154	1.108
CENTROID Y	1.748	1.932	1.772
POA TO CENTROID in.	2.061	2.251	2.090
MIN RADIUS	.379	.283	.366
MEAN RADIUS	.987	.898	.825
MAX RADIUS	1.754	1.373	1.252
HORIZONTAL SPREAD	1.749	1.749	1.749
VERTICAL SPREAD	3.129	2.139	1.832
EXTREME SPREAD	3.285	2.539	2.277
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

16 Sep 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225111

CENTERFIRE PATTERNS # 4

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in - 2

2 in - 5

3 in - 6

HS- 2.916

VS- 2.808

GS- 3.161


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.438	1.378	1.439
MINIMUM X	:	-1.478	-1.538	-1.477
MAXIMUM Y	:	1.769	1.770	1.013
MINIMUM Y	:	-1.039	-.842	-.621
CENTROID X	:	1.321	1.381	1.320
CENTROID Y	:	1.025	.828	.607
POA TO CENTROID in.	:	1.672	1.611	1.453
MIN RADIUS	:	.203	.127	.091
MEAN RADIUS	:	1.056	.893	.716
MAX RADIUS	:	1.851	1.837	1.760
HORIZONTAL SPREAD	:	2.916	2.916	2.916
VERTICAL SPREAD	:	2.808	2.612	1.634
EXTREME SPREAD	:	3.161	3.161	3.161
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		6	

16 Sep 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225111

CENTERFIRE PATTERNS # 5

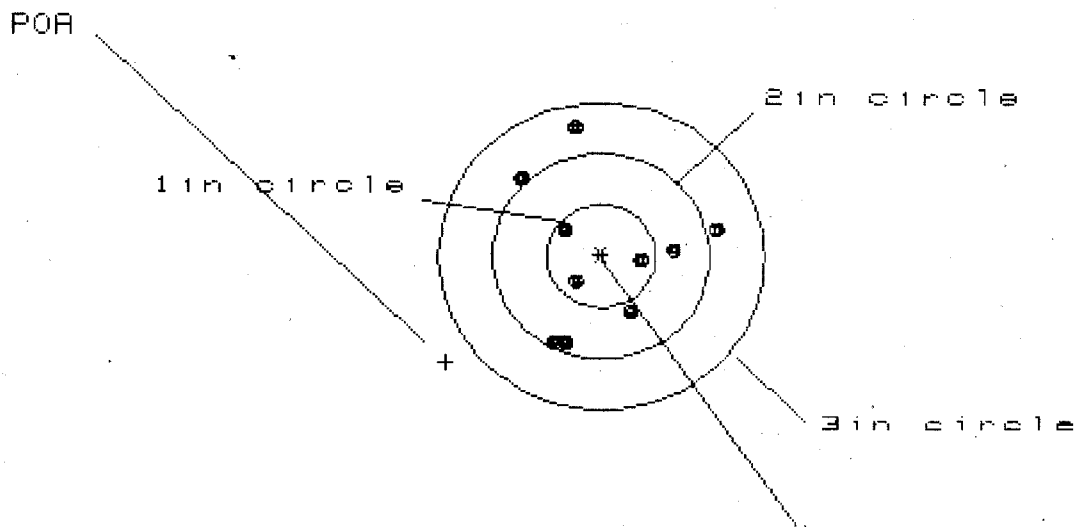

OF SHOTS- 10

IN CIR

1in - 3

2in - 7

3in - 10

HS- 1.826

VS- 2.160

GS- 2.165

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.078	1.051	.800
MINIMUM X	-.748	-.775	-.644
MAXIMUM Y	1.306	.864	.914
MINIMUM Y	-.854	-.709	-.659
CENTROID X	1.436	1.463	1.332
CENTROID Y	1.037	.892	.842
POA TO CENTROID in.	1.771	1.713	1.576
MIN RADIUS	.356	.309	.169
MEAN RADIUS	.777	.692	.625
MAX RADIUS	1.329	1.161	1.117
HORIZONTAL SPREAD	1.826	1.826	1.444
VERTICAL SPREAD	2.160	1.573	1.573
EXTREME SPREAD	2.165	1.886	1.620
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		10	

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6225111

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel <i>RB</i>		<i>2/24/89</i>	<i>WB</i>
620	Apply Coatings (Barrel Action)		<i>2/24/89</i>	<i>TA</i>
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake		<i>2/27/89</i>	<i>AC</i>

BARBER - M24 0049241		READINGS					DATE	INIT
op. #	OP. NAME							
625 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability						7/27/89	JO
	I) Firing Pin Indent							
	J) Assemble Stock						7/21/89	ALW
	K) Assemble Swivel Studs						7/21/89	WB
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection						8/2/89	JS
	A) Headspace							
	B) Trigger Pull	2.46	2.39	2.51	2.41	2.40	8/2/89	JS
	C) Function						8/2/89	JS
660	Pack						8/3/89	WB

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6225111DATE 27 July 89TESTER Jal.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.42		2.48	2.46	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.15		2.45	2.39	
PULL #3	2.47		2.37	2.51	
PULL #4	2.41		2.36	2.41	
PULL #5	2.42		2.24	2.40	
TOTAL	11.57		11.90	12.17	
AVG.	2.314		2.380	2.434	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1				
PULL #2				
PULL #3				
PULL #4				
PULL #5				
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.09			
PULL #2	4.32			
PULL #3	4.28			
PULL #4	4.27			
PULL #5	4.31			
TOTAL	21.27			
AVG.	4.254			

RECEIVING AND ESTIMATING REPORT

COMMENTS

M 24 SNIPER RIFLE

CUSTOMER ORDER NO.

CEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	MODEL AND GRADE	ORDER
18/90	11/09/90	KI 5-88	C6225111	700 7.62	R 90-29470
ORIES	W/STUDS	L/SIGHTS	SCOPE BASE	W/ 1 SWIVEL	

SHIP TO:

WEAPONS POOL BRANCH
MAINT. DIV. DOL
BLDG 9106
FORT BENNING GA 31905

WEAPONS POOL BRANCH
MAINT. DIV. DOL
BLDG 9106
FORT BENNING GA
31905

NT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	CLEAN/TEST	PROM. DATE	ESTIMATED	VIA
						UPS

CHARGE	TAX	INSURANCE	UPS	PARCEL POST	TOTAL

CONDITION: ☐ NEW ☐ SLIGHTLY WORN ☐ VERY WORN ☐ MISUSED ☐ MARRED

MER'S REQUEST

FAULT

- Re powder Coated
- Replaced Bolt - (old one Max Header)
- Replaced Stock

9/24/12 11/19/90

DAAAZI-87-G-0001-0014 RAC0007

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
RW	RW	DH	DH	DH	
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
DH	11/21/90	12-4-90	12-4-90	12-4-90	

OFFICE COPY

RD6925 REV. 7/90

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0049248

RECEIVING AND ESTIMATING REPORT

BARBER - M24 00492245

COMMENTS

SNIPER M-24 W/10X LEUPOLD SCOPE

CUSTOMER ORDER NO.

CEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	MODEL AND GRADE	ORDER
08/90	08/16/90		C6225111	9999 7.65 NATO	R 90-22041
ORIES SLING STRAP W/STUDS W/SWIVELS HARD CASE					

SHIP TO:

MAINTANCE DIVISION USAIC
ATTN ATZB-DL-MA-Q
BLDG 226
FORT BENNING GA 31905-5173

MAINTANCE DIVISION USAIC
ATTN ATZB-DL-MA-Q
BLDG 226
FORT BENNING GA
31905-5173

NT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
-----------	--------------------	--------------------------------	------------	-----------	------------

CHARGE	TAX	INSURANCE	UPS	PARCEL POST	TOTAL
--------	-----	-----------	-----	-------------	-------

CONDITION: ☐ NEW ☐ SLIGHTLY WORN ☐ VERY WORN ☐ MISUSED ☐ MARRED

VER'S REQUEST

FAULT

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

RD6925 REV. 6/88

WITH GUN

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 00492245

MAINTENANCE REQUEST				PAGE NO. 1	NO. OF PAGES 1	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)					
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG											
SECTION I - EQUIPMENT DATA											
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD 03		PD AUTHENTICATION <i>Leudmayer</i>			
☒ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION <i>Weapons Pool B- Maint Div, DOL</i>		B. LOCATION <i>Ft. Benning Ga 31905 Bldg 9106</i>		C. UNIT IDENT CODE <i>W04255</i>					
2. SERIAL NO. <i>C6225111</i>		3. NOUN NOMENCLATURE <i>Rifle Sniper</i>		4. LINE NO. <i>R95387</i>		5. MODEL <i>M24</i>		6. NATIONAL STOCK NUMBER <i>1005-01-240-2136</i>			
7A. MAINTENANCE ACTIVITY		B. LEVEL <i>H</i>		8. UTILIZATION CODE <i>Q</i>		9A. MCSR ITEM		9B. ERC			
						9C. PACING ITEM		10. HOURS			
								11. MILES			
								12. ROUNDS			
								13. STARTS			
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)						
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 068 Inoperative			
☐ B Handling		☒ D Normal Op		☐ F Inspection		☐ H Other		☐ 258 Overheating			
								☐ 790 Out of Adjustment			
								☐ 008 Noisy			
								☐ 387 Low Performance			
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). <i>Paint peeling off Barrel, Stock Fibers wearing through</i>											
B. REMARKS <i>Repair work not done - Rifle checked & repaired for function only - Remington Arms Co Inc -</i>											
SECTION II - WORK ACCOMPLISHED											
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)			19. AMS-ACCT. CODE		
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor					
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST	
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE							
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					.					\$	
					I. TOTAL MANHOURS		J. TOTAL MANHOURS COST		K. TOTAL PARTS COST		
							\$		\$		
21. DELAY (Select One)		☐ 1 Parts		☐ 2 Manpower		☐ 3 Facilities		☐ 4 Funds		☐ 5 Tools	
22. Data Transcribed											
23. SUBMITTED BY <i>Leudmayer</i>		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)	
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged	

BARBER - M24-0049247

ORDER
R 93-15025

W/ULTRA 10X-M3A SCOPE ATTN: FRED MARTIN
M-24

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
07/13/93	07/13/93	AN 3-93	C6225111		700 7.62 NATO
ACCESSORIES	SLING STRAP	W/STUDS	W/SWIVELS	HARD CASE	SCOPE MNTS
			W/SCOPE BASE		

SHIP TO:

CONSOLIDATED EQUIP POOL
ATTN TERRY MAJORS
FT BENNING GA
31905

CUST NO:059697 C.O.D L

WRITE ☐

VIA	U.F.S.
-----	--------

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

TOTAL

INSPECT

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

Front Sight Base misaligned

COMMENTS

Front Sight Mounting Base - 96011

Bad front sight base

PATTERN

DATE _____

FD6925 REV. 1/92

BARBER - M24 ~~0049247~~ **M2400049286**

MAINTENANCE REQUEST				PAGE NO. <u>1</u>		NO. OF PAGES <u>1</u>		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG											
SECTION I - EQUIPMENT DATA											
CONTROL NUMBER		WORK ORDER NO.			WESDC		ORG. PD <u>03</u>		PD AUTHENTICATION <i>[Signature]</i>		
☒ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION <u>Consolidated Equip Pool</u>			B. LOCATION <u>Ft. Benning Ga 31905</u>				C. UNIT IDENT CODE <u>W04255</u>		
2. SERIAL NO. <u>C6225111</u>		3. NOUN NOMENCLATURE <u>Rifle Sniper</u>			4. LINE NO.		5. MODEL <u>M24</u>		6. NATIONAL STOCK NUMBER <u>1005-01-240-2136</u>		
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS		11. MILES	12. ROUNDS	13. STARTS
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)						
☐ A Sch. Main.		☐ C Test	☐ E Storage	☐ G Flight	☐ 068 Inoperative		☐ 258 Overheating		☐ 790 Out of Adjustment		
☐ B Handling		☐ D Normal Op	☒ F Inspection	☐ H Other	☐ 008 Noisy		☐ 387 Low Performance		☐ Other		
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). <u>SEE ATTACHED DA Form 2404</u>											
B. REMARKS <u>This weapon was Returned with the Front Sight Mount Misaligned. There should be no charges</u>											
SECTION II - WORK ACCOMPLISHED											
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)				19. AMS ACCT. CODE	
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor					
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC. OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST	
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE							\$
					.						\$
					.						\$
					.						\$
					.						\$
					.						\$
					.						\$
					.						\$
					.						\$
					.						\$
					.						\$
					.						\$
					.						\$
					I. TOTAL MANHOURS		J. TOTAL MANHOURS COST \$		K. TOTAL PARTS COST \$		
21. DELAY (Select One)					☐ 1 Parts ☐ 2 Manpower ☐ 3 Facilities ☐ 4 Funds ☐ 5 Tools		22. Data Transcribed				
23. SUBMITTED BY <i>[Signature]</i>		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)	
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged	

725

★ U.S.GPO:1988-0-211-840

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 93-07797

INITIAL CUSTOMER ORDER NO.

M-24 W/ULTRA 10X-M3A SCOPE
W/HARD CASE, SCOPE MNTS, BASE

FPS

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

03/19/93

03/19/93

KI 5-88

C4225111

700 7.62

NATO/SWS

ACCESSORIES

SLING STRAP

W/STUDS

W/SWIVELS

FROM:

SHIP TO:

CONSOLIDATED EQUIP POOL
ATTN TERRY MAJORS
FT BENNING

GA 31905

CONSOLIDATED EQUIP POOL
ATTN TERRY MAJORS
FT BENNING

GA

31905

CUST NO: 059697 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

F1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

Check & Repair & Clean

PARTS

COMMENTS

Barrel - 96003

Clean
Re-zinc Scope Base, Scope Rings,
Swivels & Swivel Studs
Re-powder Coat Floor plate,
latch, Trigger Guard & Front &
Rear Sight Bases

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0049252 49291

1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75	
IDENT		FROM		FSC		NIIN		ADD		QUANTITY		DOCUMENT NUMBER		REQUISITIONER		DATE		SERIAL		SUPPLEMENTARY ADDRESS		FUND		DISTRIBUTION		PROJECT		PRIORITY		REC'D DEL DATE		A/C		N		TOTAL DOLL																																																																																																																	
A5AAW1		1005-01-240-2136		EA00004		W33BQ9		3071-0101		CMBBAN		MGZ		03																								51																																																																																																															
SHIPPED FROM Supply & Services Division Whse 224 Fort Benning, GA 31905-5182										SHIP TO Remington Arms Co Inc ATTN: Custom Shop 14 Hoefler Ave Ilion, NY 13357										MARK FOR PROJECT #2										TOTAL DOLL 205																																																																																																																							
WAREHOUSE LOCATION LKAH1										TYPE OF CARGO G		UNIT PACK H		UNIT WEIGHT I		UNIT CUBE J		UFC K		NMFC L		FREIGHT RATE M		DOCUMENT DATE N		MAT COND O		QUANTITY P		CONTRACT #DAA21-87-G001																																																																																																																							
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED) T										FREIGHT CLASSIFICATION NOMENCLATURE U										SN #C6225403, C6348795, C6225453																																																																																																																																	
ITEM NOMENCLATURE W										RIFLE 7.62 MM M24 (Sniper)										Y																																																																																																																																	
SELECTED BY AND DATE RT 3070					TYPE OF CONTAINER(S) Box Container					TOTAL WEIGHT 236					RECEIVED BY AND DATE 7					INSPECTED BY AND DATE 8																																																																																																																																	
PACKED BY AND DATE RT 3074					NO OF CONTAINER(S) 4					TOTAL CUBE 26 cu					WAREHOUSED BY AND DATE 9					WAREHOUSE LOCATION 10																																																																																																																																	
REMARKS SHIP US REGISTERED RETURN RECEIPT REQUESTED										CC										DD										EE																																																																																																																							
FIRST DESTINATION ADDRESS 11										DATE SHIPPED 12										FF										GG																																																																																																																							
TRANSPORTATION CHARGEABLE TO P7										BLADING, AWB, OR RECEIVER'S SIGNATURE (AND DATE) 14										RECEIVER'S DOCUMENT NUMBER 15																																																																																																																																	

DD Form 1348-1, SEP 87

Jun 86 edition may be used.

FORM APPROVED OMB NO. 0704-0188

DOD SINGLE LINE ITEM RELEASE/RECEIPT DO

Dim: 17.5" x 50" x 13" ©

MAINTENANCE REQUEST						PAGE NO.	NO. OF PAGES	REQUIREMENTS CONTROL SYMBOL		
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG						1	1	CSGLD - 1047(R1)		
SECTION I - EQUIPMENT DATA										
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD		PD AUTHENTICATION		
						03		<i>[Signature]</i>		
☒ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION CONSOI Equir POOL		B. LOCATION Ft. Benning G4 31905			C. UNIT IDENT CODE WD4255			
2. SERIAL NO. 06225111		3. NOMENCLATURE Rifle		4. LINE NO.		5. MODEL M24		6. NATIONAL STOCK NUMBER 1005-01-240-2136		
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS	11. MILES	12. ROUNDS	13. STARTS
14. FAILURE DETECTED DURING (Select one - use ☒ or X) ☐ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X) ☐ 068 Inoperative ☐ 258 Overheating ☐ 790 Out of Adjustment ☐ 008 Noisy ☐ 387 Low Performance ☐ Other					
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). SEE ATTACHED 2404										
B. REMARKS										
SECTION II - WORK ACCOMPLISHED										
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X) ☐ 1 TOE ☐ 2 TD ☐ 3 Contractor			19. AMS ACCT. CODE	
B. LOCATION										
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO. (1) CB CODE (2) REF DESIGN. (3) MFR. CODE			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER	F. PART SOURCE CODE	G. QTY.	H. PARTS COST	
					.				\$	
					.				\$	
					.				\$	
					.				\$	
					.				\$	
					.				\$	
					.				\$	
					.				\$	
					.				\$	
					.				\$	
					.				\$	
					I. TOTAL MANHOURS	J. TOTAL MANHOURS COST \$	K. TOTAL PARTS COST \$			
21. DELAY (Select One) ☐ 1 Parts ☐ 2 Manpower ☐ 3 Facilities ☐ 4 Funds ☐ 5 Tools					22. Data Transcribed					
23. SUBMITTED BY <i>[Signature]</i>		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		
28. DISPOSITION (Select One) ☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged										

BARBER - M24 062409949294

DA FORM 2404 APR 79 Replaces edition of 1 Jan 84, which will be used

BARBER - M24 0049255

U.S.GPO:1988-0-211-840

[illegible]

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 062499049295

RECEIPT BARBER - M24 0049257 REPORT

COMMENTS

ORDER
R 97-03145

INITIAL CUSTOMER ORDER NO.

JJM

WOG 2 OF 3

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE	
02/04/97	02/04/97	AN 3-93	C6225111		700 7.62	NATO
ACCESSORIES HARD CASE SCOPE BASE W/STUDS W/Scope & Rings " # 1215						

FROM:

SHIP TO:

SUPPLY & SERVICE DIVISION
WHSE. 224
FT. BENNING

GA 31905

SUPPLY & SERVICE DIVISION
WHSE. 224
FT. BENNING GA
31905

CUST NO: 080509 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE

TRIGGER GROUP

BOLT ASSY.

BARREL ASSY.

REC. ASSY.

WOOD

METAL

MAIN FAULT

PARTS

COMMENTS

Barrel 96003

Repowder Coat Trigger Guard
Assy, Front & Rear Sight
Base's
Re zinc Scope Base, ~~Rings~~ &
Swivel Studs Rings

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
-----------	-------	-------	------	--------	---------

GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
----------------	------	------	------	------	------

OFFICE COPY

RD6925 REV. 11/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0049257 M2400049296

BARBER - M24 064099849297

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG			PAGE NO	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)
SECTION I - CUSTOMER DATA			SECTION II - MAINTENANCE ACTIVITY DATA		
1a. UIC CUSTOMER <i>024584</i>	1b. CUSTOMER UNIT NAME	1c. PHONE NO <i>5-7518</i>	3a. WORK ORDER NUMBER (WON)	3b. SHOP	3c. PHONE NO
2a. SAMS-2 UIC/SAMS-I/TDA	2b. UTILIZATION CODE	2c. MCSR	4a. UIC SUPPORT UNIT	4b. SUPPORT UNIT NAME	
SECTION III - EQUIPMENT DATA					
5. TYPE MNT REQ CODE	6. ID	7. NSN <i>1005-01-240-2136</i>	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751		
8. MODEL <i>M-24</i>			15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M K
9. NOUN <i>SNIPER RIFLE</i>					H R
10a. ORG WON/DOC NO	10b. EIC				
11. SERIAL NUMBER <i>0632511</i>	12. QTY <i>0001</i>	13. PD	17. PROJECT CODE (if assigned)	18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N)
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			20. ADMIN NO		
			21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		
			22. LEVEL OF WORK		
			23. SIGNATURE		
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) <i>SHOT OUT OVER 10,000 RDS</i>					
25. REMARKS <i>POC SSG WHITBY 5-7518</i>					
PREPARATION INSTRUCTIONS FOR THIS PAGE					
SECTION I Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.			SECTION III (Cont'd) Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.		
SECTION II Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.					
SECTION III Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.					
34. SUBMITTED BY	35a. ACCEPTED BY	35c. DATE	Block 34a. Enter first initial and last name of submitter. Block 34b. Enter ordinal date submitted (YYDDD). Block 35a. Enter first initial and last name of person accepting maint. request. Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751. Block 35c. Enter ordinal date accepted (YYDDD). Block 35d. Enter military time.		
34b. DATE	35b. STATUS	35d. TIME			

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 064099849297

21 DAY TURN - AROUND *New Barrel*

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. *C6225111*

LOG IN DATE: / /

DATE

INIT.

INSPECT & VERIFY:

OP. #	OP. NAME
550	DIS-ASSEMBLE GUN
560 A	RE-BARREL AT CUSTOM SHOP
B	DRILL & TAP
C	POLISH
575	ASSEMBLE
600	PROOF
605	CHECK HEADSPACE
610	DIS-ASSEMBLE
612	MAGNAFLUX
615	ROLLMARK CALIBER
618	ROTO-BLAST
620	APPLY COATINGS
625 A	FINAL ASSEMBLY
B	TRIGGER PULL TEST
C	SAFETY ON FORCE
D	SAFETY OFF FORCE
E	FIRING PIN INDENT
640	TARGET
655	FINAL INSPECT
660	PACK
	QAR INSPECTION

*2/6/97**Rw**3/4/97**Rw**2/28/97**Rw**3/4/97**Rw*

SHIP DATE

Final Inspection

Sn: C6225711

DATE REC'D: 2/4/97

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

BARBER - M24 0049261

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225111
3 Mar 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0238
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1666
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .168291

THE AMR FOR THIS RIFLE IS: 1.146

CENTROIDAL DISTANCES

0 TO 1	.829869
1 TO 2	.946303
1 TO 3	.860976
1 TO 4	.661151
1 TO 5	1.03155

5 2 3 4 <----POA


1

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .830
 MIN RADIUS : .485
 MEAN RADIUS : 1.441
 MAX RADIUS : 3.742
 CENTROID X : .251
 CENTROID Y : -.791

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225111

CENTERFIRE PATTERN # 1

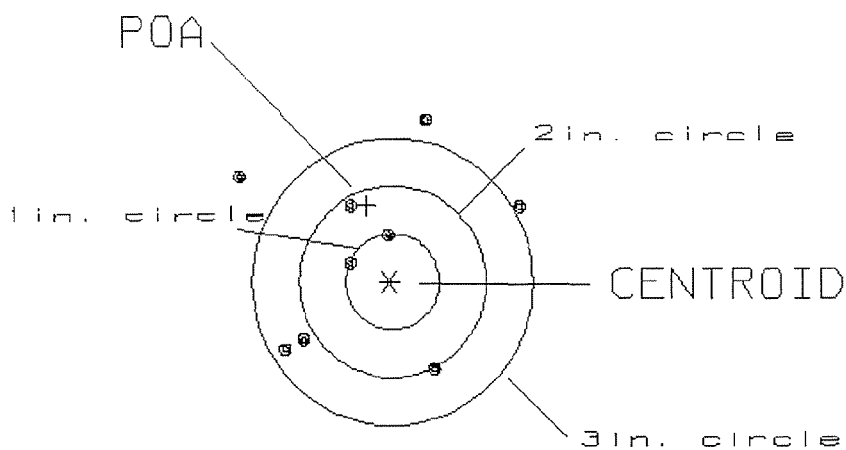

OF SHOTS= 10

IN CIRCLE

HS= 4.10

1

VS= 4.51

3

GS= 5.64


6

PATTERN #: 2
 POA TO CENTROID: .201
 MIN RADIUS : .589
 MEAN RADIUS : 1.198
 MAX RADIUS : 1.856
 CENTROID X : -.196
 CENTROID Y : .042

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225111

CENTERFIRE PATTERN # 2

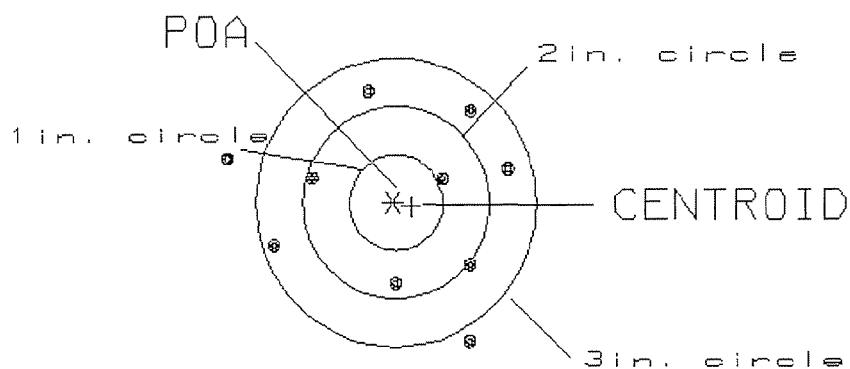

OF SHOTS= 10

IN CIRCLE

HS= 3.03

0

VS= 2.58

3

GS= 3.21


8

PATTERN #: 3
 POA TO CENTROID: .040
 MIN RADIUS : .463
 MEAN RADIUS : 1.304
 MAX RADIUS : 2.518
 CENTROID X : .015
 CENTROID Y : .037

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225111

CENTERFIRE PATTERN # 3

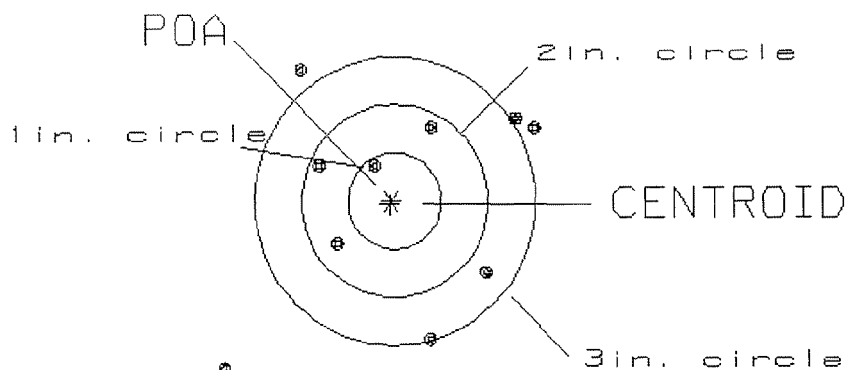

OF SHOTS= 10

IN CIRCLE

HS= 3.29

1

VS= 3.07

4

GS= 4.12


5

PATTERN #: 4
 POA TO CENTROID: .249
 MIN RADIUS : .131
 MEAN RADIUS : .896
 MAX RADIUS : 2.123
 CENTROID X : .212
 CENTROID Y : -.131

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225111

CENTERFIRE PATTERN # 4

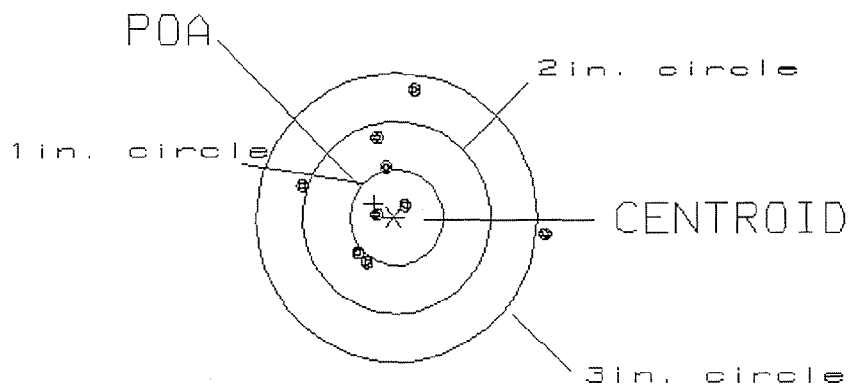

OF SHOTS= 10

IN CIRCLE

HS= 2.55
 VS= 3.47
 GS= 3.47


2
 6
 8

PATTERN #: 5
 POA TO CENTROID: .400
 MIN RADIUS : .073
 MEAN RADIUS : .890
 MAX RADIUS : 2.292
 CENTROID X : -.399
 CENTROID Y : .010

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225111

CENTERFIRE PATTERN # 5

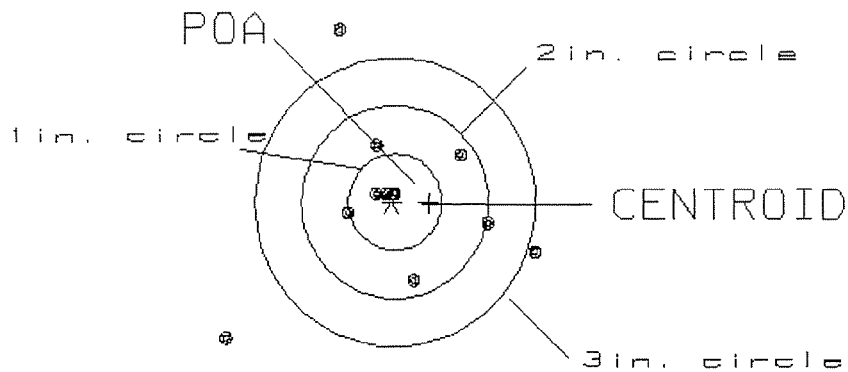

OF SHOTS= 11

IN CIRCLE

HS= 3.30

3

VS= 3.13

7

GS= 3.41

8

00299

5091