

C6225531

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Smead®

Arms Services Repair Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00087797** Serial: C6225531 Model: M24 SWS Center Fire Caliber: 7.62 NATO Repairman: Status: Closed 11/11/2004 10:13:03 AM

Verify Repair

Address Information

Customer: ☐ Received From ☒ Return To: ☐ Received From ☒

Name: **TRANSPORTATION DIV DFEL** **TRANSPORTATION DIV DFEL**

Address 1: **BLDG 1836** **BLDG 1836**

Address 2: **6759 MITCHELL AVE** **6759 MITCHELL AVE** PO Box: PO Box:

City: **FORT BENNING** **FORT BENNING**

State: **GA** Zip Code: **31905** Country: **US** State: **GA** Zip Code: **31905** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information:

Phone:

Fax:

Email:

Comments:

Received Condition:

Good

Condition Notes:

CSR Notes:

Accessories Received:

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
C000	FRT AND RSGT BAS	1

Repair Search Refresh Close

maglet 11/11/2004 11:22 AM CAPS NUM INS SCPL

start 3 4 5 6 7 8 9 10

Serial Number: **C6225531**

Model: **M24 SWS**



RE00087797

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225531.___0

FILE DATE AND TIME: 12/08/2004 07:54

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.057
The Average Y Centroid of the Five Target Set:	-0.084
The Average Point of Impact of the Five Target Set:	0.102
The Average Mean Radius of the Five Target Set:	0.590
The Distance from POA to Centroid Target #1:	0.166
The Distance from Centroid Target #2 to Centroid Target #1:	0.396
The Distance from Centroid Target #3 to Centroid Target #1:	0.240
The Distance from Centroid Target #4 to Centroid Target #1:	0.332
The Distance from Centroid Target #5 to Centroid Target #1:	0.352

BARBER - M24 0050763

SERIAL NUMBER: C6225531. __0
 TARGET NUMBER: 1
 FILE DATE: 12/08/2004
 FILE TIME: 07:54

POINT#	X	Y
1:	1.776	0.722
2:	0.495	1.140
3:	0.112	0.687
4:	-0.359	0.489
5:	-0.883	0.061
6:	0.094	0.201
7:	-0.040	-0.072
8:	0.451	-0.354
9:	0.057	-0.868
10:	-0.331	-1.078

X CENTROID: 0.137
 Y CENTROID: 0.093
 POA TO CENTROID: 0.166
 HORZ SPREAD: 2.659
 VERT SPREAD: 2.218
 GROUP SPREAD: 2.771
 MIN RADIUS: 0.117
 MAX RADIUS: 1.755
 MEAN RADIUS: 0.824
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 9

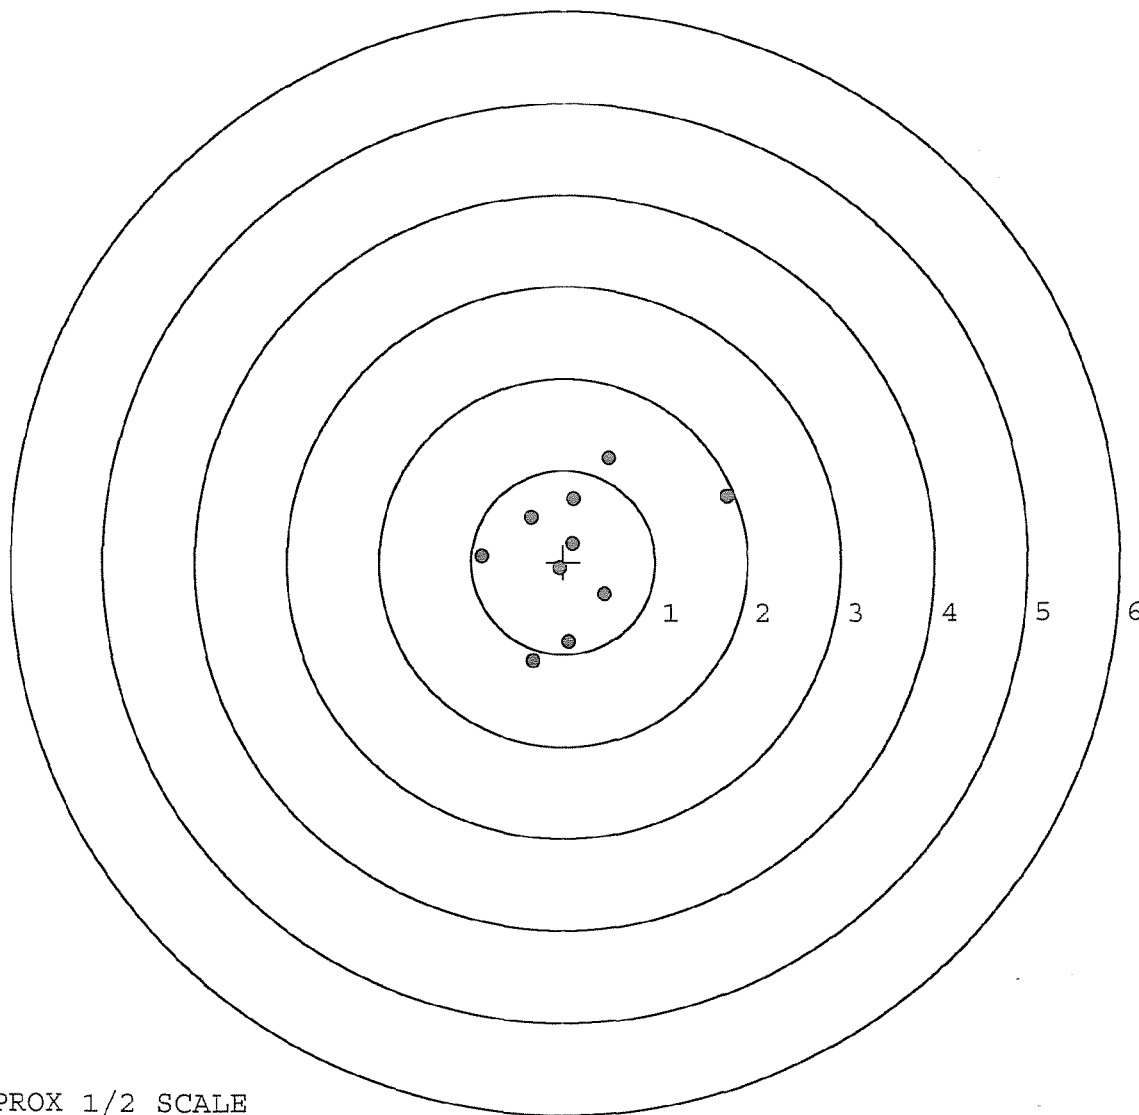


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225531.0
 TARGET NUMBER: 2
 FILE DATE: 12/08/2004
 FILE TIME: 07:54

X CENTROID: -0.157
 Y CENTROID: -0.173
 POA TO CENTROID: 0.234
 HORZ SPREAD: 1.591
 VERT SPREAD: 1.612
 GROUP SPREAD: 1.857
 MIN RADIUS: 0.189
 MAX RADIUS: 1.122
 MEAN RADIUS: 0.568
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.672	-0.355
2:	-0.097	-0.547
3:	-0.533	-0.363
4:	-0.800	-0.440
5:	-0.919	-0.996
6:	0.002	0.616
7:	0.150	0.349
8:	0.059	0.163
9:	-0.166	0.016
10:	0.059	-0.169

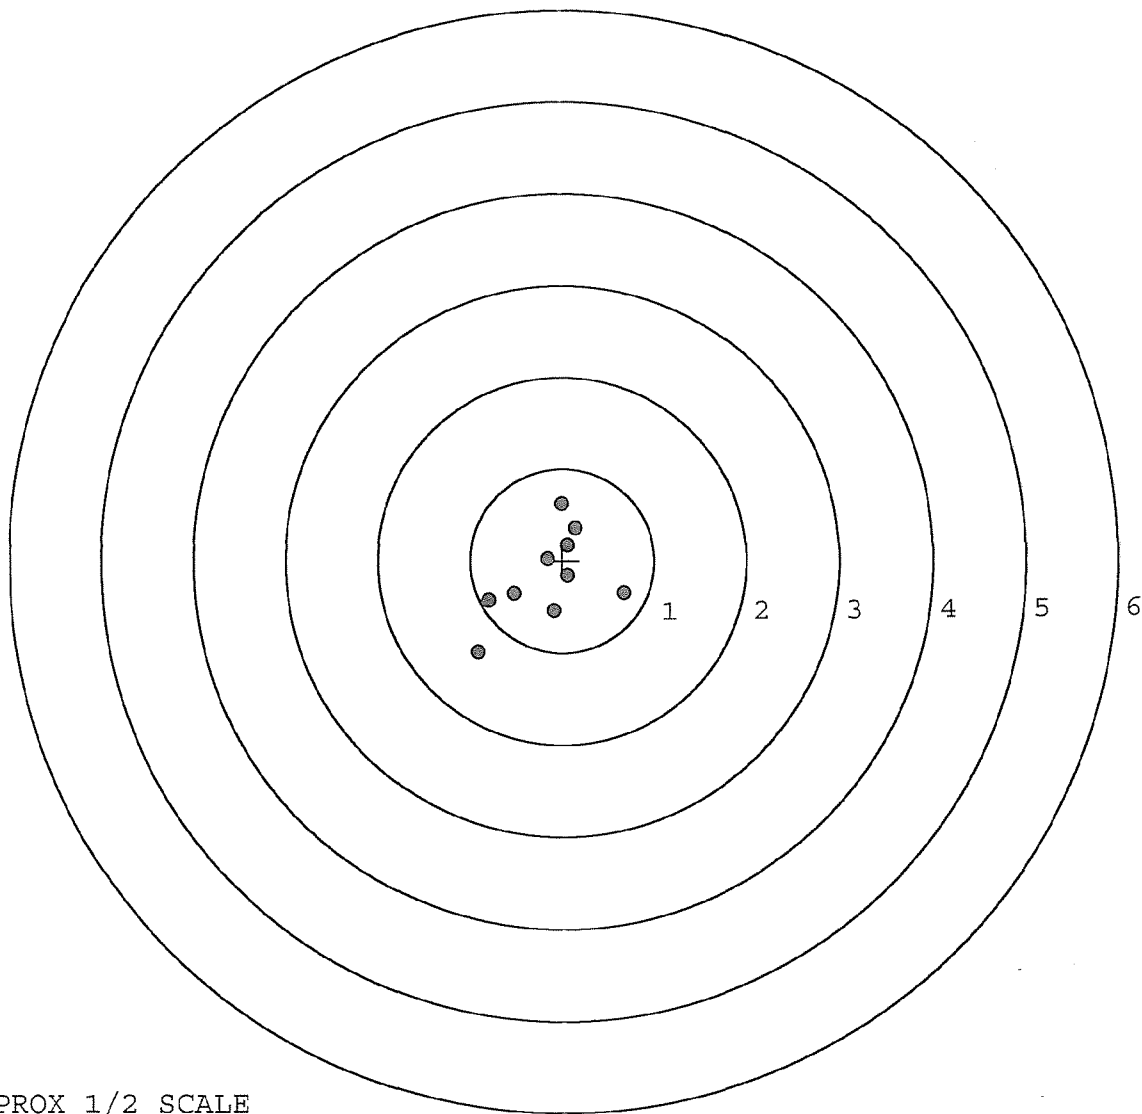


TARGET APPROX 1/2 SCALE

BARBER - M24 0050765

SERIAL NUMBER: C6225531. __0
 TARGET NUMBER: 3
 FILE DATE: 12/08/2004
 FILE TIME: 07:54

X CENTROID: -0.037
 Y CENTROID: -0.072
 POA TO CENTROID: 0.081
 HORZ SPREAD: 1.300
 VERT SPREAD: 0.924
 GROUP SPREAD: 1.324
 MIN RADIUS: 0.139
 MAX RADIUS: 0.698
 MEAN RADIUS: 0.406
 # IN 1 IN DIAMETER: 7
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.315	0.388
2:	0.661	-0.064
3:	0.262	0.006
4:	0.029	0.149
5:	0.081	-0.536
6:	-0.639	-0.315
7:	-0.436	0.053
8:	-0.186	-0.298
9:	-0.136	0.025
10:	-0.322	-0.128

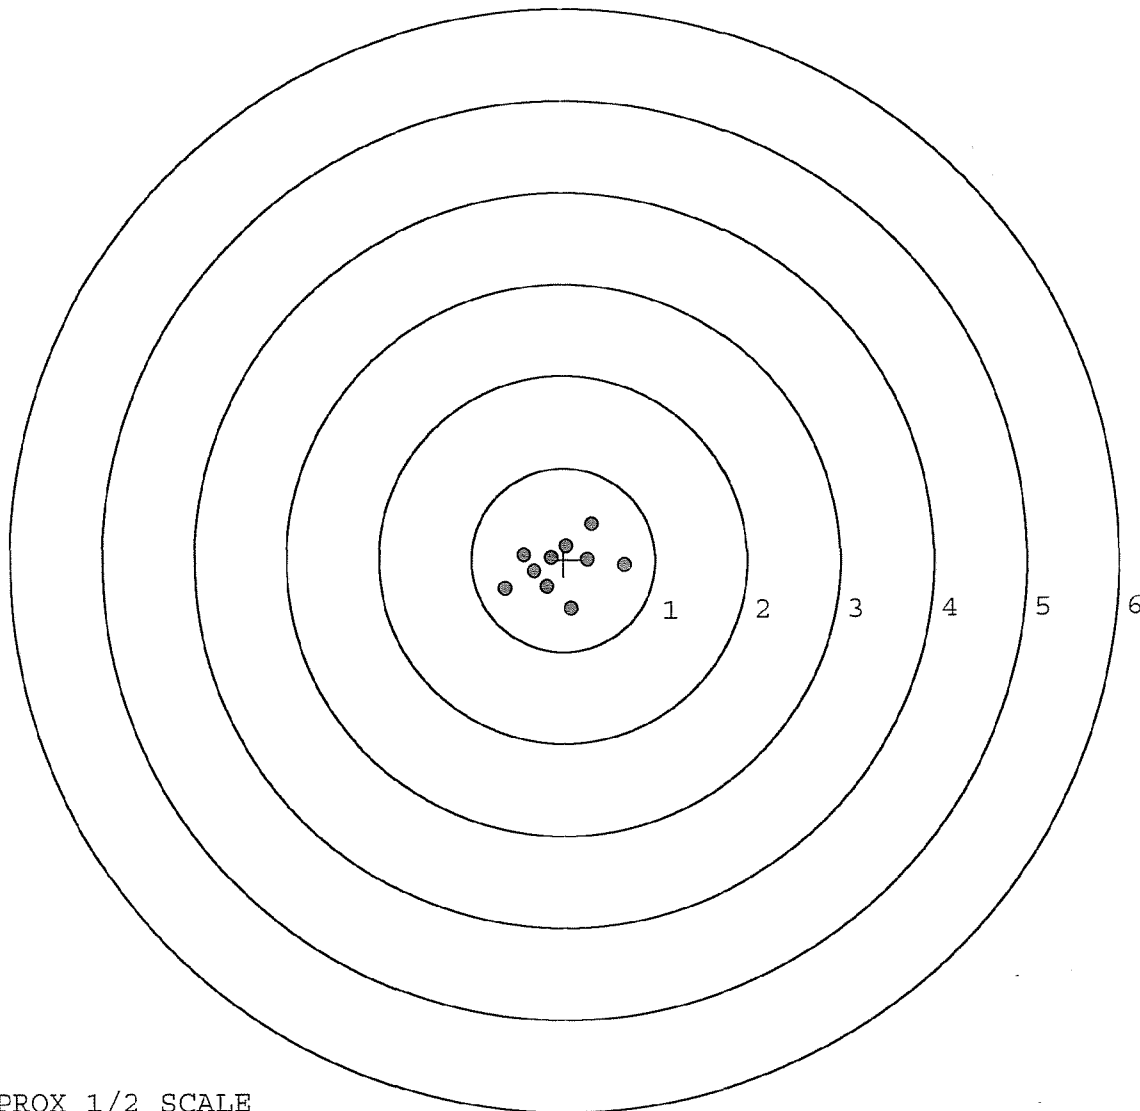


TARGET APPROX 1/2 SCALE

BARBER - M24 0050766

SERIAL NUMBER: C6225531. __0
 TARGET NUMBER: 4
 FILE DATE: 12/08/2004
 FILE TIME: 07:54

X CENTROID: -0.138
 Y CENTROID: -0.093
 POA TO CENTROID: 0.166
 HORZ SPREAD: 1.289
 VERT SPREAD: 1.124
 GROUP SPREAD: 1.432
 MIN RADIUS: 0.177
 MAX RADIUS: 0.759
 MEAN RADIUS: 0.473
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.488	-0.380
2:	0.450	0.388
3:	-0.213	0.577
4:	-0.801	-0.233
5:	-0.635	-0.547
6:	-0.209	-0.478
7:	-0.078	-0.317
8:	-0.327	-0.067
9:	0.088	0.048
10:	-0.140	0.084

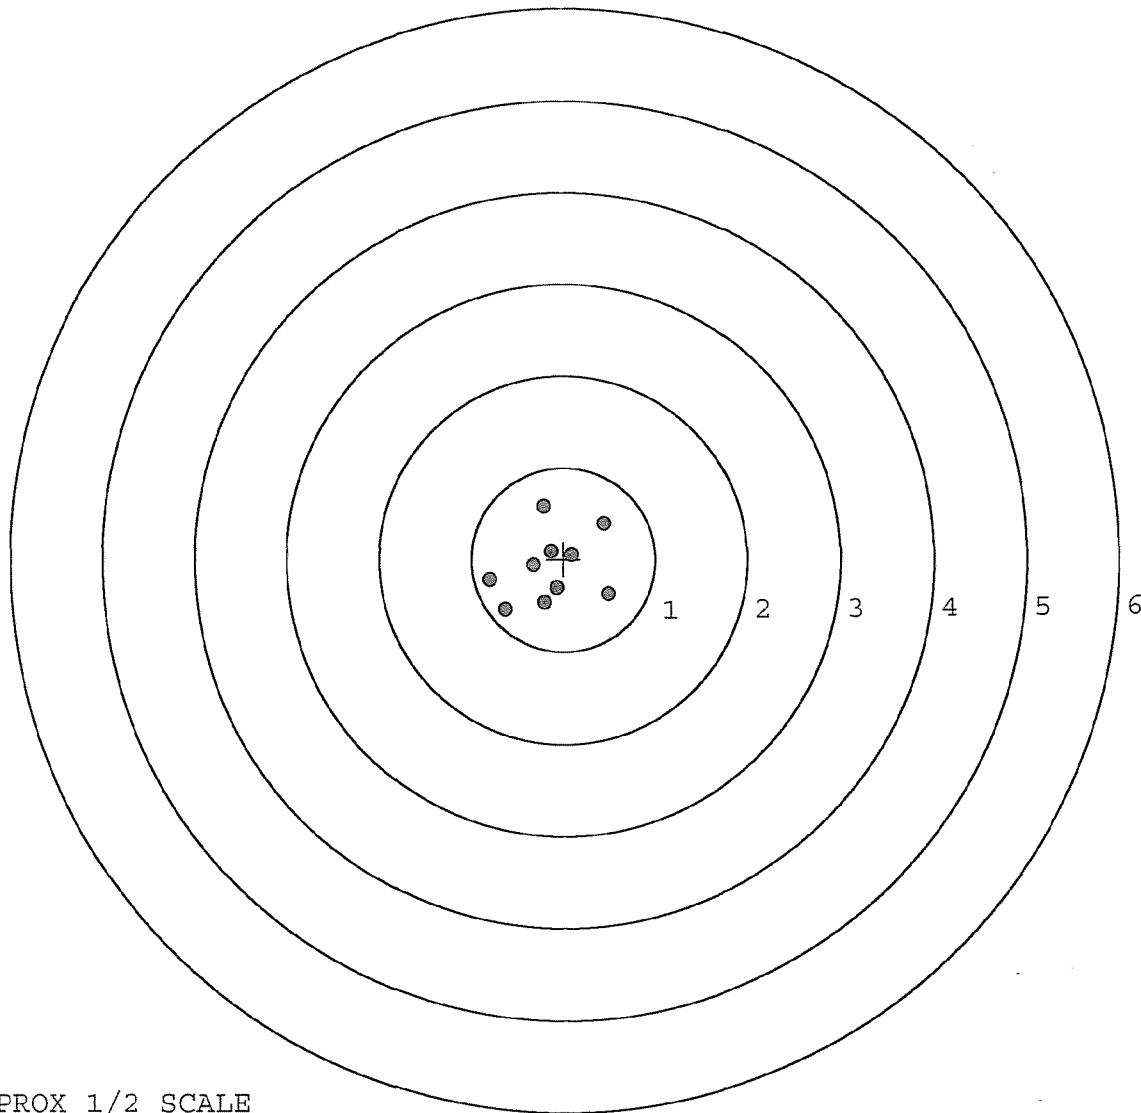


TARGET APPROX 1/2 SCALE

BARBER - M24 0050767

SERIAL NUMBER: C6225531. __0
 TARGET NUMBER: 5
 FILE DATE: 12/08/2004
 FILE TIME: 07:54

POINT#	X	Y
1:	0.932	-0.668
2:	0.394	0.496
3:	-0.269	0.317
4:	-1.019	0.707
5:	-0.882	-0.339
6:	-0.536	-0.587
7:	-0.038	-0.751
8:	0.047	-0.471
9:	0.333	-0.375
10:	0.151	-0.097

X CENTROID: -0.089
 Y CENTROID: -0.177
 POA TO CENTROID: 0.198
 HORZ SPREAD: 1.951
 VERT SPREAD: 1.458
 GROUP SPREAD: 2.387
 MIN RADIUS: 0.253
 MAX RADIUS: 1.283
 MEAN RADIUS: 0.681
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

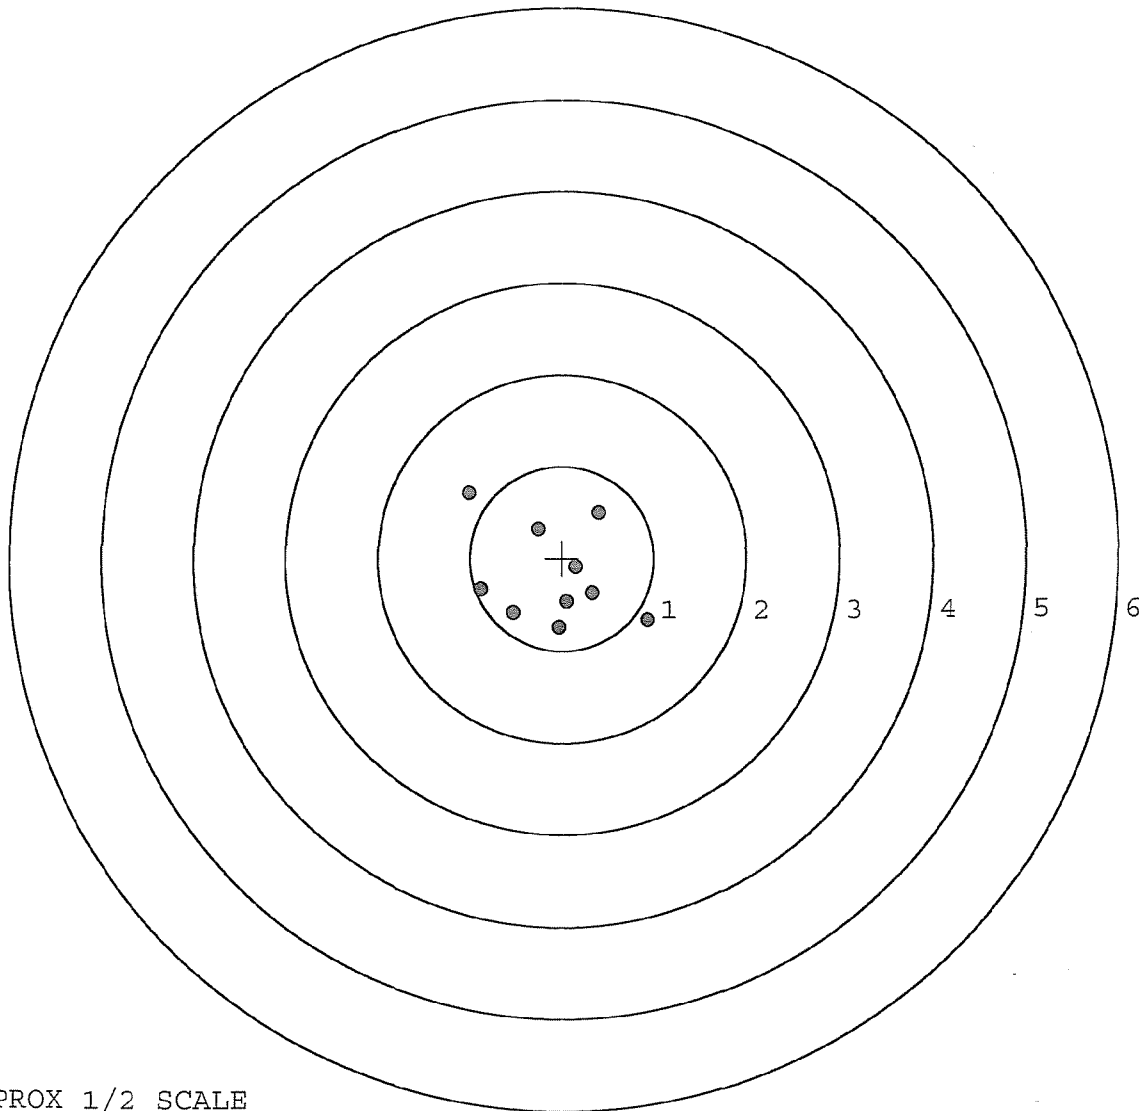

TARGET APPROX 1/2 SCALE

SERIAL # C 6225531 INSPECTED BY: ACDATE REC'D: 11-11-04 DATE RET'D: 12-9-04

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☐ FRONT SIGHT BASE
☐ REAR SIGHT BASE
☐ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☐ SCOPE
☐ SCOPE RINGS
☐ MOUNTING SCREWS
☐ MOUNTING BASE
☐ SCREWS
☐ FINISH
☐ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☐ SCOPE CASE
☐ IRON SIGHTS
☐ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS: _____

R & E NUMBER	87797		Supp.# 4358
SERIAL NUMBER	C6225531		
LOG-IN DATE	11-11-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	11-15-04	RTL
560 A	RE-BARREL	11-16-04	RTL
B	DRILL AND TAP		
575	ASSEMBLE	11-16-04	RTL
600	PROOF	11-16-04	RTL
605	CHECK HEADSPACE	11-16-04	RTL
610	DIS-ASSEMBLE GUN	11-17-04	RTL
612	MAGNAFLUX	OPERATOR	
615	ROLLMARK CALIBER	11-18-04	SB/CW
618	ROTO-BLAST	11-30-04	LB
620	APPLY COATINGS	12/1/04	
625 A	FINAL ASSEMBLY	12-7-04	RTL
B	TRIGGER PULL TEST	N/A	
C	SAFETY "ON" FORCE		N/A
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	12-8-04	TRW
655	FINAL INSPECT	12-8-04	AC
660	PACK	12-9-04	DA
		SHIP DATE	
QAR INSPECTION DATE			

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225531

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	4 12 89		RW
600	Proof	4 12 89		RW
607	Check Headspace	4 12 89		RW
610	Dis-assemble Gun	4 12 89		RW
612	Magnaflux Barrel Action		4/13/89	KCR
	Magnaflux Bolt		4/14/89	KCR
615	Rollmark Caliber		4/15/89	GS
617	Drill and Tap Sight Holes	4 14 89		LB
618	Polish Barrel RB	4 14 89		BT
620	Apply Coatings (Barrel Action)		4-19-89	TJA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		5/8/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/8/89	RW
	C) Inspect Ejector Hole for Chamfer		5/8/89	RW
	D) Oil Firing Pin Ass'y		5/8/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		5/11/89	WB

op. #	BARBER - M24 0050771 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			5/11/89	guy
	G) Safety Off Force	2	2	2			5/11/89	guy
	H) Trigger Pull Test & Retainability						5/11/89	WOB
	I) Firing Pin Indent	.021	.021.5	.020			5/11/89	guy
	J) Assemble Stock						5/11/89	RW
	K) Assemble Swivel Studs						15 May 89	JS
	L) Attach Front and Rear Sight Assemblies						5/11/89	RW
	M) Iron Sight Alignment						5/11/89	RW
	N) Detach Front & Rear Sights & place in numbered container						5/11/89	RW
	O) Attach Scope to Rifle						5/11/89	guy
	P) Detach & Attach Scope 20 Times						5/12/89	guy
640	Gallery Target & Test	74R	80L				5/12/89	DH
	A) Time						5/12/89	DH
	B) Malfunctions						5/12/89	DH
	C) Pierced Primers						5/12/89	DH
	D) Optical Clarity of Scope						5/12/89	DH
645	Inspect for Live Ammo						5/12/89	DH
655	Final Inspection							
	A) Headspace						15 May 89	JS
	B) Trigger Pull	2.48	2.84	2.64	2.83	2.74	15 May 89	JS
	C) Function						15 May 89	JS
660	Pack						21 June 89	JS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6348971

DATE 6 NOV 89

TESTER 918

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	251	232	220	249	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	224	221	219	268	
PULL #3	231	223	217	266	
PULL #4	235	217	215	264	
PULL #5	240	224	218	271	
TOTAL	1181	1117	1089	1318	
AVG.	2.362	2.234	2.178	2.636	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	295	297		
PULL #2	290	300		
PULL #3	293	305		
PULL #4	291	306		
PULL #5	292	289		
TOTAL	1461	1492		
AVG.	2.922	2.984		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	398	402		450
PULL #2	489	396		419
PULL #3	381	362		437
PULL #4	384	381		431
PULL #5	387	391		420
TOTAL	2039	1932		2207
AVG.	4.078	3.864		4.414

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225531
15 May 1989

CENTROIDAL DISTANCES

Ø TO	1	.758359
1 TO	2	.924807
1 TO	3	.727836
1 TO	4	1.09256
1 TO	5	.2067


15 + <----POA
32
4

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.337
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1944
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .389051
THE AMR FOR THIS RIFLE IS: .8326

15 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225531

CENTERFIRE PATTERNS # 1

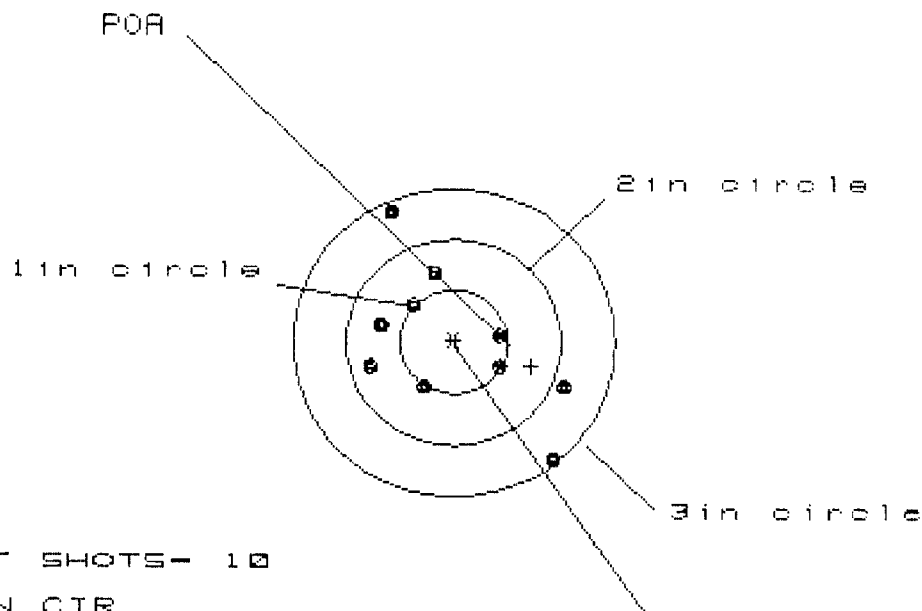

OF SHOTS- 10

IN CIR

1in = 3

2in = 7

3in = 10

HS= 1.769

VS= 2.389

GS= 2.828

CENTROID *

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.002	1.104	1.042
MINIMUM X	-.767	-.665	-.727
MAXIMUM Y	1.288	1.165	.732
MINIMUM Y	-1.101	-.571	-.425
CENTROID X	-.722	-.824	-.762
CENTROID Y	.232	.355	.209
POA TO CENTROID in.	.758	.897	.790
MIN RADIUS	.467	.315	.463
MEAN RADIUS	.808	.724	.651
MAX RADIUS	1.434	1.265	1.126
HORIZONTAL SPREAD	1.769	1.769	1.769
VERTICAL SPREAD	2.389	1.736	1.157
EXTREME SPREAD	2.828	2.359	1.782
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	10		

15 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225531

CENTERFIRE PATTERNS # 2

POA

1 in circle

2 in circle

3 in circle

CENTROID #

OF SHOTS - 10

IN CIR

1 in - 2

2 in - 6

3 in = 10

HS = 2.056

VS = 2.119

GS = 2.196

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.099	.544	.546
MINIMUM X	:	-.957	-.835	-.833
MAXIMUM Y	:	.890	.958	.813
MINIMUM Y	:	-1.229	-1.161	-1.064
CENTROID X	:	.020	-.103	-.105
CENTROID Y	:	-.320	-.388	-.243
POA TO CENTROID in.	:	.321	.401	.265
MIN RADIUS	:	.228	.299	.201
MEAN RADIUS	:	.826	.785	.709
MAX RADIUS	:	1.258	1.161	1.068
HORIZONTAL SPREAD	:	2.056	1.379	1.379
VERTICAL SPREAD	:	2.119	2.119	1.877
EXTREME SPREAD	:	2.196	2.119	1.877
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

15 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225531

CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS - 10

IN CIR

1 in - 2

2 in - 8

3 in - 8

HS = 3.439

VS = 2.147

GS = 3.713


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.528	.891	.673
MINIMUM X	:	-1.911	-1.741	-.880
MAXIMUM Y	:	.868	.726	.724
MINIMUM Y	:	-1.279	-.476	-.478
CENTROID X	:	-.174	-.344	-.126
CENTROID Y	:	-.247	-.105	-.103
POA TO CENTROID in.	:	.302	.360	.163
MIN RADIUS	:	.433	.218	.376
MEAN RADIUS	:	.930	.798	.659
MAX RADIUS	:	1.992	1.741	.890
HORIZONTAL SPREAD	:	3.439	2.632	1.553
VERTICAL SPREAD	:	2.147	1.202	1.202
EXTREME SPREAD	:	3.713	2.671	1.668
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		8	

15 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225531

CENTERFIRE PATTERNS # 4

POR

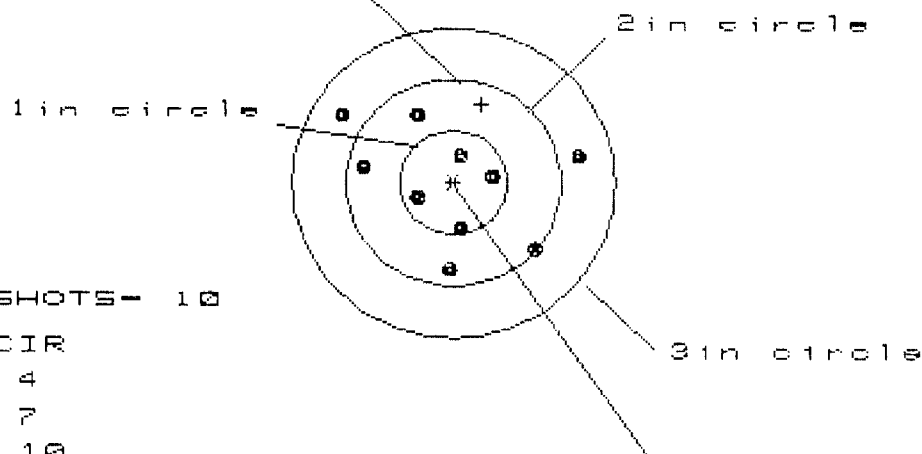

OF SHOTS- 10

IN CIR

1 in = 4

2 in = 7

3 in = 10

HS= 2.161

VS= 1.504

GS= 2.218


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.161	1.049	.808
MINIMUM X	:	-1.000	-.920	-.788
MAXIMUM Y	:	.649	.701	.741
MINIMUM Y	:	-.855	-.783	-.743
CENTROID X	:	-.262	-.150	-.282
CENTROID Y	:	-.759	-.831	-.871
POR TO CENTROID in.	:	.803	.845	.916
MIN RADIUS	:	.312	.312	.354
MEAN RADIUS	:	.736	.680	.619
MAX RADIUS	:	1.193	1.097	.978
HORIZONTAL SPREAD	:	2.161	1.969	1.596
VERTICAL SPREAD	:	1.504	1.484	1.484
EXTREME SPREAD	:	2.218	1.970	1.809
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

15 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225531

CENTERFIRE PATTERNS # 5

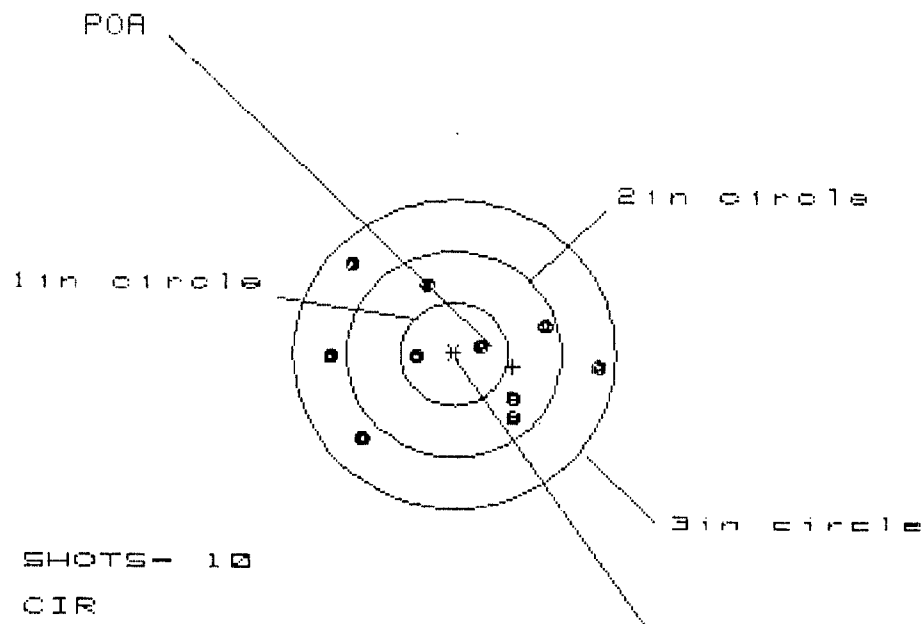

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 10

HS= 2.438

VS= 1.719

GS= 2.442

PATTERN #	:	5	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.303	.942	.846
MINIMUM X	:	-1.135	-.991	-1.087
MAXIMUM Y	:	.897	.883	.773
MINIMUM Y	:	-.822	-.836	-.726
CENTROID X	:	-.547	-.691	-.595
CENTROID Y	:	.122	.136	.026
POA TO CENTROID in.	:	.560	.705	.596
MIN RADIUS	:	.295	.222	.323
MEAN RADIUS	:	.863	.811	.757
MAX RADIUS	:	1.309	1.170	1.090
HORIZONTAL SPREAD	:	2.438	1.933	1.933
VERTICAL SPREAD	:	1.719	1.719	1.499
EXTREME SPREAD	:	2.442	2.097	1.995
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	10		

Remington
REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24


SERIAL NO.
C6225531

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

Q1

UPC



5716 C6225531