

G-6360900

INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # 06360900

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		2-17-04	RW
600	PROOF		2-17-04	RW
607	CHECK HEADSPACE		2-17-04	RW
610	DIS-ASSEMBLE GUN		2-17-04	RW
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	INSPECTED FEB 23 2004 OPERATOR <i>RK</i>		
615	ROLLMARK CALIBER		2/25/04	JS
617	DRILL AND TAP SIGHT HOLES		2-20-04	TRW
620	APPLY COATINGS (BARREL ACTION)		3-5	TA
	(BOLT)		3-5	TA
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		3/22/04	DA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		3/22/04	DA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		3/22/04	DA
	D) OIL FIRING PIN ASSEMBLY		3/22/04	DA
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS		

OP # OPERATION NAME		READINGS			DATE	INITIAL			
625	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	<u>8⁰</u>	<u>8⁰</u>	<u>8⁰</u>	5-24-04	RR		
CONT.	G) SAFETY OFF FORCE	2 LBS MIN	<u>2⁰</u>	<u>2⁰</u>	<u>2⁰</u>	5-24-04	RR		
	H) TRIGGER PULL TEST AND RETAINABILITY								
	I) FIRING PIN INDENT	.020 MIN	<u>.021</u>	<u>.021</u>	<u>.021</u>	5-24-04	RR		
	J) ASSEMBLE STOCK					4-23-04	RR		
	K) ASSEMBLE SWIVEL STUDS					6-9-04	RR		
	L) ATTACH FRONT AND REAR SIGHT ASSY'S					4-23-04	RR		
	M) IRON SIGHT ALIGNMENT					4-23-04	RR		
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER					4-23-04	RR		
640	GALLERY TEST AND TARGET		PASS	FAIL		5-3-04	TRW		
	MALFUNCTION		CORRECTION			5-3-04	TRW		
	MALFUNCTION		CORRECTION			5-3-04	TRW		
	MALFUNCTION		CORRECTION			5-3-04	TRW		
	MALFUNCTION		CORRECTION			5-3-04	TRW		
645	INSPECT FOR LIVE AMMO					5-3-04	TRW		
655	FINAL INSPECTION A) HEADSPACE					6-9-04	RR		
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.88</u>	<u>2.90</u>	<u>2.91</u>	<u>2.93</u>	<u>2.86</u>	5/24/04	OA
	C) FUNCTION					6-9-04	RR		
660	PACK					6-10-04	OA		

AVERAGE PULL FORCE BETWEEN

SERIAL NO.

INITIAL **BARBER - M24 0083563**

2.50 LBS (plus or minus 0.50 LBS)

DATE

4-22-04

3.00 LBS (plus or minus 0.75 LBS)

TESTER

RW

4.00 LBS (plus or minus 1.00 LBS)

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.39	2.19		2.10	
PULL #2	2.34	2.11		2.06	
PULL #3	2.30	2.19		2.06	
PULL #4	2.27	2.16		2.07	
PULL #5	2.38	2.10		2.04	
TOTAL	11.68	10.75		10.33	
AVERAGE	2.34	2.15		2.07	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.01	3.11		
PULL #2	3.17	3.11		
PULL #3	3.22	3.14		
PULL #4	3.21	3.14		
PULL #5	3.20	3.10		
TOTAL	15.81	15.60		
AVERAGE	3.16	3.12		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.24	4.13		4.37
PULL #2	4.22	4.17		4.28
PULL #3	4.14	4.15		4.20
PULL #4	4.15	4.21		4.23
PULL #5	4.17	4.15		4.18
TOTAL	20.92	20.81		21.26
AVERAGE	4.18	4.16		4.25

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6360900.___0

FILE DATE AND TIME: 05/03/2004 06:45

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.005
The Average Y Centroid of the Five Target Set:	-0.004
The Average Point of Impact of the Five Target Set:	0.006
The Average Mean Radius of the Five Target Set:	0.771
The Distance from POA to Centroid Target #1:	0.060
The Distance from Centroid Target #2 to Centroid Target #1:	0.253
The Distance from Centroid Target #3 to Centroid Target #1:	0.122
The Distance from Centroid Target #4 to Centroid Target #1:	0.289
The Distance from Centroid Target #5 to Centroid Target #1:	0.171

BARBER - M24 0083565

SERIAL NUMBER: G6360900. __0

TARGET NUMBER: 1

FILE DATE: 05/03/2004

FILE TIME: 06:45

POINT#	X	Y
1:	0.515	-1.459
2:	0.586	-0.672
3:	0.698	0.046
4:	0.047	-0.529
5:	-0.185	-0.312
6:	-0.102	0.180
7:	-0.248	0.533
8:	-0.513	0.792
9:	-0.548	1.349
10:	-0.847	0.036

X CENTROID: -0.060

Y CENTROID: -0.004

POA TO CENTROID: 0.060

HORZ SPREAD: 1.545

VERT SPREAD: 2.808

GROUP SPREAD: 3.002

MIN RADIUS: 0.188


MAX RADIUS: 1.565

MEAN RADIUS: 0.802

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 9

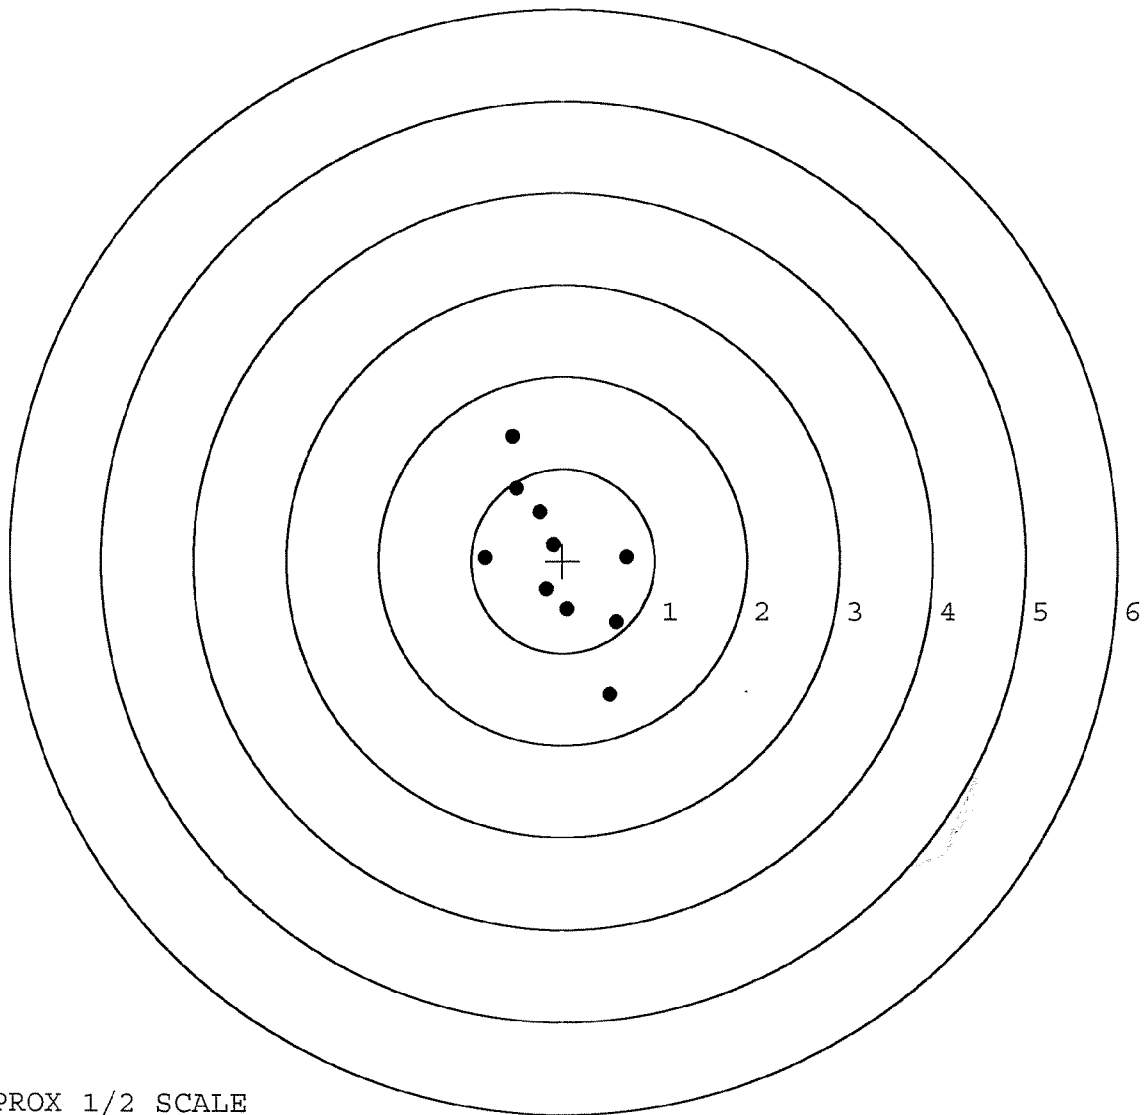

TARGET APPROX 1/2 SCALE

BARBER - M24 0083566

SERIAL NUMBER: G6360900. __0

TARGET NUMBER: 2

FILE DATE: 05/03/2004

FILE TIME: 06:45

POINT#	X	Y
1:	0.540	-1.392
2:	-0.103	-0.849
3:	0.671	-0.543
4:	0.930	-0.327
5:	0.882	-0.038
6:	0.031	0.001
7:	-0.069	0.288
8:	-0.533	-0.111
9:	-0.954	0.385
10:	-0.173	0.786

X CENTROID: 0.122

Y CENTROID: -0.180

POA TO CENTROID: 0.218

HORZ SPREAD: 1.884

VERT SPREAD: 2.178

GROUP SPREAD: 2.322

MIN RADIUS: 0.203


MAX RADIUS: 1.282

MEAN RADIUS: 0.783

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

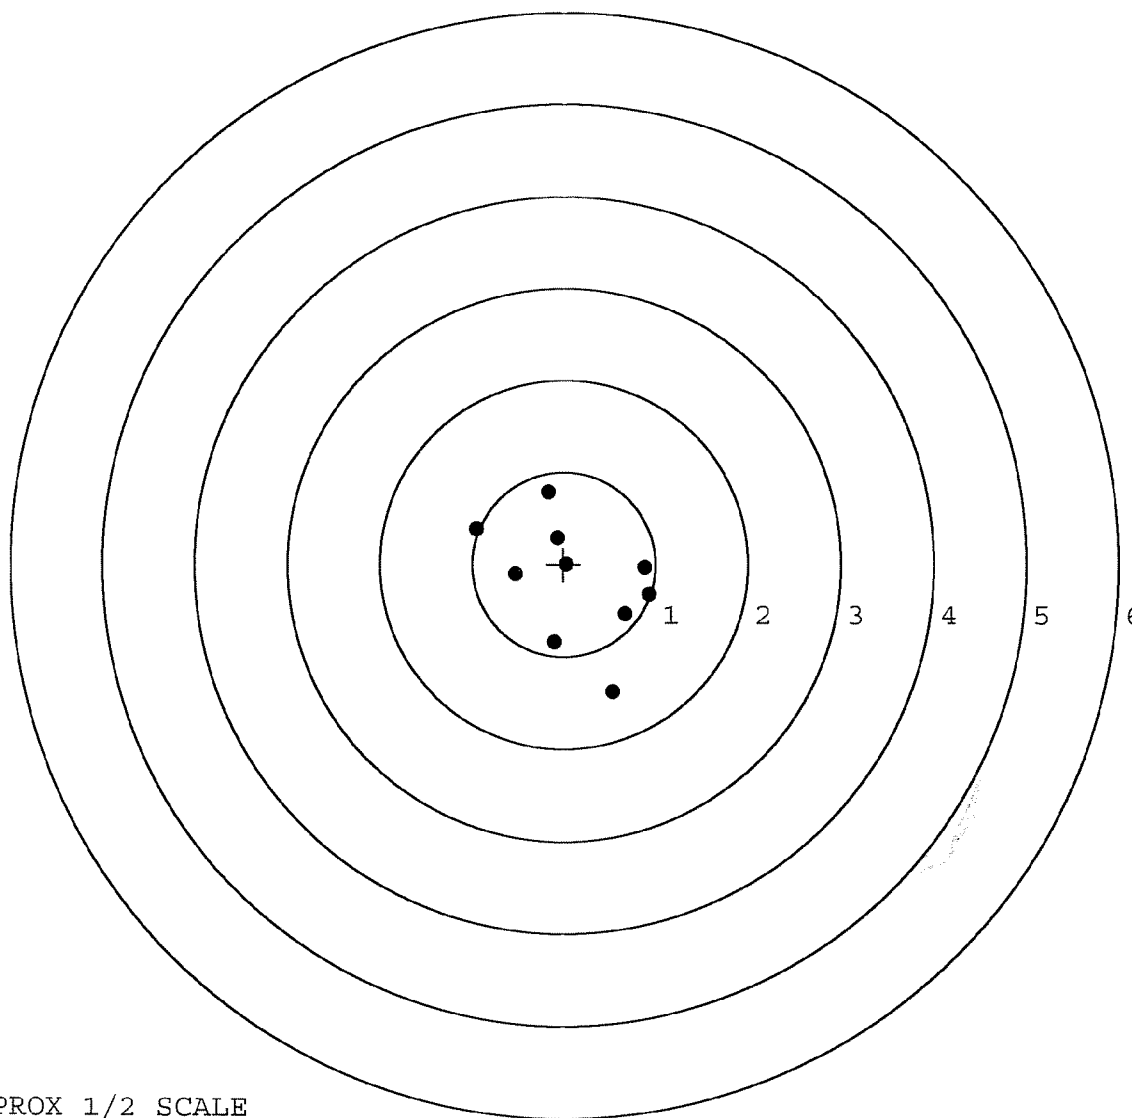

TARGET APPROX 1/2 SCALE

BARBER - M24 0083567

SERIAL NUMBER: G6360900. __0

TARGET NUMBER: 3

FILE DATE: 05/03/2004

FILE TIME: 06:45

POINT#	X	Y
1:	0.300	-1.181
2:	0.479	-0.783
3:	0.685	-0.349
4:	0.137	-0.256
5:	-0.244	-0.306
6:	-0.421	0.125
7:	-0.433	0.480
8:	-0.154	0.755
9:	-0.648	1.134
10:	0.876	0.676

X CENTROID: 0.058

Y CENTROID: 0.029

POA TO CENTROID: 0.065

HORZ SPREAD: 1.524

VERT SPREAD: 2.315

GROUP SPREAD: 2.502

MIN RADIUS: 0.296


MAX RADIUS: 1.311

MEAN RADIUS: 0.789

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

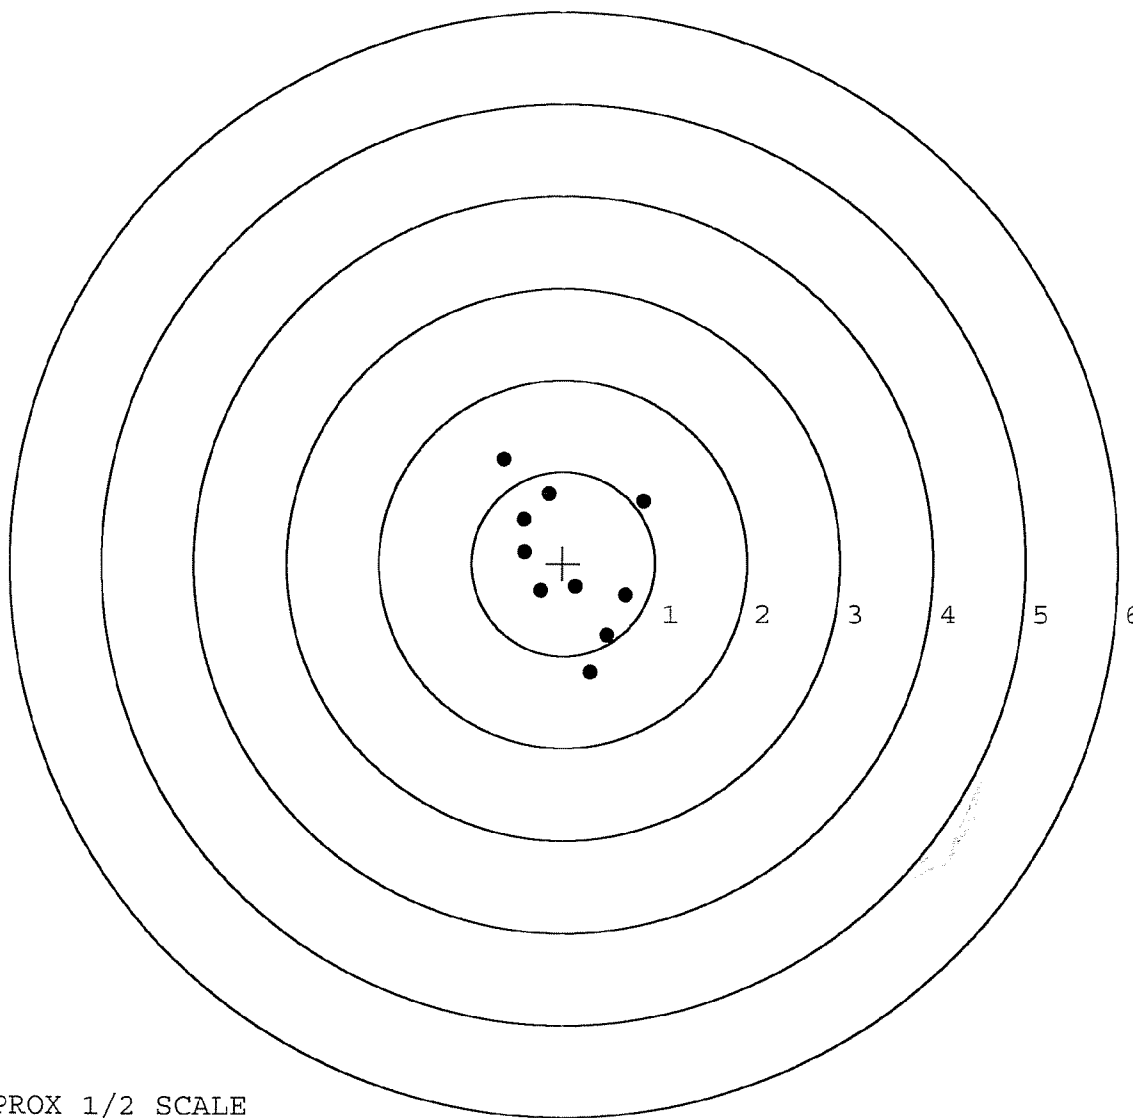


TARGET APPROX 1/2 SCALE

BARBER - M24 0083568

SERIAL NUMBER: G6360900. __0
 TARGET NUMBER: 4
 FILE DATE: 05/03/2004
 FILE TIME: 06:45

POINT#	X	Y
1:	0.072	-0.953
2:	0.885	0.092
3:	0.750	0.729
4:	0.496	1.251
5:	-0.119	1.469
6:	0.167	-0.123
7:	0.067	0.065
8:	-0.169	0.289
9:	-0.583	-0.039
10:	-0.557	-0.411

X CENTROID: 0.101
 Y CENTROID: 0.237
 POA TO CENTROID: 0.257
 HORZ SPREAD: 1.468
 VERT SPREAD: 2.422
 GROUP SPREAD: 2.430
 MIN RADIUS: 0.175
 MAX RADIUS: 1.252
 MEAN RADIUS: 0.762
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 10

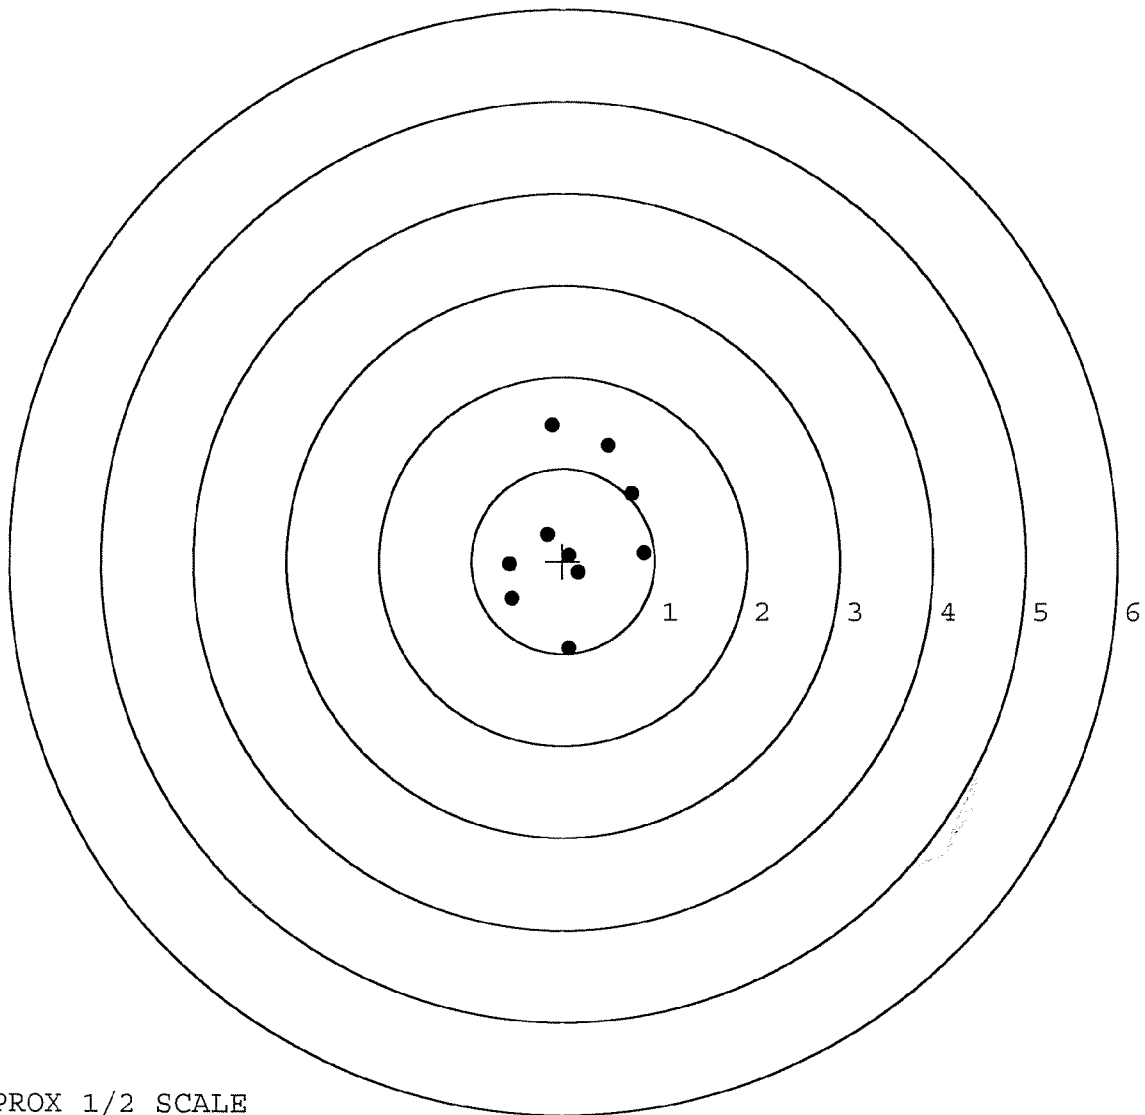


TARGET APPROX 1/2 SCALE

BARBER - M24 0083569

SERIAL NUMBER: G6360900. __0
 TARGET NUMBER: 5
 FILE DATE: 05/03/2004
 FILE TIME: 06:45

POINT#	X	Y
1:	0.265	-0.854
2:	-0.969	-1.358
3:	-0.720	-0.558
4:	-0.311	-0.324
5:	-0.809	0.134
6:	0.185	-0.108
7:	-0.278	0.152
8:	0.172	0.336
9:	0.370	0.517
10:	0.115	1.020

X CENTROID: -0.198
 Y CENTROID: -0.104
 POA TO CENTROID: 0.224
 HORZ SPREAD: 1.339
 VERT SPREAD: 2.378
 GROUP SPREAD: 2.613
 MIN RADIUS: 0.247
 MAX RADIUS: 1.472
 MEAN RADIUS: 0.718
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

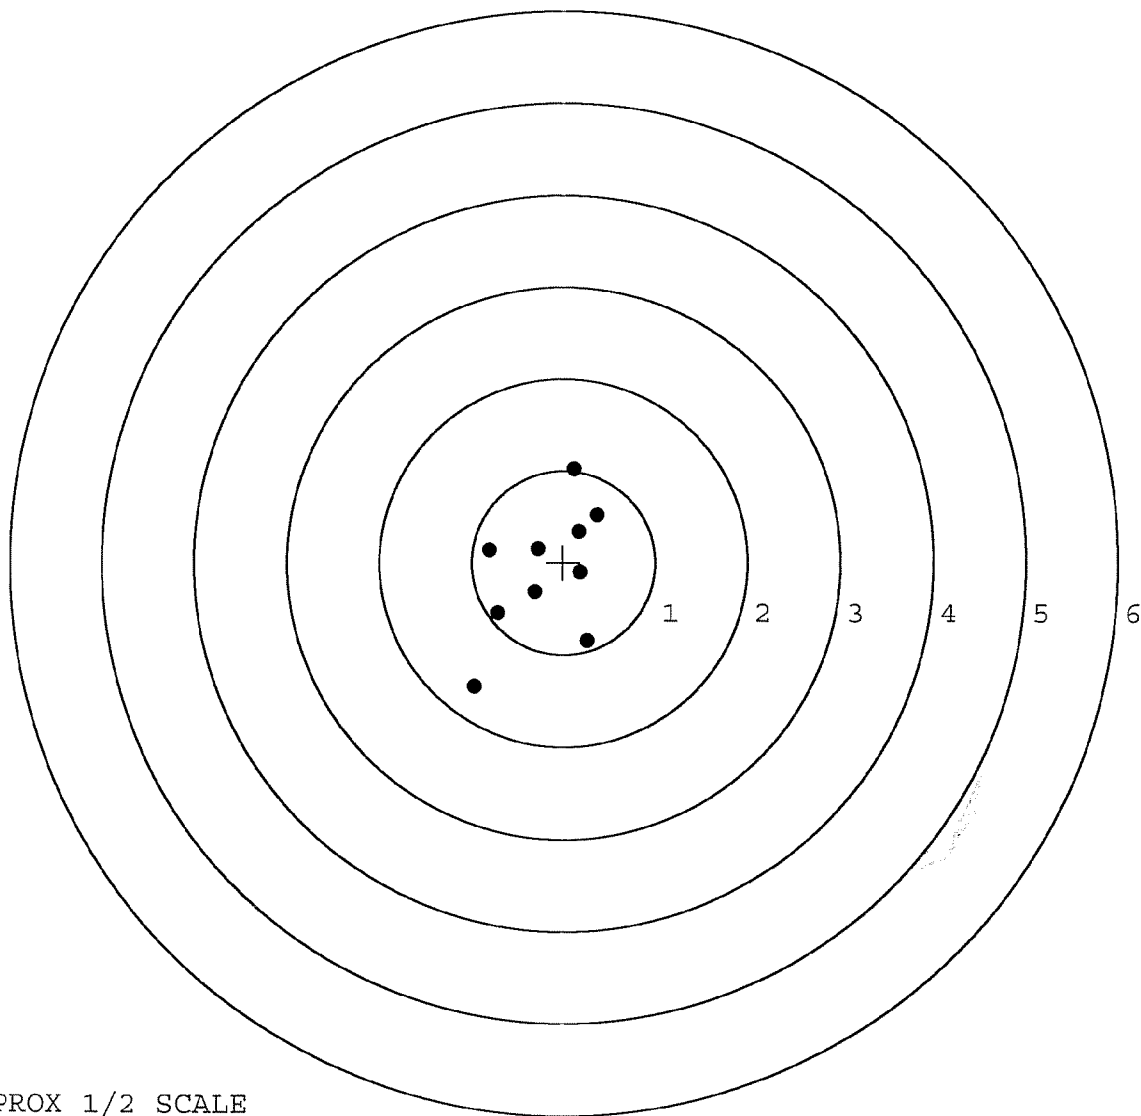

TARGET APPROX 1/2 SCALE

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Serial No. **G6360900**
Order No. **25716**

Made in Ilion, NY Reg. U.S. Pat. & Tm. Off. Remington-Union Deposee

11PY

5716 G6360900

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTI

UPC



ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTI

UPC



SERIAL NO.



M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

DD FORM

proof of purchase



owner registration sticker



ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

G6360900

UPC

