

C6349014

NEW RICOIVER

E6374546

MODEL 700TM M24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6349014

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	4 12	90	RW
600	Proof	4 12	90	A
607	Check Headspace	4 12	90	A
610	Dis-assemble Gun	4 12	90	RW
612	Magnaflux Barrel Action	4-19-90		KCR
	Magnaflux Bolt	4-19-90		KCR
615	Rollmark Caliber	4-19-90		SL
617	Drill and Tap Sight Holes		4/23/90	FB
618	Polish Barrel RB		4/24/90	WB
620	Apply Coatings (Barrel Action)		4/28/90	JA
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		4/18/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/18/90	RW
	C) Inspect Ejector Hole for Chamfer		4/18/90	RW
	D) Oil Firing Pin Ass'y		4/18/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		5/9/90	JM

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	3	3	3			5/9/90	JH
	G) Safety Off Force	2	2	2			5/9/90	JH
	H) Trigger Pull Test & Retainability						5/9/90	JH
	I) Firing Pin Indent	.020	.020	.020			5/9/90	JH
	J) Assemble Stock						5/10/90	RW
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies						5/10/90	RW
	M) Iron Sight Alignment						5/10/90	RW
	N) Detach Front & Rear Sights & place in numbered container						5/10/90	RW
	O) Attach Scope to Rifle						5/10/90	JH
	P) Detach & Attach Scope 20 Times						5/10/90	JH
640	Gallery Target & Test						5-11-90	DH
	A) Time						5-11-90	DH
	B) Malfunctions						5-11-90	DH
	C) Pierced Primers						5-11-90	DH
	D) Optical Clarity of Scope						5-11-90	DH
645	Inspect for Live Ammo						5-11-90	DH
655	Final Inspection						5/15/90	WB
	A) Headspace							
	B) Trigger Pull	2.38	2.48	2.36	2.44	2.46	5/14/90	WB
	C) Function						6-20-90	WB
660	Pack						6-20-90	DH

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. 06349014DATE 5/9/90TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.45	2.40	2.24	2.38	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.55	2.29	2.14	2.48	
PULL #3	2.51	2.34	2.31	2.36	
PULL #4	2.35	2.38	2.15	2.44	
PULL #5	2.19	2.40	2.20	2.46	
TOTAL	12.05	11.81	11.04		
AVG.	2.41	2.362	2.208		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.47	3.47		
PULL #2	3.51	3.49		
PULL #3	3.45	3.38		
PULL #4	3.43	3.41		
PULL #5	3.43	3.43		
TOTAL	17.29	17.18		
AVG.	3.458	3.436		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.49	4.40		4.56
PULL #2	4.39	4.42		4.24
PULL #3	4.43	4.30		4.18
PULL #4	4.44	4.43		4.16
PULL #5	4.42	4.49		4.23
TOTAL	22.17	22.04		21.37
AVG.	4.434	4.408		4.274

CENTROIDAL DISTANCE CALCULATIONS
 FOR RIFLE # C6349014
 11 May 1990

CENTROIDAL DISTANCES

0	TO	1	.39
1	TO	2	.165424
1	TO	3	.524844
1	TO	4	.882683
1	TO	5	.527691


$\bar{x}_4$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0048
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0406
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0408828
 THE AMP FOR THIS RIFLE IS: .859

11 May 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6349014

CENTERFIRE PATTERNS # 3

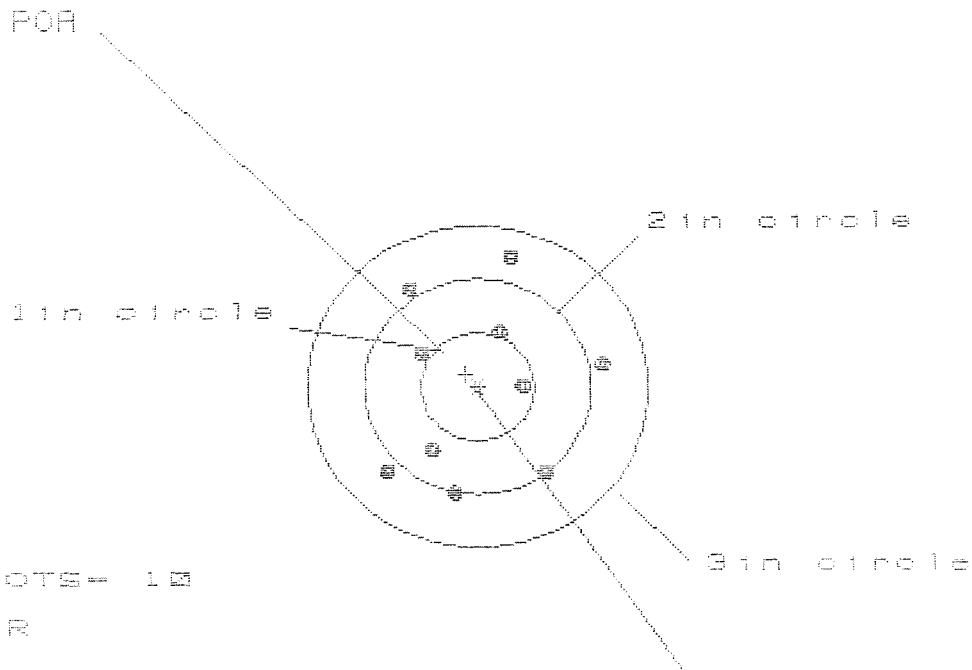

OF SHOTS= 10

IN CIR

1in = 1

2in = 6

3in = 10

HS= 1.905

VS= 2.172

GS= 2.290

CENTROID #

PATTERN #	3	4	5
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.055	1.088	.985
MINIMUM X	-.850	-.817	-.635
MAXIMUM Y	1.204	1.023	.942
MINIMUM Y	-.968	-.834	-.915
CENTROID X	.103	.070	.172
CENTROID Y	-.114	-.248	-.167
POA TO CENTROID in.	.154	.257	.240
MIN RADIUS	.391	.455	.332
MEAN RADIUS	.860	.814	.773
MAX RADIUS	1.239	1.153	1.136
HORIZONTAL SPREAD	1.905	1.905	1.620
VERTICAL SPREAD	2.172	1.857	1.857
EXTREME SPREAD	2.290	2.147	2.040
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		


11 May 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06349014

CENTERFIRE PATTERNS

4

POB

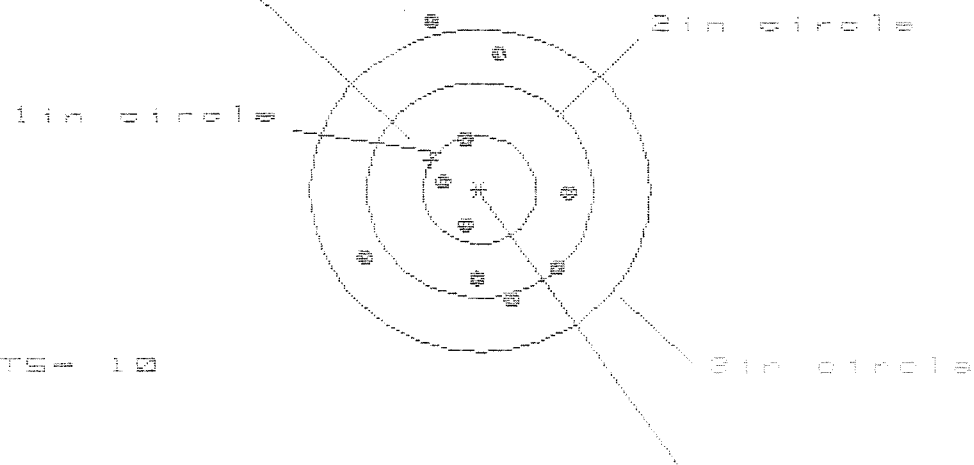

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 3

3 in = 5

HS = 1.876

VS = 2.630

GS = 2.726

CENTROID #


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.819	.773	.793
MINIMUM X	-1.058	-1.103	-1.083
MAXIMUM Y	1.592	1.484	.856
MINIMUM Y	-1.038	-.861	-.675
CENTROID X	.422	.468	.448
CENTROID Y	-.277	-.454	-.640
POB TO CENTROID in.	.505	.652	.781
MIN RADIUS	.298	.175	.144
MEAN RADIUS	.911	.805	.698
MAX RADIUS	1.644	1.493	1.188
HORIZONTAL SPREAD	1.876	1.876	1.876
VERTICAL SPREAD	2.630	2.345	1.531
EXTREME SPREAD	2.726	2.347	1.963
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

11 May 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8349014

CENTERFIRE PATTERNS

5

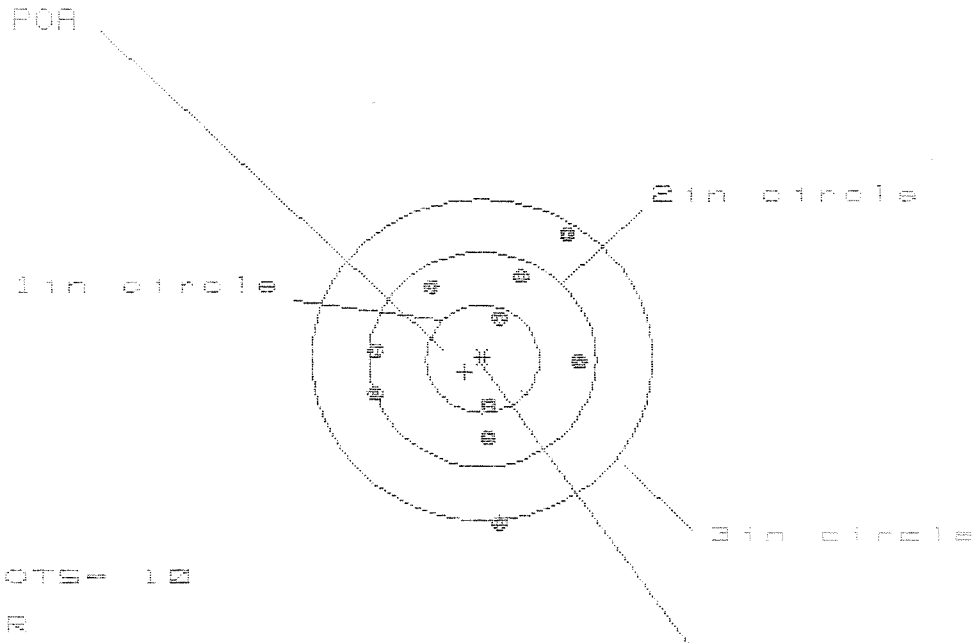

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 7

3 in = 9

HE= 1.793

VS= 2.717

GS= 2.779

CENTROID *

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	.813
MINIMUM X	-.980
MAXIMUM Y	1.172
MINIMUM Y	-1.545
CENTROID X	.149
CENTROID Y	.123
POA TO CENTROID in.	.193
MIN RADIUS	.433
MEAN RADIUS	.895
MAX RADIUS	1.557
HORIZONTAL SPREAD	1.793
VERTICAL SPREAD	2.717
EXTREME SPREAD	2.779
NUMBER IN ONE INCH CIRCLE =	2
NUMBER IN TWO INCH CIRCLE =	7
NUMBER IN THREE INCH CIRCLE =	9

Remington[®]

DUPONT
REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700TM M24

SERIAL NO.
C6349014

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01



5716 C6349014

UPC



0 47700 25716 7

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
DOC. IDENT.		FR. FROM		M. AS		STOCK NUMBER										U. N. I. T.		QUANTITY		DOCUMENT NUMBER										S. U. P. P. L. Y.		F. U. N. D.		D. I. S. T. R. I. B. U. T. I. O. N.		P. R. O. J. E. C. T.		P. O. R. T. I. T. Y.		R. E. C. D. DATE		A. D. V. I. C. E.		R. I.		UNIT PRICE																																	
A5Z		AW1		1005-01-240-2136		EA00002										W33BQ9		6080 0169										CMBBAN		HGE						03						F		514500																																			
SHIPPED FROM															SHIP TO															MARK FOR										PROJECT										TOTAL PRICE																													
Supply & Services Division															REMINGTON ARMS CO, INC															W33BSW 6065-0063																				DOLLARS		CTS.																											
Whse 224															ATTN: Custom Shop															CONTRACT #DAA21-87-C001																				DOLLARS		CTS.																											
Fort Benning, GA 31905															14 Hoefler Avenue																																																																
Ilion, NY 13357																																																																															
WAREHOUSE LOCATION										TYPE OF CARGO		UNIT PACK		UNIT WEIGHT		UNIT CUBE		UFC		NMFC		FREIGHT RATE		DOCUMENT DATE		MAT COND		QUANTITY																																																			
LJAA1										G		H		I		J		K		L		M		N		O		P		Q		R		S																																													
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)															FREIGHT CLASSIFICATION NOMENCLATURE																																																																
T															U															V																																																	
															ITEM NOMENCLATURE																																																																
W															X															SNIP RIFLE										SN: C6349014, C6225240																																							
SELECTED BY AND DATE															TYPE OF CONTAINER(S)										TOTAL WEIGHT										RECEIVED BY AND DATE										INSPECTED BY AND DATE																																		
1															2										3										7										8																																		
PACKED BY AND DATE															NO. OF CONTAINER(S)										TOTAL CUBE										WAREHOUSED BY AND DATE										WAREHOUSE LOCATION																																		
4															5										6										9										10																																		
REMARKS:																																																																															
SHIP US REGISTERED																																																																															
RETURN RECEIPT REQUESTED																																																																															
AA															BB															CC															DD															EE																			
FIRST DESTINATION ADDRESS															DATE SHIPPED																																																																
11															12															FF															GG																																		
13 TRANSPORTATION CHARGEABLE TO															14 B/LADING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)															15 RECEIVER'S DOCUMENT NUMBER																																																	

DD Form 1348-1, JUL 91

PREVIOUS EDITION MAY BE USED

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

MAINTENANCE REQUEST

For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG

PAGE NO.

NO. OF PAGES

REQUIREMENTS CONTROL SYMBOL
CSGLD - 1047(R1)

SECTION I - EQUIPMENT DATA

CONTROL NUMBER		WORK ORDER NO.		WESDC	ORG. PD 03	PD AUTHENTICATION		
☒ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION C 60729 ivif		B. LOCATION ft B...ing LA 21955		C. UNIT IDENT CODE		
2. SERIAL NO. See Below		3. NOUN NOMENCLATURE R.516		4. LINE NO. R45287	5. MODEL MLU	6. NATIONAL STOCK NUMBER 100501240 2136		
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS	11. MILES
								12. ROUNDS
								13. STARTS
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)			
☐ A Sch. Main. ☐ B Handling		☐ C Test ☒ D Normal Op		☐ E Storage ☐ F Inspection		☐ G Flight ☐ H Other		☐ 088 Inoperative ☐ 008 Noisy
						☐ 258 Overheating ☐ 387 Low Performance		☐ 790 Out of Adjustment ☒ Other
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). SN # C 6349014 and C 6225240 B... shot out								
B. REMARKS 6534 Rnos Per Terry Majors								

SECTION II - WORK ACCOMPLISHED

17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)		19. AMS ACCT. CODE	
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor			
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER	F. PART SOURCE CODE	G. QTY.	H. PARTS COST
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE					
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
I. TOTAL MANHOURS					J. TOTAL MANHOURS COST		K. TOTAL PARTS COST		
					\$		\$		
21. DELAY (Select One)									
☐ 1 Parts ☐ 2 Manpower ☐ 3 Facilities ☐ 4 Funds ☐ 5 Tools									
23. SUBMITTED BY		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY	
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE	
28. DISPOSITION (Select One)									
☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged									

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6349014
11 Feb 1900

CENTROIDAL DISTANCES

0 TO	1	.881368
1 TO	2	.440296
1 TO	3	.332488
1 TO	4	.252353
1 TO	5	.259208

51⁴
+ 32
<-----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .562
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .5612
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .794223


THE AMR FOR THIS RIFLE IS: 1.031

11 Feb 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08349014

CENTERFIRE PATTERNS

1

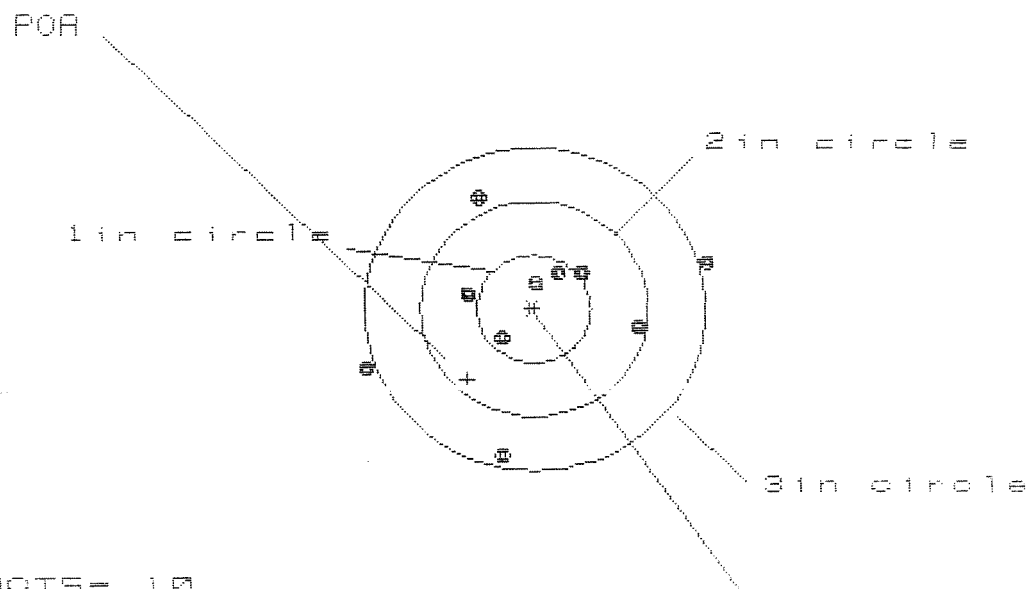

OF SHOTS= 10

IN CIR

1in = 3

2in = 6

3in = 8

HS= 0.953

VS= 2.406

GS= 3.131


CENTROID *

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.525	1.115	.956
MINIMUM X	:	-1.438	-1.268	-.579
MAXIMUM Y	:	1.028	1.074	1.005
MINIMUM Y	:	-1.378	-1.332	-1.401
CENTROID X	:	.583	.413	.572
CENTROID Y	:	.661	.615	.584
POA TO CENTROID in.	:	.881	.741	.891
MIN RADIUS	:	.251	.276	.231
MEAN RADIUS	:	.876	.802	.698
MAX RADIUS	:	1.581	1.382	1.434
HORIZONTAL SPREAD	:	2.963	2.383	1.535
VERTICAL SPREAD	:	2.406	2.406	2.406
EXTREME SPREAD	:	3.131	2.421	2.411
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		8	

11 Feb 1968

FILE:/PATTERNING/CENTERFIRE_PATT/06349014

CENTERFIRE PATTERNS # 2

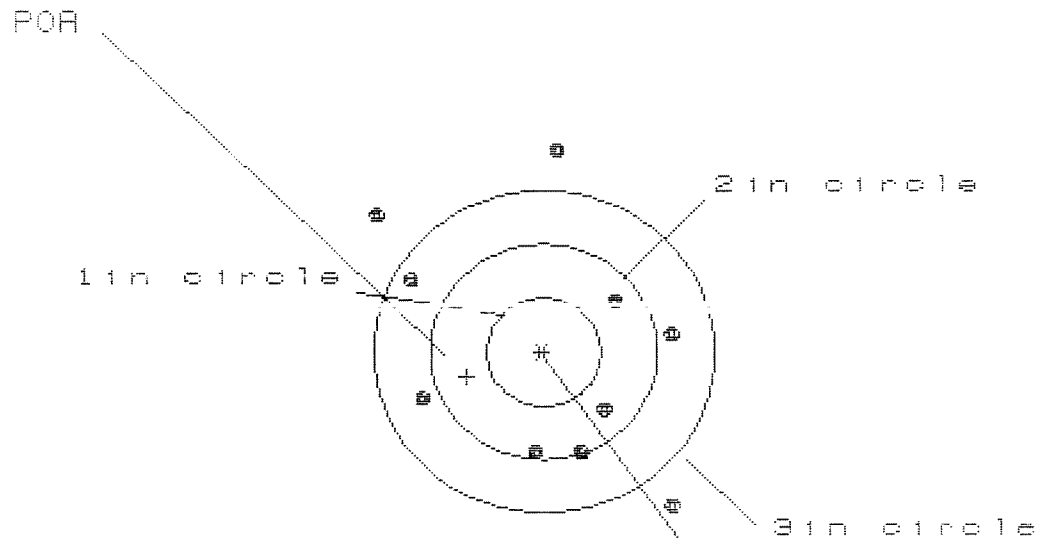

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 4

3 in = 7

HS= 2.640

VS= 3.330

GS= 3.761


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.141	.975	.975
MINIMUM X	:	-1.499	-1.377	-1.377
MAXIMUM Y	:	1.880	2.017	1.089
MINIMUM Y	:	-1.450	-1.313	-1.061
CENTROID X	:	.673	.839	.839
CENTROID Y	:	.230	.093	-.159
POA TO CENTROID in.	:	.711	.845	.854
MIN RADIUS	:	.742	.530	.371
MEAN RADIUS	:	1.282	1.163	1.002
MAX RADIUS	:	1.938	2.017	1.755
HORIZONTAL SPREAD	:	2.640	2.352	2.352
VERTICAL SPREAD	:	3.330	3.330	2.150
EXTREME SPREAD	:	3.761	3.468	3.187
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

11 Feb 1900

FILE:/PATTERNING/CENTERFIRE_PATT/C6349014

CENTERFIRE PATTERNS # 3

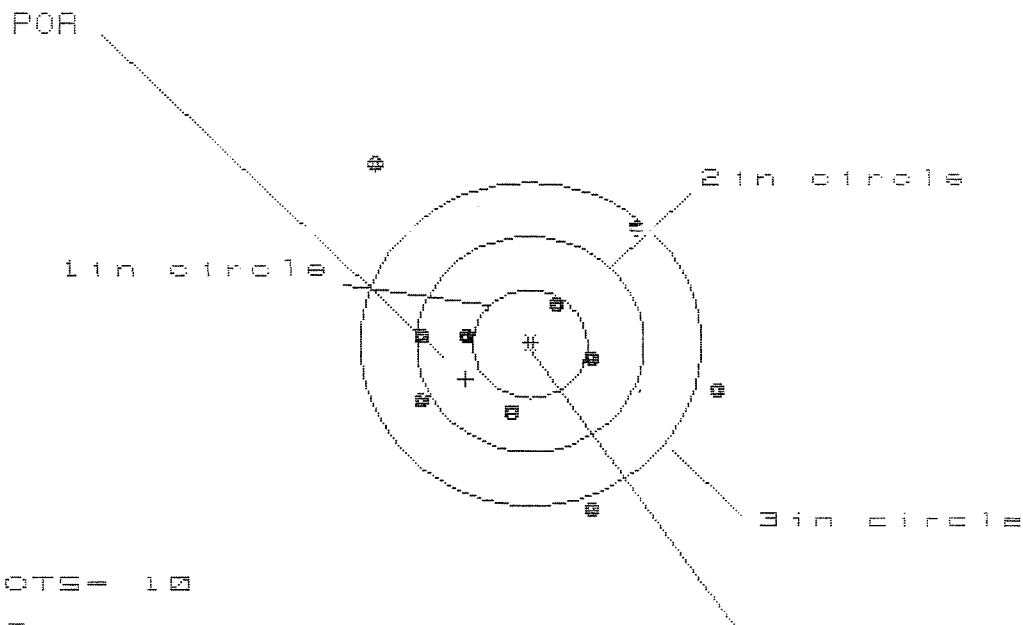

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 4

3 in = 7

HS= 2.963

VS= 3.139

GS= 3.669


CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.638	1.491	.969
MINIMUM X	:	-1.325	-1.144	-.958
MAXIMUM Y	:	1.624	1.244	1.210
MINIMUM Y	:	-1.515	-1.334	-1.368
CENTROID X	:	.565	.712	.526
CENTROID Y	:	.329	.148	.182
POA TO CENTROID in.	:	.654	.728	.557
MIN RADIUS	:	.457	.435	.462
MEAN RADIUS	:	1.110	.994	.903
MAX RADIUS	:	2.096	1.515	1.550
HORIZONTAL SPREAD	:	2.963	2.635	1.927
VERTICAL SPREAD	:	3.139	2.578	2.578
EXTREME SPREAD	:	3.669	2.689	2.602
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

11 Feb 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06349014

CENTERFIRE PATTERNS # 4

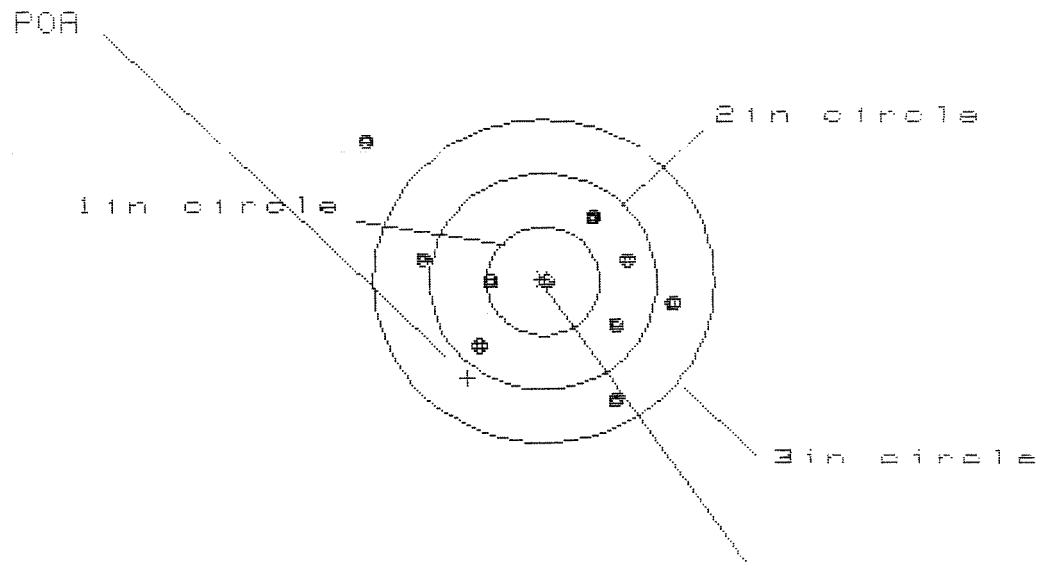

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 8

HS= 2.723

VS= 2.433

GS= 3.284

CENTROID *


PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.173	1.001	1.061
MINIMUM X	:	-1.550	-1.239	-1.179
MAXIMUM Y	:	1.309	.750	.628
MINIMUM Y	:	-1.124	-.979	-.558
CENTROID X	:	.664	.836	.776
CENTROID Y	:	.900	.755	.877
POA TO CENTROID in.	:	1.119	1.127	1.171
MIN RADIUS	:	.022	.204	.098
MEAN RADIUS	:	.913	.783	.726
MAX RADIUS	:	2.029	1.285	1.199
HORIZONTAL SPREAD	:	2.723	2.240	2.240
VERTICAL SPREAD	:	2.433	1.729	1.186
EXTREME SPREAD	:	3.284	2.268	2.268
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

(1 Feb 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06349014

CENTERFIRE PATTERNS

5

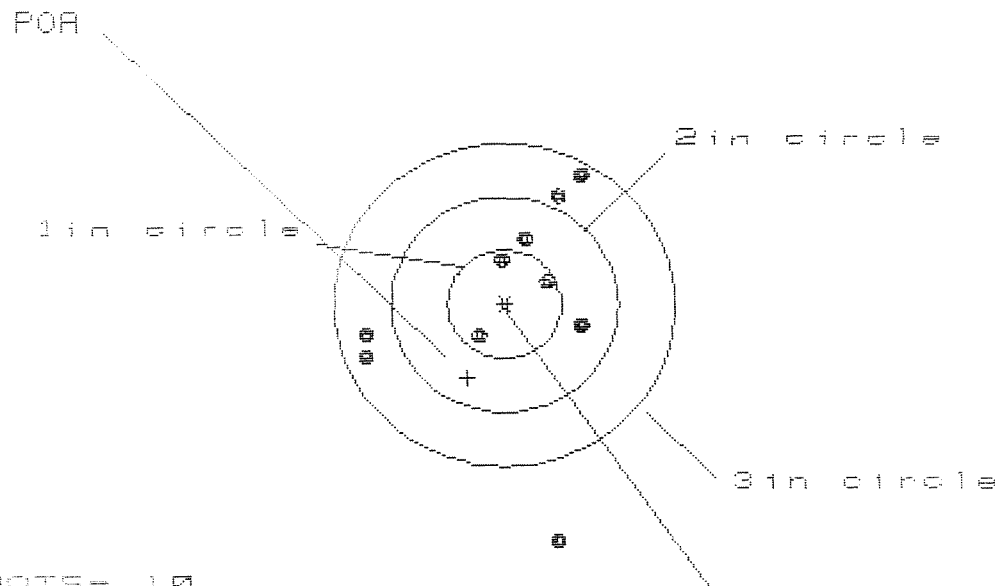

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 5

3 in = 9

HS= 1.900

VS= 3.402

GS= 3.405

CENTROID *

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	.652
MINIMUM X	-1.248
MAXIMUM Y	1.247
MINIMUM Y	-2.155
CENTROID X	.325
CENTROID Y	.686
POA TO CENTROID in.	.759
MIN RADIUS	.332
MEAN RADIUS	.976
MAX RADIUS	2.209
HORIZONTAL SPREAD	1.900
VERTICAL SPREAD	3.402
EXTREME SPREAD	3.405
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	5
NUMBER IN THREE INCH CIRCLE =	9

Final Inspection

Sn: C6349014 DATE REC'D: 3/26/96 DATE RET'D:

AUDITOR: *PN*

Item:

BARREL ASSY.

☒ BARREL

☒ RECEIVER

☒ FRONT SIGHT BLOCK

☒ REAR SIGHT BLOCK

☒ SCREWS

☒ FINISH

SCOPE ASSY.

☒ SCOPE

☒ SCOPE RINGS

☒ MOUNTING SCREWS

☒ MOUNTING BASE

☒ SCREWS

☒ FINISH

☒ LOOSENESS

☒ CLARITY

MISC.

☐ DD-250

☐ BAR CODE

☐ PACKAGING

Item:

STOCK ASSY.

☒ STOCK

☒ SLING SWIVEL STUDS

☒ ADJUSTABLE BUTT PLATE

☒ LOCK NUTS

☒ BARREL CLEARANCE

☒ COLOR/FINISH

SYSTEMS CASE

☒ SCOPE CASE

☐ IRON SIGHTS

☐ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION

☒ SET

Comments:

Barrel
Stock

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6349014

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		4/3/96	RW
600	Proof		4/3/96	RW
607	Check Headspace		4/3/96	RW
610	Dis-assemble Gun		4/3/96	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/13/96	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/13/96	RW
	C) Inspect Ejector Hole for Chamfer		4/13/96	RW
	D) Oil Firing Pin Ass'y		4/13/96	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock		4/13/96	RW
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
640	Gallery Target & Test		4/13/96	WB
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo		4/13/96	WB
655	Final Inspection			
	A) Headspace		4/15/96	RW
	B) Trigger Pull			
	C) Function		4/15/96	RW
660	Pack			