

C6349061

MODEL 700TM M24

Model **SMS**TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

INSPECTION CHECKLIST - REPAIRS

CONTRACT #: W52H09-07-C-0207

ISSUED 10/1/2007

R & E NUMBER

151955

SERIAL NUMBER

C6349061

LOG-IN DATE

9-26-08


OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	5-21-09	RTZ
505	RE-BARREL	5-26-09	RTZ
420	ASSEMBLE	5-26-09	RTZ
440	PROOF	5-26-09	RTZ
460	CHECK HEADSPACE	5-26-09	RTZ
470	DIS-ASSEMBLE GUN	5-26-09	RTZ
480	MAGNAFLUX	5-26-09	RTZ
510	DRILL AND TAP	5-27-09	RTZ
500	ROLLMARK CALIBER	6-1-09	RT
520	GOFF BLAST BBL / REC	6-1-09	DWD
530 & 540	APPLY COATINGS	6-3	RTZ
560	FINAL ASSEMBLY	6-4-09	RTZ
640	FUNCTION TEST AND	6-14-09	RTZ
650	TARGET	6-14-09	RTZ
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	6-14-09	RTZ
	A) HEADSPACE	PASS	RTZ
	B) TRIGGER PULL	252 248 246 256 249 6-5-09	RTZ
680	F) SAFETY ON FORCE	50 40 40 6-5-09	RTZ
	G) SAFETY OFF FORCE	60 60 60 6-5-09	RTZ
	I) FIRING PIN INDENT	.031 .031 .031 6-5-09	RTZ
690	PACK	6-5-09	RTZ

F006 REV 1/2009

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 4/15/2009

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs ini +/- .50 lb

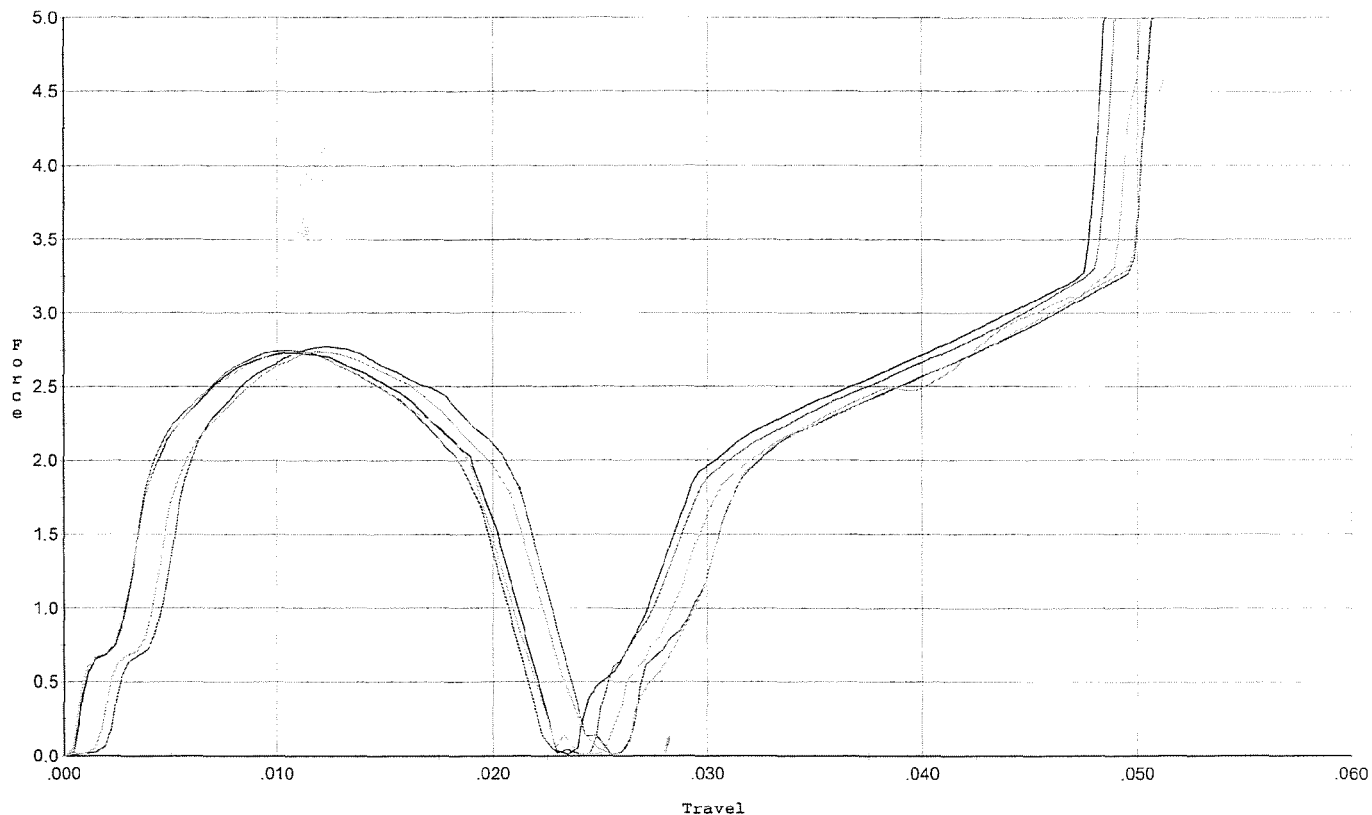


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.773	0.021	0.00	0.033	0.040		Set Trigger
2	2.730	0.020	0.00	0.033	0.040		Set Trigger
3	2.745	0.019	0.00	0.034	0.038		Set Trigger
4	2.718	0.019	0.00	0.035	0.038		Set Trigger
5	2.739	0.021	0.00	0.034	0.039		Set Trigger

4-2-74

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 4/15/2009

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs after 50 cycles+/- .50 lb

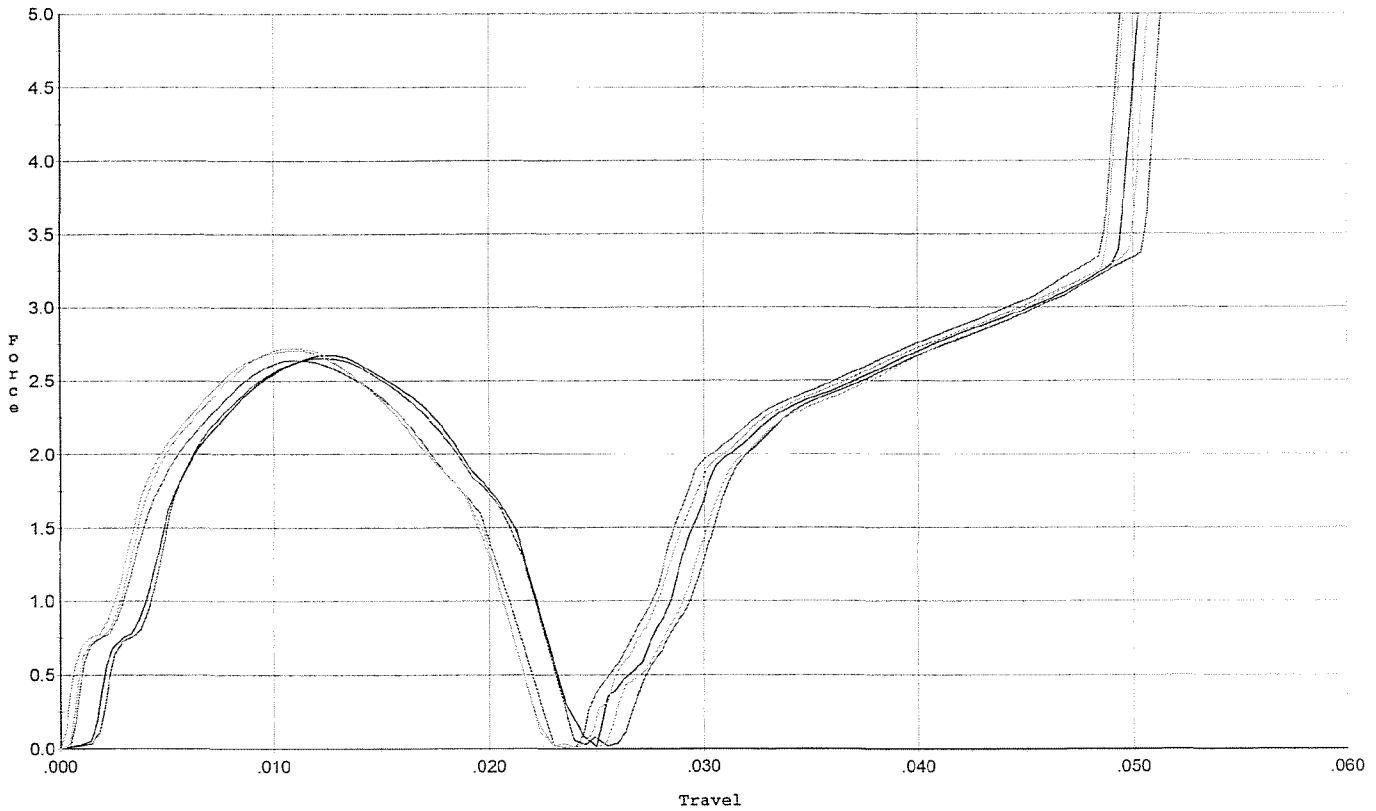


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.653	0.021	0.00	0.034	0.038		Set Trigger
2	2.673	0.021	0.00	0.033	0.038		Set Trigger
3	2.640	0.021	0.00	0.033	0.038		Set Trigger
4	2.721	0.020	0.00	0.035	0.038		Set Trigger
5	2.709	0.020	0.00	0.034	0.038		Set Trigger

A-2-67

Trigger Profile [lbs,inch]

Profile: SWS
GunType: Rifle
Make: Remington
Note: C Schults 4/15/2009

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs ini +/- .75 lb

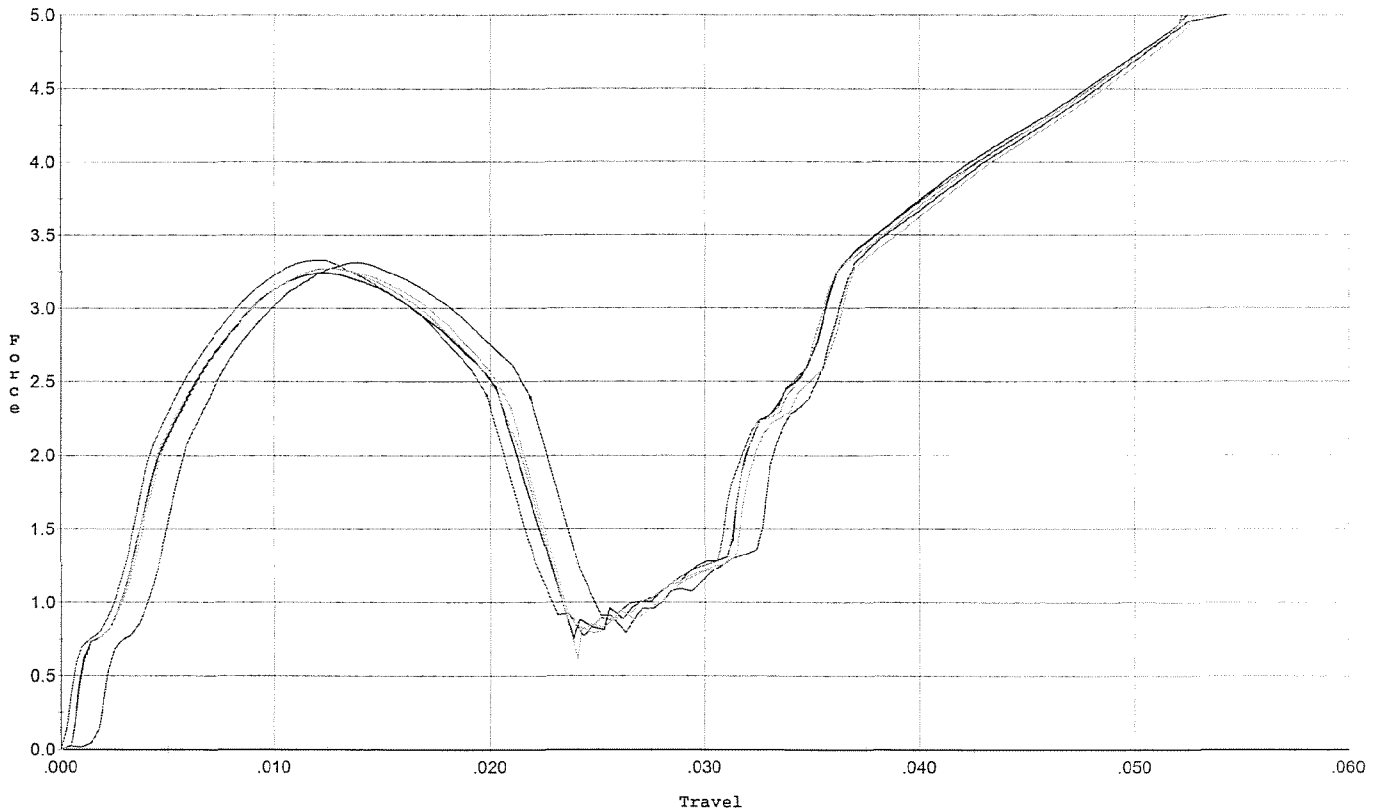


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.312	0.022	0.00	0.034	0.048		Set Trigger
2	3.242	0.020	0.00	0.034	0.046		Set Trigger
3	3.328	0.020	0.00	0.035	0.047		Set Trigger
4	3.271	0.021	0.00	0.034	0.048		Set Trigger
5	3.276	0.021	0.00	0.034	0.049		Set Trigger

A-3.28

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: C Schults 4/15/2009

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs after 20 cycles+/- .75 lb

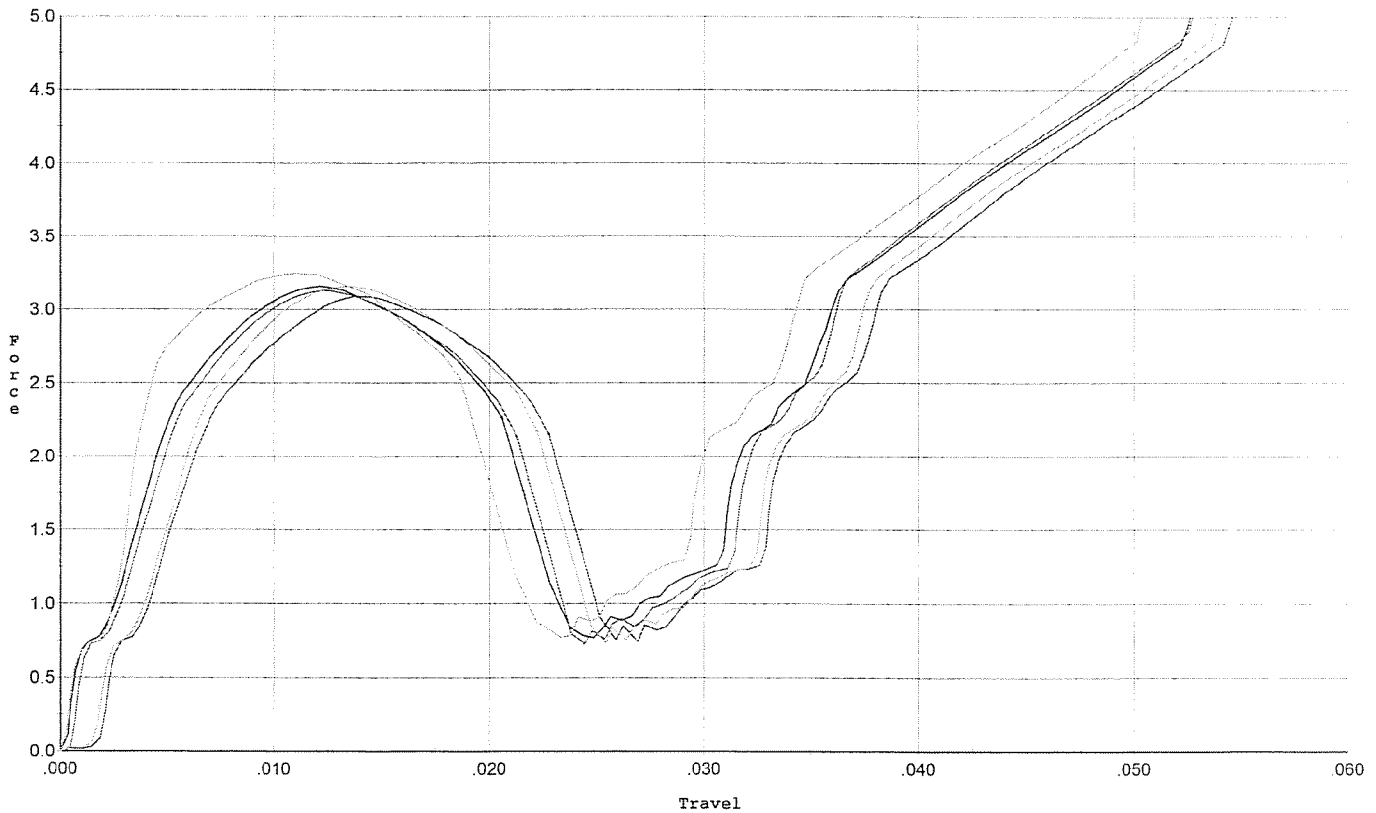


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.087	0.023	0.00	0.035	0.047		Set Trigger
2	3.155	0.021	0.00	0.035	0.047		Set Trigger
3	3.128	0.021	0.00	0.034	0.047		Set Trigger
4	3.153	0.022	0.00	0.035	0.048		Set Trigger
5	3.245	0.019	0.00	0.034	0.044		Set Trigger

A.3.15

Trigger Profile [lbs,inch]

Profile: SWS
 GunType: Rifle
 Make: Remington
 Note: C Schults 4/15/2009

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs ini +/- 1.0 lb

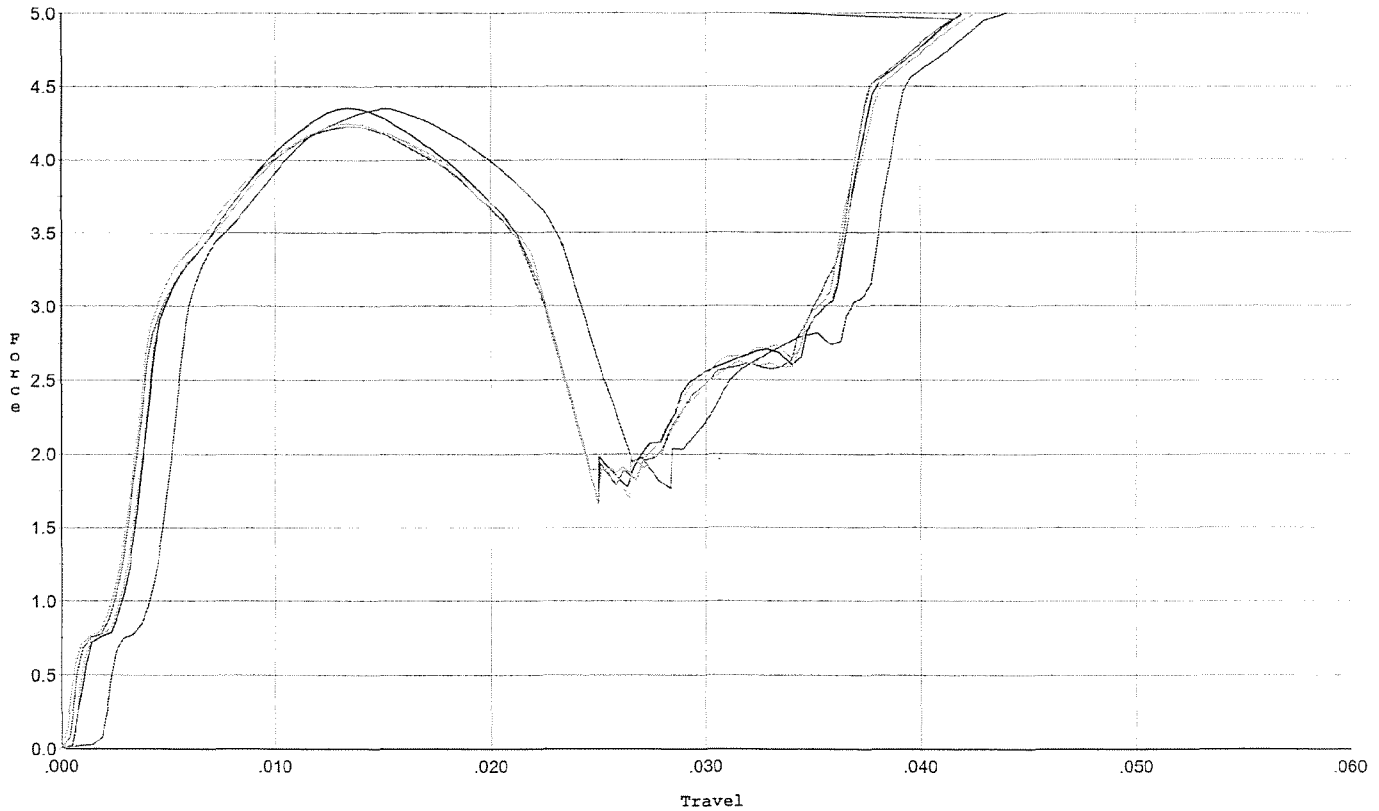


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.349	0.023	0.002	0.031	0.068		Set Trigger
2	4.355	0.022	0.00	0.031	0.067		Set Trigger
3	4.229	0.022	0.00	0.031	0.067		Set Trigger
4	4.228	0.022	0.00	0.031	0.067		Set Trigger
5	4.244	0.022	0.00	0.031	0.066		Set Trigger

A-4-28

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: C Schults 4/15/2009

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs after 20 cycles+/- 1.0 lb

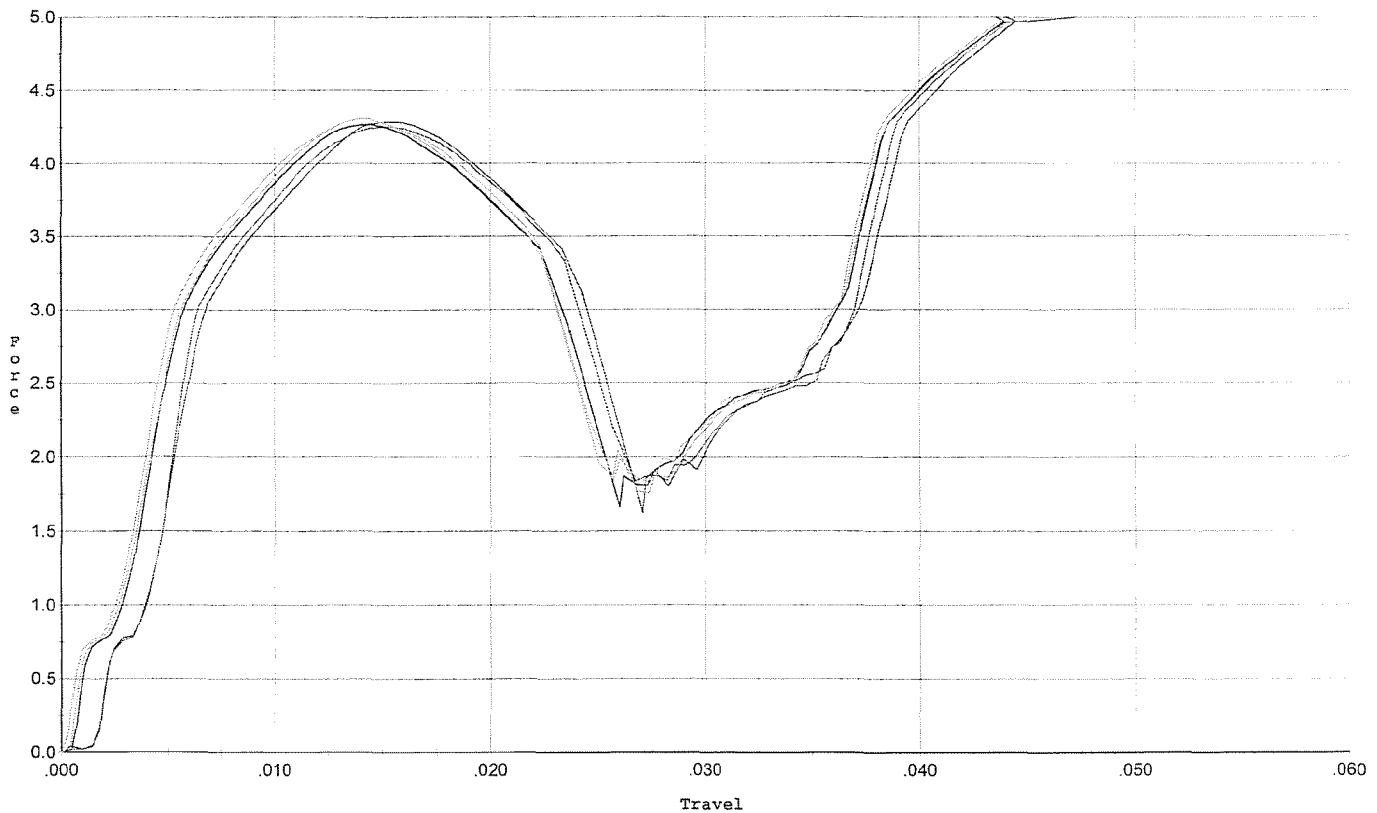


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.288	0.024	0.00	0.032	0.069		Set Trigger
2	4.269	0.024	0.00	0.032	0.070		Set Trigger
3	4.252	0.023	0.00	0.032	0.067		Set Trigger
4	4.306	0.022	0.00	0.032	0.068		Set Trigger
5	4.309	0.022	0.00	0.032	0.067		Set Trigger

A.4.28

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: C Schults 4/15/2009

Model: M/24
 Serial No: Form #F005
 Trigger: reset to 2.5 lbs +/- .50 lb for final test

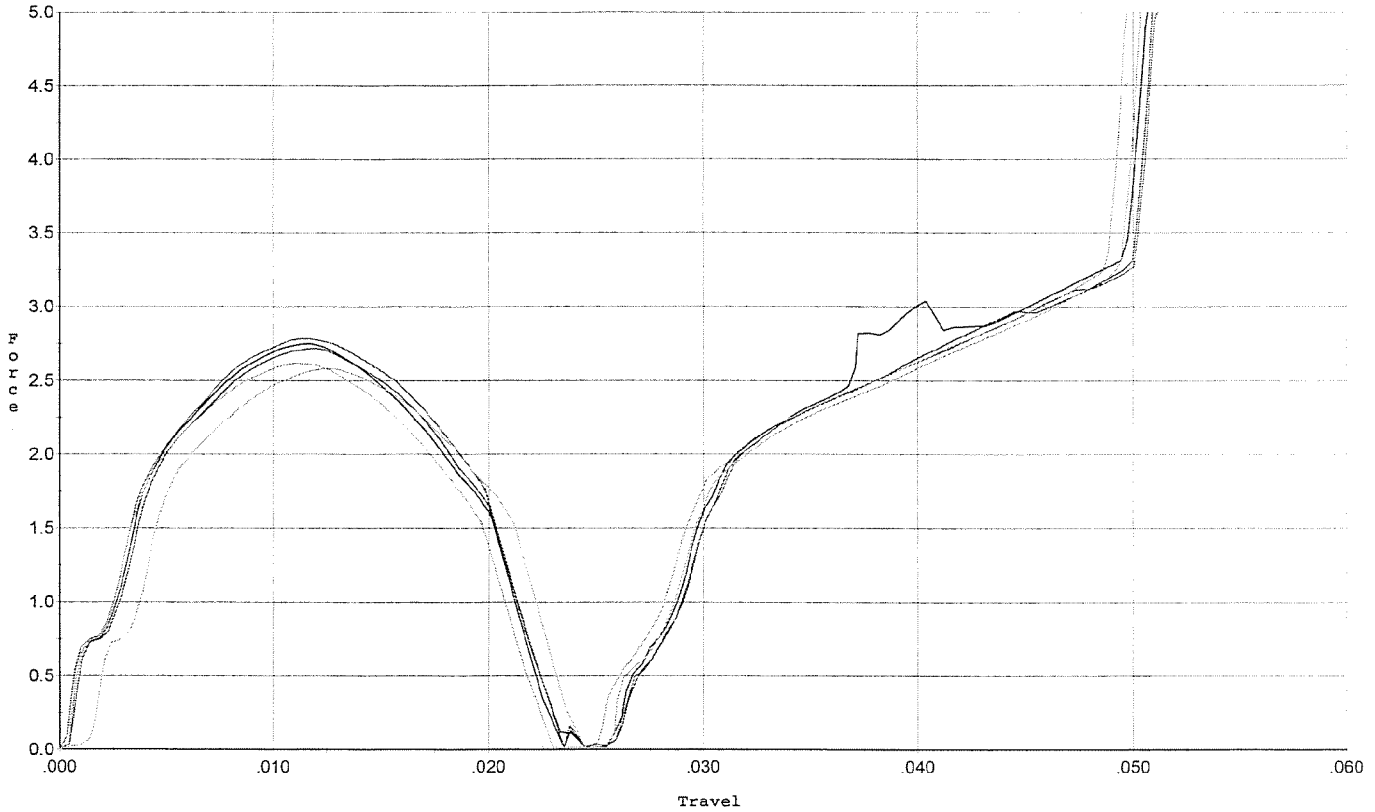


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.719	0.020	0.00	0.035	0.038		Set Trigger
2	2.747	0.020	0.00	0.035	0.039		Set Trigger
3	2.783	0.020	0.00	0.035	0.040		Set Trigger
4	2.584	0.021	0.00	0.033	0.038		Set Trigger
5	2.620	0.020	0.00	0.034	0.037		Set Trigger

A-2-69

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: C Schults 4/15/2009

Model: M/24
 Serial No: Form #F005
 Trigger: set to 4.0 lbs +/- 1.0 lb for target & accuracy

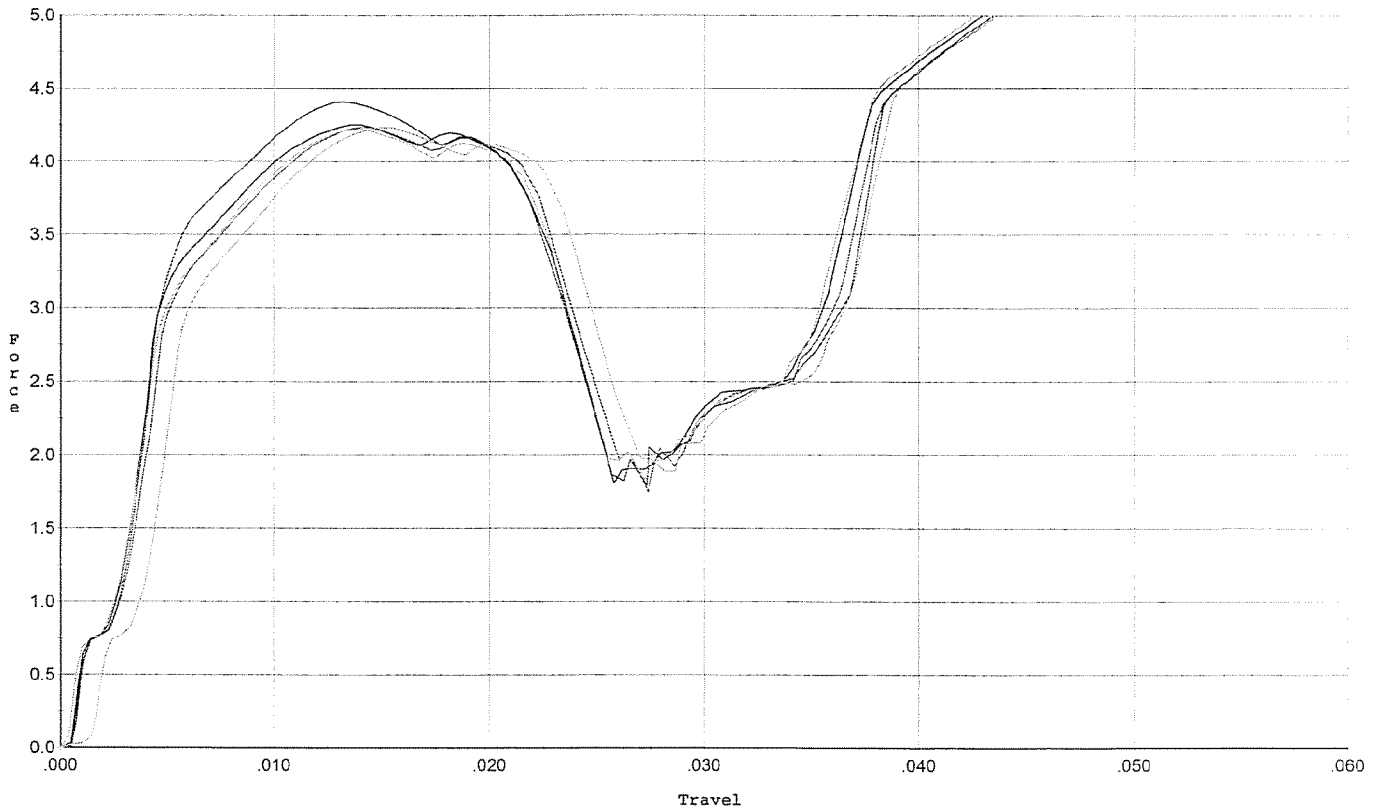

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.409	0.023	0.00	0.031	0.073		Set Trigger
2	4.250	0.023	0.00	0.030	0.071		Set Trigger
3	4.233	0.022	0.00	0.031	0.068		Set Trigger
4	4.218	0.023	0.00	0.030	0.070		Set Trigger
5	4.234	0.023	0.00	0.031	0.069		Set Trigger

A-4.26

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6349061.___0

FILE DATE AND TIME: 06/04/2009 14:11

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.024
The Average Y Centroid of the Five Target Set:	0.020
The Average Point of Impact of the Five Target Set:	0.031
The Average Mean Radius of the Five Target Set:	0.515
The Distance from POA to Centroid Target #1:	0.163
The Distance from Centroid Target #2 to Centroid Target #1:	0.186
The Distance from Centroid Target #3 to Centroid Target #1:	0.293
The Distance from Centroid Target #4 to Centroid Target #1:	0.122
The Distance from Centroid Target #5 to Centroid Target #1:	0.200

BARBER - M24 0106965

SERIAL NUMBER: C6349061. __0
 TARGET NUMBER: 1
 FILE DATE: 06/04/2009
 FILE TIME: 14:11

POINT#	X	Y
1:	0.432	0.969
2:	0.627	0.179
3:	0.181	0.247
4:	0.147	0.489
5:	-0.353	0.652
6:	-0.498	0.155
7:	-0.623	-0.552
8:	-0.506	-0.297
9:	-0.248	-0.437
10:	-0.414	-0.361

X CENTROID: -0.125
 Y CENTROID: 0.104
 POA TO CENTROID: 0.163
 HORZ SPREAD: 1.250
 VERT SPREAD: 1.521
 GROUP SPREAD: 1.851
 MIN RADIUS: 0.338
 MAX RADIUS: 1.029
 MEAN RADIUS: 0.604
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

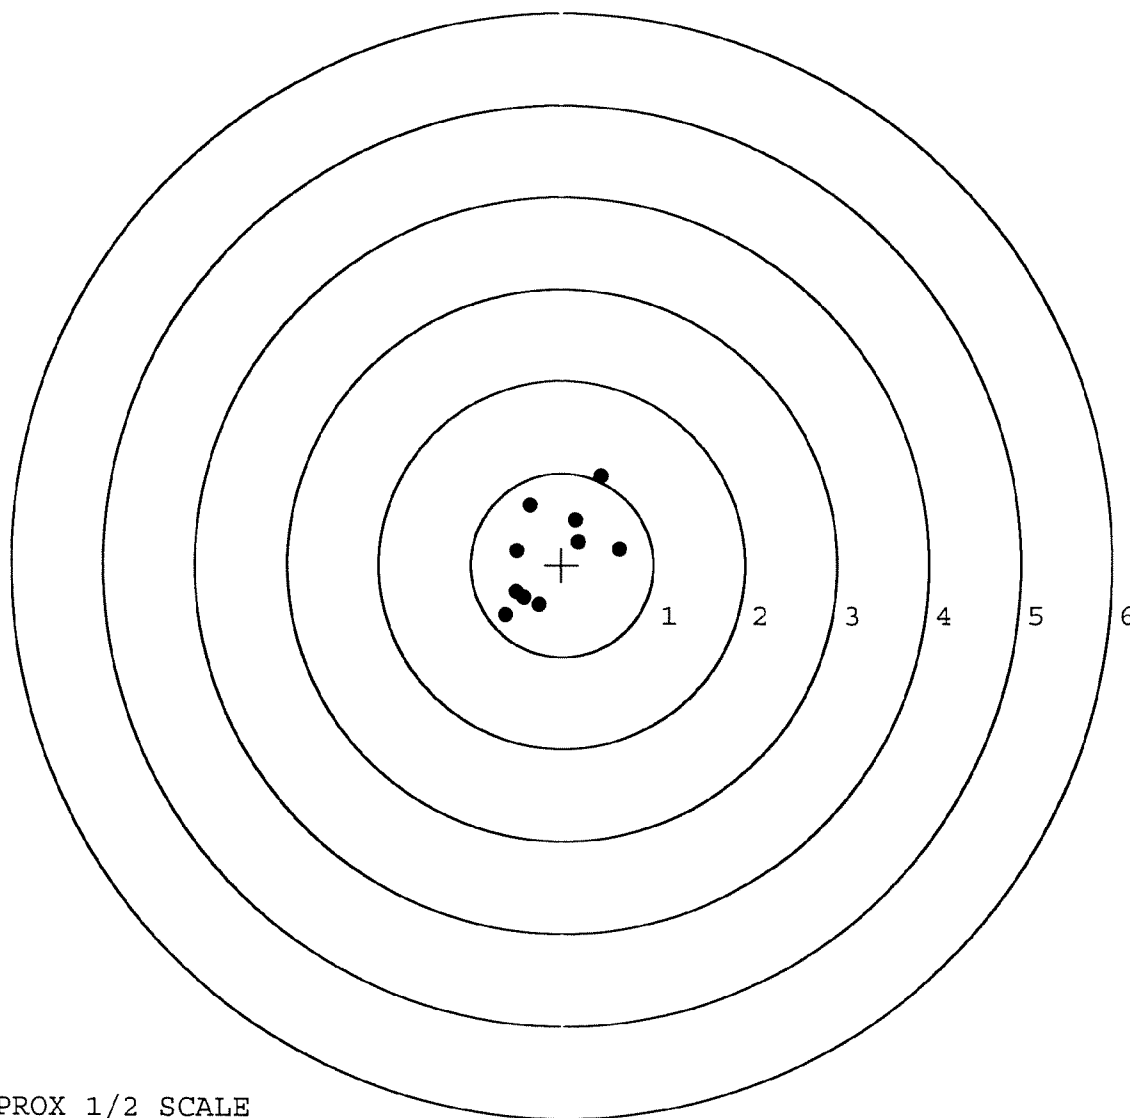

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349061. __0

TARGET NUMBER: 2

FILE DATE: 06/04/2009

FILE TIME: 14:11

X CENTROID: 0.018

Y CENTROID: -0.013

POA TO CENTROID: 0.022

HORZ SPREAD: 0.979

VERT SPREAD: 1.729

GROUP SPREAD: 1.752

MIN RADIUS: 0.171

MAX RADIUS: 0.998


MEAN RADIUS: 0.521

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.134	0.978
2:	0.447	0.622
3:	0.116	0.302
4:	0.379	-0.101
5:	-0.339	0.164
6:	-0.532	-0.480
7:	-0.146	-0.751
8:	0.164	-0.312
9:	-0.046	-0.372
10:	0.003	-0.184

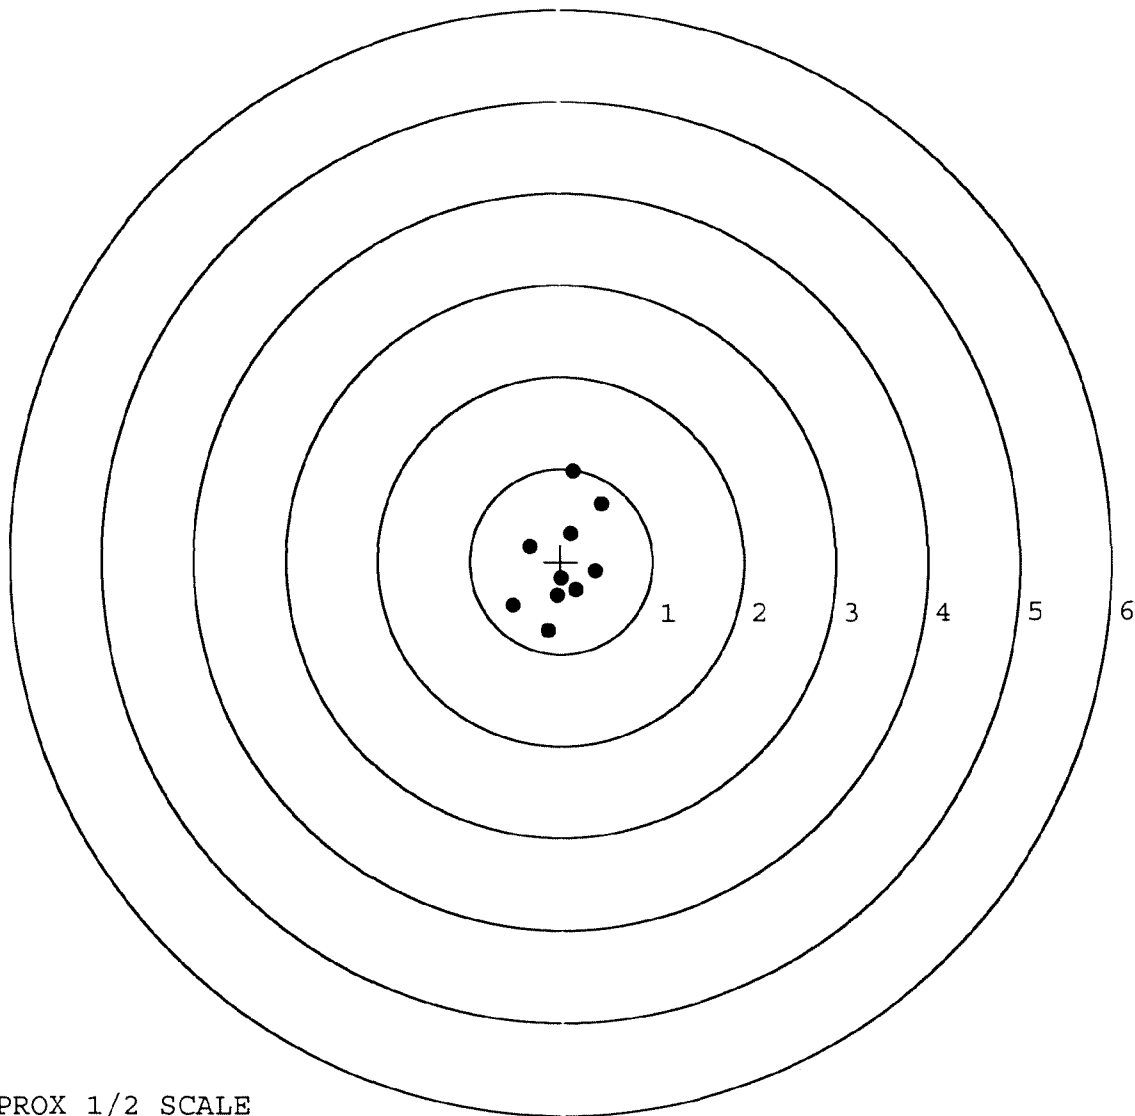


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349061. __0
 TARGET NUMBER: 3
 FILE DATE: 06/04/2009
 FILE TIME: 14:11

POINT#	X	Y
1:	0.856	-0.471
2:	-0.163	-1.096
3:	-0.129	-0.586
4:	0.125	-0.471
5:	0.278	-0.213
6:	0.433	0.492
7:	0.023	0.565
8:	-0.293	0.320
9:	-0.607	0.634
10:	0.143	-0.342


X CENTROID: 0.067
 Y CENTROID: -0.117
 POA TO CENTROID: 0.134
 HORZ SPREAD: 1.463
 VERT SPREAD: 1.730
 GROUP SPREAD: 1.833
 MIN RADIUS: 0.232
 MAX RADIUS: 1.009
 MEAN RADIUS: 0.618
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

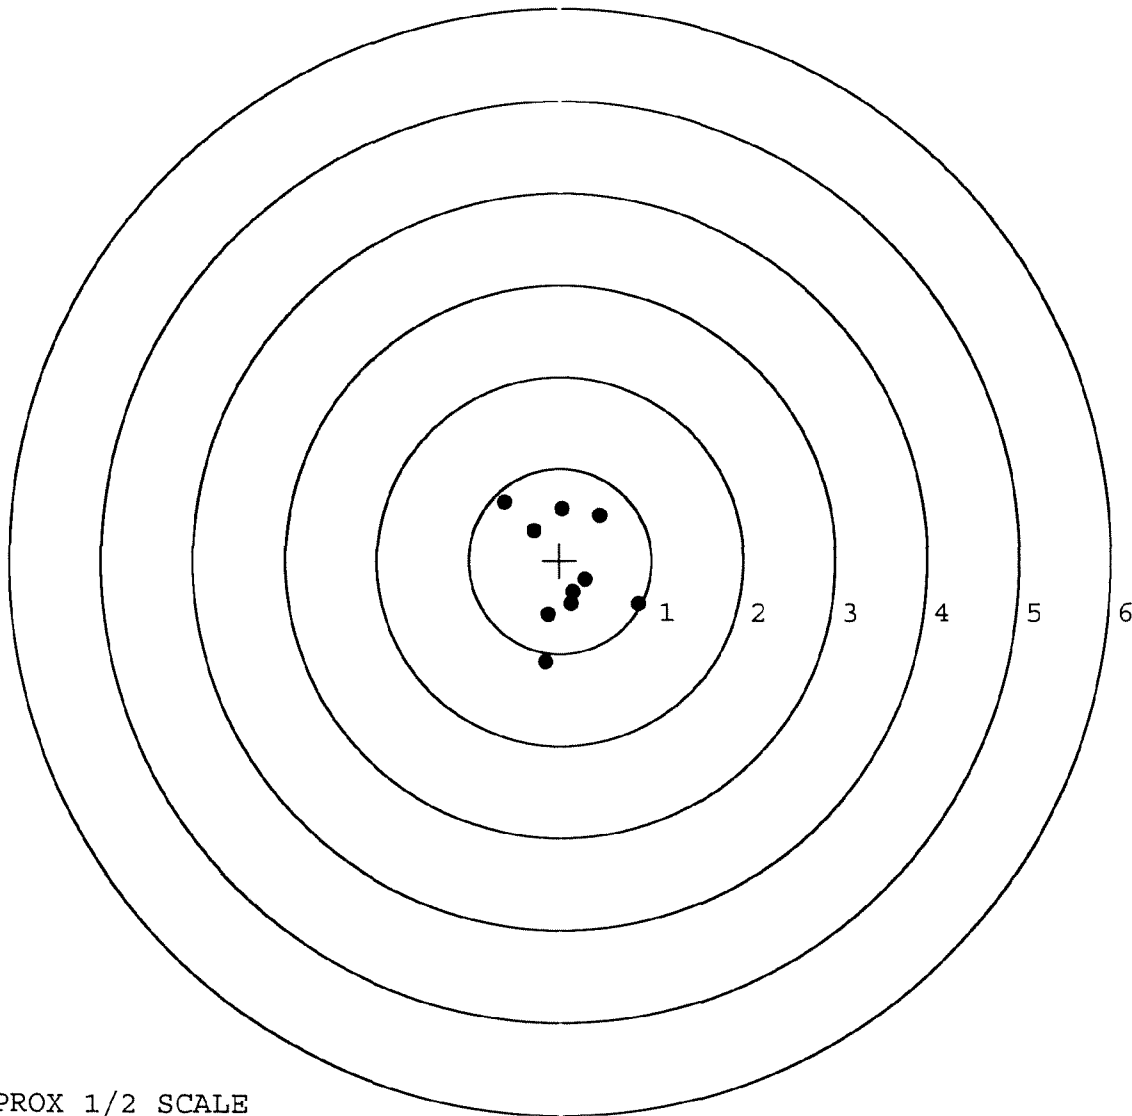

TARGET APPROX 1/2 SCALE

BARBER - M24 0106968

SERIAL NUMBER: C6349061. __0	POINT#	X	Y
TARGET NUMBER: 4	1:	0.409	0.093
FILE DATE: 06/04/2009	2:	0.031	0.448
FILE TIME: 14:11	3:	-0.254	0.213
	4:	-0.682	0.335
X CENTROID: -0.048	5:	0.180	-0.348
Y CENTROID: 0.198	6:	0.361	0.136
POA TO CENTROID: 0.203	7:	0.011	0.448
HORZ SPREAD: 1.091	8:	-0.087	0.239
VERT SPREAD: 0.796	9:	-0.359	0.189
GROUP SPREAD: 1.118	10:	-0.087	0.225
MIN RADIUS: 0.048			
MAX RADIUS: 0.649			
MEAN RADIUS: 0.326			
# IN 1 IN DIAMETER: 8			
# IN 2 IN DIAMETER: 10			
# in 3 IN DIAMETER: 10			

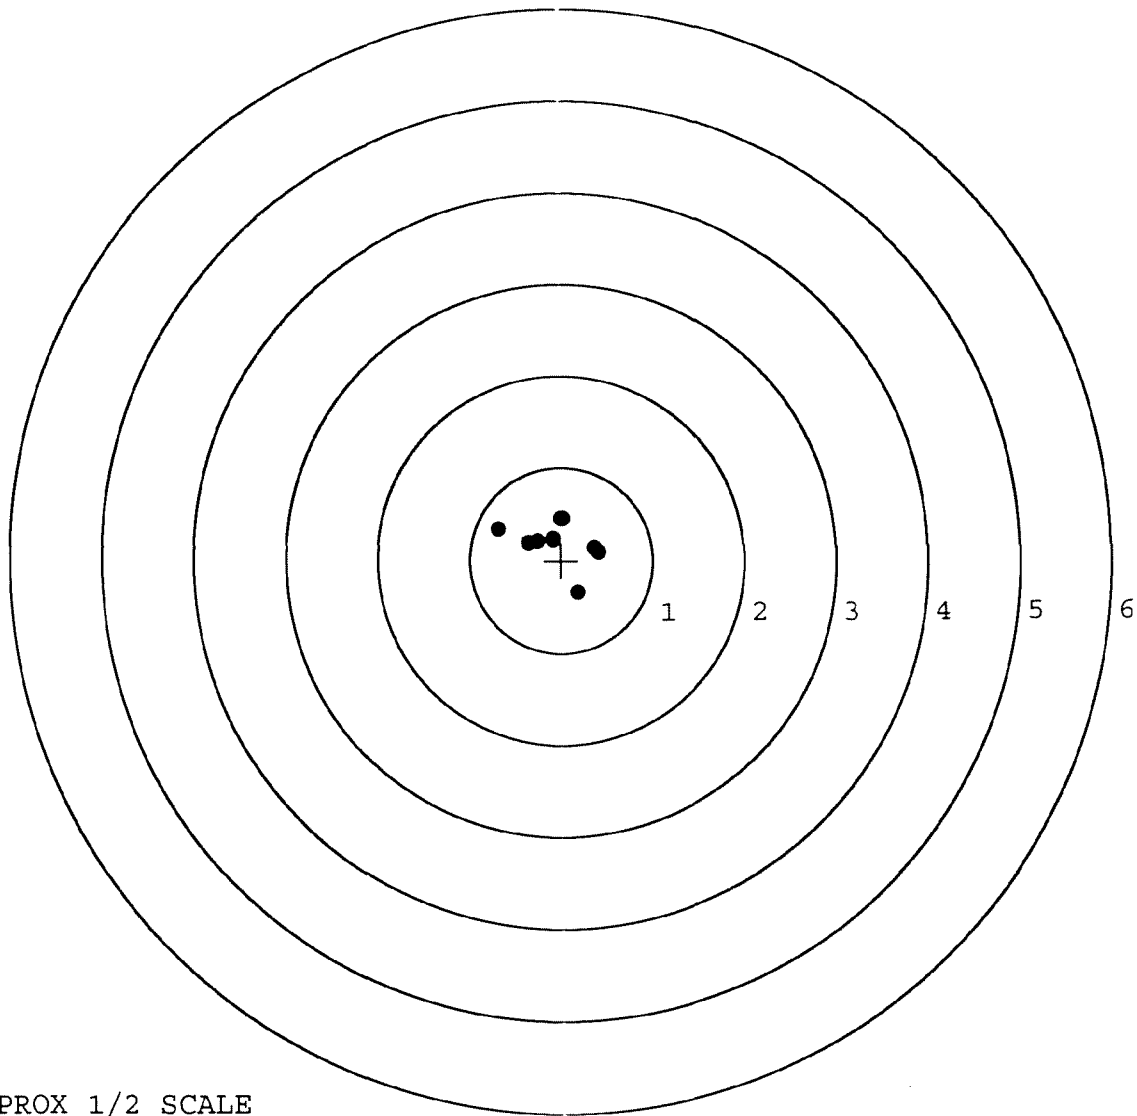


TARGET APPROX 1/2 SCALE

BARBER - M24 0106969

SERIAL NUMBER: C6349061. __0
 TARGET NUMBER: 5
 FILE DATE: 06/04/2009
 FILE TIME: 14:11

POINT#	X	Y
1:	-0.032	0.673
2:	0.407	0.530
3:	0.197	0.161
4:	0.516	-0.587
5:	0.246	-0.841
6:	-0.015	-0.246
7:	-0.308	-0.119
8:	-0.448	-0.099
9:	-0.420	-0.104
10:	-0.448	-0.081

X CENTROID: -0.031
 Y CENTROID: -0.071
 POA TO CENTROID: 0.078
 HORZ SPREAD: 0.964
 VERT SPREAD: 1.514
 GROUP SPREAD: 1.539
 MIN RADIUS: 0.175
 MAX RADIUS: 0.818
 MEAN RADIUS: 0.507
 # IN 1 IN DIAMETER: 6
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

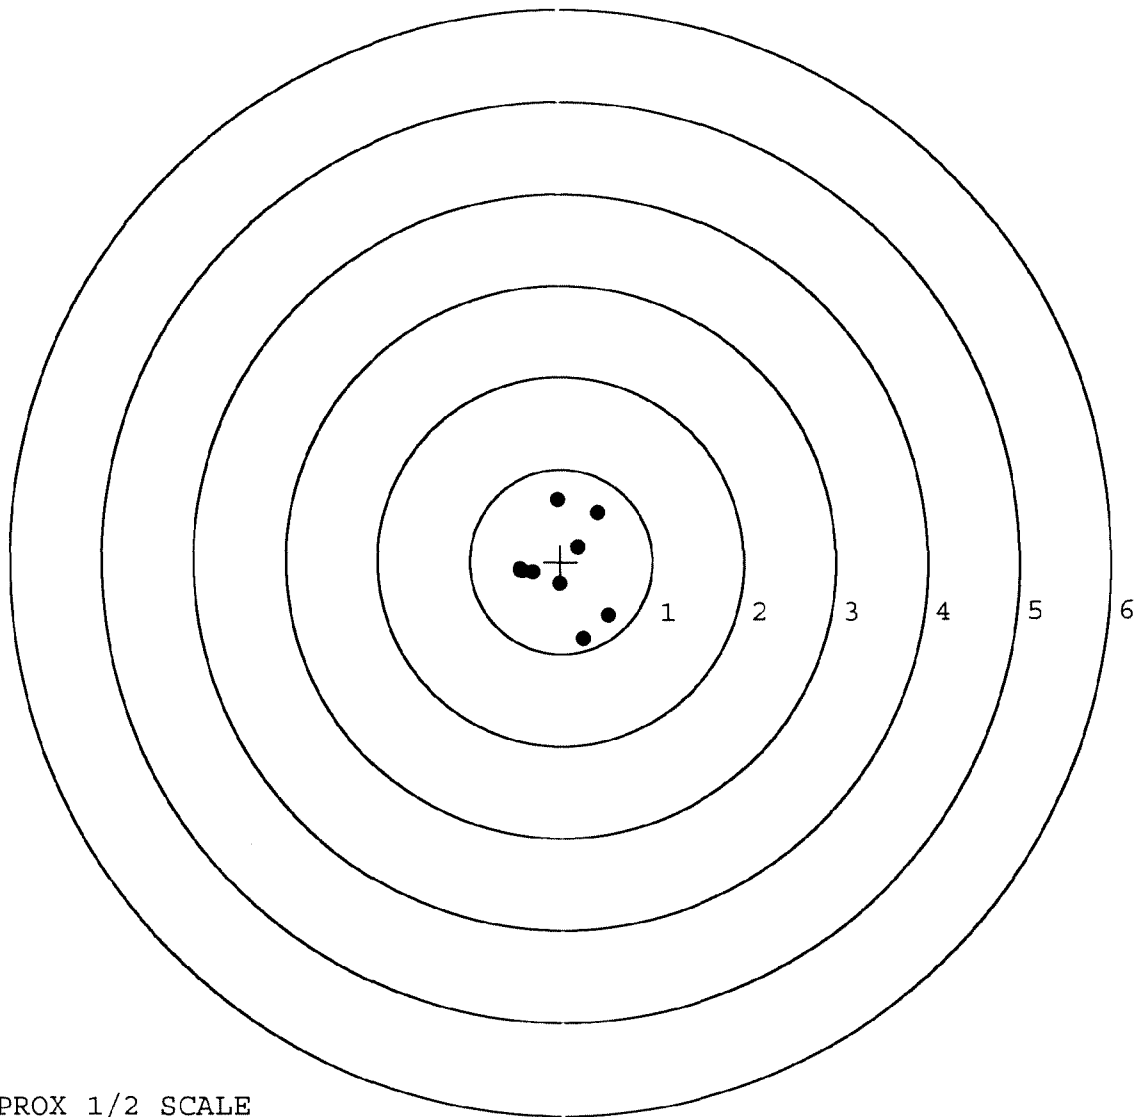

TARGET APPROX 1/2 SCALE

Remington[®]

REG. U.S. PAT. & TM. OFF.

MODEL 700TM M24

MADE IN ILLION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO.
C6349061

ORDER NO.
5716

Ø1

5716 C6349061

UPC

0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6349061

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	1 12 90		RW
600	Proof	1 12 90		
607	Check Headspace	1 12 90		
610	Dis-assemble Gun	1 12 90		RW
612	Magnaflux Barrel Action	1-16-90		KCR
	Magnaflux Bolt	1-17-90		KCR
615	Rollmark Caliber	1-17-90		CS
617	Drill and Tap Sight Holes	1-19-90		FB
618	Polish Barrel RB	1-22-90		WB
620	Apply Coatings (Barrel Action)		1-28-90	HA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/1/90	WB
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/1/90	RW
	C) Inspect Ejector Hole for Chamfer		2/1/90	RW
	D) Oil Firing Pin Ass'y		2/1/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		12/6/90	GS

op. #	NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			2-1-90	JH
	G) Safety Off Force	3	3	3			2-1-90	JH
	H) Trigger Pull Test & Retainability						1/26/90	JS
	I) Firing Pin Indent	.020	.020	.020			2-1-90	JH
	J) Assemble Stock						3/1/90	RW
	K) Assemble Swivel Studs						3/12/90	WB
	L) Attach Front and Rear Sight Assemblies						3/1/90	RW
	M) Iron Sight Alignment						3/1/90	RW
	N) Detach Front & Rear Sights & place in numbered container						3/1/90	RW
	O) Attach Scope to Rifle						3/1/90	WB
	P) Detach & Attach Scope 20 Times						3/1/90	WB
640	Gallery Target & Test						3-2-90	JH
	A) Time						"	JH
	B) Malfunctions						"	JH
	C) Pierced Primers						"	JH
	D) Optical Clarity of Scope						"	JH
645	Inspect for Live Ammo						3-2-90	JH
655	Final Inspection						3/12/90	WB
	A) Headspace							
	B) Trigger Pull	2.76	2.74	2.74	2.72	2.72	3/12/90	CS
	C) Function						3/12/90	WB
660	Pack						2/26/90	JH

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C 634906/

DATE 1/26/90

TESTER 938

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.21	2.36	2.28	2.16	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.34	2.38	2.30	2.14	
PULL #3	2.34	2.29	2.32	2.14	
PULL #4	2.25	2.37	2.29	2.12	
PULL #5	2.30	2.37	2.26	2.12	
TOTAL	11.44	11.77	11.45		
AVG.	2.288	2.354	2.29		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	2.94	2.86		
PULL #2	2.90	2.89		
PULL #3	2.91	2.87		
PULL #4	2.90	2.89		
PULL #5	2.92	2.82		
TOTAL	14.57	14.33		
AVG.	2.914	2.866		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.91	3.90		3.97
PULL #2	3.94	3.86		3.99
PULL #3	3.93	3.96		3.85
PULL #4	3.93	3.98		3.94
PULL #5	3.94	3.97		3.98
TOTAL	19.65	19.61		19.73
AVG.	3.93	3.922		3.946

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06349061
3 Mar 1990

CENTROIDAL DISTANCES

0 TO	1	.332122
1 TO	2	.4158
1 TO	3	.37987
1 TO	4	.162003
1 TO	5	.633877

5
143
2 <----POR


ORDINATE FOR THIS RIFLE IS: -.085
ABDINATE FOR THIS RIFLE IS: .0156
RANGE POI RADIUS FOR THIS RIFLE IS: .0864197
E IS: .8782

2 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6345061

CENTERFIRE PATTERNS

1

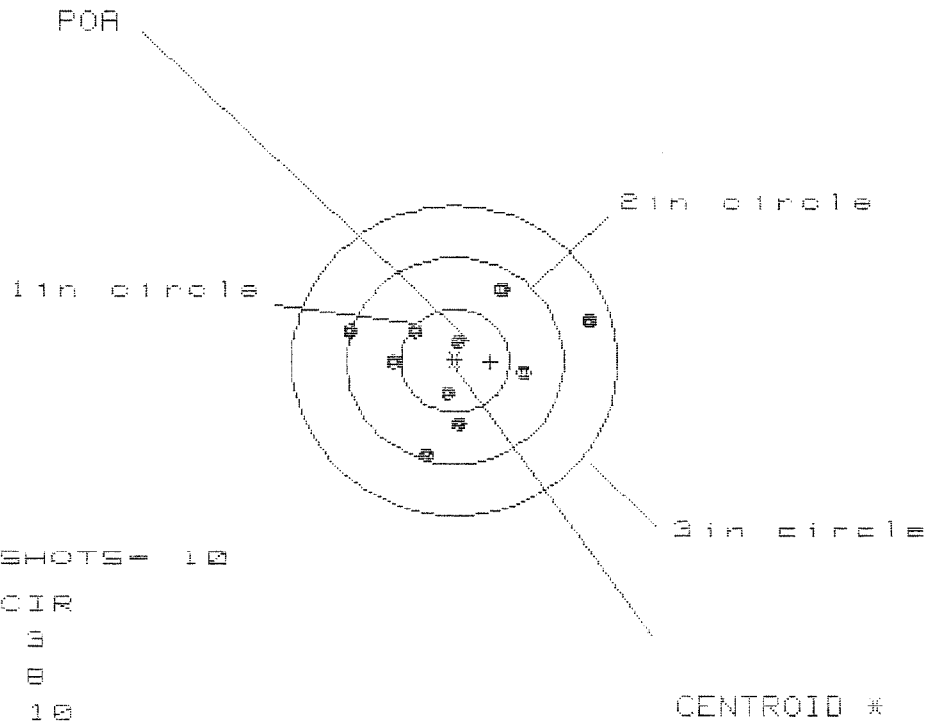

OF SHOTS= 10

IN CIR

1in = 3

2in = 8

3in = 10

ES= 2.241

VS= 1.551

GS= 2.247

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MEAN	:	1.241	.802	.694
STDEV	:	-1.000	-.862	-.541
COVAR	:	.678	.727	.767
COVAR	:	-.873	-.824	-.784
COVAR	:	-.332	-.470	-.362
COVAR	:	.009	-.040	-.080
COVAR	:	.332	.472	.371
COVAR	:	.231	.292	.259
COVAR	:	.700	.615	.574
COVAR	:	1.315	.921	.884
COVAR	:	2.241	1.664	1.235
COVAR	:	1.551	1.551	1.551
COVAR	:	2.247	1.714	1.695
COVAR	:	3	8	10
COVAR	:	8	10	
COVAR	:	10		

2 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06349061

CENTERFIRE PATTERNS # 2

POR

1in circle

2in circle

3in circle

OF SHOTS = 10

IN CIR

1in = 1

2in = 4

3in = 8

HS = 3.315

VS = 2.106

GS = 3.550

CENTROID *

PATTERN #


2

SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.469	1.264	1.037
MINIMUM X	-1.846	-1.363	-1.205
MAXIMUM Y	.985	.916	.987
MINIMUM Y	-1.121	-1.190	-1.119
CENTROID X	-.041	.164	.006
CENTROID Y	-.288	-.219	-.290
EXT. TO CENTROID INCH	.291	.274	.290
MAX. X INCH	.350	.526	.394
MAX. Y INCH	1.082	.988	.913
MIN. X INCH	1.950	1.387	1.252
MIN. Y INCH	3.315	2.627	2.292
VERTICAL SPREAD	2.106	2.106	2.106
HORIZONTAL SPREAD	3.550	2.670	2.337
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

2 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06349061

CENTERFIRE PATTERNS # 3

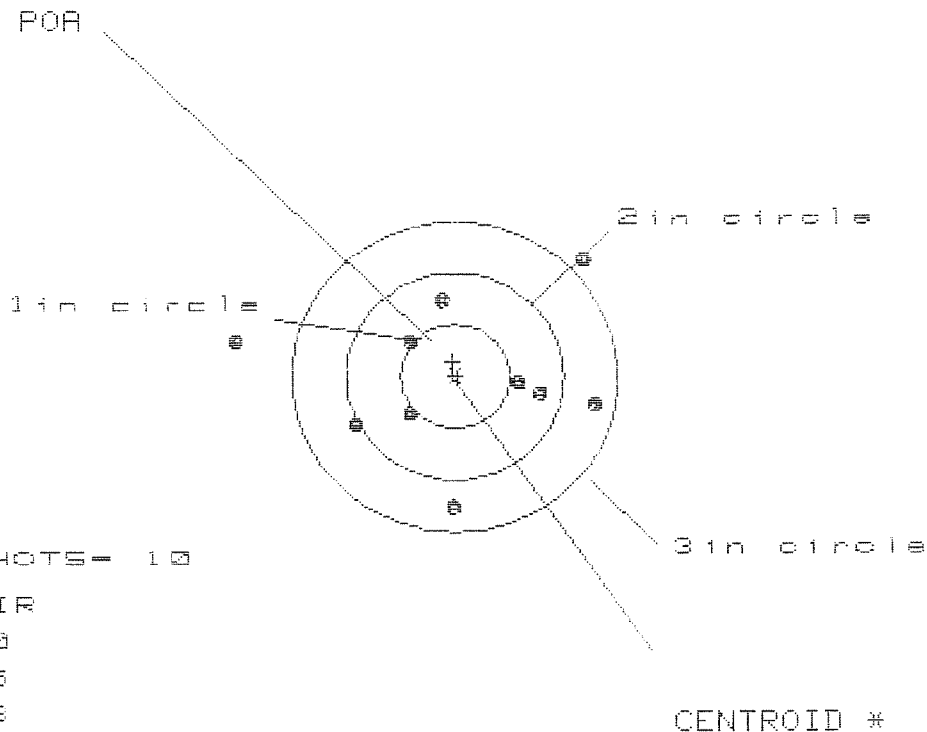

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 5

3 in = 8

HS= 3.235

VS= 2.331


GS= 3.362

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.241	1.019	1.143
MINIMUM X	:	-1.994	-1.143	-1.019
MAXIMUM Y	:	1.114	1.151	.935
MINIMUM Y	:	-1.217	-1.180	-1.036
CENTROID X	:	.017	.239	.115
CENTROID Y	:	-.141	-.178	-.322
POR TO CENTROID in.	:	.142	.298	.342
MIN RADIUS	:	.539	.357	.435
MEAN RADIUS	:	1.047	.920	.840
MA RADIUS	:	2.022	1.519	1.149
HORIZONTAL SPREAD	:	3.235	2.162	2.162
VERTICAL SPREAD	:	2.331	2.331	1.971
EXTREME SPREAD	:	3.362	2.647	2.168
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

2 Mar 1938

FILE:/PATTERNING/CENTERFIRE_PATT/C6349061

CENTERFIRE PATTERNS # 4

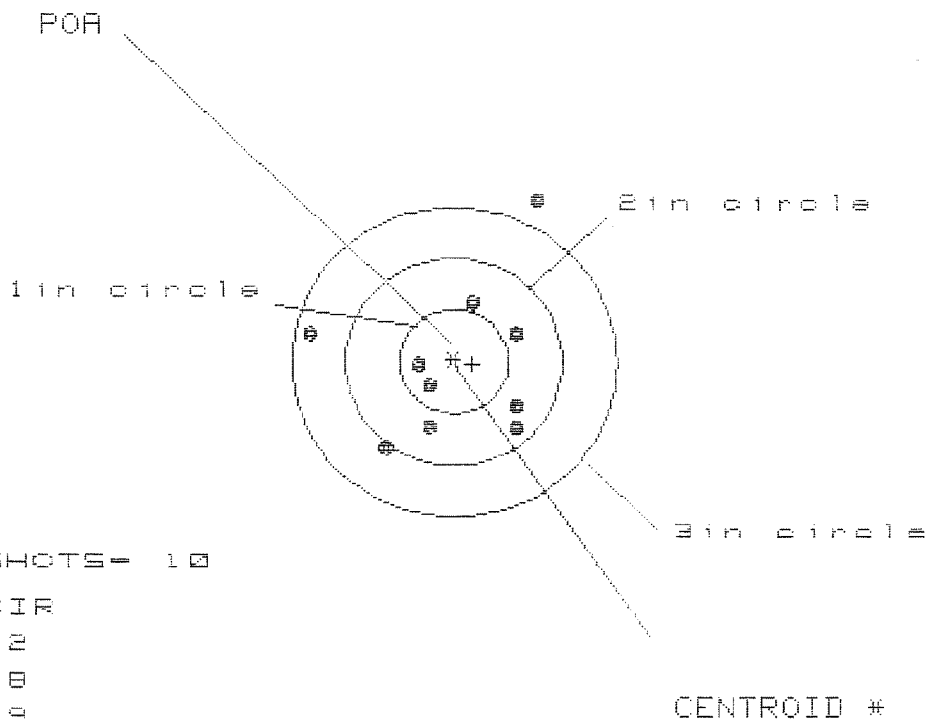

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 8

3 in = 9

HE= 2.019

VS= 2.320

GS= 2.678


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.735	.701	.551
MINIMUM X	:	-1.284	-1.203	-.671
MAXIMUM Y	:	1.529	.737	.791
MINIMUM Y	:	-.791	-.621	-.567
CENTROID X	:	-.171	-.252	-.102
CENTROID Y	:	.027	-.143	-.197
POR TO CENTROID in.	:	.173	.290	.222
MIN RADIUS	:	.284	.181	.323
MEAN RADIUS	:	.806	.675	.602
MAX RADIUS	:	1.697	1.277	.879
HORIZONTAL SPREAD	:	2.019	1.904	1.222
VERTICAL SPREAD	:	2.320	1.358	1.358
EXTREME SPREAD	:	2.678	2.055	1.532
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

2 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8349051

CENTERFIRE PATTERNS # 5

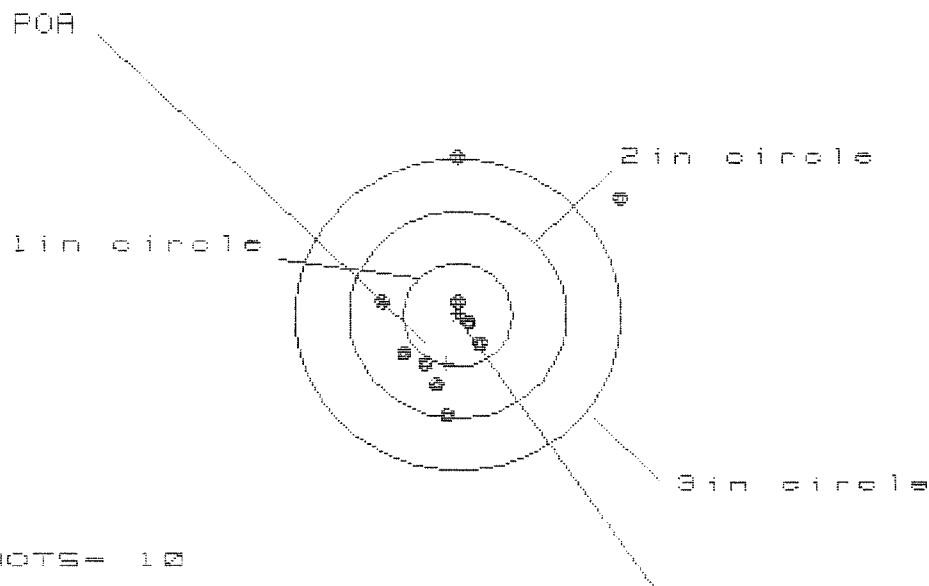

OF SHOTS= 10

IN CIR

1in = 3

2in = 8

3in = 8

HS= 2.140

VS= 2.432

GS= 2.599

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.470
MINIMUM X	-.670
MAXIMUM Y	1.504
MINIMUM Y	-.928
CENTROID X	.102
CENTROID Y	.471
POA TO CENTROID in.	.482
MIN RADIUS	.149
MEAN RADIUS	.756
MAX RADIUS	1.867
HORIZONTAL SPREAD	2.140
VERTICAL SPREAD	2.432
EXTREME SPREAD	2.599
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	8
NUMBER IN THREE INCH CIRCLE =	8