

E6790642

VERY IMPORTANT: Book instruction enclosed to assure safe use of this firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

SERIAL NO. **E6790642**
ORDER NO. **25705**
46

Made in Illinois, NY Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Déposée.

31KW

 5705 E6790642

ORDER 25705

MODEL 700™ M24

UPC




0 47700 25705 1

ORDER 25705

MODEL 700™ M24

UPC



0 47700 25705 1

SERIAL NO.





E6790642

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

GREEN ENVELOPE CONTAINS:
 - INSTRUCTION BOOK
 - PRODUCT OWNER'S CARD
 - SAFETY BOOKLET

46 FORM




ORDER NO. **25705**

BARREL LENGTH **24"**

CAPACITY **6**

E6790642



CONTRACT #
DAAE20-01-P-0489
170 RIFLES

GUN SERIAL # F6790642

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		2-1-02	RTL
600	PROOF		2-1-02	AC
607	CHECK HEADSPACE		2-1-02	AC
610	DIS-ASSEMBLE GUN		2-1-02	RTL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT		FEB 9 2002	
615	ROLLMARK CALIBER		OPERATOR 2-9-02	AC
617	DRILL AND TAP SIGHT HOLES		2-12-02	AC
620	APPLY COATINGS (BARREL ACTION)		2-20	TR
	(BOLT)		2-20	TR
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY		2/26/02	DK
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		2/26/02	DK
	C) INSPECT EJECTOR HOLE FOR CHAMFER		2/26/02	DK
	D) OIL FIRING PIN ASSEMBLY		2/26/02	DK
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		2/24/02	RTL

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. EL6790642DATE 2/6/02TESTER D.N.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.47	2.47	2.12	2.40	MIN. SETTING,
PULL #2	2.43	2.92	2.34	2.75	NO AVG. OF 5
PULL #3	2.38	2.68	2.49	2.81	READINGS ACCEPT-
PULL #4	2.49	2.69		2.43	ABLE LESS THAN 2#
PULL #5	2.51	2.81		2.57	
TOTAL	12.28	13.57			
AVG.	2.46	2.71			

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.02	3.13		
PULL #2	3.01	2.98		
PULL #3	2.90	3.12		
PULL #4	3.16	3.15		
PULL #5	3.17	3.16		
TOTAL	15.26	15.54		
AVG.	3.05	3.11		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.07	4.05		4.06
PULL #2	4.11	3.93		4.28
PULL #3	4.04	4.29		4.23
PULL #4	4.11	4.40		4.20
PULL #5	4.14	4.39		4.14
TOTAL	20.47	21.06		20.91
AVG.	4.09	4.21		4.18

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6790642.___0


FILE DATE AND TIME: 03/19/2002 03:00

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.131
The Average Y Centroid of the Five Target Set:	-0.143
The Average Point of Impact of the Five Target Set:	0.194
The Average Mean Radius of the Five Target Set:	0.749
The Distance from POA to Centroid Target #1:	0.401
The Distance from Centroid Target #2 to Centroid Target #1:	0.294
The Distance from Centroid Target #3 to Centroid Target #1:	0.402
The Distance from Centroid Target #4 to Centroid Target #1:	0.269
The Distance from Centroid Target #5 to Centroid Target #1:	0.218

BARBER - M24 0111941

SERIAL NUMBER: E6790642. __0	POINT#	X	Y
TARGET NUMBER: 1	1:	0.438	-0.475
FILE DATE: 03/19/2002	2:	-0.326	-0.769
FILE TIME: 03:00	3:	-0.783	-1.181
	4:	-0.777	-1.018
X CENTROID: -0.315	5:	-1.006	-0.438
Y CENTROID: -0.248	6:	-0.272	-0.122
POA TO CENTROID: 0.401	7:	-0.518	-0.064
HORZ SPREAD: 1.873	8:	-0.897	0.484
VERT SPREAD: 1.806	9:	0.129	0.477
GROUP SPREAD: 2.446	10:	0.867	0.625
MIN RADIUS: 0.133			
MAX RADIUS: 1.469			
MEAN RADIUS: 0.763			
# IN 1 IN DIAMETER: 2			
# IN 2 IN DIAMETER: 8			
# in 3 IN DIAMETER: 10			

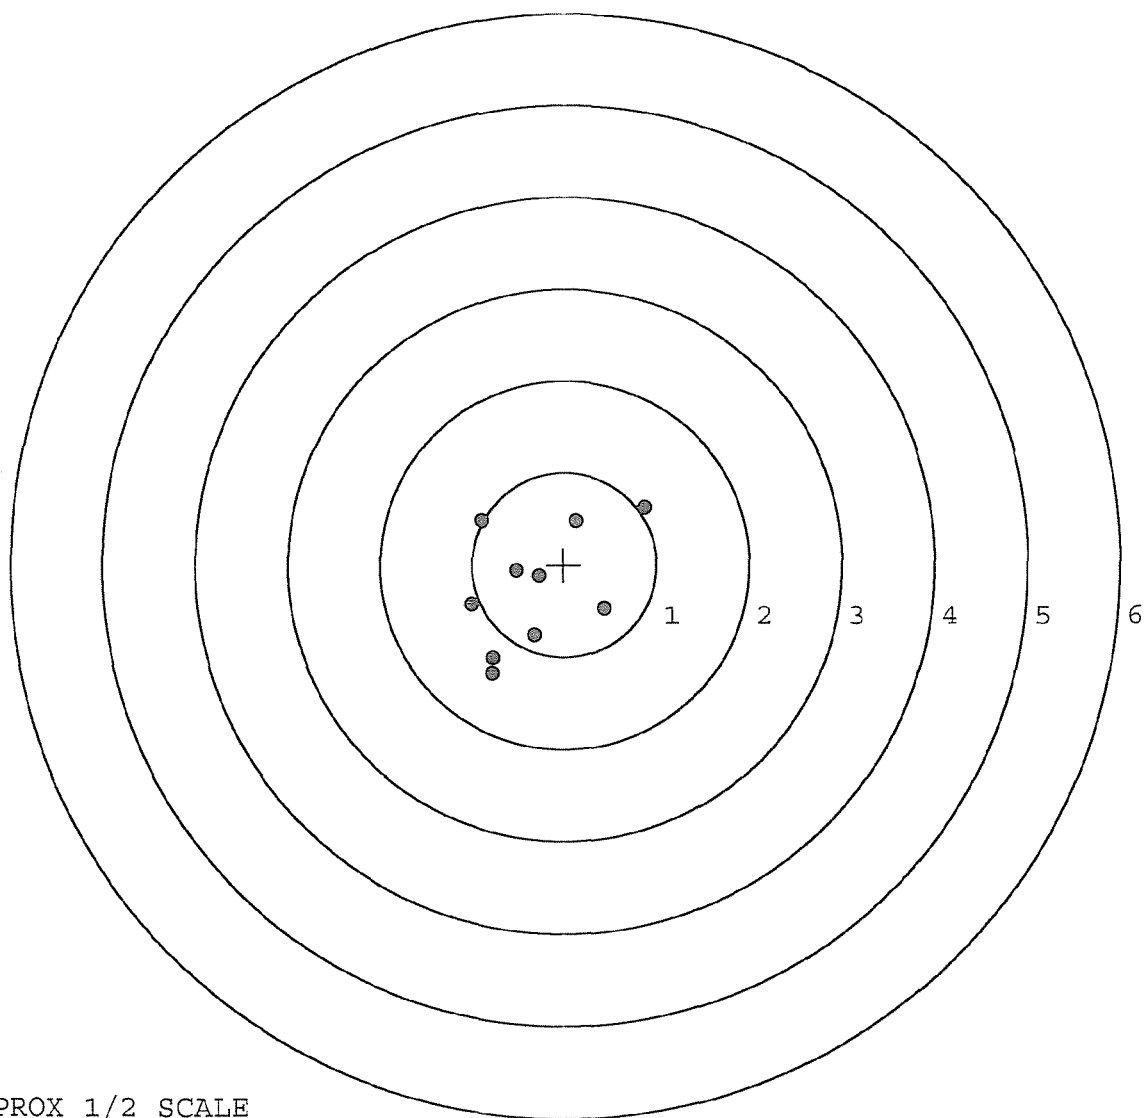

TARGET APPROX 1/2 SCALE

BARBER - M24 0111942

SERIAL NUMBER: E6790642. __ 0

TARGET NUMBER: 2

FILE DATE: 03/19/2002

FILE TIME: 03:00

X CENTROID: -0.124

Y CENTROID: -0.025

POA TO CENTROID: 0.127

HORZ SPREAD: 1.855

VERT SPREAD: 1.922

GROUP SPREAD: 2.038

MIN RADIUS: 0.122

MAX RADIUS: 1.244


MEAN RADIUS: 0.645

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.903	0.248
2:	0.388	0.227
3:	0.162	-0.315
4:	-0.010	-0.851
5:	-0.277	-0.880
6:	-0.009	0.016
7:	-0.356	0.003
8:	-0.952	0.121
9:	-0.765	1.042
10:	-0.327	0.144

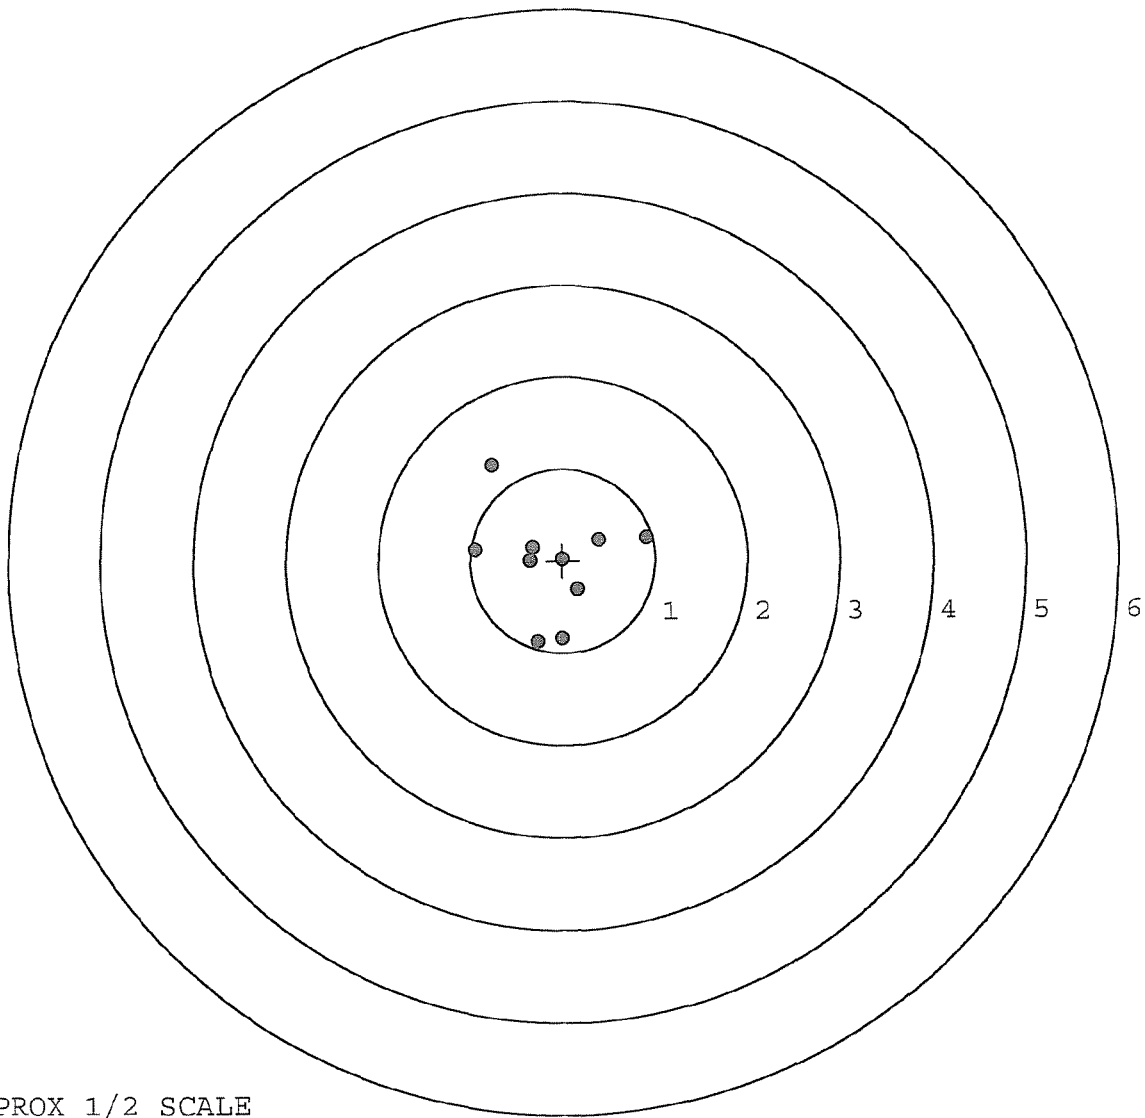


TARGET APPROX 1/2 SCALE

BARBER - M24 0111944

SERIAL NUMBER: E6790642. __0
 TARGET NUMBER: 3
 FILE DATE: 03/19/2002
 FILE TIME: 03:00

POINT#	X	Y
1:	0.748	0.227
2:	0.664	0.030
3:	-0.043	-0.152
4:	0.236	-0.484
5:	0.152	-0.693
6:	0.027	-0.798
7:	0.146	-1.039
8:	-0.295	-1.029
9:	-0.962	0.369
10:	0.198	1.268

X CENTROID: 0.087
 Y CENTROID: -0.230
 POA TO CENTROID: 0.246
 HORZ SPREAD: 1.710
 VERT SPREAD: 2.307
 GROUP SPREAD: 2.349
 MIN RADIUS: 0.152
 MAX RADIUS: 1.502
 MEAN RADIUS: 0.733
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 9

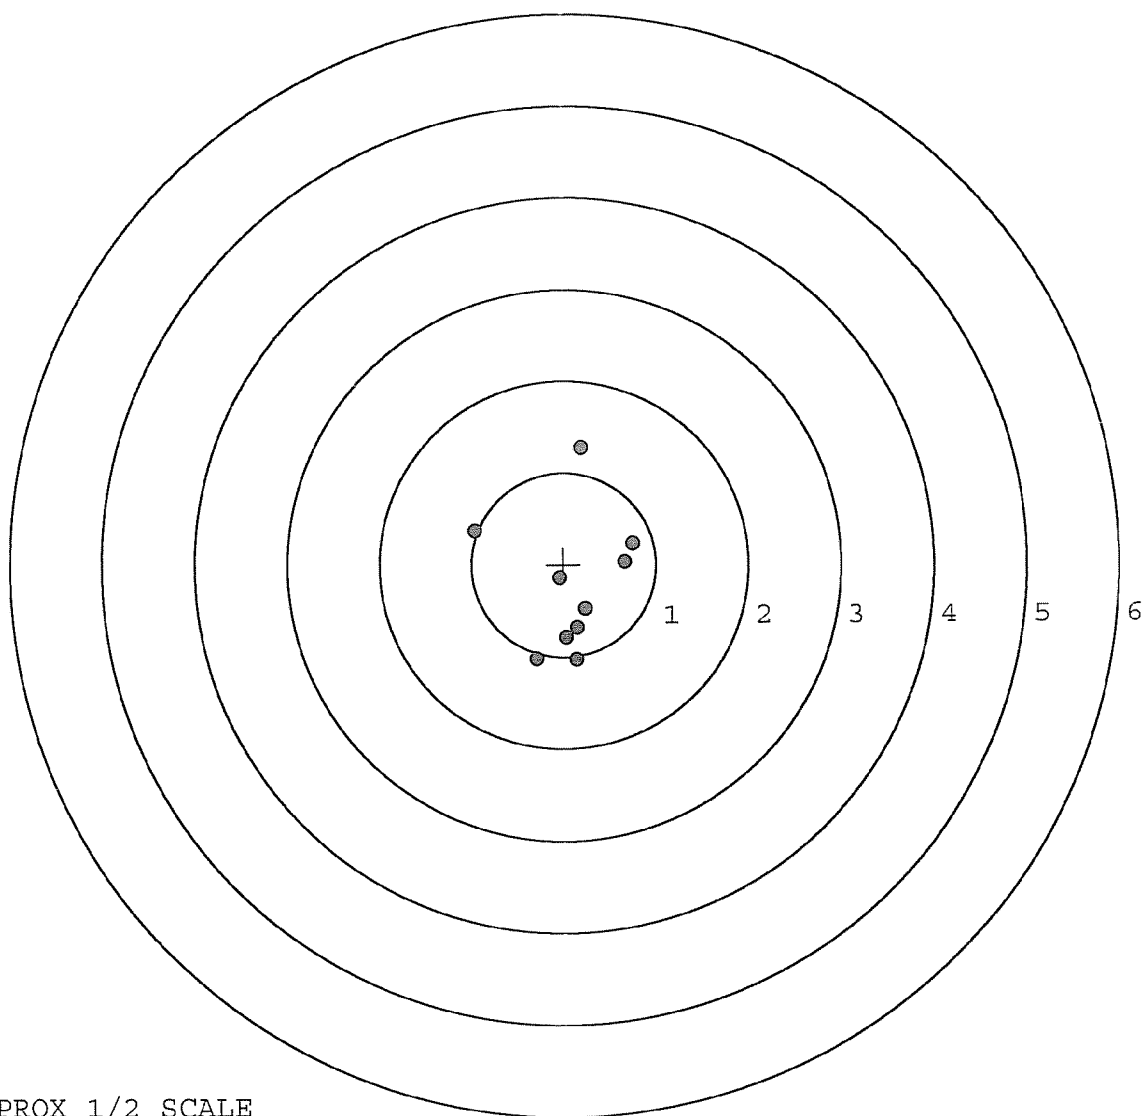

TARGET APPROX 1/2 SCALE

BARBER - M24 0111945

SERIAL NUMBER: E6790642. __0

TARGET NUMBER: 4

FILE DATE: 03/19/2002

FILE TIME: 03:00

POINT#	X	Y
1:	0.380	0.105
2:	0.273	0.622
3:	-0.251	0.408
4:	-0.413	0.522
5:	-0.542	0.132
6:	-0.638	1.511
7:	-0.015	0.018
8:	0.520	-1.313
9:	-0.092	-1.088
10:	-1.264	-0.948

X CENTROID: -0.204

Y CENTROID: -0.003

POA TO CENTROID: 0.204

HORZ SPREAD: 1.784

VERT SPREAD: 2.824

GROUP SPREAD: 3.052

MIN RADIUS: 0.190


MAX RADIUS: 1.575

MEAN RADIUS: 0.850

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 6


in 3 IN DIAMETER: 9

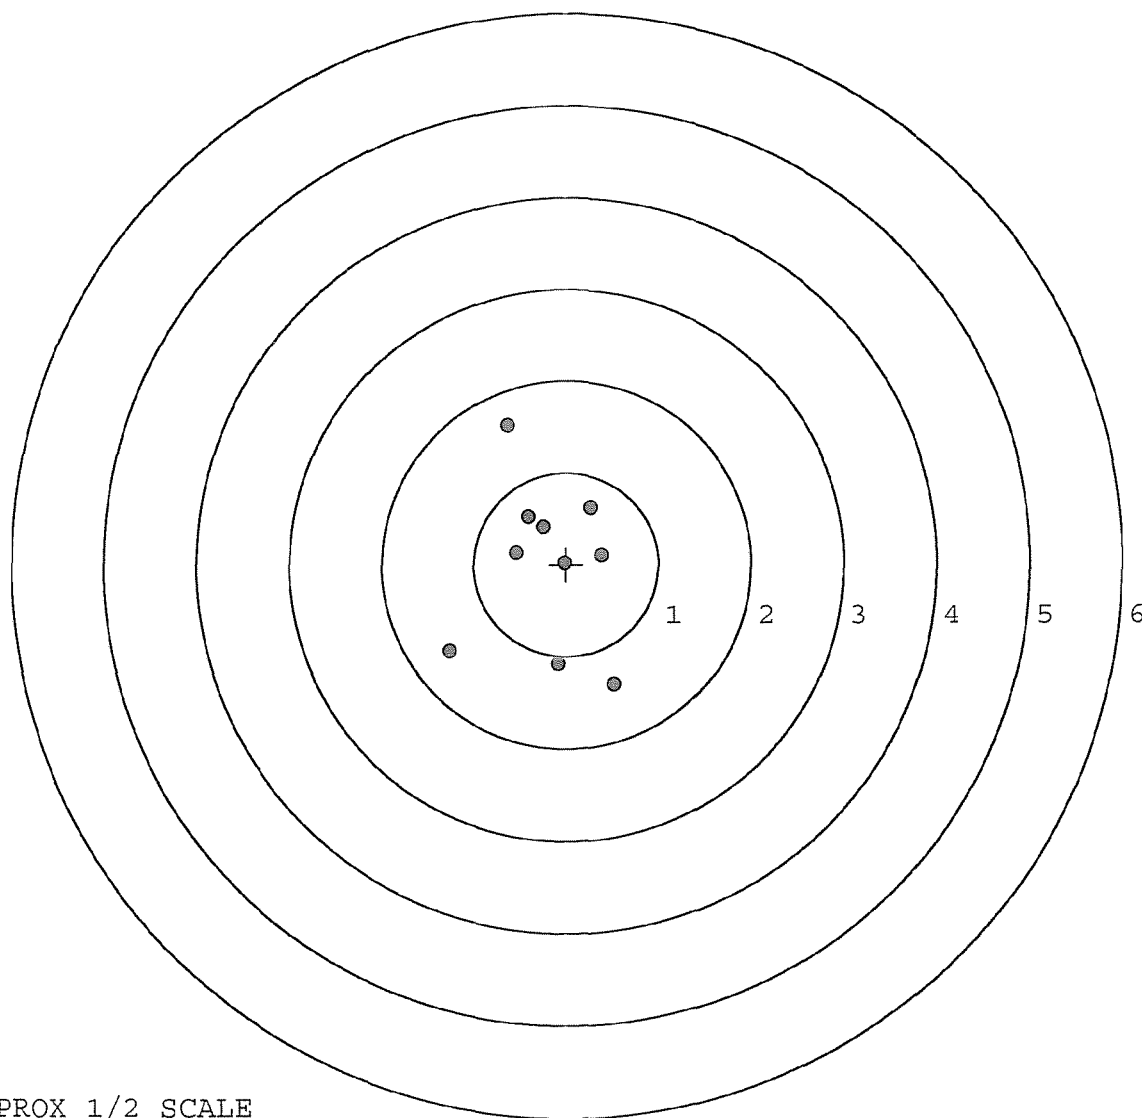

TARGET APPROX 1/2 SCALE

BARBER - M24 0111946

SERIAL NUMBER: E6790642. 0	POINT#	X	Y
TARGET NUMBER: 5	1:	0.427	-0.477
FILE DATE: 03/19/2002	2:	1.349	0.344
FILE TIME: 03:00	3:	-0.513	0.150
	4:	-0.499	-0.011
X CENTROID: -0.100	5:	-0.275	-0.342
Y CENTROID: -0.211	6:	-0.756	-0.150
POA TO CENTROID: 0.234	7:	-1.095	-1.359
HORZ SPREAD: 2.444	8:	0.573	0.205
VERT SPREAD: 1.722	9:	-0.003	0.363
GROUP SPREAD: 2.979	10:	-0.207	-0.835
MIN RADIUS: 0.219			
MAX RADIUS: 1.552			
MEAN RADIUS: 0.754			
# IN 1 IN DIAMETER: 2			
# IN 2 IN DIAMETER: 8			
# in 3 IN DIAMETER: 8			

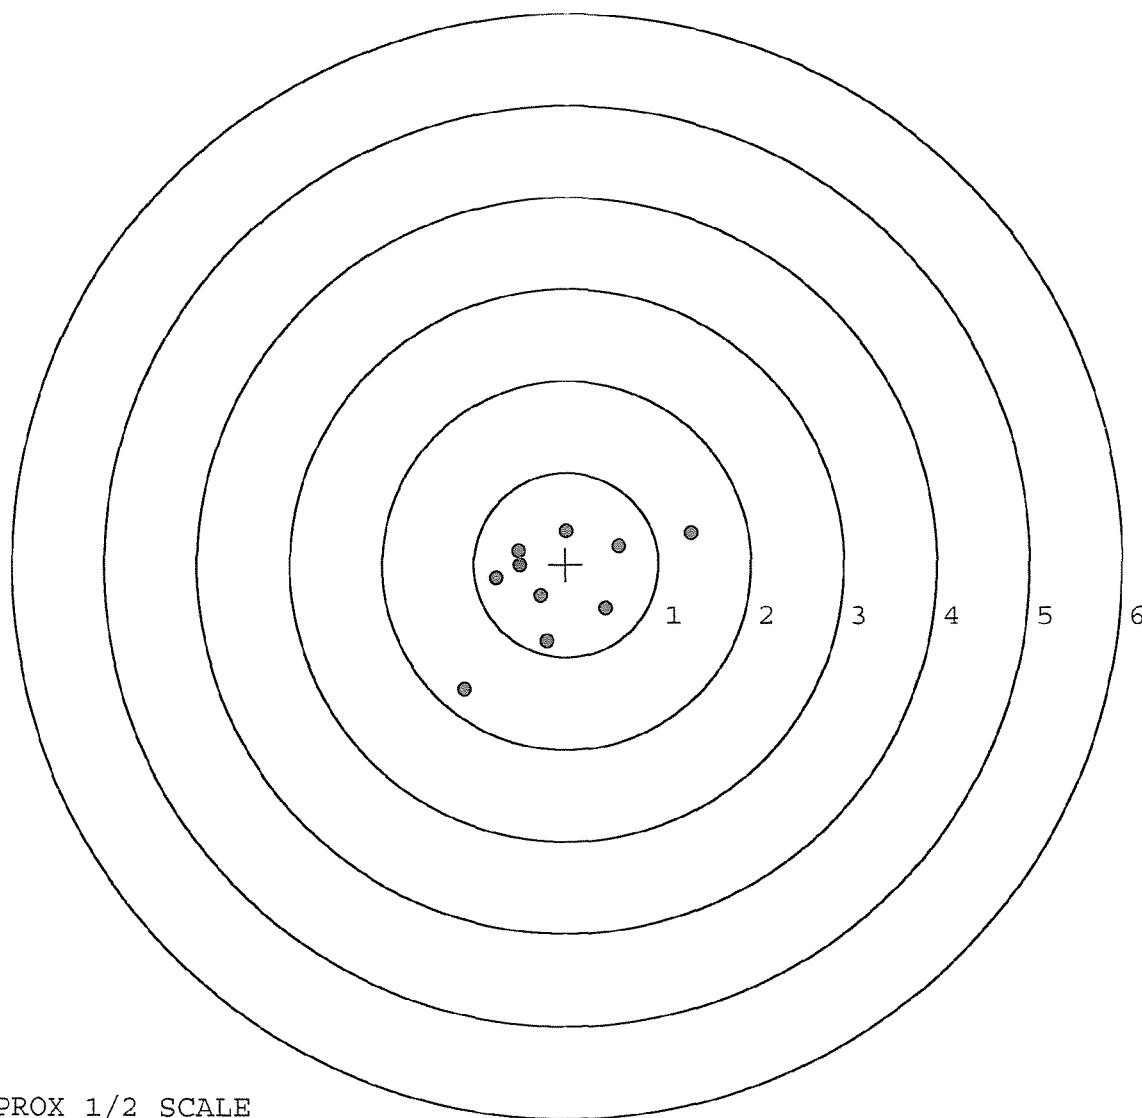

TARGET APPROX 1/2 SCALE