

E 6790345

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Made in Illinois, NY Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.

SERIAL NO. **J**
E6790345

ORDER NO. **25716**

46

31XV

5716 E6790345

ORDER 25716

MODEL 700™ M24

UPC



ORDER 25716

MODEL 700™ M24

UPC



SERIAL NO.



MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

DOCUMENT ENVELOPE ASSEMBLY:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- SAFETY BOOKLET

46 FORM 1444




ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

E6790345

UPC



CONTRACT #

GUN SERIAL # E6790345

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		11/6/01	REP
600	PROOF		11/6/01	REP
607	CHECK HEADSPACE	MAGNA - FLUX INSPECTED	11/6/01	REP
610	DIS-ASSEMBLE GUN	NOV 13 2001	11/6/01	REP
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	OPERATOR <u>DRS</u>		
615	ROLLMARK CALIBER		11/14-01	WM
617	DRILL AND TAP SIGHT HOLES		11/14	BWT
620	APPLY COATINGS (BARREL ACTION)		11/15	HP
	(BOLT)		11/15	HP
625	FINAL ASSEMBLY		12/9/01	DR
	A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		12/9/01	OK
	C) INSPECT EJECTOR HOLE FOR CHAMFER		12/9/01	OK
	D) OIL FIRING PIN ASSEMBLY		12/9/01	OK
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS	12/20/01	DA

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>6.0</u> <u>5.75</u> <u>5.75</u>	12-17-01	EK
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>3.5</u> <u>3.5</u> <u>3.5</u>	12-17-01	EK
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.021</u> <u>.023</u> <u>.024</u>	12-17-01	EK
	J) ASSEMBLE STOCK		12/13	BWT
	K) ASSEMBLE SWIVEL STUDS		12/20/01	REP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		12/20/01	REP
	M) IRON SIGHT ALIGNMENT		12/20/01	REP
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		12/20/01	REP
640	GALLERY TEST AND TARGET	PASS FAIL	12-13-01	A
	A) MALFUNCTIONS	PASS FAIL	12-13-01	A
	B) PIERCED PRIMERS	PASS FAIL	12-13-01	C
645	INSPECT. FOR LIVE AMMO		12-13-01	C
655	FINAL INSPECTION A) HEADSPACE		12/20/01	REP
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.74</u> <u>2.59</u> <u>2.63</u> <u>2.65</u> <u>2.60</u>	12/18/01	D.M.
	C) FUNCTION		12/20/01	REP
660	PACK		12/20/01	DA

BARBER - M24 0116077

 AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

 SERIAL NO. E6790345

 DATE 10/30/01

 TESTER B.K.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.33	2.27		2.66	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.26	2.23		2.36	
PULL #3	2.30	2.30		2.26	
PULL #4	2.40	2.73		2.30	
PULL #5	2.46	2.43		2.64	
TOTAL	1175	1196		1222	
AVG.	2.35	2.39		2.44	


	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.39	3.35		
PULL #2	3.32	3.17		
PULL #3	3.40	3.24		
PULL #4	3.42	3.33		
PULL #5	3.32	3.22		
TOTAL	1685	1631		
AVG.	3.37	3.26		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.04	4.20		4.21
PULL #2	4.35	4.31		4.07
PULL #3	4.24	4.43		4.02
PULL #4	4.13	4.30		4.25
PULL #5	4.25	4.40		4.45
TOTAL	2101	2164		2100
AVG.	4.20	4.32		4.20

SERIAL NUMBER: E6790345. 0
 TARGET NUMBER: 1
 FILE DATE: 12/13/2001
 FILE TIME: 04:22

POINT#	X	Y
1:	0.857	2.125
2:	-0.792	0.219
3:	0.348	-0.357
4:	-0.179	-1.374
5:	-0.081	-1.645

X CENTROID: 0.031
 Y CENTROID: -0.206
 POA TO CENTROID: 0.209
 HORZ SPREAD: 1.649
 VERT SPREAD: 3.770
 GROUP SPREAD: 3.885
 MIN RADIUS: 0.351
 MAX RADIUS: 2.474
 MEAN RADIUS: 1.276
 # IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 2
 # in 3 IN DIAMETER: 4

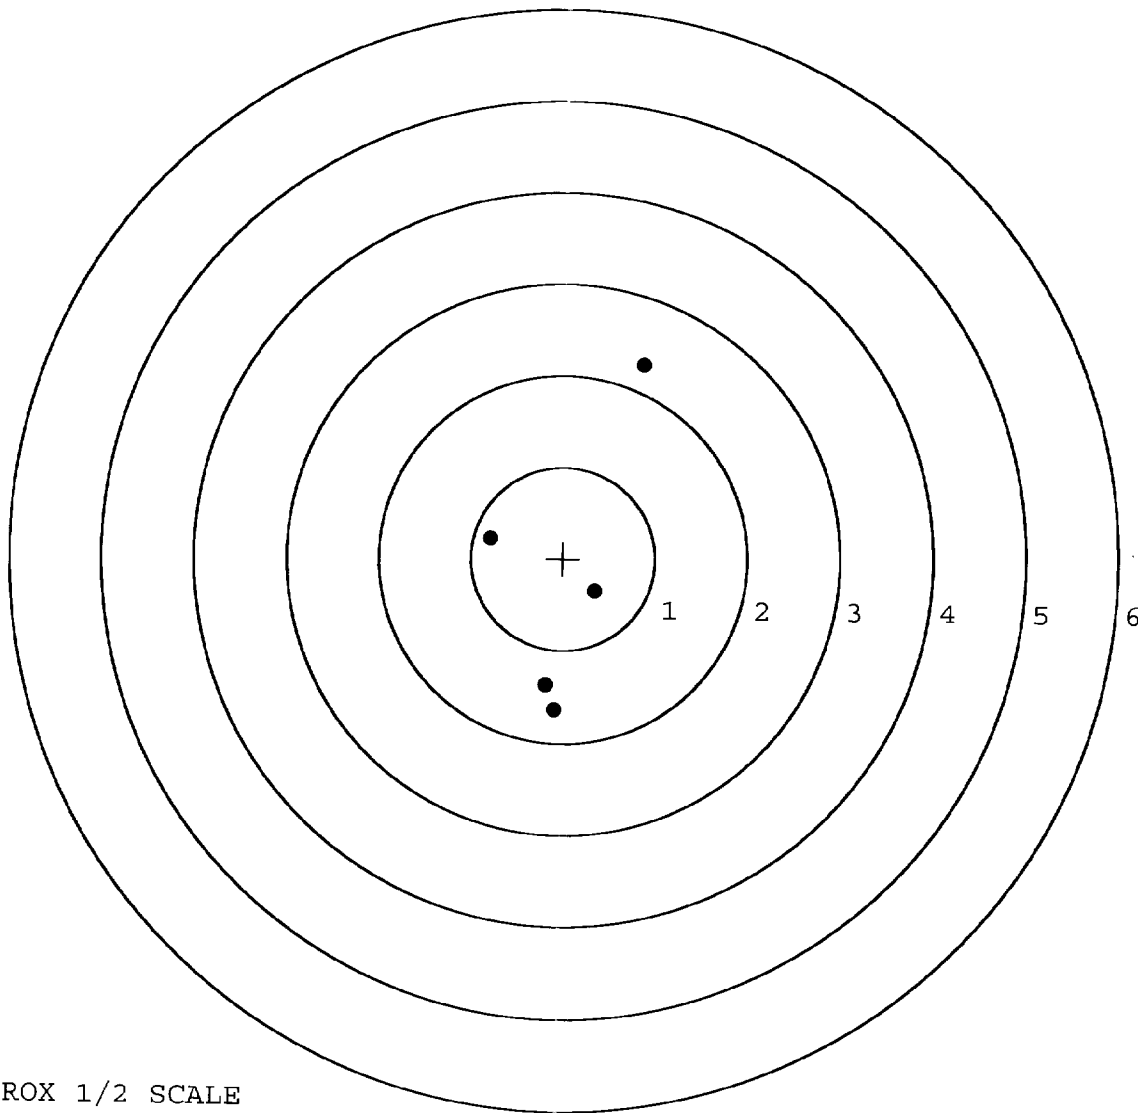

TARGET APPROX 1/2 SCALE

BARBER - M24 0116079

SERIAL NUMBER: E6790345. __0

TARGET NUMBER: 2

FILE DATE: 12/13/2001

FILE TIME: 04:22

X CENTROID: -0.056

Y CENTROID: -0.073

POA TO CENTROID: 0.092

HORZ SPREAD: 0.983

VERT SPREAD: 1.095

GROUP SPREAD: 1.096

MIN RADIUS: 0.350

MAX RADIUS: 0.693


MEAN RADIUS: 0.487

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 5

POINT#	X	Y
1:	-0.132	0.615
2:	-0.610	-0.120
3:	-0.096	-0.480
4:	0.186	-0.326
5:	0.373	-0.056

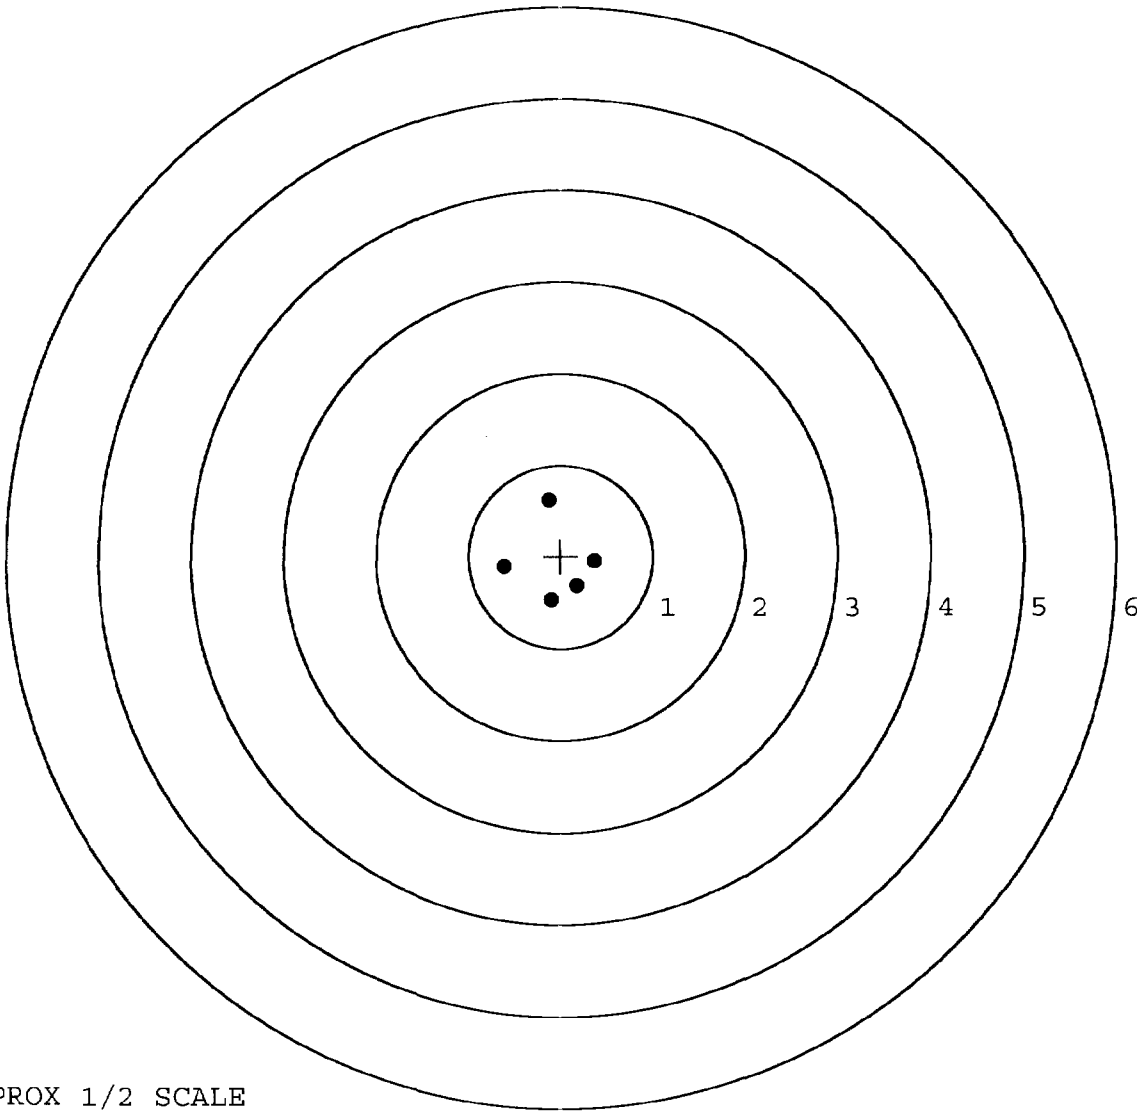

TARGET APPROX 1/2 SCALE

BARBER - M24 0116080

SERIAL NUMBER: R6790345. __0

TARGET NUMBER: 1

FILE DATE: 12/14/2001

FILE TIME: 11:15

POINT#	X	Y
1:	0.523	0.659
2:	-0.085	0.876
3:	0.163	0.515
4:	0.311	-0.704
5:	-0.543	-0.898

X CENTROID: 0.074

Y CENTROID: 0.090

POA TO CENTROID: 0.116

HORZ SPREAD: 1.066

VERT SPREAD: 1.774

GROUP SPREAD: 1.887

MIN RADIUS: 0.435


MAX RADIUS: 1.164

MEAN RADIUS: 0.791

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 5

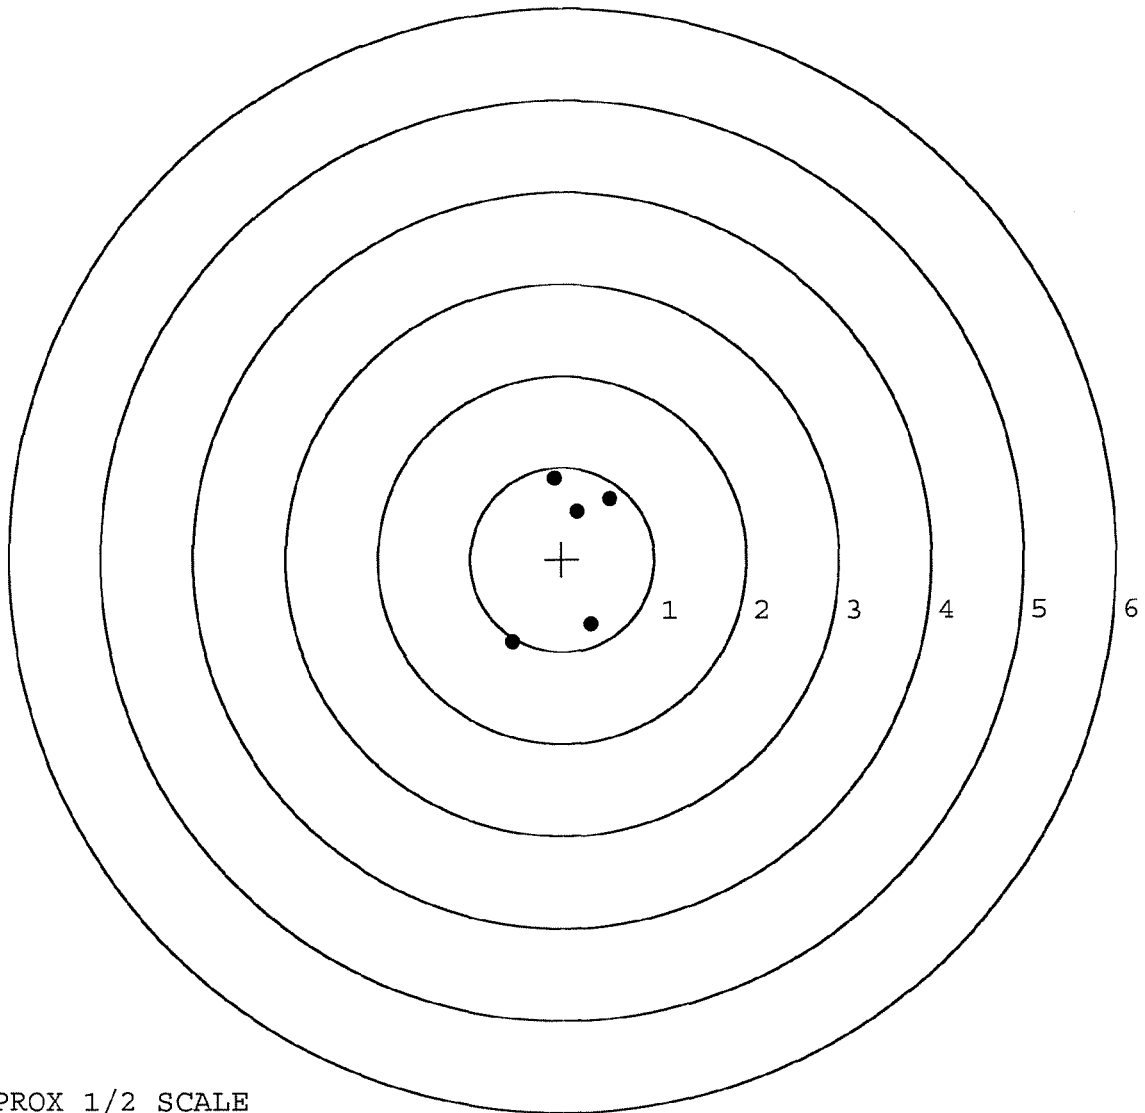

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: R6790345. __0

TARGET NUMBER: 2

FILE DATE: 12/14/2001

FILE TIME: 11:15

POINT#	X	Y
1:	0.594	-0.247
2:	0.291	0.157
3:	-0.256	0.475
4:	-0.400	-0.023
5:	-0.189	-0.282

X CENTROID: 0.008

Y CENTROID: 0.016

POA TO CENTROID: 0.018

HORZ SPREAD: 0.994

VERT SPREAD: 0.757

GROUP SPREAD: 1.115

MIN RADIUS: 0.316


MAX RADIUS: 0.642

MEAN RADIUS: 0.451

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 5

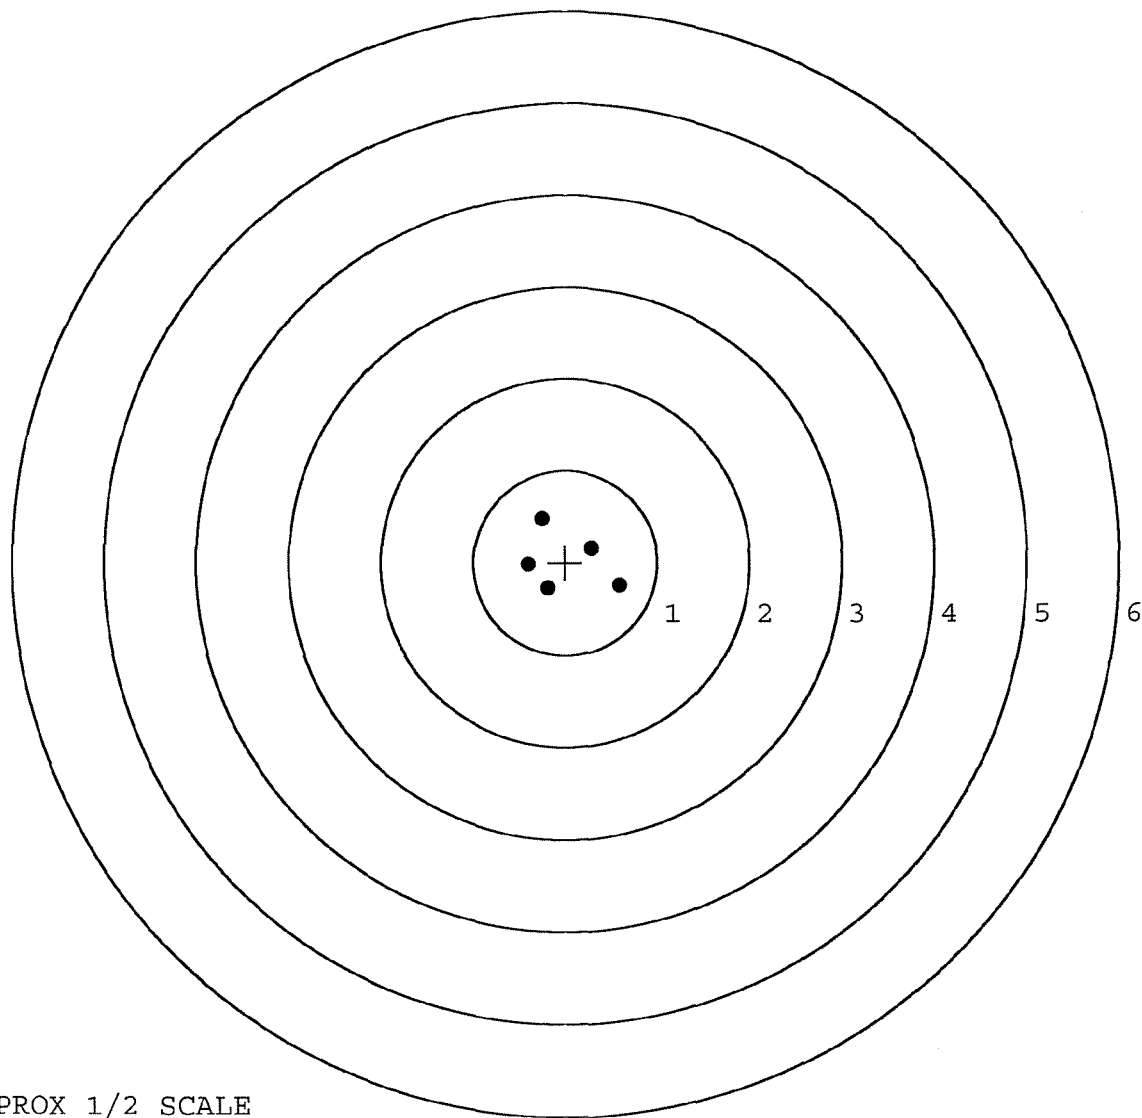

TARGET APPROX 1/2 SCALE