

UPC



E6374651

ORDER NO.	25705
BARREL LENGTH	24"
CAPACITY *	6
*INCLUDES 1 IN CHAMBER	

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374651
18 Nov 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.035
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0873333
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0940857

THE AMR FOR THIS RIFLE IS: 1.168

CENTROIDAL DISTANCES

0	TO	1	.401171
1	TO	2	.955264
1	TO	3	.27933

2 + <----POA
3 1

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .401

MIN RADIUS : .059

MEAN RADIUS : .913

MAX RADIUS : 1.419


CENTROID X : .357

CENTROID Y : -.183

18 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374651

CENTERFIRE PATTERN # 1

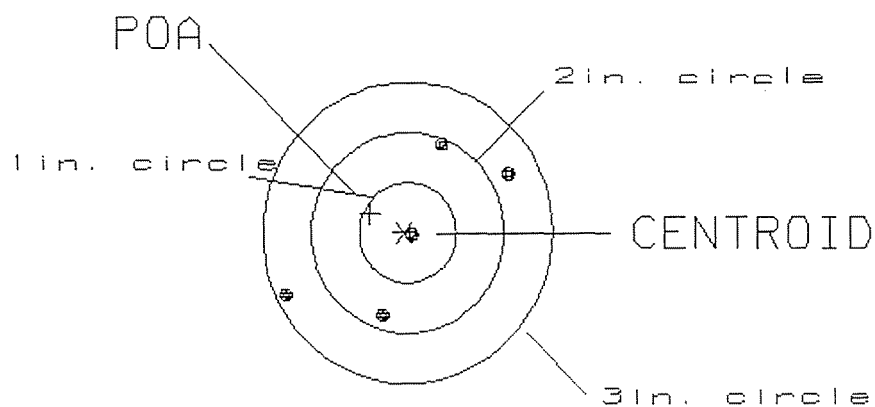

OF SHOTS= 5

IN CIRCLE

HS= 2.31

1

VS= 1.77

2

GS= 2.63


5

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .560
 MIN RADIUS : .449
 MEAN RADIUS : 1.645
 MAX RADIUS : 2.844
 CENTROID X : -.542
 CENTROID Y : .140

18 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374651

CENTERFIRE PATTERN # 2

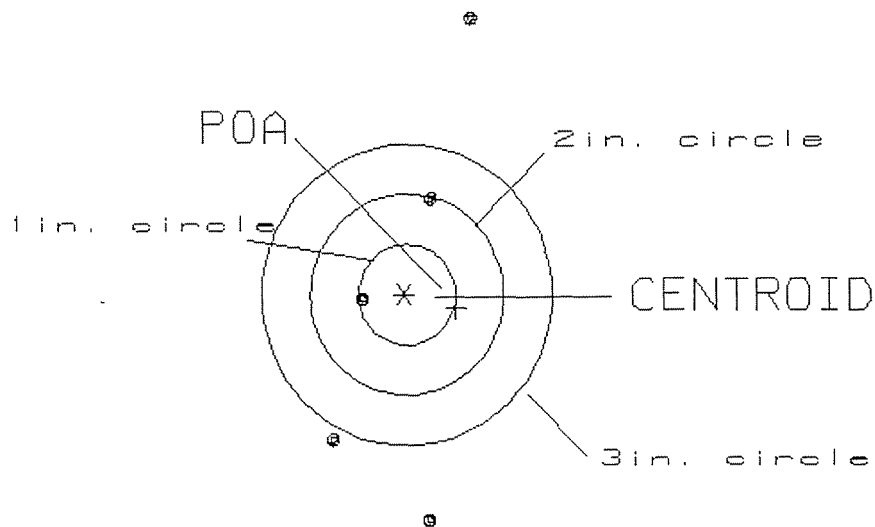

OF SHOTS= 5

IN CIRCLE

HS= 1.43

1

VS= 5.01

1

GS= 5.03


2

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .234
 MIN RADIUS : .493
 MEAN RADIUS : .946
 MAX RADIUS : 1.633
 CENTROID X : .080
 CENTROID Y : -.219

18 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374651

CENTERFIRE PATTERN # 3

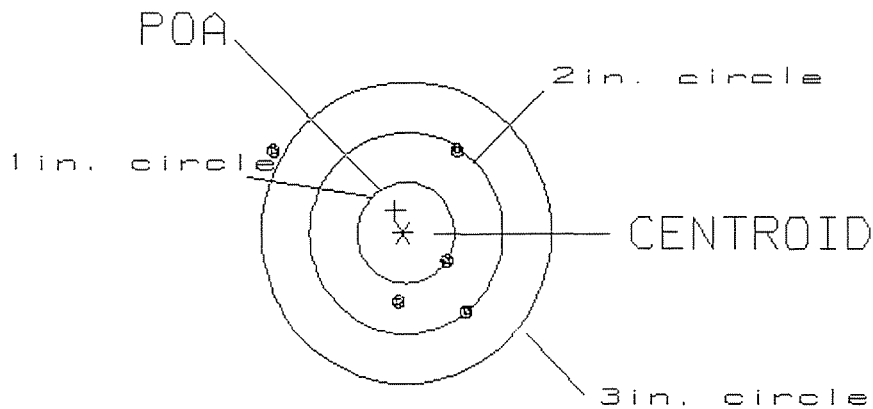

OF SHOTS= 5

IN CIRCLE

HS= 1.96

1

VS= 1.64

4

GS= 2.56

4

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL #

E637 4651

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

625	F) SAFETY ON FORCE	<u>5</u> <u>5</u> <u>5</u>	10-30-97	CR
CONT.	G) SAFETY OFF FORCE	<u>3</u> <u>3</u> <u>3</u>	10-30-97	CR
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.024</u> <u>.023</u> <u>.023</u>	10-30-97	CR
	J) ASSEMBLE STOCK		10-29-97	CR
	K) ASSEMBLE SWIVEL STUDS		12-5-97	CK
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		10-29-97	CR
	M) IRON SIGHT ALIGNMENT		10-29-97	CR
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		10-29-97	CR
640	GALLERY TEST AND TARGET	L 42 R 108	11-18-97	DB
	A) MALFUNCTIONS		11-18-97	DB
	B) PIERCED PRIMERS		11-18-97	DB
645	INSPECT FOR LIVE AMMO		11-18-97	DB DE
655	FINAL INSPECTION A) HEADSPACE		12-5-97	CK
	B) TRIGGER PULL	<u>2.55</u> <u>2.56</u> <u>2.59</u> <u>2.60</u> <u>2.59</u>	11/19/97	Tm
	C) FUNCTION		12-5-97	CK
660	PACK			

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. E6374651DATE 10-24-97TESTER TRJ

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.34	2.53	2.60	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.33	2.45	2.59	
PULL #3	2.38	2.48	2.54	
PULL #4	2.41	2.49	2.62	
PULL #5	2.32	2.52	2.54	
TOTAL	11.78	12.47	12.89	
AVG.	2.35	2.49	2.57	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.24	3.22	
PULL #2	3.12	3.17	
PULL #3	3.18	3.10	
PULL #4	3.15	3.24	
PULL #5	3.18	3.19	
TOTAL	15.87	15.92	
AVG.	3.17	3.18	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.05	4.04		4.11
PULL #2	4.05	4.13		4.17
PULL #3	3.91	4.09		3.95
PULL #4	3.99	4.00		4.12
PULL #5	4.05	4.12		4.15
TOTAL	20.05	20.38		20.50
AVG.	4.01	4.07		4.10

MODEL 700TM M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:
- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



E6374651

owner registration sticker



E6374651

Do Not Use

Do Not Use

SERIAL NO.



E6374651

ORDER

25705

MODEL 700™ M24

UPC



ORDER

25705

MODEL 700™ M24

UPC




Remington®

MODEL 700™ M24

BOLT ACTION CENTERFIRE RIFLE

24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Déposée.



5705 E6374651