

UPC



E6374661

ORDER NO. 25705
BARREL LENGTH 24"
CAPACITY * 6
* INCLUDES 1 IN CHAMBER

BARBER - M24 0119541

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374661
3 Dec 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .182
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0873333
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .201869
THE AMR FOR THIS RIFLE IS: 1.159

CENTROIDAL DISTANCES

0 TO 1	.478132
1 TO 2	.398549
1 TO 3	.430248

+2 1 <----POA

BARBER - M24 0119542

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: [1]
 POA TO CENTROID: .478
 MIN RADIUS : .887
 MEAN RADIUS : 1.562
 MAX RADIUS : 2.601
 CENTROID X : .431
 CENTROID Y : .207

3 Dec 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374661

CENTERFIRE PATTERN # 1

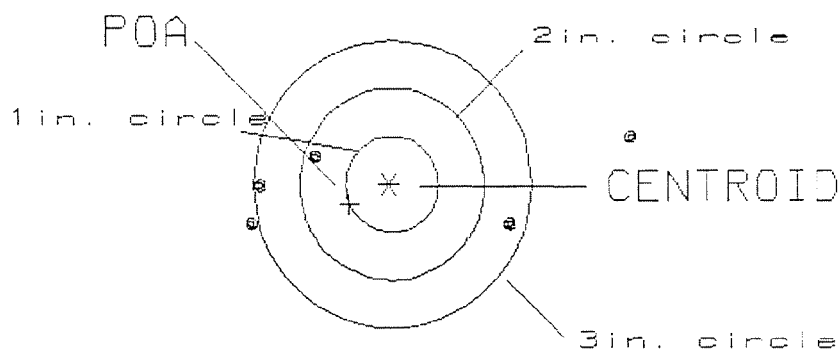

OF SHOTS= 5

IN CIRCLE

HS= 4.03

0

VS= .95

1

GS= 4.14

3

BARBER - M24 0119543

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
 POA TO CENTROID: .080
 MIN RADIUS : .452
 MEAN RADIUS : 1.011
 MAX RADIUS : 1.694
 CENTROID X : .071
 CENTROID Y : .036

3 Dec 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374651

CENTERFIRE PATTERN # 2

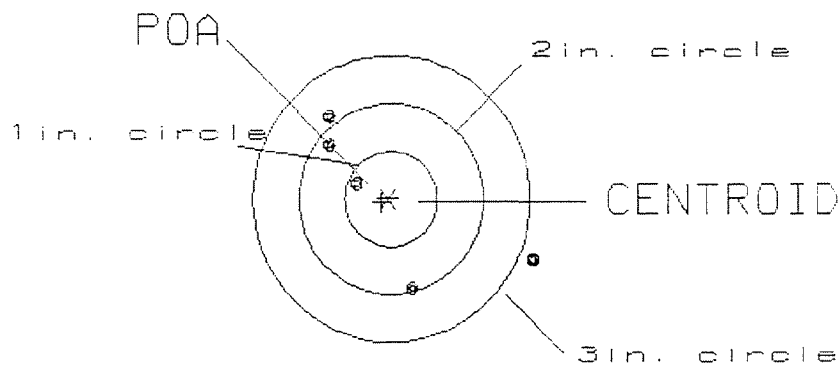

OF SHOTS= 5

IN CIRCLE

HS= 2.25
 VS= 1.78
 GS= 2.73


1
 3
 4

PATTERN #: 3
 POA TO CENTROID: .048
 MIN RADIUS : .709
 MEAN RADIUS : .905
 MAX RADIUS : 1.375
 CENTROID X : .044
 CENTROID Y : .019

3 Dec 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374661

CENTERFIRE PATTERN # 3

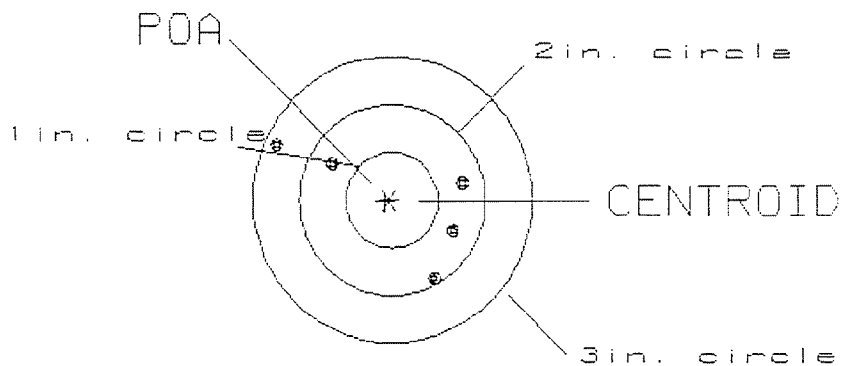

OF SHOTS= 5

IN CIRCLE

HS= 2.01

0

US= 1.40

4

GS= 2.20

5

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL #

E6374661

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	BARBER - M24 0119546 F) SAFETY ON FORCE	<u>5</u> <u>5</u> <u>5</u>	11-13-97	CR
CONT.	G) SAFETY OFF FORCE	<u>3</u> <u>3</u> <u>3</u>	11-13-97	CR
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.022</u> <u>.022</u> <u>.022</u>	11-13-97	CR
	J) ASSEMBLE STOCK		11-11-97	RW
	K) ASSEMBLE SWIVEL STUDS			
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		11-11-97	RW
	M) IRON SIGHT ALIGNMENT		11-11-97	RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		11-11-97	RW
640	GALLERY TEST AND TARGET	L52 R98	12-3-97	DB
	A) MALFUNCTIONS		12-3-97	DB
	B) PIERCED PRIMERS		12-3-97	DB
645	INSPECT FOR LIVE AMMO		12-3-97	DB DB
655	FINAL INSPECTION A) HEADSPACE		12/9/97	RW
	B) TRIGGER PULL	<u>2.55</u> <u>2.55</u> <u>2.56</u> <u>2.58</u> <u>2.46</u>	12/4/97	TM
	C) FUNCTION			
660	PACK			

BARBER - M24 0119547

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. E6374661DATE 11-5-97TESTER P.B.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.53	2.29	2.50	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.49	2.24	2.55	
PULL #3	2.55	2.38	2.67	
PULL #4	2.53	2.55	2.82	
PULL #5	2.47	2.42	2.59	
TOTAL	12.57	11.88	13.13	
AVG.	2.51	2.37	2.62	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.02	3.09	
PULL #2	2.95	3.08	
PULL #3	2.93	3.17	
PULL #4	3.06	3.00	
PULL #5	3.15	3.01	
TOTAL	15.11	15.35	
AVG.	3.02	3.07	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.00	4.16		4.07
PULL #2	4.08	4.13		4.17
PULL #3	3.78	3.94		4.19
PULL #4	4.22	4.06		4.41
PULL #5	4.12	4.20		4.11
TOTAL	20.20	20.49		20.95
AVG.	4.04	4.09		4.19

MODEL 700[™] M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



E6374661

owner registration sticker



E6374661

Do Not Use

VERY IMPORTANT
Instruction Book
enclosed to assure
safe use of this
firearm

SERIAL NO.
E6374661

46

ORDER NO.
25705

19XR

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marks Registered Marque Déposée

5705 E6374661

ORDER 25705

MODEL 700™ M24

UPC



ORDER 25705

MODEL 700™ M24

UPC



SERIAL NO.



E6374661

Do Not Use