

BARBER - M24 0120051

E 641 3439

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0120051 M2400120090

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00111518** Serial: **E6413439** Model: **M24 SWS** Center Fire
 Verify Repair Caliber: **7.62 NATO** Repairman: Status: **New 4/27/2006 10:57:14 AM**

Address Information

Customer: ☒ Received From Return To: ☒ Received From

Name: **DET MICHAEL WESCOTT** **K R GUN DISTRIBUTORS**

Address 1: **NYPD EMERGENCY SERVICES UNIT** **4 BASHFORD STREET**

Address 2: **BLDG 13, FLOYD BENNETT** PO Box: PO Box:

City: **BROOKLYN** **YONKERS**

State: **NY** Zip Code: **11234** Country: **US** State: **NY** Zip Code: **10701** Country: **US**

FFL: **6 13 119 01 7J 00205 092007**

Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing															
Contact Information Phone: 914 968 3452 Fax: Email: Comments:	Received Condition Fair Condition Notes: CSR Notes:	Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Stud</td> <td>3</td> </tr> <tr> <td>A010</td> <td>Hard Case</td> <td>1</td> </tr> <tr> <td>A017</td> <td>Scope Base</td> <td>1</td> </tr> <tr> <td>A057</td> <td>Fit and Rear Sgt Base</td> <td>1</td> </tr> </tbody> </table>			Code	Desc	Qty	A007	With Stud	3	A010	Hard Case	1	A017	Scope Base	1	A057	Fit and Rear Sgt Base	1
Code	Desc	Qty																	
A007	With Stud	3																	
A010	Hard Case	1																	
A017	Scope Base	1																	
A057	Fit and Rear Sgt Base	1																	

Repair Search Refresh Close

nalet 4/27/2006 2:48 PM CAPS NUM INS SCRL

start 2 Micr... 5 Micr... Arms S... 2 Inte... Misc PDF Part Se... 2:48 PM

Serial Number: **E6413439**
 Model: **M24 SWS**

RE00111518

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413439.___0
FILE DATE AND TIME: 06/13/2006 17:12

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.085
The Average Y Centroid of the Five Target Set:	0.037
The Average Point of Impact of the Five Target Set:	0.093
The Average Mean Radius of the Five Target Set:	0.941
The Distance from POA to Centroid Target #1:	0.252
The Distance from Centroid Target #2 to Centroid Target #1:	0.326
The Distance from Centroid Target #3 to Centroid Target #1:	0.228
The Distance from Centroid Target #4 to Centroid Target #1:	0.590
The Distance from Centroid Target #5 to Centroid Target #1:	0.152

BARBER - M24 0120054

SERIAL NUMBER: E6413439. __0
 TARGET NUMBER: 1
 FILE DATE: 06/13/2006
 FILE TIME: 17:12

POINT#	X	Y
1:	-0.652	0.941
2:	-0.262	1.243
3:	0.051	1.755
4:	0.221	0.126
5:	-0.262	0.026
6:	-1.086	-0.468
7:	-0.150	-0.221
8:	-0.068	-0.862
9:	0.152	-1.416
10:	-0.254	-0.118

X CENTROID: -0.231
 Y CENTROID: 0.101
 POA TO CENTROID: 0.252
 HORZ SPREAD: 1.307
 VERT SPREAD: 3.171
 GROUP SPREAD: 3.173
 MIN RADIUS: 0.081
 MAX RADIUS: 1.678
 MEAN RADIUS: 0.841
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 8

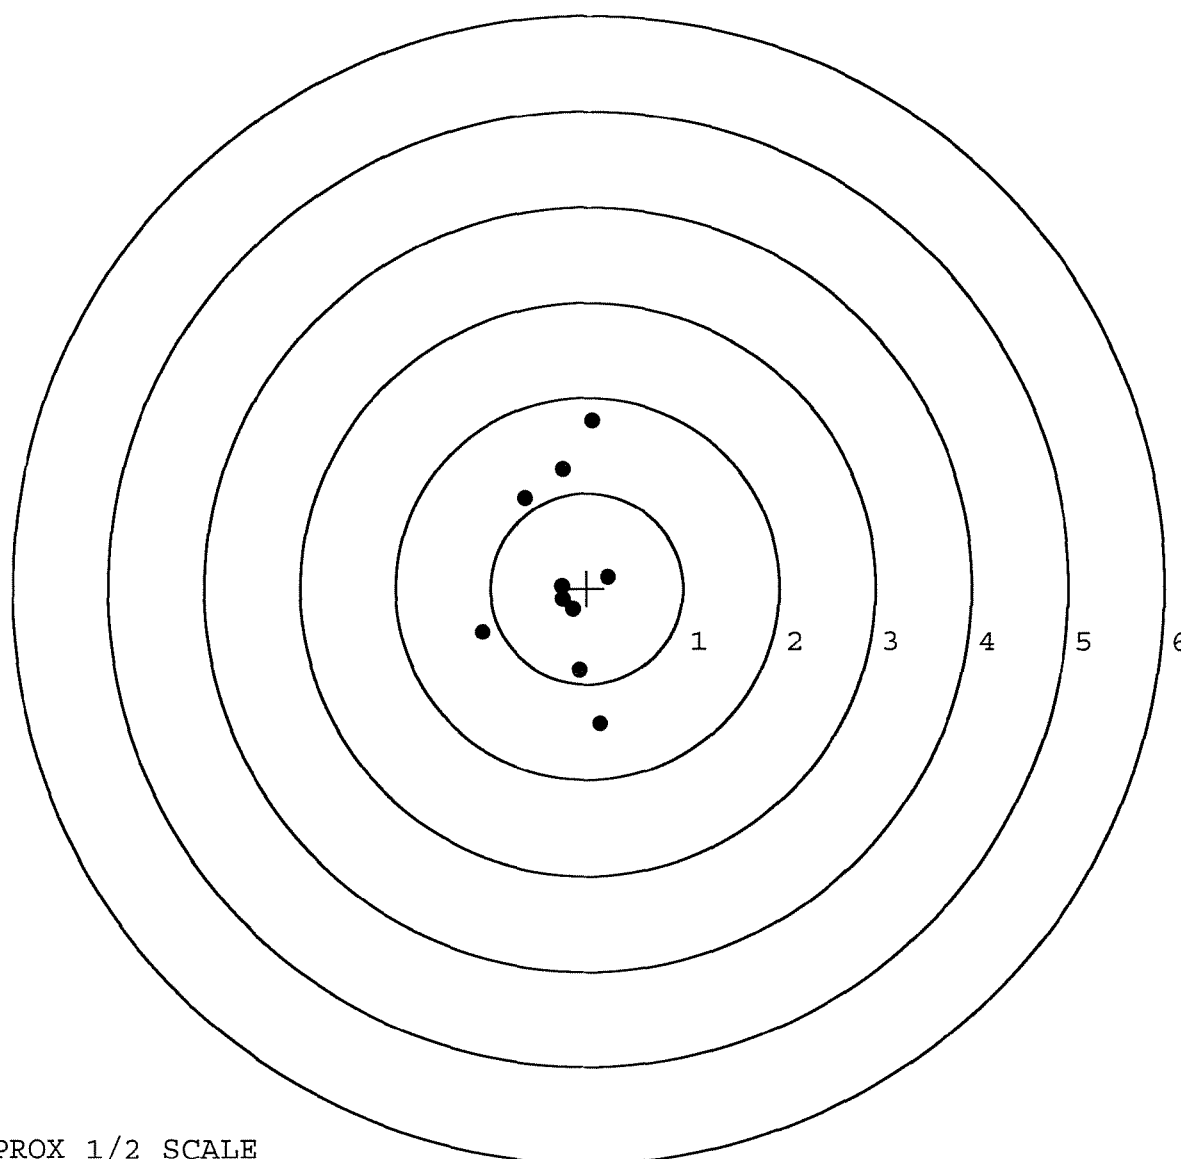

TARGET APPROX 1/2 SCALE


BARBER - M24 0120055

SERIAL NUMBER: E6413439. 0
TARGET NUMBER: 2
FILE DATE: 06/13/2006
FILE TIME: 17:12

X CENTROID: 0.082
Y CENTROID: 0.190
POA TO CENTROID: 0.207
HORZ SPREAD: 1.160
VERT SPREAD: 2.281
GROUP SPREAD: 2.284
MIN RADIUS: 0.110
MAX RADIUS: 1.601
MEAN RADIUS: 0.630

IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.437	1.751
2:	-0.030	0.950
3:	0.692	0.502
4:	-0.019	0.233
5:	0.065	-0.016
6:	0.171	-0.324
7:	0.317	-0.530
8:	-0.055	-0.128
9:	-0.290	-0.191
10:	-0.468	-0.345

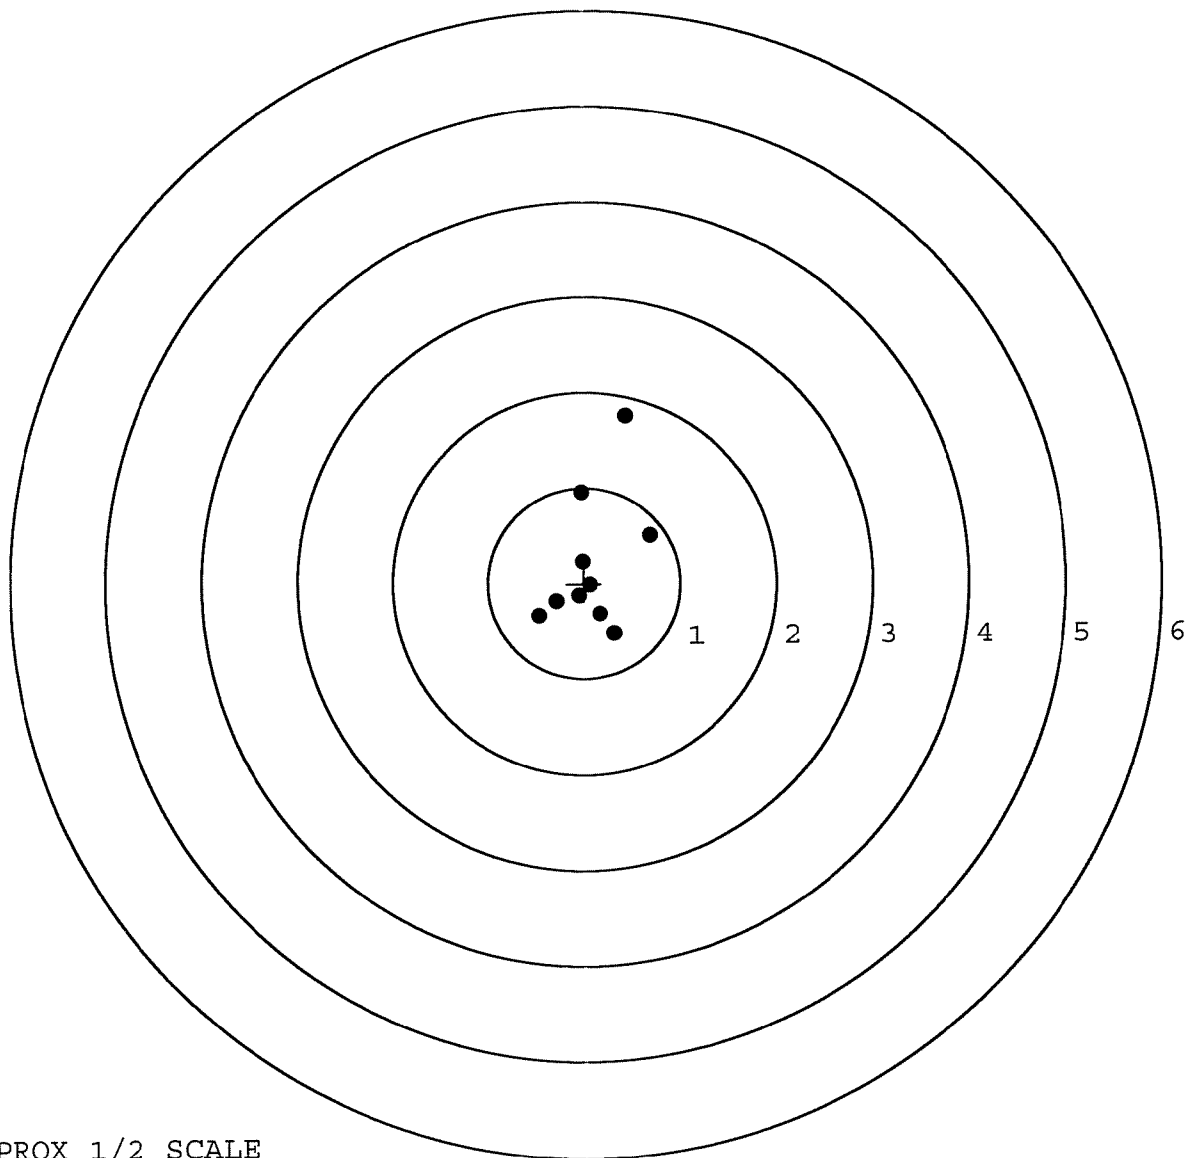


TARGET APPROX 1/2 SCALE

BARBER - M24 0120056

SERIAL NUMBER: E6413439. __0
TARGET NUMBER: 3
FILE DATE: 06/13/2006
FILE TIME: 17:12

POINT#	X	Y
1:	-0.137	2.516
2:	-1.134	1.791
3:	-0.847	1.407
4:	-0.305	1.379
5:	0.235	1.323
6:	-0.445	-0.305
7:	-0.413	-1.708
8:	-0.022	-1.090
9:	0.513	-1.355
10:	0.662	-0.711

X CENTROID: -0.189
Y CENTROID: 0.325
POA TO CENTROID: 0.376
HORZ SPREAD: 1.796
VERT SPREAD: 4.224
GROUP SPREAD: 4.233
MIN RADIUS: 0.680
MAX RADIUS: 2.192
MEAN RADIUS: 1.466
IN 1 IN DIAMETER: 0
IN 2 IN DIAMETER: 1
in 3 IN DIAMETER: 6

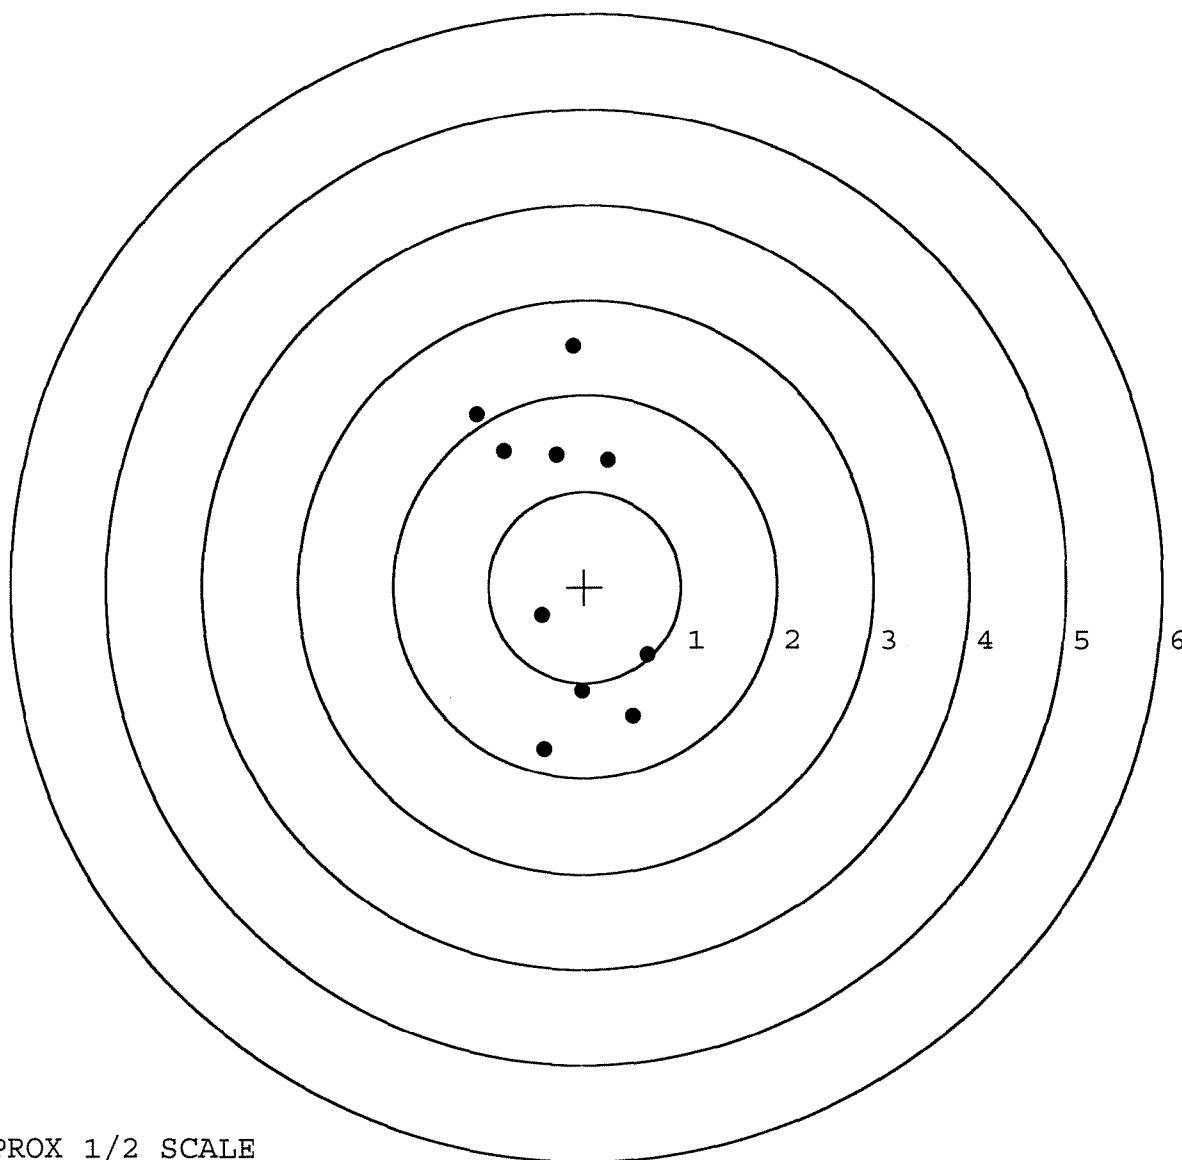


TARGET APPROX 1/2 SCALE

BARBER - M24 0120057

SERIAL NUMBER: E6413439. __0
TARGET NUMBER: 4
FILE DATE: 06/13/2006
FILE TIME: 17:12

X CENTROID: 0.033
Y CENTROID: -0.427
POA TO CENTROID: 0.429
HORZ SPREAD: 1.755
VERT SPREAD: 4.269
GROUP SPREAD: 4.299
MIN RADIUS: 0.096
MAX RADIUS: 2.497
MEAN RADIUS: 0.930
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.535	1.345
2:	-0.857	0.507
3:	-0.478	0.019
4:	-0.369	-0.194
5:	-0.323	-0.478
6:	-0.047	-0.373
7:	0.283	-0.349
8:	0.898	-0.778
9:	0.656	-1.048
10:	0.027	-2.924

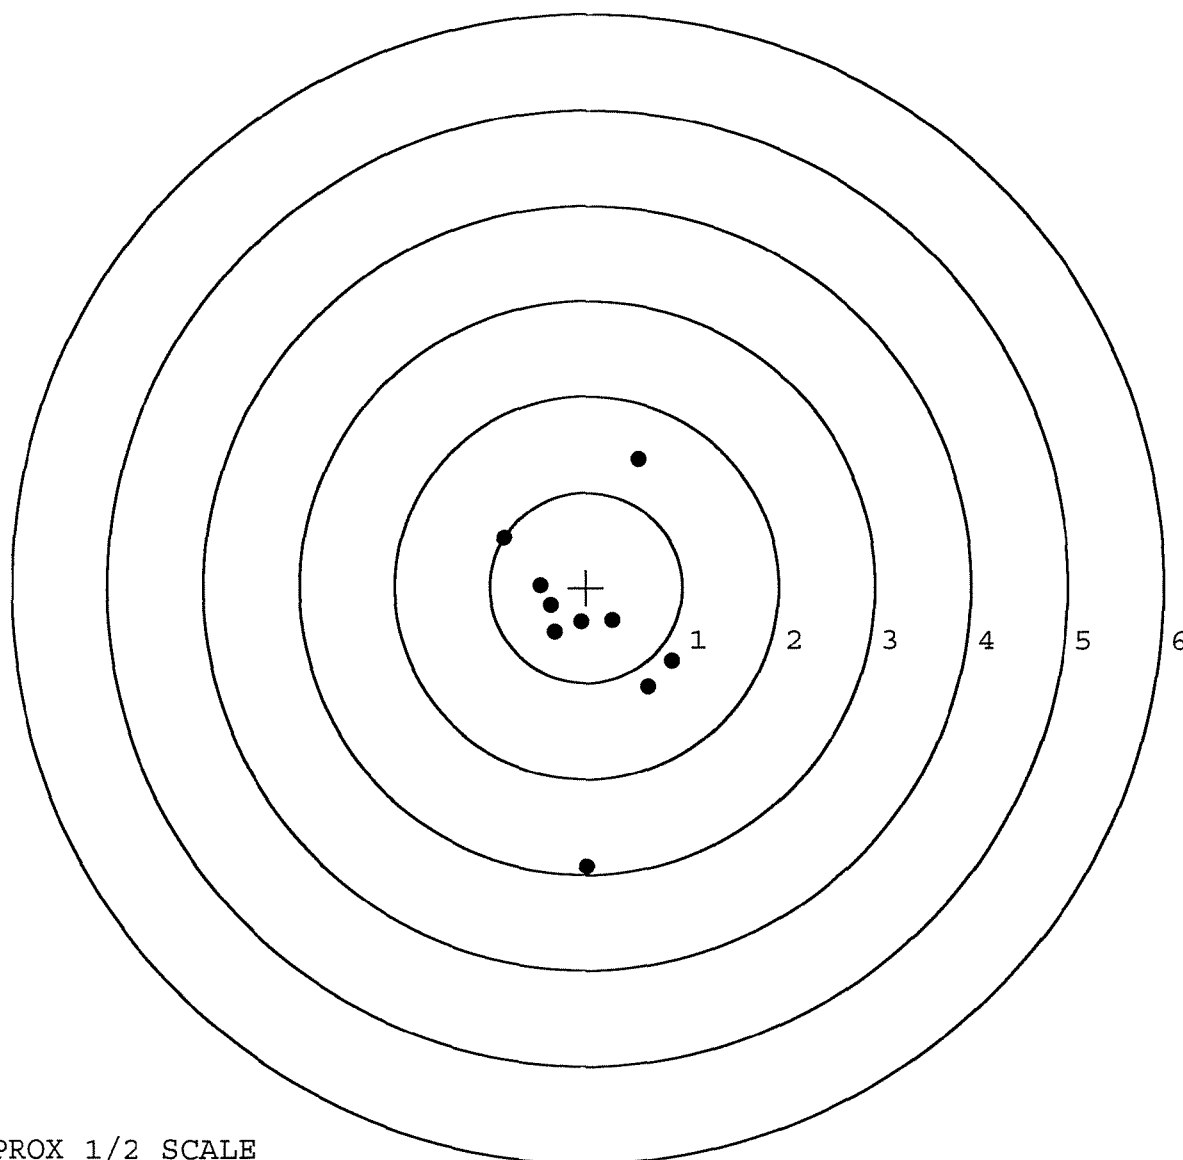

TARGET APPROX 1/2 SCALE

FILE DATE: 06/13/2006


FILE TIME: 17:12

BARBER - M24 0120058

X CENTROID: -0.119
Y CENTROID: -0.002
POA TO CENTROID: 0.119
HORZ SPREAD: 1.146
VERT SPREAD: 2.407
GROUP SPREAD: 2.501
MIN RADIUS: 0.354
MAX RADIUS: 1.291
MEAN RADIUS: 0.836

2:	0.244	0.731
3:	0.009	0.328
4:	-0.712	0.138
5:	-0.581	-0.091
6:	0.106	-0.434
7:	-0.310	-0.774
8:	-0.237	-1.105
9:	0.269	-1.151
10:		

IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 10

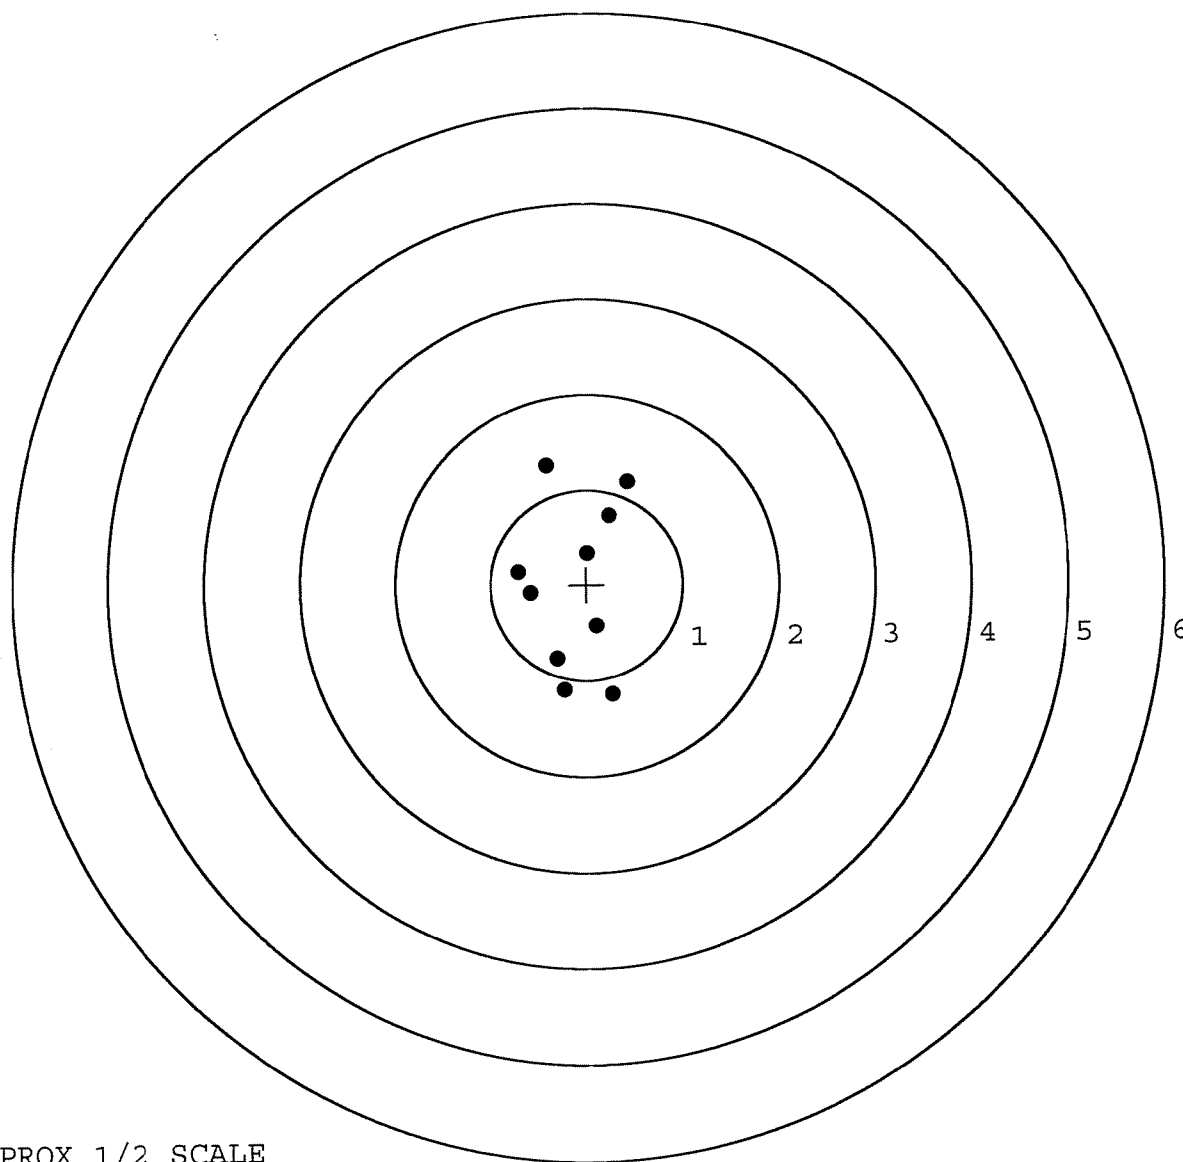

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	111518			
SERIAL NUMBER	E6413439			
LOG-IN DATE	4-27-06			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		5-3-06	RTZ
505	RE-BARREL		5-3-06	RTZ
560	ASSEMBLE		5-3-06	RTZ
600	PROOF	MAGNA-FLUX	5-4-06	TRW
605	CHECK HEADSPACE	INSPECTED	5-4-06	TRW
610	DIS-ASSEMBLE GUN	JUN 09 2006	6-6-06	RTZ
612	MAGNAFLUX	OPERATOR APD	6-9-06	APD
510	DRILL AND TAP		6-8-06	TRW
615	ROLLMARK CALIBER		6-9-06	CW
618	ROTO-BLAST		6-9-06	LB
620	APPLY COATINGS		6-13-06	TRW
625	FINAL ASSEMBLY		6-13-06	RTZ
640	FUNCTION TEST AND	PASS FAIL	6-13-06	msh
650	TARGET	PASS FAIL	6-13-06	msh
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
670	FINAL INSPECTION		6-19-06	R.P.D.
	A) HEADSPACE	PASS FAIL	6-19-06	R.P.D.
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	6-14-06 2.66 2.71 2.84 2.86 2.90 2.83	RA
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	6-14-06 6.5 6.5 6.5	RA
	G) SAFETY OFF FORCE	2 LBS MIN	6-14-06 2.5 2.5 2.5	RA
	I) FIRING PIN INDENT	.020	6-14-06 .023 .023 .024	RA
690	PACK		6-20-06	RA