

E 6413611

E 6413611

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # e6413611
7 Feb 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1154
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.146
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .1861

THE AMR FOR THIS RIFLE IS: 1.091

CENTROIDAL DISTANCES

0 TO	1	.292171
1 TO	2	.427604
1 TO	3	.35945
1 TO	4	.247095
1 TO	5	.305221


5 1 <----POA
2 4
3

PATTERN #: 1
 POA TO CENTROID: .292
 MIN RADIUS : .231
 MEAN RADIUS : 1.129
 MAX RADIUS : 2.611
 CENTROID X : .292
 CENTROID Y : -.010

7 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413611

CENTERFIRE PATTERN # 1

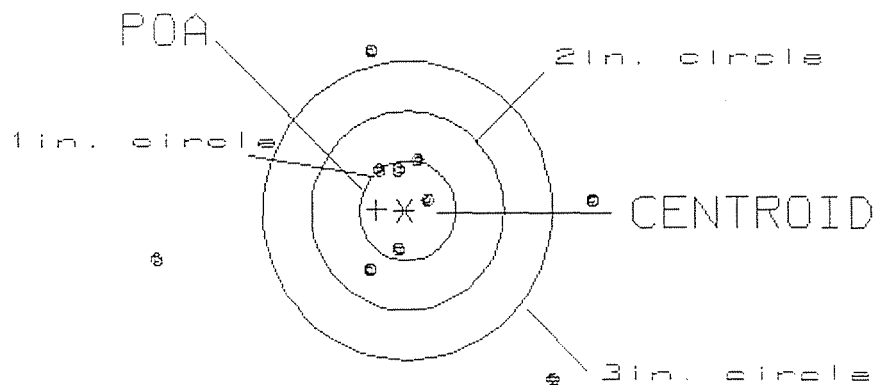

OF SHOTS= 10

IN CIRCLE

HS= 4.51

4

VS= 3.27

6

GS= 4.55

6

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .225
 MIN RADIUS : .343
 MEAN RADIUS : .849
 MAX RADIUS : 1.182
 CENTROID X : -.087
 CENTROID Y : -.208

7 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413611

CENTERFIRE PATTERN # 2

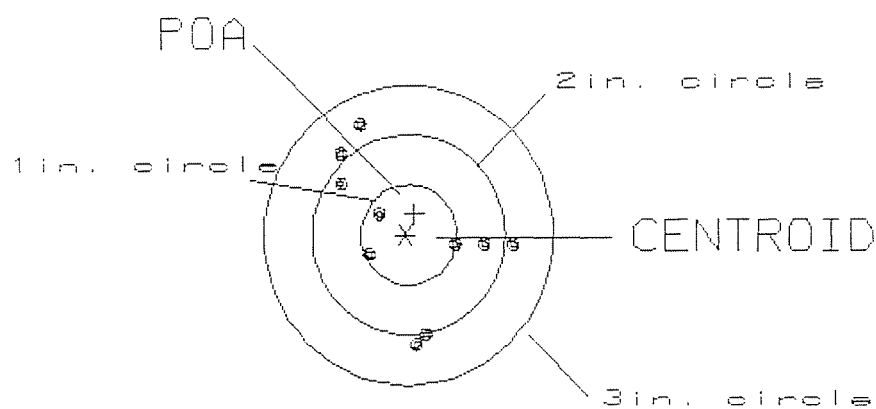

OF SHOTS= 10

IN CIRCLE

HS= 1.81

2

VS= 2.18

6

GS= 2.27


10

PATTERN #: 3
 POA TO CENTROID: .411
 MIN RADIUS : .710
 MEAN RADIUS : 1.218
 MAX RADIUS : 2.440
 CENTROID X : .202
 CENTROID Y : -.358

7 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413611

CENTERFIRE PATTERN # 3

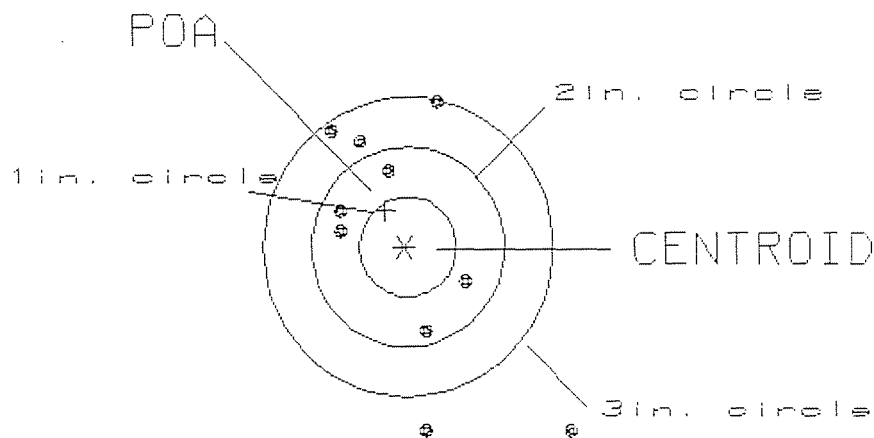

OF SHOTS= 10

IN CIRCLE

HS= 2.50

0

VS= 3.24

5

GS= 3.89


8

PATTERN #: 4
 POA TO CENTROID: .284
 MIN RADIUS : .317
 MEAN RADIUS : 1.199
 MAX RADIUS : 2.751
 CENTROID X : .172
 CENTROID Y : -.226

7 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413611

CENTERFIRE PATTERN # 4

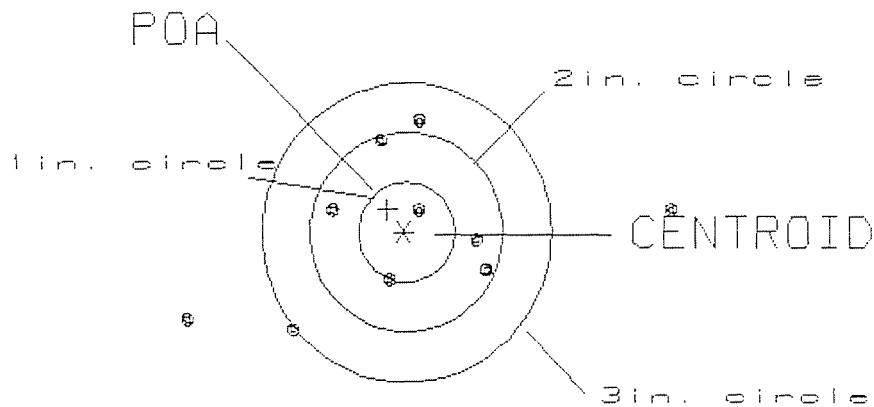

OF SHOTS= 10

IN CIRCLE

HS= 5.00

2

VS= 2.13

6

GS= 5.12

7

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .072

MIN RADIUS : .459

MEAN RADIUS : 1.061

MAX RADIUS : 1.918


CENTROID X : -.002

CENTROID Y : .072

7 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413611

CENTERFIRE PATTERN # 5

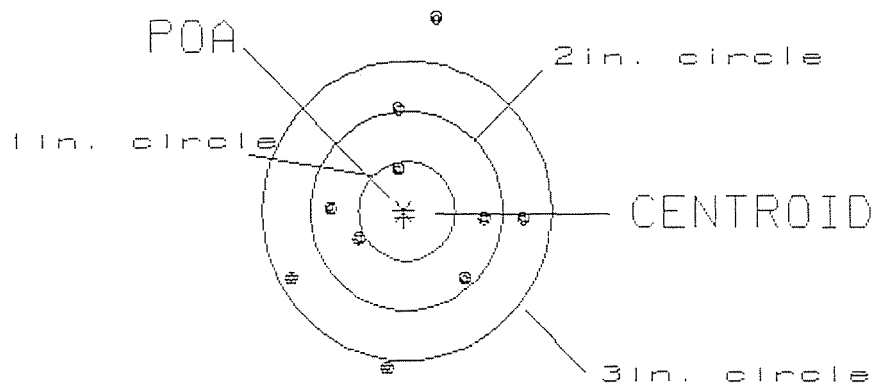

OF SHOTS= 10

IN CIRCLE

HS= 2.40

1

VS= 3.48

5

GS= 3.52

8

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

E6413611

LOG IN DATE: / /		DATE	INT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	12-12-99	RW
605	CHECK HEADSPACE	12-12-99	RW
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	2-2-00	RW
655	FINAL INSPECT	2-8-00	RW
660	PACK		

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: E6413611

DATE REC'D: 10-18-99

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: