

UPC



E6349980

ORDER NO.	25705
BARREL LENGTH	24"
CAPACITY *	6

BARBER - M24 0124436

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6349980
14 Aug 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0346667
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .18
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .183308

THE AMR FOR THIS RIFLE IS: .895

CENTROIDAL DISTANCES

0 TO	1	.191207
1 TO	2	.101828
1 TO	3	.0800562

$\sum^2$
+ <----POA

BARBER - M24 0124437

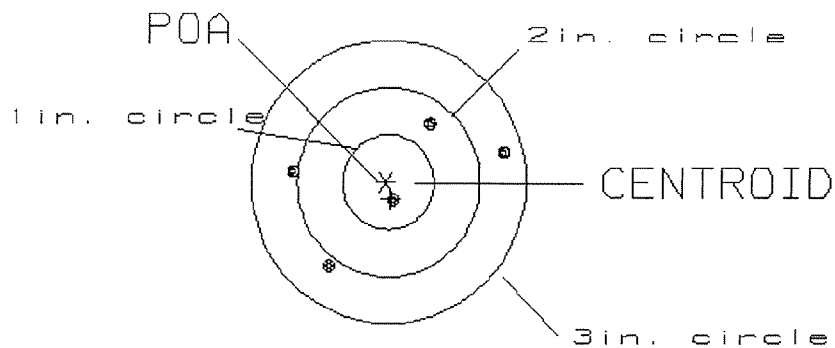
REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 1
POA TO CENTROID: .191
MIN RADIUS : .195
MEAN RADIUS : .891
MAX RADIUS : 1.287
CENTROID X : -.052
CENTROID Y : .184

14 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349980

CENTERFIRE PATTERN # 1

OF SHOTS= 5

IN CIRCLE

HS= 2.33

1

VS= 1.47

2

GS= 2.34

5

BARBER - M24 0124438

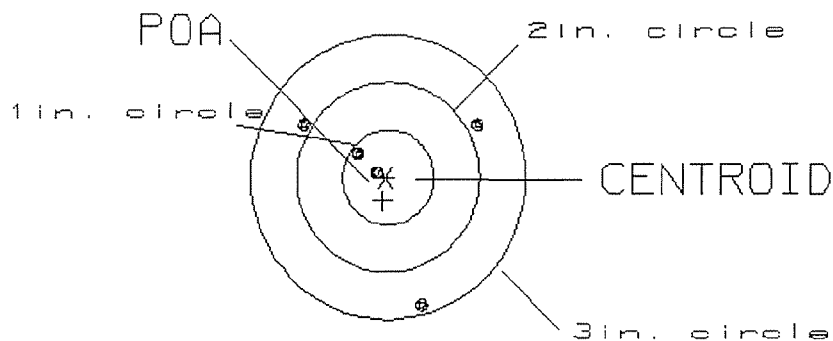
REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
POA TO CENTROID: .249
MIN RADIUS : .087
MEAN RADIUS : .817
MAX RADIUS : 1.436
CENTROID X : .028
CENTROID Y : .247

14 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349900

CENTERFIRE PATTERN # 2

OF SHOTS= 5

IN CIRCLE

HS= 1.85

2

VS= 1.96

2

GS= 2.31

5

BARBER - M24 0124439

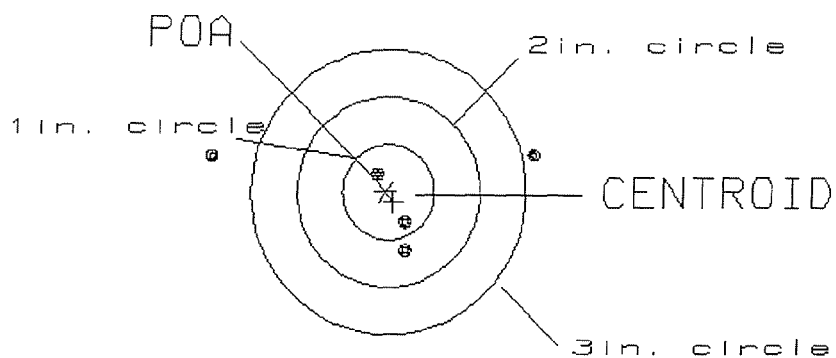
REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
POA TO CENTROID: .135
MIN RADIUS : .211
MEAN RADIUS : .977
MAX RADIUS : 1.963
CENTROID X : -.080
CENTROID Y : .109

14 Aug 1997

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/E6349980

CENTERFIRE PATTERN # 3

OF SHOTS= 5

IN CIRCLE

HS= 3.54

2

VS= 1.03

3

GS= 3.54

3

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. E6349980DATE 7-29-97TESTER T.M.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.58	2.64	2.56	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.54	2.66	2.55	
PULL #3	2.55	2.68	2.51	
PULL #4	2.58	2.65	2.50	
PULL #5	2.58	2.61	2.52	
TOTAL	12.83	13.24	12.64	
AVG.	2.566	2.648	2.528	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.01	3.05	
PULL #2	3.17	3.07	
PULL #3	3.15	3.06	
PULL #4	3.00	3.06	
PULL #5	3.21	3.13	
TOTAL	15.54	15.37	
AVG.	3.108	3.074	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.93	4.09		4.08
PULL #2	3.90	4.12		4.28
PULL #3	4.12	4.14		4.19
PULL #4	4.14	4.12		3.99
PULL #5	4.16	4.05		4.20
TOTAL	20.25	20.52		20.74
AVG.	4.050	4.104		4.148

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # E6349980

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>4</u> <u>4</u> <u>4</u>	7-31-97	QW
CONT.	G) SAFETY OFF FORCE	<u>25</u> <u>25</u> <u>25</u>	7-31-97	QW
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>21</u> <u>24</u> <u>23</u>	7-31-97	QW
	J) ASSEMBLE STOCK		7-29-97	CK
	K) ASSEMBLE SWIVEL STUDS		8-20-97	CK
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		7-29-97	CK
	M) IRON SIGHT ALIGNMENT		7-29-97	CK
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		7-29-97	CK
640	GALLERY TEST AND TARGET	R 47 L 103	8-14-97	KT
	A) MALFUNCTIONS		8-14-97	KT
	B) PIERCED PRIMERS		8-14-97	KT
645	INSPECT FOR LIVE AMMO		8/14-97	QW
655	FINAL INSPECTION A) HEADSPACE		8-20-97	CK
	B) TRIGGER PULL	<u>2.43</u> <u>2.39</u> <u>2.36</u> <u>2.32</u> <u>2.28</u>	8-19-97	CK
	C) FUNCTION		8-20-97	CK
660	PACK			

Do Not Use

SERIAL NO.



E6349980

ORDER 25705
MODEL 700™ M24
UPC



0 47700 25705 1

ORDER 25705
MODEL 700™ M24
UPC



0 47700 25705 1

Do Not Use

BARBER - M24 0124448

VERY IMPORTANT!
Instruction
enclosed to assure
safe use of
firearm.

SERIAL NO.
E6349980

ORDER NO.
25705

26WR

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Hargreaves.



5705 E6349980

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



owner registration sticker

