



B-17053

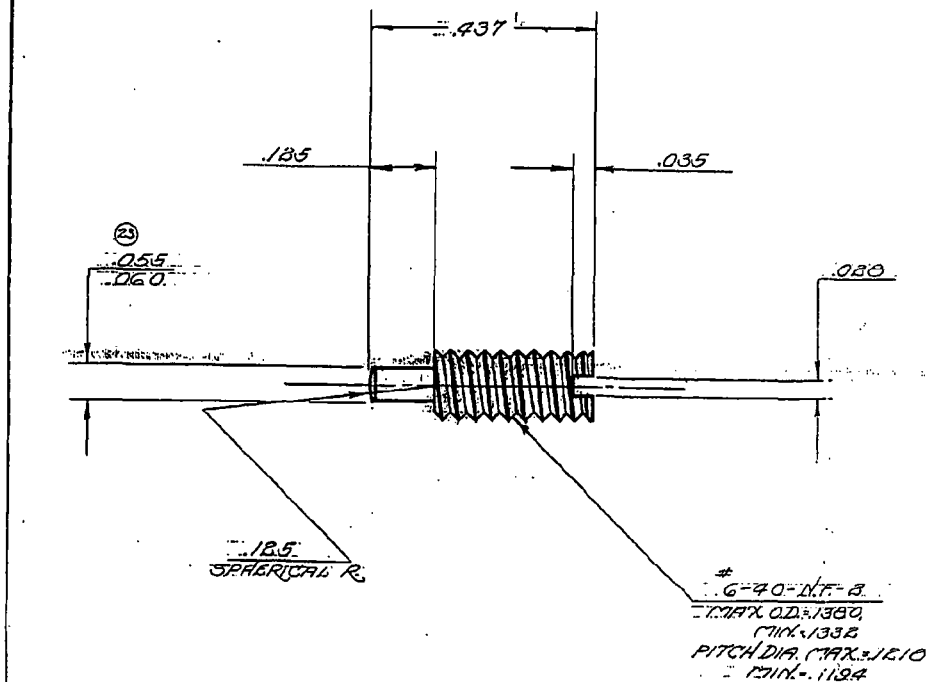

FOR BLANK DRAWING
SEE B-91920



RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL: 1015
HEAT TREAT: 1015
HARDNESS: 1015
COLOR: 1015
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{32}$
& ON ANGULAR DIMENSIONS $\pm 0.1^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
157
OR BETTER.

REVISIONS

LET.	WAS	REFERENCE	BY	DATE
18	REDRAWN	9557	4.2	3-8-62
19	A-17053	"	"	"
20	40XCF 1.35	9832	1.2	7-11-61
21	40XCF 1.35	5120	"	1-29-61
22	40XCF 1.35	"	"	"
23	40XCF 1.35	"	"	"
24	ADDED USE	6479	DD	3-14-61
25	ADDED USE	6666	4A	7-11-61
26	40XCF 1.35	7110	DD	7-11-61
27	ADDED USE	8445	4A	7-11-61
28	REMOVED	9803	4A	7-11-61
29	TRIG ADJ. SC.	10899	4A	7-11-61
30	ADDED	11204	13	7-11-61
31	ADDED 7LWT	11667	4A	7-11-61
32	REMOVED	12337	4A	7-11-61

27	40XCF 1.35	TRIGGER STOP SCREW	1	
25	660	TRIGGER STOP SCREW	1	
29	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
28	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
31	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
32	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
26	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
25	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
24	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
23	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
22	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
21	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
20	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
19	40XCF 1.35	TRIGGER STOP SCREW	1	PL.
18	40XCF 1.35	TRIGGER STOP SCREW	1	PL.

MODEL	PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE

TITLE: SCREW

NUMBER: 1015 SCALE: 1015 SUPERSEDED: 1015

REVISIONS: 1015 REMINGTON-ARMY CORP. INC.