

C-EXP9500

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE IT DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.

TOLERANCES ON DECIMAL DIMENSIONS ARE:

1 PLACE (1) - TOLERANCE $\pm .5$
2 PLACE (10) - TOLERANCE $\pm .05$
3 PLACE (100) - TOLERANCE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm 30'$ - 30"

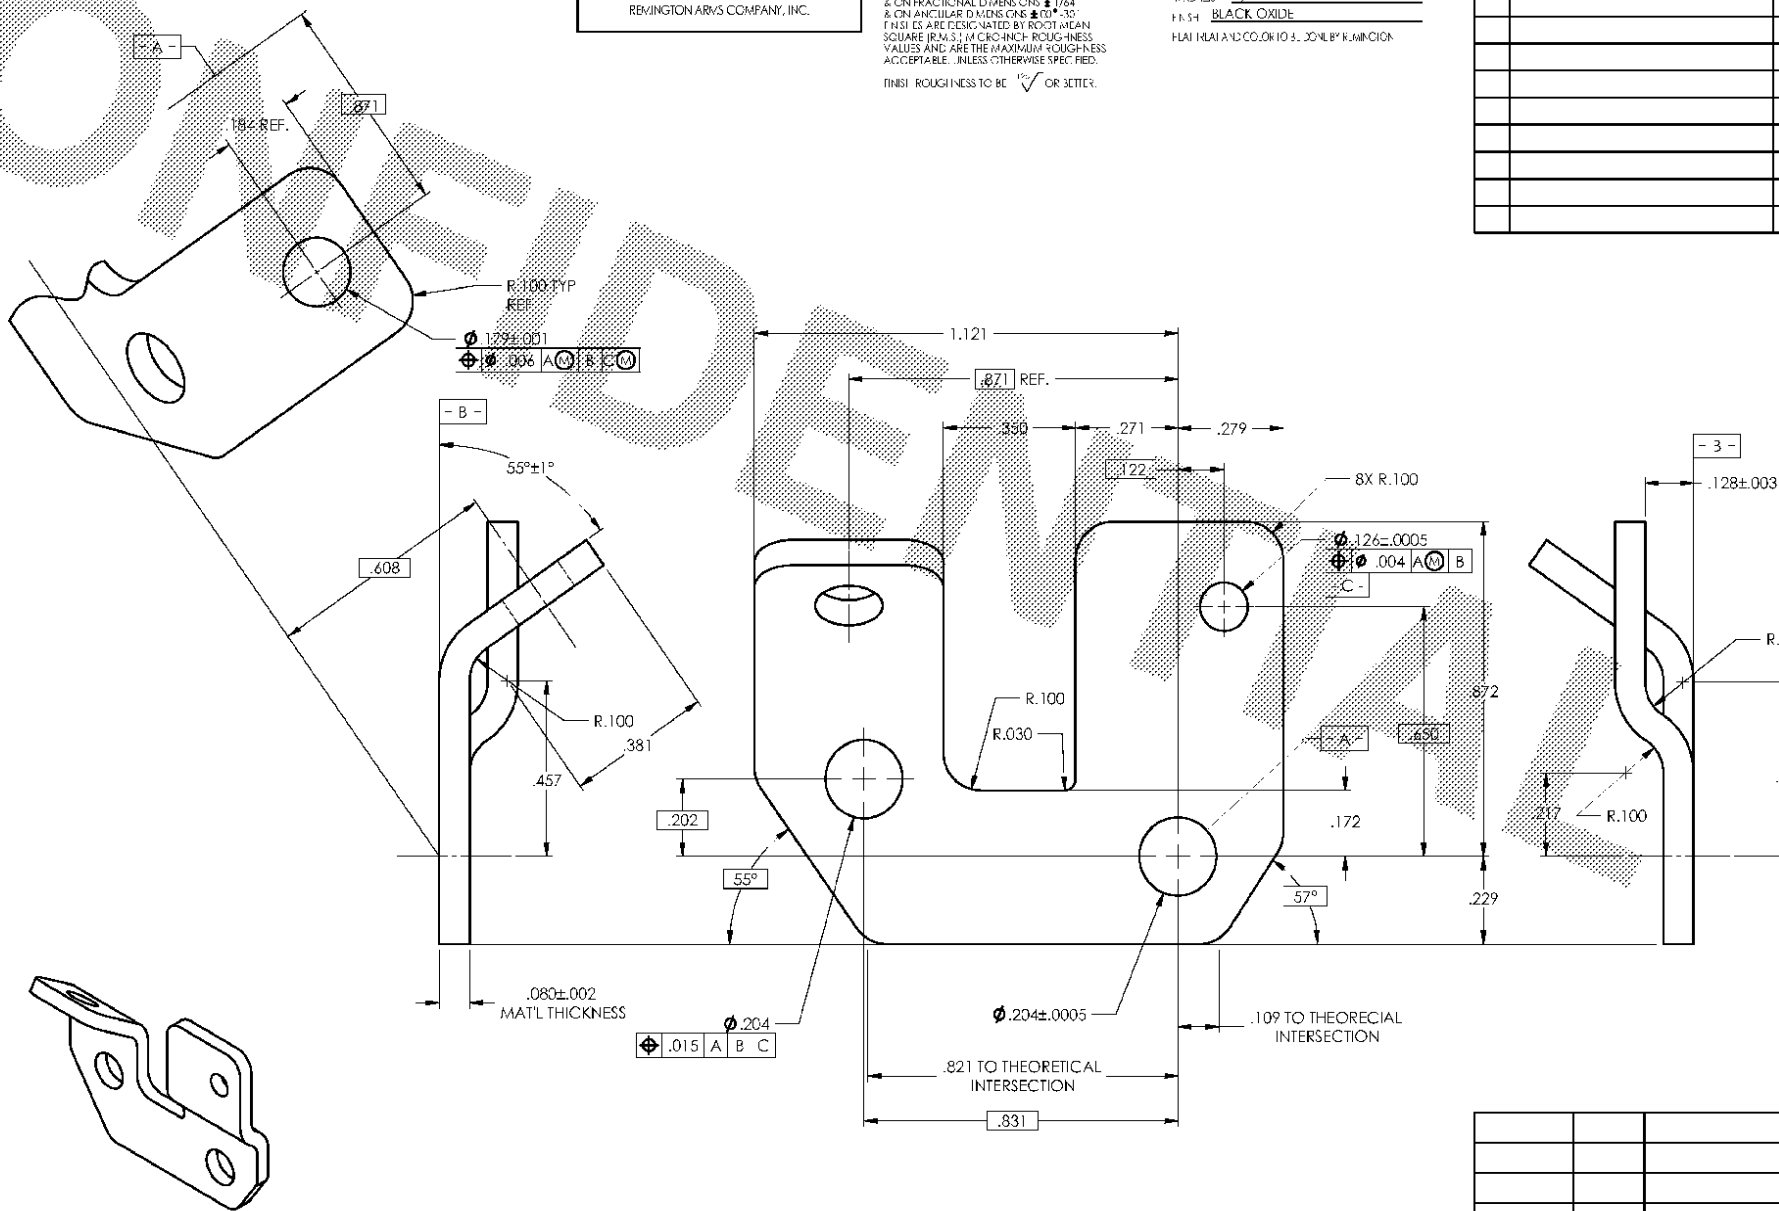
FITS ARE DESIGNATED BY ROOT MEAN
SQUARE (RMS) & MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.

FINISH ROUGHNESS TO BE $\sqrt{160}$ OR BETTER.

MATERIAL AND HEAT TREAT

MATERIAL: ALSI 1010 102C
HEAT TREAT: NONE
FINISH: N/A
FINISH: BLACK OXIDE
FLAT RATE AND COLOR TO BE DONOR BY REFINITION

ALTERATIONS

[illegible]

ISOMETRIC VIEW

Subject to Protective Order - Williams v. Remington

ETEO00000297