

C6522124

MODEL 700TM M24

Model **SWS**TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00110415** Serial: C6522124 Model M24 SWS Center Fire
 Verify Repair Caliber: .62 NATO Repairman: Status: New 3/28/2006 10:40:46 AM

Address Information

Customer: Received From: Return To: Received From:

Name: **CO A 1/20 SFG A** **CO A 1/20 SFG A**

Address 1: **1455 SHUG JORDAN PARKWAY** **1455 SHUG JORDAN PARKWAY**

Address 2: **ATTN MR GAY** PO Box: **ATTN MR GAY** PO Box:

City: **AUBURN** **AUBURN**

State: **AL** Zip Code: **36832** Country: **US** State: **AL** Zip Code: **36832** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Good

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
C000	SGT BASES	2

Repair Search Refresh Close

maglel 3/28/2006 10:52 AM CAPS NUM INS SCRL

start 2 Mic... Part Se... Arms S... 2 Mic... 2 Int... Create ... 10:52 AM

Serial Number: **C6522124**

Model: **M24 SWS**



RE00110415


SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6522124.__0
FILE DATE AND TIME: 04/11/2006 16:31

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.036
The Average Y Centroid of the Five Target Set:	0.012
The Average Point of Impact of the Five Target Set:	0.038
The Average Mean Radius of the Five Target Set:	0.646
The Distance from POA to Centroid Target #1:	0.114
The Distance from Centroid Target #2 to Centroid Target #1:	0.142
The Distance from Centroid Target #3 to Centroid Target #1:	0.225
The Distance from Centroid Target #4 to Centroid Target #1:	0.260
The Distance from Centroid Target #5 to Centroid Target #1:	0.213

SERIAL NUMBER: C6522124.____0	POINT#	X	Y
TARGET NUMBER: 1	1:	0.129	1.306
FILE DATE: 04/11/2006	2:	0.008	0.770
FILE TIME: 16:31	3:	0.128	0.458
	4:	-0.348	0.386
X CENTROID: -0.077	5:	0.492	0.118
Y CENTROID: 0.084	6:	0.397	-0.501
POA TO CENTROID: 0.114	7:	0.705	-0.886
HORZ SPREAD: 2.198	8:	-0.401	-0.455
VERT SPREAD: 2.192	9:	-0.386	-0.217
GROUP SPREAD: 2.322	10:	-1.493	-0.137
MIN RADIUS: 0.406			
MAX RADIUS: 1.433			
MEAN RADIUS: 0.782			
# IN 1 IN DIAMETER: 3			
# IN 2 IN DIAMETER: 7			
# in 3 IN DIAMETER: 10			

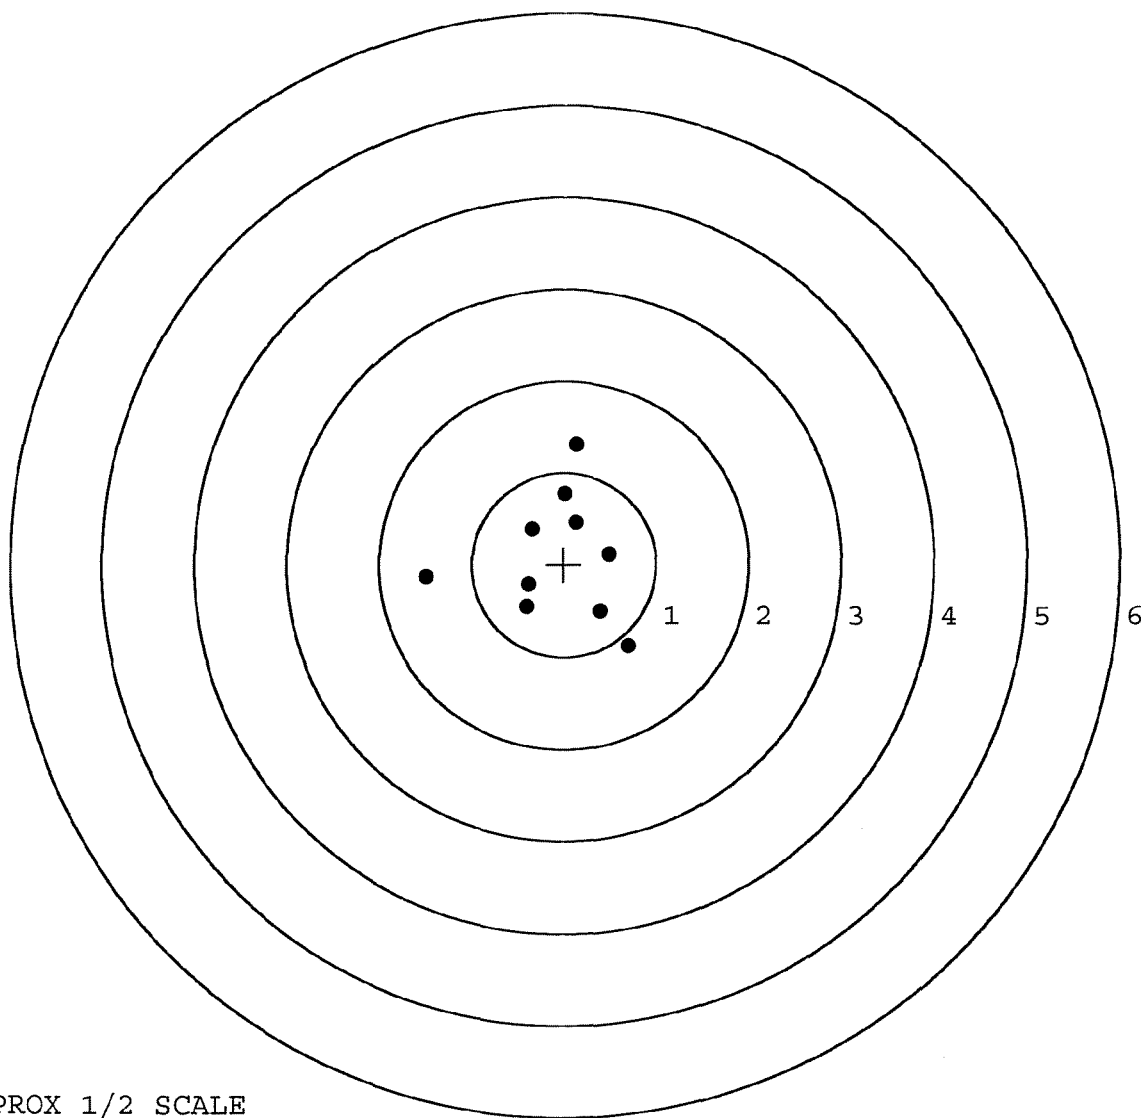


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6522124. __0
TARGET NUMBER: 2
FILE DATE: 04/11/2006
FILE TIME: 16:31

X CENTROID: 0.028
Y CENTROID: -0.011
POA TO CENTROID: 0.030
HORZ SPREAD: 1.506
VERT SPREAD: 1.098
GROUP SPREAD: 1.642
MIN RADIUS: 0.378
MAX RADIUS: 0.956
MEAN RADIUS: 0.544

POINT#	X	Y
1:	-0.057	0.512
2:	0.181	0.335
3:	0.333	0.281
4:	0.574	0.044
5:	0.876	-0.452
6:	0.004	-0.427
7:	-0.199	-0.586
8:	-0.344	-0.105
9:	-0.460	0.084
10:	-0.630	0.203

IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

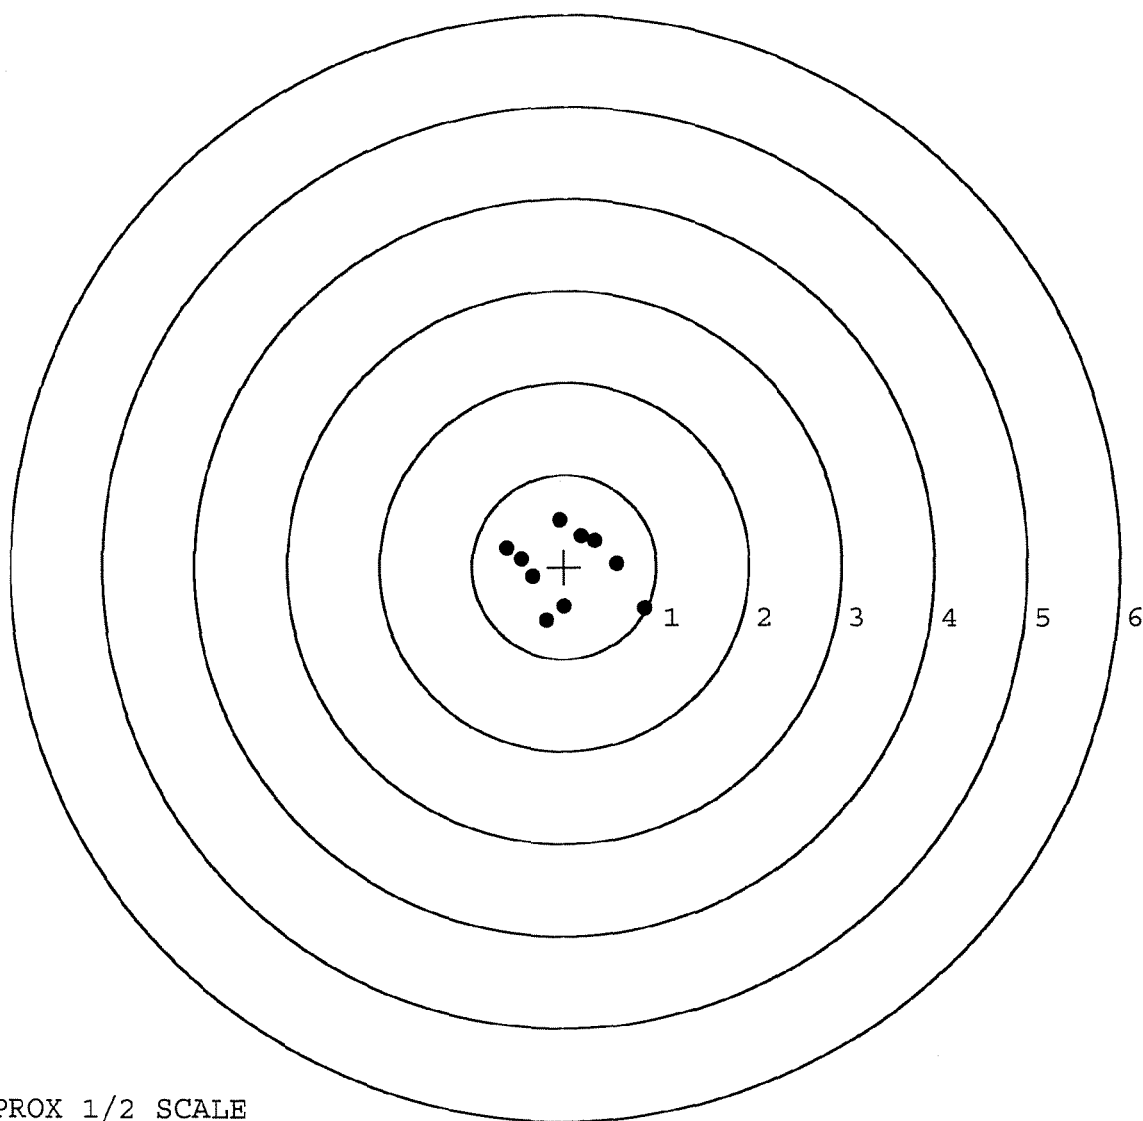


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6522124. 0
TARGET NUMBER: 3
FILE DATE: 04/11/2006
FILE TIME: 16:31

X CENTROID: -0.077
Y CENTROID: -0.141
POA TO CENTROID: 0.160
HORZ SPREAD: 1.261
VERT SPREAD: 1.955
GROUP SPREAD: 1.994
MIN RADIUS: 0.163
MAX RADIUS: 1.204
MEAN RADIUS: 0.658
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.020	0.502
2:	-0.181	0.440
3:	-0.233	-0.186
4:	-0.429	0.130
5:	-0.603	0.618
6:	0.658	-0.110
7:	0.223	-0.628
8:	0.301	-0.986
9:	-0.211	-1.337
10:	-0.310	0.150

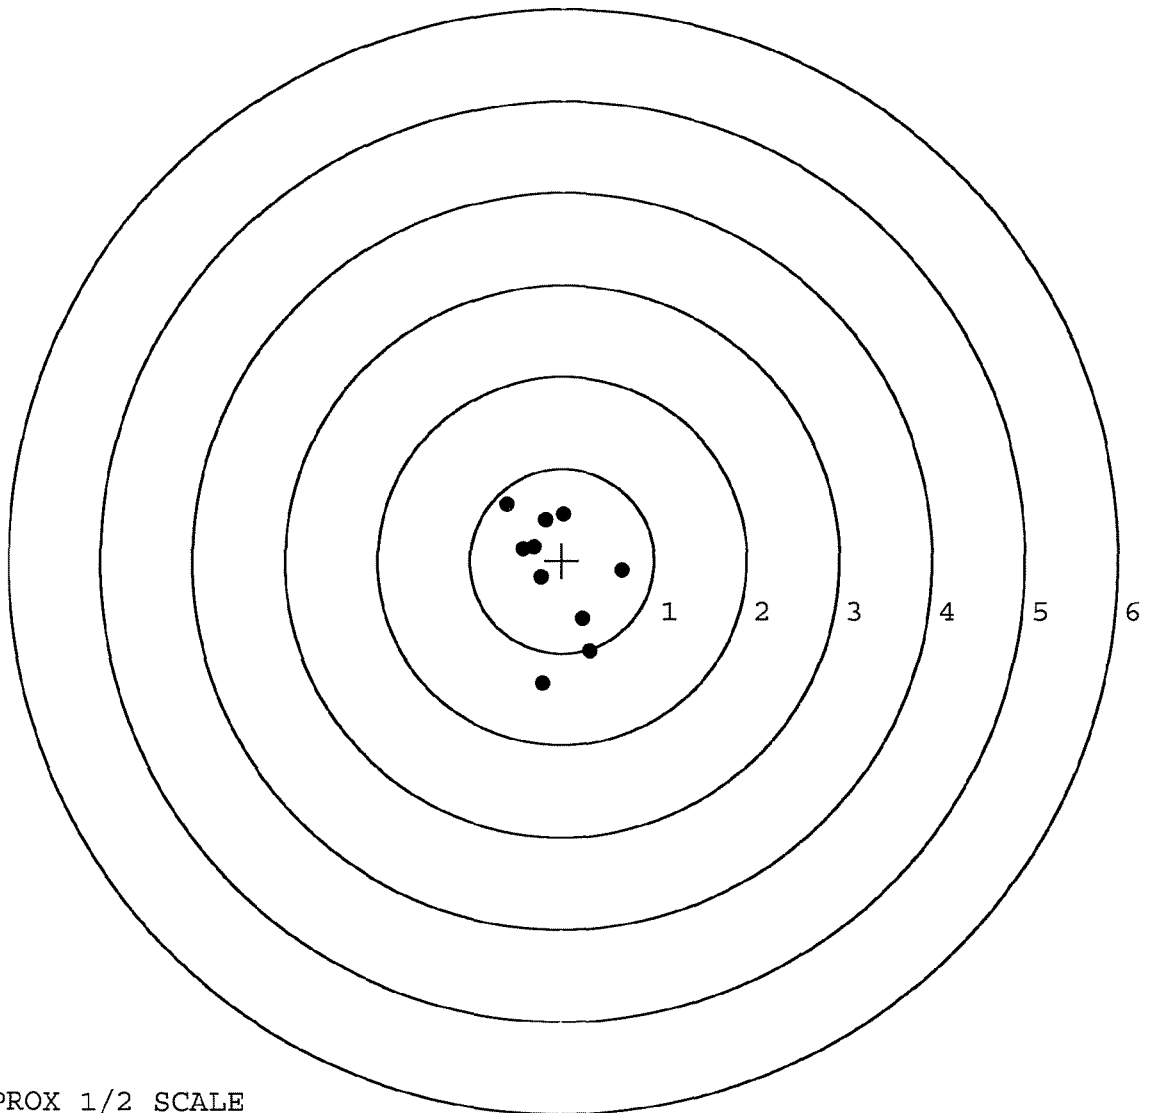


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6522124. 0
TARGET NUMBER: 4
FILE DATE: 04/11/2006
FILE TIME: 16:31

X CENTROID: 0.144
Y CENTROID: 0.221
POA TO CENTROID: 0.264
HORZ SPREAD: 2.587
VERT SPREAD: 1.287
GROUP SPREAD: 2.649
MIN RADIUS: 0.201
MAX RADIUS: 1.789
MEAN RADIUS: 0.676
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-0.045	0.288
2:	-0.690	0.012
3:	-0.226	-0.646
4:	0.275	-0.242
5:	0.748	0.191
6:	1.897	0.580
7:	0.211	0.623
8:	-0.194	0.211
9:	-0.146	0.641
10:	-0.386	0.548

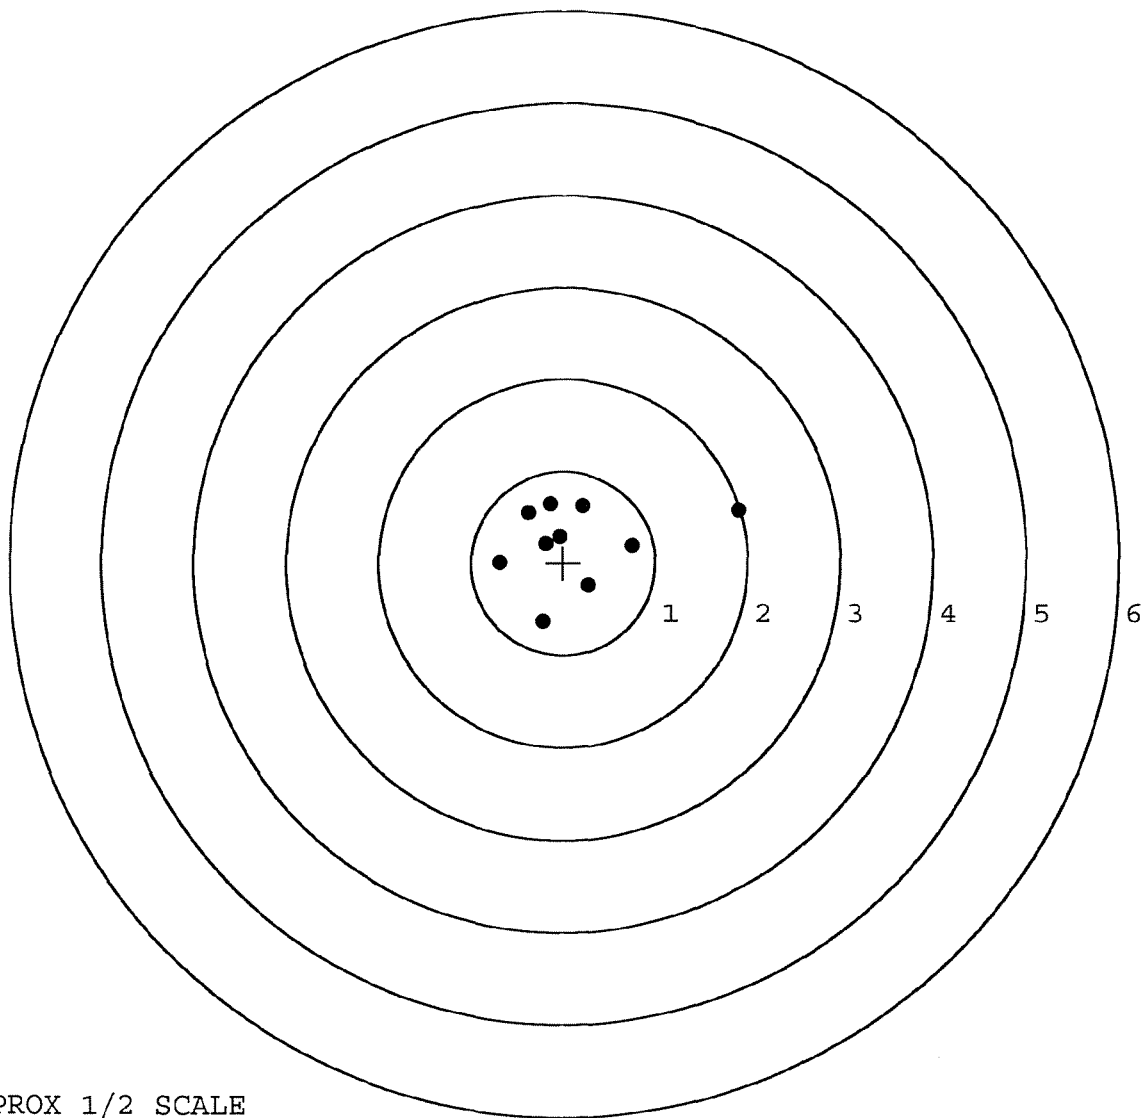

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6522124.___0

TARGET NUMBER: 5

FILE DATE: 04/11/2006

FILE TIME: 16:31

POINT#	X	Y
--------	---	---

1:	0.021	0.754
----	-------	-------

2:	-0.680	0.598
----	--------	-------

3:	-0.313	0.407
----	--------	-------

4:	-0.320	0.130
----	--------	-------

5:	-0.455	-0.133
----	--------	--------

6:	-0.217	-0.112
----	--------	--------

7:	0.038	-0.344
----	-------	--------

8:	-0.297	-0.720
----	--------	--------

9:	-0.320	-1.248
----	--------	--------

10:	0.549	-0.238
-----	-------	--------

X CENTROID: -0.199

Y CENTROID: -0.091

POA TO CENTROID: 0.219

HORZ SPREAD: 1.229

VERT SPREAD: 2.002

GROUP SPREAD: 2.031

MIN RADIUS: 0.028


MAX RADIUS: 1.164

MEAN RADIUS: 0.567

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

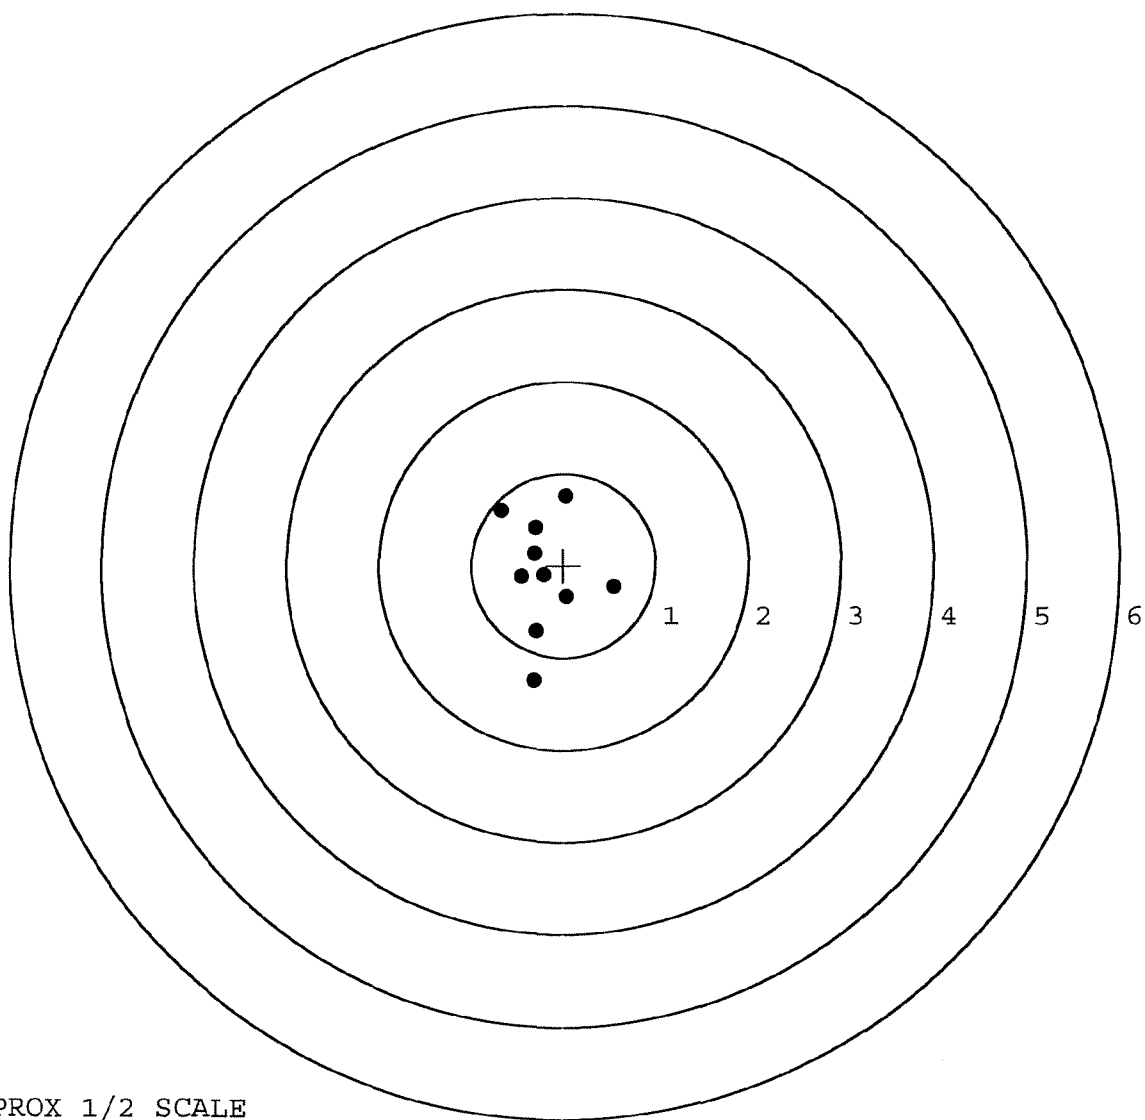

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

DATE 3-15-06

TESTER R.P.

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	257	247		246	
PULL #2	258	255		254	
PULL #3	251	253		252	
PULL #4	257	251		250	
PULL #5	259	245		253	
TOTAL	1282	1251		1255	
AVERAGE	256	250		251	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	305	303		
PULL #2	308	305		
PULL #3	299	305		
PULL #4	309	306		
PULL #5	308	308		
TOTAL	1529	1527		
AVERAGE	305	305		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	411	401		412
PULL #2	402	410		418
PULL #3	396	411		407
PULL #4	397	412		403
PULL #5	411	417		411
TOTAL	2017	2051		2051
AVERAGE	403	410		410

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	110415		
SERIAL NUMBER	C6522125 C6522124		
LOG-IN DATE	3-28-06		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIALS
550	DIS-ASSEMBLE GUN	3-29-06	RTZ
560 A	RE-BARREL	4-3-06	RTZ
B	DRILL AND TAP	4-4-06	TRW
575	ASSEMBLE	4-4-06	RTZ
600	PROOF	4-4-06	TRW
605	CHECK HEADSPACE	4-4-06	TRW
610	DIS-ASSEMBLE GUN	4-4-06	RTZ
612	MAGNAFLUX	4/9/06	WCB
615	ROLLMARK CALIBER	4-5-06	CW
618	ROTO-BLAST	4-5-06	LB
620	APPLY COATINGS	4/6/06	RB
625 A	FINAL ASSEMBLY	4-10-06	RTZ
B	TRIGGER PULL TEST	4-12-06	AC
C	SAFETY "ON" FORCE	4-12-06	AC
D	SAFETY "OFF" FORCE	4-12-06	AC
E	FIRING PIN INDENT	4-12-06	AC
640	TARGET	4-11-06	R.P.D.
655	FINAL INSPECT	4-12-06	AC
660	PACK	4-19-06	RA
		SHIP DATE	
		QAR INSPECTION DATE	

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.



Remington®

MODEL 700™ H24

SERIAL NO.
C6522124

ORDER NO.
5716


Ø1

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6522124

UPC



0 47700 25716 7

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # *C6522124*

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		<i>8/1/90</i>	<i>KS</i>
600	Proof		<i>8/1/90</i>	<i>KS</i>
607	Check Headspace		<i>8/1/90</i>	<i>KS</i>
610	Dis-assemble Gun		<i>8/1/90</i>	<i>KS</i>
612	Magnaflux Barrel Action		<i>8/7/90</i>	<i>KR</i>
	Magnaflux Bolt		<i>8/7/90</i>	<i>KR</i>
615	Rollmark Caliber		<i>8/7/90</i>	<i>GL</i>
617	Drill and Tap Sight Holes		<i>8/10/90</i>	<i>LB</i>
618	Polish Barrel <i>RB</i>		<i>8/14/90</i>	<i>WB</i>
620	Apply Coatings (Barrel Action)		<i>8/22/90</i>	<i>TB</i>
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake		<i>9/8/90</i>	<i>WB</i>

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			9/8/90	WB
	G) Safety Off Force	2 1/2	2 1/2	2 1/2			9/8/90	WB
	H) Trigger Pull Test & Retainability						9/8/90	WB
	I) Firing Pin Indent	.0245	.0245	.0245			9/8/90	WB
	J) Assemble Stock						9/9/90	KS
	K) Assemble Swivel Studs						9/11/90	KS
	L) Attach Front and Rear Sight Assemblies						9/9/90	KS
	M) Iron Sight Alignment						9/9/90	KS
	N) Detach Front & Rear Sights & place in numbered container						9/9/90	KS
	O) Attach Scope to Rifle						9/9/90	KS
	P) Detach & Attach Scope 20 Times						9/9/90	KS
640	Gallery Target & Test						9/9/90	AF
	A) Time						9/9/90	AF
	B) Malfunctions						9/9/90	AF
	C) Pierced Primers						9/9/90	AF
	D) Optical Clarity of Scope						9/9/90	AF
645	Inspect for Live Ammo						9/9/90	AF
655	Final Inspection						9/11/90	KS
	A) Headspace							
	B) Trigger Pull	2.32	2.11	2.08	2.25	2.34	9/10/90	WB
	C) Function						9/11/90	KS
660	Pack						9/19/90	AF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6527124
DATE 9/8/90
TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.35	2.11	2.24	2.32	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.32	2.26	2.41	2.11	
PULL #3	2.40	2.15	2.29	2.08	
PULL #4	2.45	2.26	2.26	2.25	
PULL #5	2.36	2.33	2.38	2.34	
TOTAL	11.88	11.10	11.58	11.10	
AVG.	2.38	2.22	2.31	2.22	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.17	3.29		
PULL #2	3.34	3.31		
PULL #3	3.39	3.26		
PULL #4	3.36	3.27		
PULL #5	3.42	3.34		
TOTAL	16.68	16.47		
AVG.	3.34	3.29		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.11	4.01		4.19
PULL #2	4.06	3.90		4.20
PULL #3	4.10	4.03		4.29
PULL #4	4.03	3.90		4.24
PULL #5	4.05	3.90		4.34
TOTAL	20.35	19.74		21.26
AVG.	4.07	3.95		4.25

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06522124
9 Sep 1990

CENTROIDAL DISTANCES

0 TO	1	.126752
1 TO	2	.133843
1 TO	3	.084214
1 TO	4	.248871
1 TO	5	.237228

☆ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1496
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0432
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .155713

THE AMR FOR THIS RIFLE IS: 1.257

9 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06522124

CENTERFIRE PATTERNS # 1

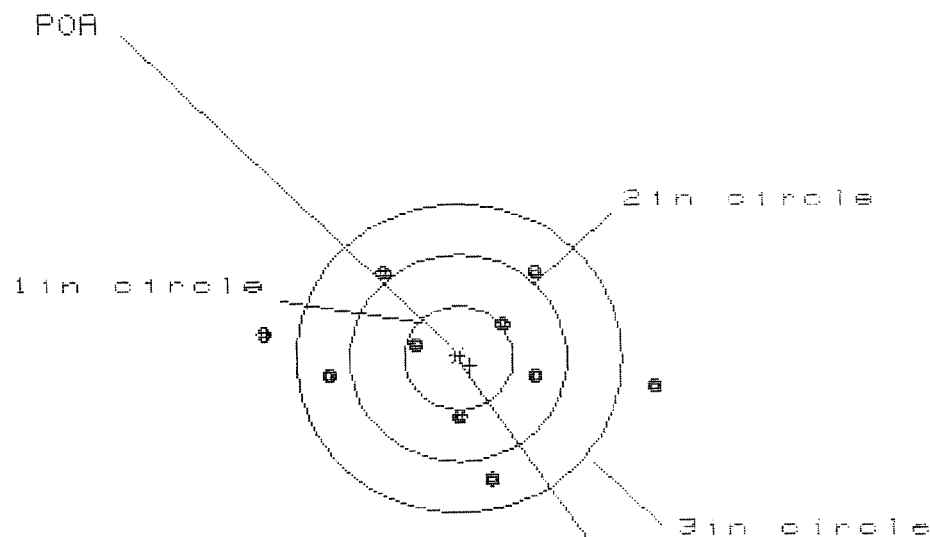

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 8

CENTROID #

HS= 3.603

VS= 1.969


GS= 3.644

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.829	.944	.748
MINIMUM X	-1.774	-1.571	-1.160
MAXIMUM Y	.807	.777	.808
MINIMUM Y	-1.162	-1.192	-1.161
CENTROID X	-.105	-.308	-.112
CENTROID Y	.071	.101	.070
POA TO CENTROID in.	.127	.324	.132
MIN RADIUS	.381	.180	.375
MEAN RADIUS	1.042	.941	.847
MAX RADIUS	1.849	1.590	1.203
HORIZONTAL SPREAD	3.603	2.515	1.908
VERTICAL SPREAD	1.969	1.969	1.969
EXTREME SPREAD	3.644	2.570	2.219
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

9 Sep 1938

FILE:/PATTERNING/CENTERFIRE_PATT/06522124

CENTERFIRE PATTERNS # 2

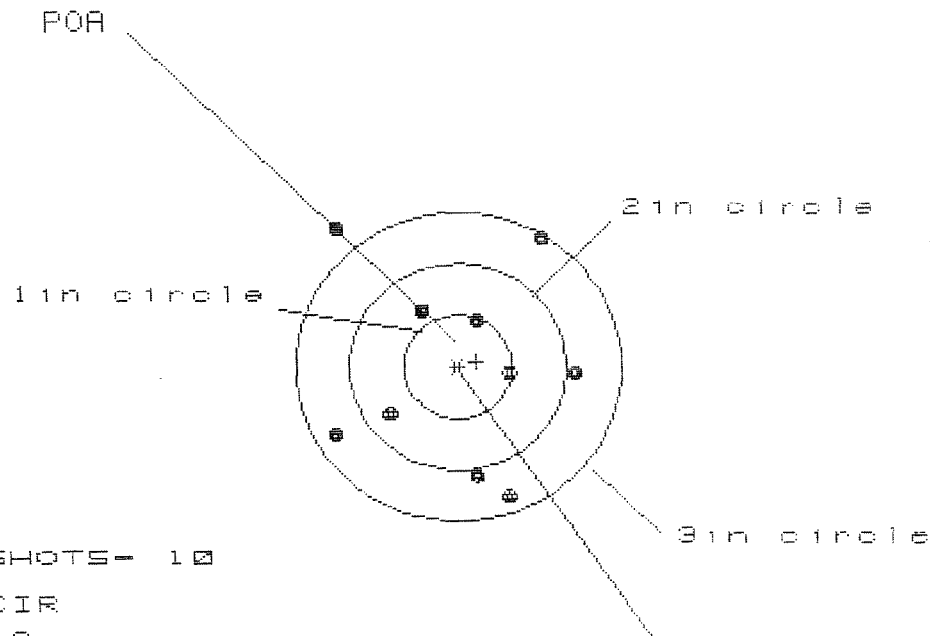

OF SHOTS- 10

IN CIR

1in = 2

2in = 4

3in = 8

CENTROID #

HS= 2.236

VS= 2.589


GS= 3.085

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.073	.944	1.025
MINIMUM X	:	-1.163	-1.225	-1.144
MAXIMUM Y	:	1.306	1.417	.853
MINIMUM Y	:	-1.283	-1.138	-.961
CENTROID X	:	-.170	-.041	-.122
CENTROID Y	:	-.046	-.191	-.368
POA TO CENTROID in.	:	.176	.195	.388
MIN RADIUS	:	.437	.321	.475
MEAN RADIUS	:	1.031	.939	.864
MAX RADIUS	:	1.749	1.559	1.183
HORIZONTAL SPREAD	:	2.236	2.169	2.169
VERTICAL SPREAD	:	2.589	2.555	1.814
EXTREME SPREAD	:	3.085	2.666	2.242
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		9	

9 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522124

CENTERFIRE PATTERNS # 3

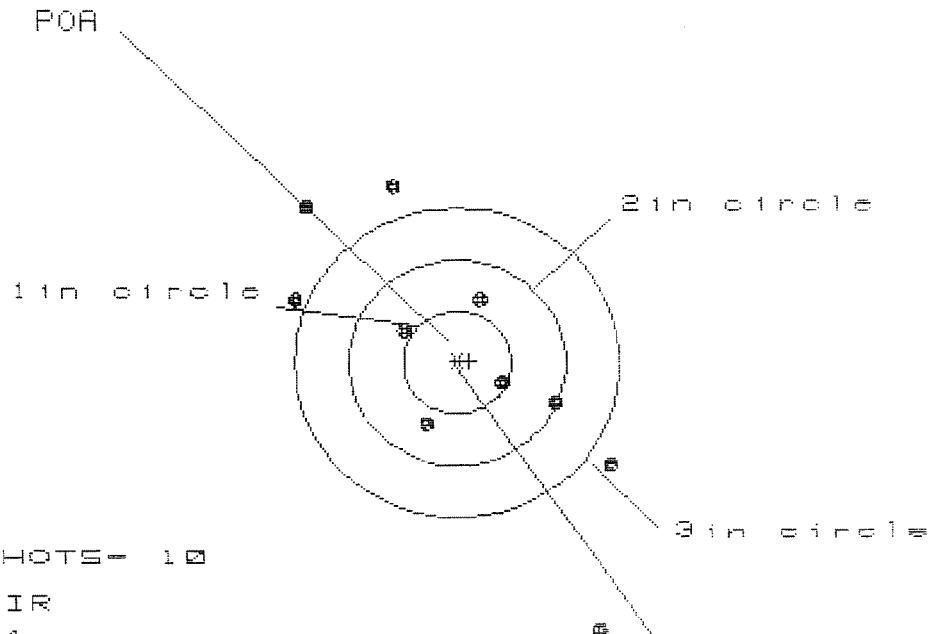

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 5

HS= 2.916

VS= 4.317

GS= 4.902

CENTROID *


PATTERN #	3	3	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.429	1.574	1.422
MINIMUM X	-1.486	-1.342	-1.494
MAXIMUM Y	1.715	1.425	1.579
MINIMUM Y	-2.602	-1.298	-1.144
CENTROID X	-.111	-.255	-.103
CENTROID Y	-.013	.277	.123
POA TO CENTROID in.	.111	.376	.161
MIN RADIUS	.492	.359	.529
MEAN RADIUS	1.351	1.154	1.067
MAX RADIUS	2.909	2.040	1.825
HORIZONTAL SPREAD	2.916	2.916	2.916
VERTICAL SPREAD	4.317	2.723	2.723
EXTREME SPREAD	4.902	3.761	3.413
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

9 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8522124

CENTERFIRE PATTERNS

4

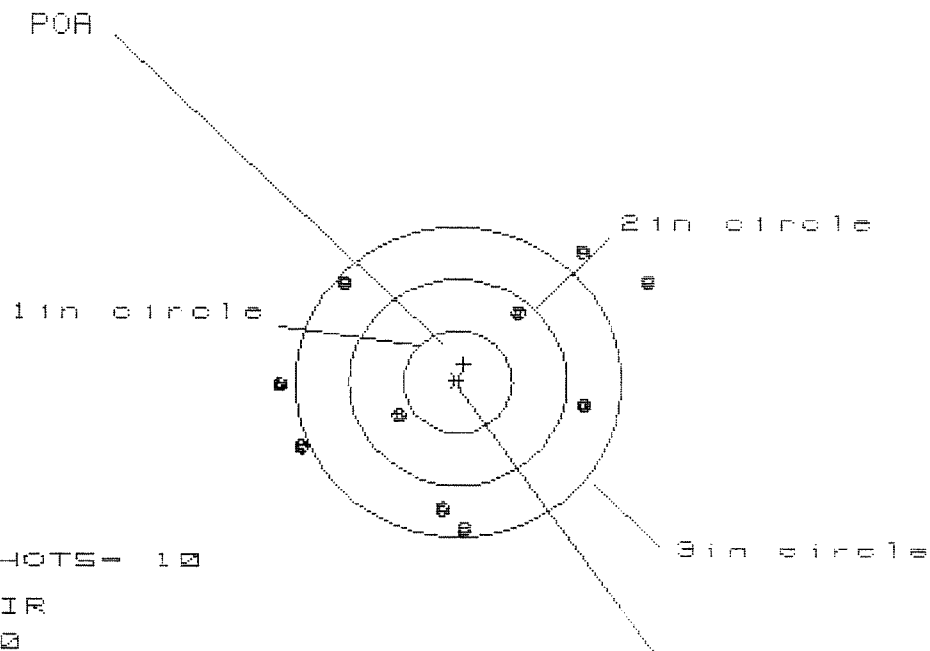

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 2

3 in = 6

HS= 3.362

VS= 2.715

GS= 3.500


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.732	1.376	1.536
MINIMUM X	:	-1.630	-1.437	-1.265
MAXIMUM Y	:	1.310	1.412	1.261
MINIMUM Y	:	-1.405	-1.303	-1.126
CENTROID X	:	-.056	-.249	-.421
CENTROID Y	:	-.173	-.275	-.452
POA TO CENTROID in.	:	.182	.371	.618
MIN RADIUS	:	.615	.399	.157
MEAN RADIUS	:	1.371	1.274	1.133
MAX RADIUS	:	1.964	1.972	1.537
HORIZONTAL SPREAD	:	3.362	2.813	2.801
VERTICAL SPREAD	:	2.715	2.715	2.387
EXTREME SPREAD	:	3.500	3.232	2.807
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		2	
NUMBER IN THREE INCH CIRCLE	=		6	

9 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8522124

CENTERFIRE PATTERNS # 5

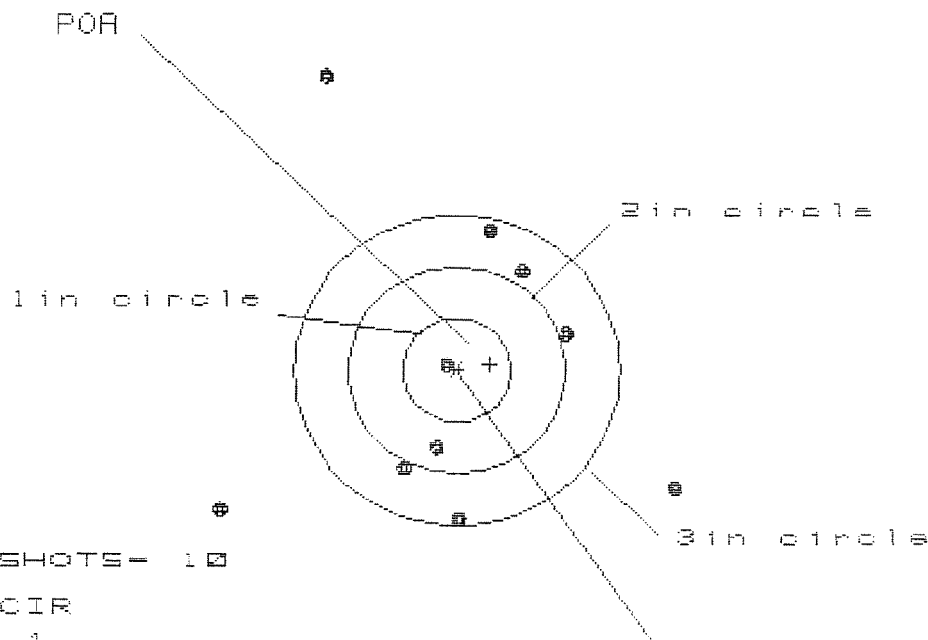

OF SHOTS- 10

IN CIR

1in = 1

2in = 2

3in = 7

HS= 4.114

VS= 4.311

GS= 5.119

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.968	1.835	1.550
MINIMUM X	:	-2.146	-2.279	-.885
MAXIMUM Y	:	2.894	1.676	1.543
MINIMUM Y	:	-1.417	-1.095	-1.228
CENTROID X	:	-.306	-.173	.112
CENTROID Y	:	-.055	-.377	-.244
POA TO CENTROID in.	:	.311	.415	.268
MIN RADIUS	:	.082	.425	.536
MEAN RADIUS	:	1.490	1.291	1.142
MAX RADIUS	:	3.132	2.516	1.813
HORIZONTAL SPREAD	:	4.114	4.114	2.435
VERTICAL SPREAD	:	4.311	2.771	2.771
EXTREME SPREAD	:	5.119	4.122	2.963
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		2	
NUMBER IN THREE INCH CIRCLE	=		7	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R93-15396

INITIAL

CUSTOMER ORDER NO.

ATTN: FRED MARTIN W/TARGET SIGHTS/M-24

FPS

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

07/19/93

07/19/93

WK 8-90

C6522124

700 7.62

NATO

ACCESSORIES

W/STUDS

W/SWIVELS

SCOPE BASE

SOFT CASE

FROM:

SHIP TO:

HHD 1/20 SFGA
ALABAMA ARMY NATIONAL GUARD
2499 JOHNSON RD. SW
HUNTSVILLE AL 35805

HHD 1/20 SFGA
ALABAMA ARMY NATIONAL GUARD
2499 JOHNSON RD. SW
HUNTSVILLE AL 35805

CUST NO:081055 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE

A1

B1

TRIGGER GROUP

B2

BOLT ASSY.

B3

BARREL ASSY.

B4

REC. ASSY.

B5

WOOD

C1

D1

E1

F1

METAL

C2

D2

E2

F2

MAIN FAULT

Barrel Contacts Stick

PARTS

COMMENTS

*Rebed Stock TO Free Float
Barrel Action**Bench Test only*

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400004204

A7 M24 SER. # C6522124 SCOPE # 900088

30 APR 91 M118
14 MAY 91 M118
15 MAY M118

80 RDS
150 RDS
20 RDS

Replaces edition of 1 Jan 64, which will be used

MAINTENANCE REQUEST			PAGE /	REQUIREMENTS CONTROL	CONTROL NUMBER
For use of this form, see DA PAM 738-750, the proponent agency is DCSLOG			OF /	SYMBOL CSGD - 1047	
SECTION I - CUSTOMER DATA			SECTION II - MAINTENANCE ACTIVITY DATA		
1a. WORK ORDER NO. <i>W.T.P.C.A. 10</i>	b. CUSTOMER UNIT NAME <i>CO A 11205FGA</i>	c. PHONE NO. <i>205-887-8973</i>	3a. WORK ORDER NO (WON)		b. SHOP
2. If Intransit Customer, enter data in Blocks 2a and 2b		2a. SAMS-2 UIC	4a. UIC SUPPORT		b. SUPPORT UNIT NAME
SECTION III - EQUIPMENT DATA					
5. ID	6. NSN <i>1005012402136</i>		15. FAILURE DETECTED DURING (Select one - use / or X)		
7. TYPE MNT. REQ. CODE	8. MODEL <i>M24</i>		☒ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other ☐ I Calibration		
9. NOUN <i>SNIPER RIFLE 7.62MM</i>		16a. MILES/KILOMETERS (Enter or x)	b. HOURS	c. ROUNDS <i>000250</i>	
10a. ORG WON	b. EIC	d. LANDINGS	e. AUTO ROTATIONS	17. PROJ CODE (If Assigned)	18. ACCT PROCESSING CODE
11. SERIAL NUMBER <i>465221124</i>	b. QTY. <i>01001012</i>	13. PD	19. IN WARRANTY? (Y or N)		
24. Describe Deficiencies or Symptoms on the basis of Complete Checkout and Diagnostic Procedure in Equipment TM (Do not prescribe repairs.) <i>BARREL TOUCHING STOCK/BOLT</i>		20. LEVEL OF WORK (Select one - use / or X)			
<i>UNIT JOB ORD 3-92</i>		☐ O Unit Level ☐ H Intermediate General Spt. ☒ Special Repair Activity ☐ F Immediate Direct Spt. ☐ D Depot			
		21. BUMPER NO./TAIL NO.			
		22. REIMBURSABLE CUSTOMER? (If Intransit Customer, enter Y or N)			
		23. PD AUTHENTICATION SIGNATURE (Payroll Signature)			
PREPARATION INSTRUCTIONS					
SECTION I - Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maintenance is completed. Block 2b. Enter UIC of supporting SAMS-2 if work is requested while intransit and away from your support maintenance unit. Block 2c. Enter equipment utilization code under which Materiel Condition Status is reported. See SAMS Codes and Tables.			SECTION III (Continued) - Block 14. Leave blank. Block 15. Select one. Use a " / or x" to indicate when failure was detected. Block 16. Enter the accumulated usage data in block 16a through 16e, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. Leave blank (for DSU/GSU use). Block 19. Enter a "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Select one. Use a " / or x" to indicate the level of work to be performed on equipment submitted. See SAMS Codes and Tables. Block 21. Enter the bumper number or admin. number assigned for property control purposes to the equipment being submitted. Block 22. Leave blank (for DSU/GSU use). Block 23. Enter the payroll signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maintenance.		
SECTION II - Leave blank. To be completed by the support maintenance DSU/GSU.					
SECTION III - Block 5. Enter the Type Maintenance Request Code. See SAMS Codes and Tables. Block 6. Enter ID associated with block 7. See SAMS Codes and Tables. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON) assigned when item submitted is reportable for MCSR. Otherwise, leave blank. Block 10b. Enter EIC (left justify). Block 11. Enter serial number of item being submitted. Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from SAMS Codes and Tables.			Block 34a. Enter signature of submitter. Block 34b. Enter Ordinal Date submitted (YYDDD). Block 35a. Enter signature of person accepting the maintenance request. Block 35b. Enter the status. Block 35c. Enter Ordinal Date accepted (YYDDD). Block 35d. Enter Military Time.		
34a. SUBMITTED BY		35a. ACCEPTED BY			
b. ORD DATE <i>931194</i>	b. ST	c. ORD DATE	d. MIL TIME		

DA FORM 5504, SEP 88

DA FORM 5504, APR 87 MAY BE USED

RECEIPT COPY 1

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400004208

Final Inspection

In: _____ DATE REC'D: 7/19/93 DATE RET'D: 7/26/93
 Auditor: RW _____ C6522/24

Item:

Barrel Assy.

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BLOCK
☒ REAR SIGHT BLOCK
☒ SCREWS
☒ FINISH

Scope Assy.

☐ SCOPE
☐ SCOPE RINGS
☐ MOUNTING SCREWS
☐ MOUNTING BASE
☐ SCREWS
☐ FINISH
☐ LOOSENESS
☐ CLARITY

Misc.

☐ DD-250
☐ BAR CODE
☐ PACKAGING

Item:

Stock Assy.

☒ STOCK
☒ SLING SWIVEL STUDS
☒ ADJUSTABLE BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR/FINISH

Systems Case

☐ SCOPE CASE
☐ IRON SIGHTS
☐ DEPLOYMENT KIT

Trigger

☒ SAFETY OPERATION
☒ SET
☐

Comments: _____

