

C6594631

MODEL 700™ M24

Model **S&S**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



Arms Services Repair & Estimate System

File

Add Repair

Estimate Repair

Expedite Repair

Inquiry

Repair Tools

CSR Tools

Reports

Table Maintenance

System Maintenance

Help

Repair Inquiry

Repair Number: RE00063304

Serial: C6594631 Model 700 Center Fire Caliber: 7.62 NATO PSS WITH BIPOD

Repairman:

Status: New 3/25/2003 10:00:21 AM

Verify Repair

Address Information

Customer: ☒ Received From

Return To: ☐ Received From

Name: DAN MC BRIDE

Address 1: C/O NATIONAL TRAINING CENTER MP CO

Address 2: BUILDING 248 C BARSTOW RD PO Box:

City: FORT IRWIN

State: CA Zip Code: 92310 Country: US

State: CA Zip Code: 92310 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: 760 380 3489

Fax:

Email:

Comments:

Received Condition

Good

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
	Adjustable Recoil Pad	1
A017	Scope Base	1
A045	Bi Pod	1

Repair Search

Refresh

Close

negle

3/25/2003

10:08 AM

CAPS

NUM

INS

SCRL

start

Micros...

Internet...

Arms Serv...

Part Search...

mlm-expl...

Scorecard...

10:08 AM

C-6594631

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6594631.___0
FILE DATE AND TIME: 04/09/2003 00:59


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.062
The Average Y Centroid of the Five Target Set:	-0.006
The Average Point of Impact of the Five Target Set:	0.062
The Average Mean Radius of the Five Target Set:	[REDACTED]
The Distance from POA to Centroid Target #1:	0.112
The Distance from Centroid Target #2 to Centroid Target #1:	0.121
The Distance from Centroid Target #3 to Centroid Target #1:	0.126
The Distance from Centroid Target #4 to Centroid Target #1:	0.215
The Distance from Centroid Target #5 to Centroid Target #1:	0.207

SERIAL NUMBER: C6594631. __0
TARGET NUMBER: 1
FILE DATE: 04/09/2003
FILE TIME: 00:59

X CENTROID: 0.026
Y CENTROID: 0.109
POA TO CENTROID: 0.112
HORZ SPREAD: 1.136
VERT SPREAD: 1.001
GROUP SPREAD: 1.137
MIN RADIUS: 0.127
MAX RADIUS: 0.710
MEAN RADIUS: 0.418
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.302	-0.512
2:	-0.070	-0.358
3:	0.234	-0.112
4:	0.709	0.303
5:	-0.165	-0.085
6:	0.044	0.438
7:	-0.168	0.489
8:	-0.427	0.342
9:	0.022	0.236
10:	-0.223	0.345

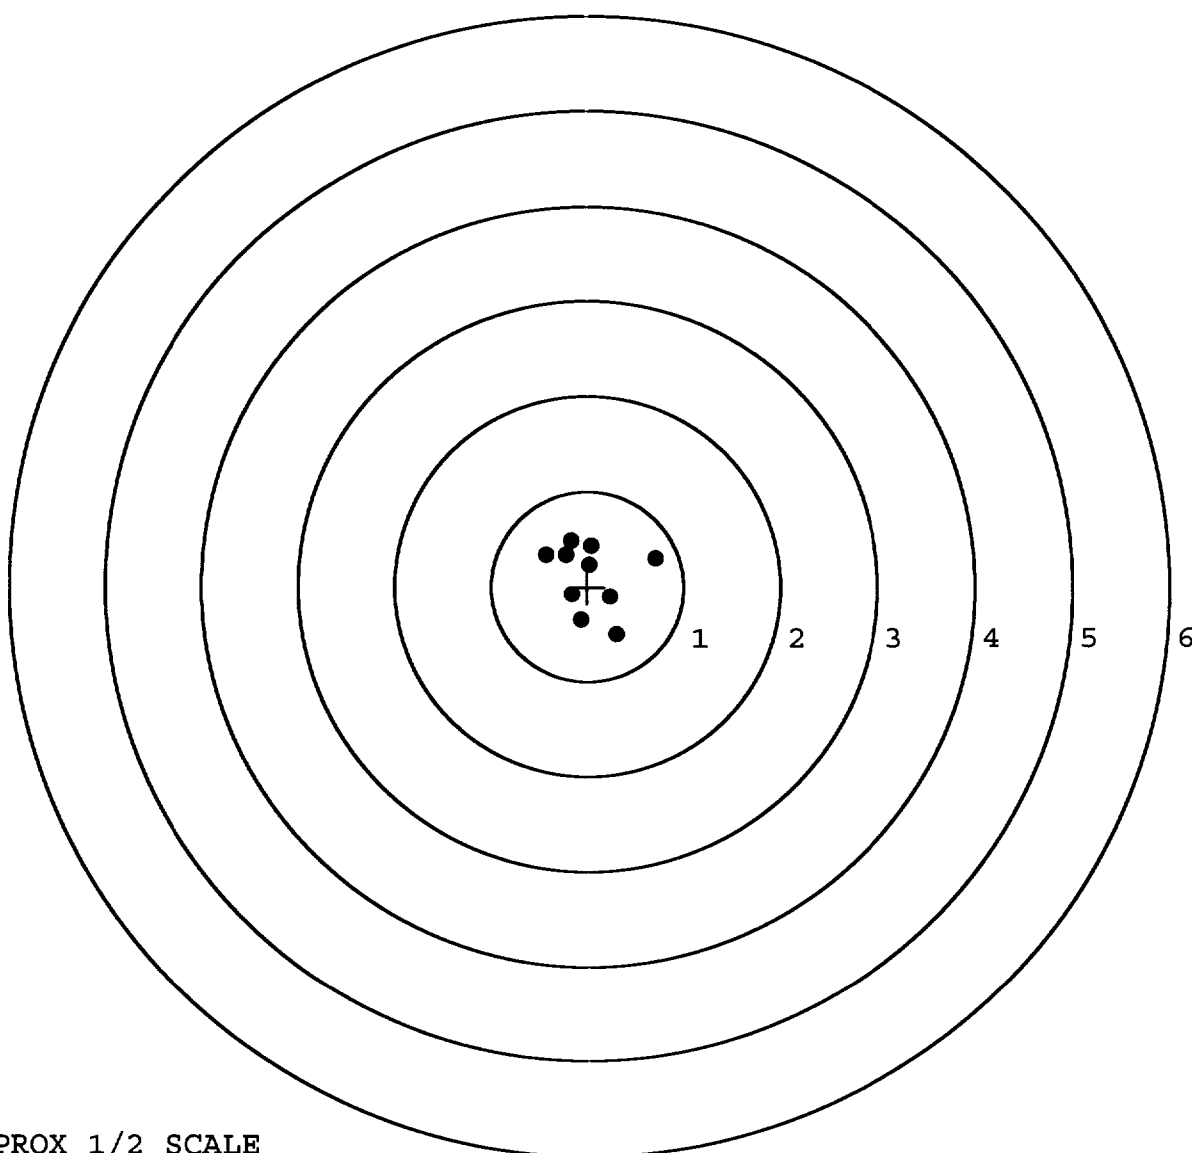


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594631. __0
TARGET NUMBER: 2
FILE DATE: 04/09/2003
FILE TIME: 00:59

X CENTROID: 0.121
Y CENTROID: 0.034
POA TO CENTROID: 0.126
HORZ SPREAD: 1.335
VERT SPREAD: 1.377
GROUP SPREAD: 1.402
MIN RADIUS: 0.138
MAX RADIUS: 0.884
MEAN RADIUS: 0.486
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.996	0.162
2:	0.475	0.315
3:	0.043	0.451
4:	0.122	0.754
5:	0.073	-0.095
6:	-0.339	-0.267
7:	-0.087	-0.205
8:	-0.119	-0.378
9:	-0.121	-0.623
10:	0.171	0.225

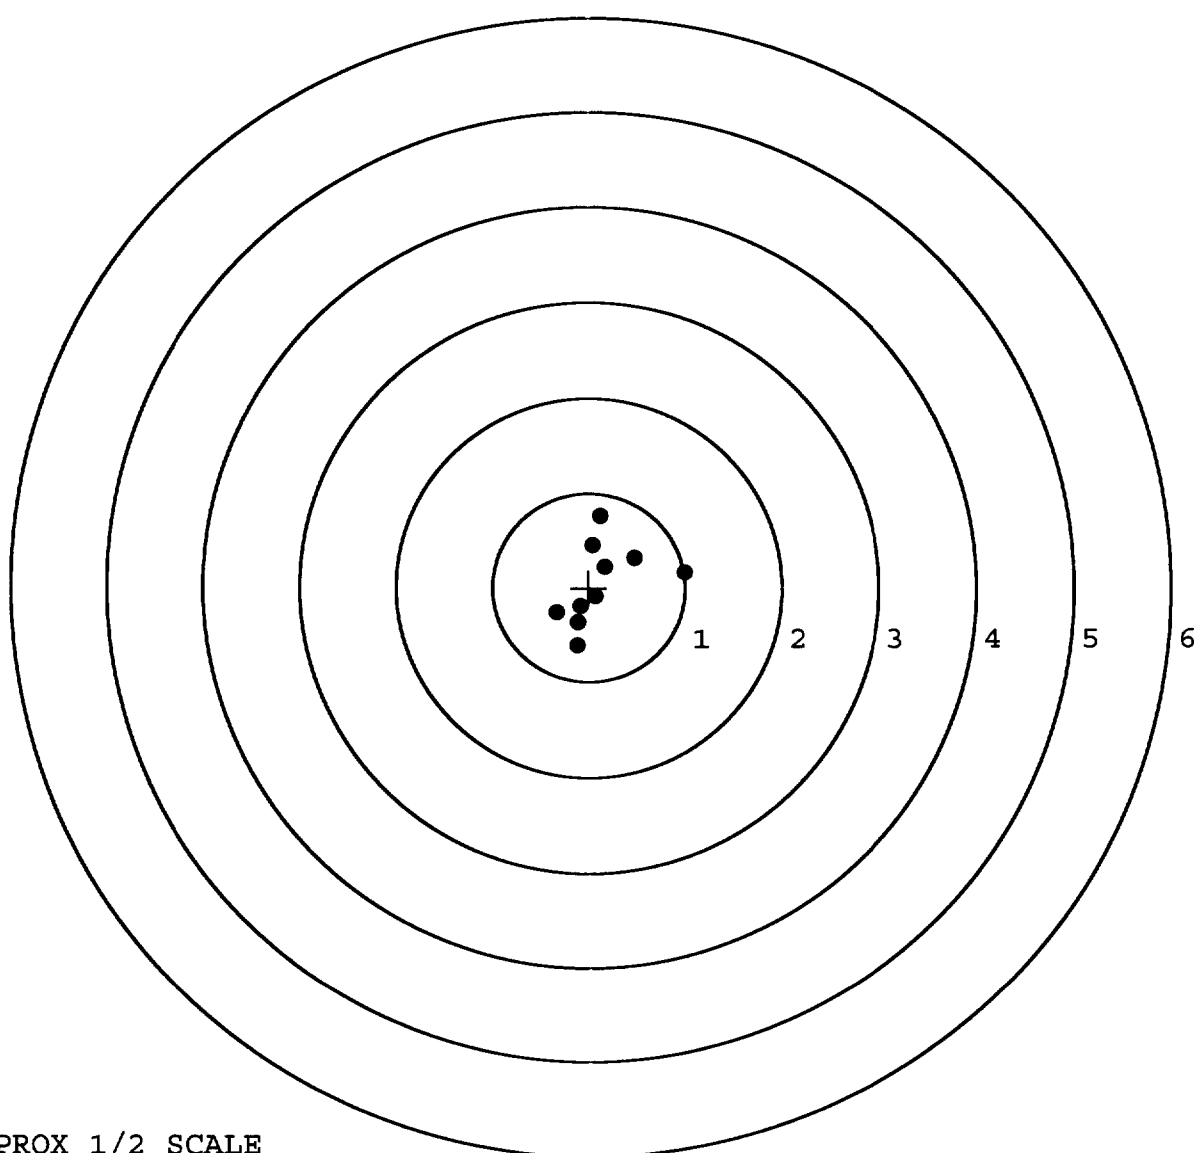


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594631. 0
TARGET NUMBER: 3
FILE DATE: 04/09/2003
FILE TIME: 00:59

X CENTROID: 0.121
Y CENTROID: 0.026
POA TO CENTROID: 0.124
HORZ SPREAD: 2.210
VERT SPREAD: 1.476
GROUP SPREAD: 2.288
MIN RADIUS: 0.045
MAX RADIUS: 1.214
MEAN RADIUS: 0.565
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.286	0.370
2:	1.049	0.716
3:	-0.016	-0.760
4:	-0.924	-0.221
5:	-0.219	0.362
6:	0.194	-0.134
7:	0.076	0.026
8:	0.007	-0.123
9:	-0.184	-0.084
10:	-0.057	0.113

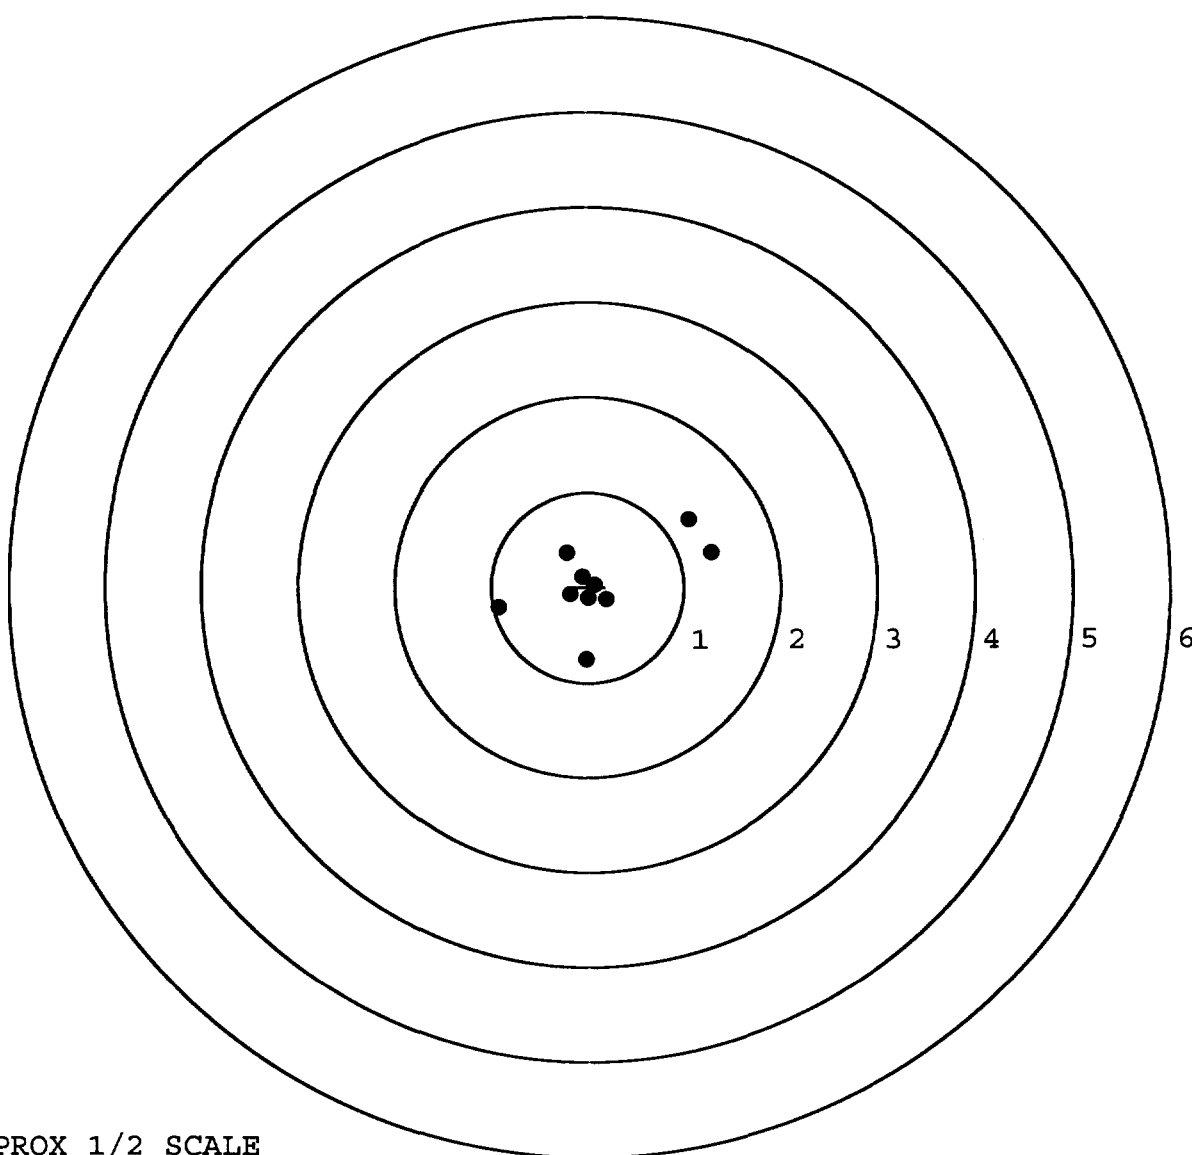


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594631. __0
TARGET NUMBER: 4
FILE DATE: 04/09/2003
FILE TIME: 00:59

X CENTROID: -0.021
Y CENTROID: -0.101
POA TO CENTROID: 0.103
HORZ SPREAD: 1.338
VERT SPREAD: 0.723
GROUP SPREAD: 1.503
MIN RADIUS: 0.073
MAX RADIUS: 0.891
MEAN RADIUS: 0.433
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.478	0.285
2:	0.290	0.277
3:	0.298	0.053
4:	-0.073	-0.330
5:	0.136	-0.438
6:	0.203	-0.157
7:	-0.801	0.006
8:	-0.860	-0.399
9:	0.214	-0.223
10:	-0.091	-0.083

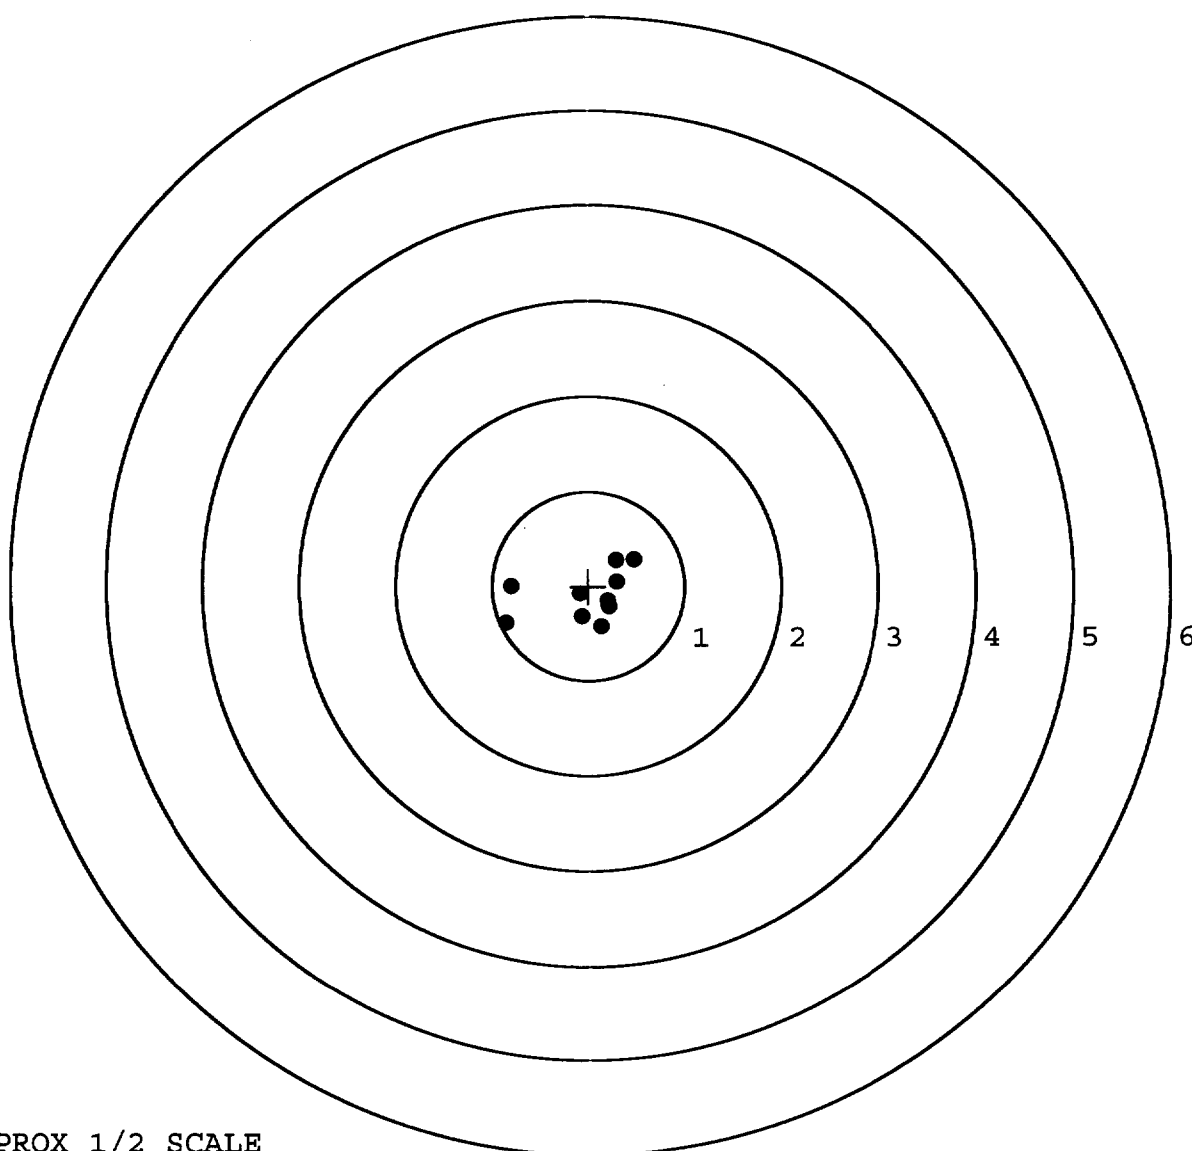


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594631. __0
TARGET NUMBER: 5
FILE DATE: 04/09/2003
FILE TIME: 00:59

X CENTROID: 0.061
Y CENTROID: -0.096
POA TO CENTROID: 0.114
HORZ SPREAD: 1.462
VERT SPREAD: 1.156
GROUP SPREAD: 1.574
MIN RADIUS: 0.088
MAX RADIUS: 0.833
MEAN RADIUS: 0.546
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.851	-0.359
2:	0.473	-0.563
3:	-0.611	-0.098
4:	-0.403	0.593
5:	0.519	0.518
6:	0.297	0.183
7:	-0.026	-0.110
8:	-0.332	-0.128
9:	-0.212	-0.487
10:	0.055	-0.506

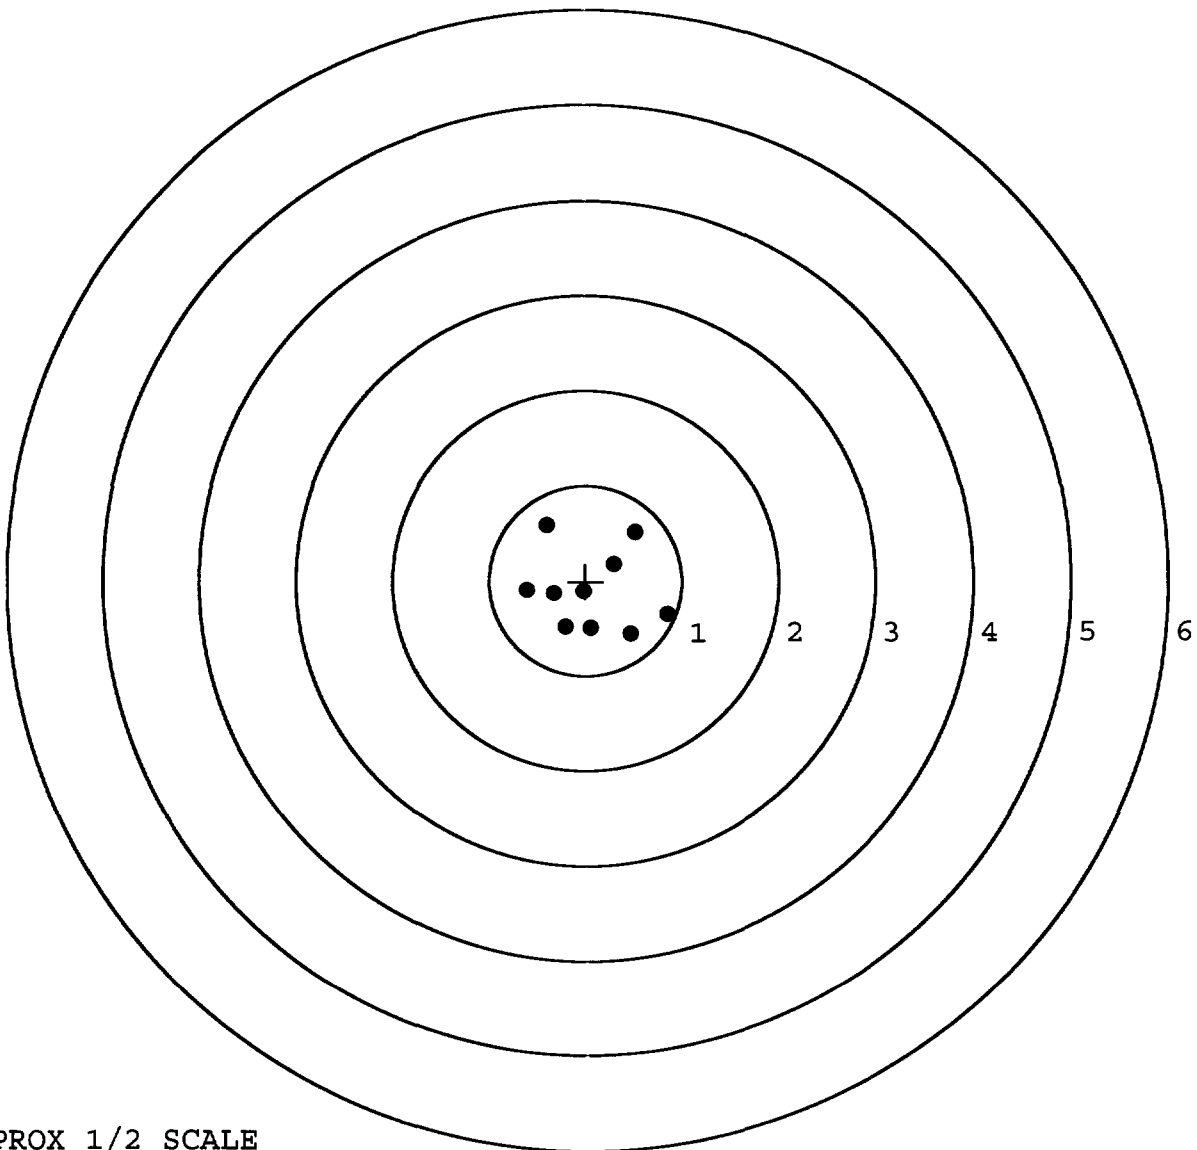

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. _____

DATE 12-17-02

TESTER TRW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.50	2.55		2.53	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT ABLE LESS THAN
PULL #2	2.43	2.35		2.46	
PULL #3	2.52	2.34		2.44	
PULL #4	2.53	2.30		2.48	
PULL #5	2.48	2.26		2.46	
TOTAL	12.46	11.80		12.37	
AVG.	2.49	2.36		2.47	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.46	3.20		
PULL #2	3.40	3.19		
PULL #3	3.01	3.41		
PULL #4	3.16	3.37		
PULL #5	3.19	3.36		
TOTAL	16.22	16.53		
AVG.	3.24	3.30		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# .50 TARGET & ACCUR
PULL #1	4.04	4.21		4.36
PULL #2	4.15	4.07		4.39
PULL #3	4.08	4.37		4.12
PULL #4	4.01	4.28		4.26
PULL #5	4.08	4.38		4.43
TOTAL	20.36	21.31		21.56
AVG.	4.07	4.26		4.31

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	63304		
SERIAL NUMBER	C6594631		
LOG-IN DATE	3-25-03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	3-27-03	RTL
560 A	RE-BARREL	3-27-03	RTL
B	DRILL AND TAP	3-28-03	RTL
575	ASSEMBLE	3-28-03	RTL
600	PROOF	3-28-03	RTL
605	CHECK HEADSPACE	3-28-03	RTL
610	DIS-ASSEMBLE GUN	3-28-03	RTL
612	MAGNAFLUX OPERATOR		
615	ROLLMARK CALIBER	3-28-03	RTL
618	ROTO-BLAST	3-31-03	JAB
620	APPLY COATINGS	4-4	TA
625 A	FINAL ASSEMBLY	04-07-03	RTL
B	TRIGGER PULL TEST	4-8-03	TRW
C	SAFETY "ON" FORCE 8.0, 7.5, 8.0	4-8-03	TRW
D	SAFETY "OFF" FORCE 3.5, 3.5, 3.5	4-8-03	TRW
E	FIRING PIN INDENT. 0.022 ⁵ , 0.022 ⁵ , 0.021 ⁵	4-8-03	TRW
640	TARGET	4-8-03	AC
655	FINAL INSPECT	04-09-03	RTL
660	PACK	4-9-03	10A
		SHIP DATE	
QAR INSPECTION DATE			

Remington®		DU PONT REG. U.S. PAT. & TM. OFF.	VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.
MODEL 700™ H24		SERIAL NO. C6594631	
MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.		ORDER NO. 5716	
 5716 C6594631			

UPC



0 47700 25716 7

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6594631
16 May 1991

CENTROIDAL DISTANCES

0 TO	1	.306438
1 TO	2	.199672
1 TO	3	.217348
1 TO	4	.577914
1 TO	5	.406553


5.4
12 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0584
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.033
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0670728
THE AMR FOR THIS RIFLE IS: 1.075

16 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594631

CENTERFIRE PATTERNS # 1

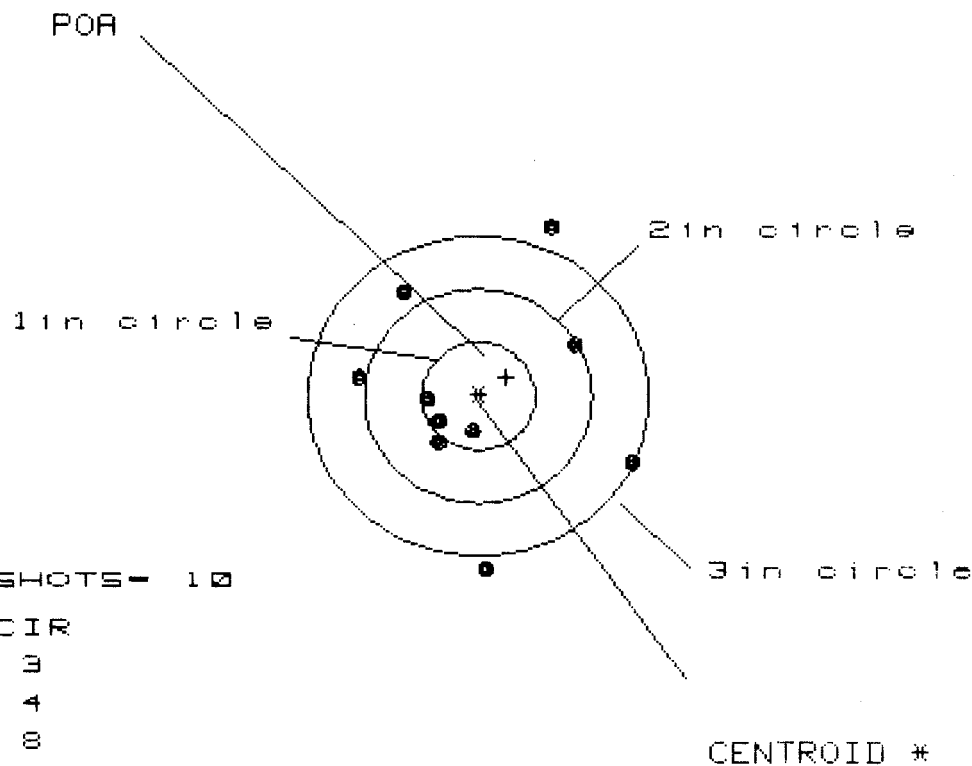

OF SHOTS- 10

IN CIR

1in - 3

2in - 4

3in - 8

HS- 2.402

VS= 3.154


GS= 3.207

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.340	1.407	1.419
MINIMUM X	:	-1.062	-.995	-.983
MAXIMUM Y	:	1.578	1.128	.953
MINIMUM Y	:	-1.576	-1.400	-.577
CENTROID X	:	-.248	-.315	-.327
CENTROID Y	:	-.180	-.356	-.181
POA TO CENTROID in.	:	.307	.475	.374
MIN RADIUS	:	.358	.183	.325
MEAN RADIUS	:	.969	.841	.782
MAX RADIUS	:	1.691	1.464	1.532
HORIZONTAL SPREAD	:	2.402	2.402	2.402
VERTICAL SPREAD	:	3.154	2.528	1.530
EXTREME SPREAD	:	3.207	2.613	2.509
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

16 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594631

CENTERFIRE PATTERNS # 2

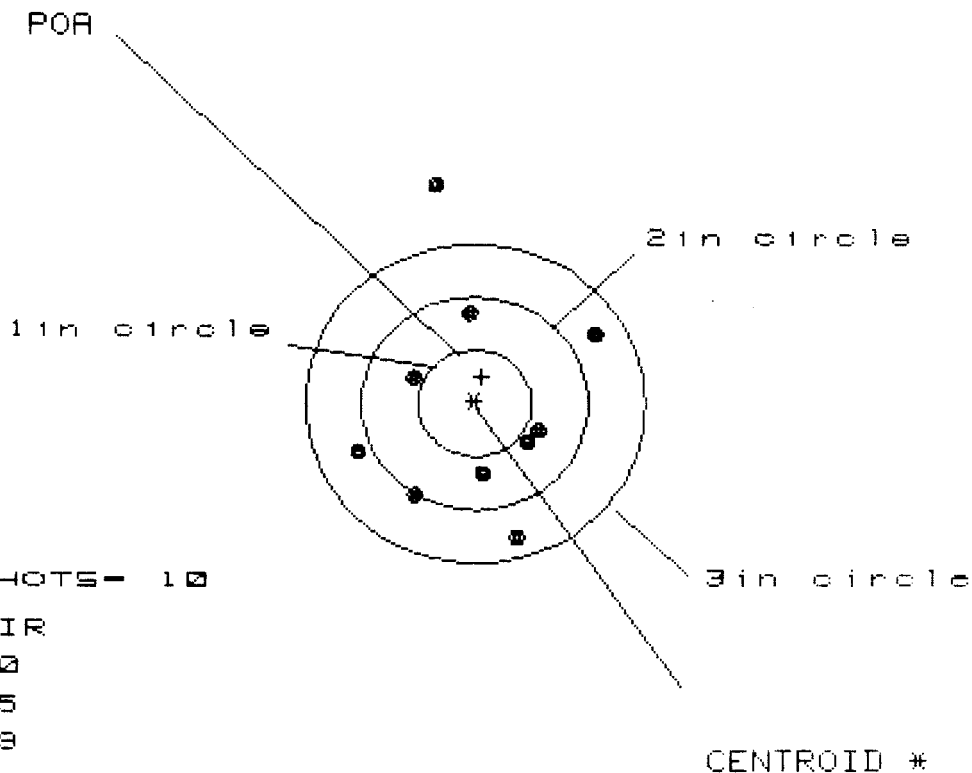

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 5

3 in = 9

HS= 2.114

VS= 3.300

GS= 3.358


CENTROID #

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.092	1.058	.673
MINIMUM X	:	-1.022	-1.056	-.923
MAXIMUM Y	:	2.055	1.043	1.157
MINIMUM Y	:	-1.245	-1.017	-.903
CENTROID X	:	-.061	-.027	-.159
CENTROID Y	:	-.250	-.478	-.592
POA TO CENTROID in.	:	.257	.479	.613
MIN RADIUS	:	.551	.405	.317
MEAN RADIUS	:	1.005	.843	.760
MAX RADIUS	:	2.078	1.398	1.160
HORIZONTAL SPREAD	:	2.114	2.114	1.597
VERTICAL SPREAD	:	3.300	2.060	2.060
EXTREME SPREAD	:	3.358	2.405	2.087
NUMBER IN ONE INCH CIRCLE	=	0	5	9
NUMBER IN TWO INCH CIRCLE	=	5	9	
NUMBER IN THREE INCH CIRCLE	=	9		

16 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594631

CENTERFIRE PATTERNS # 3

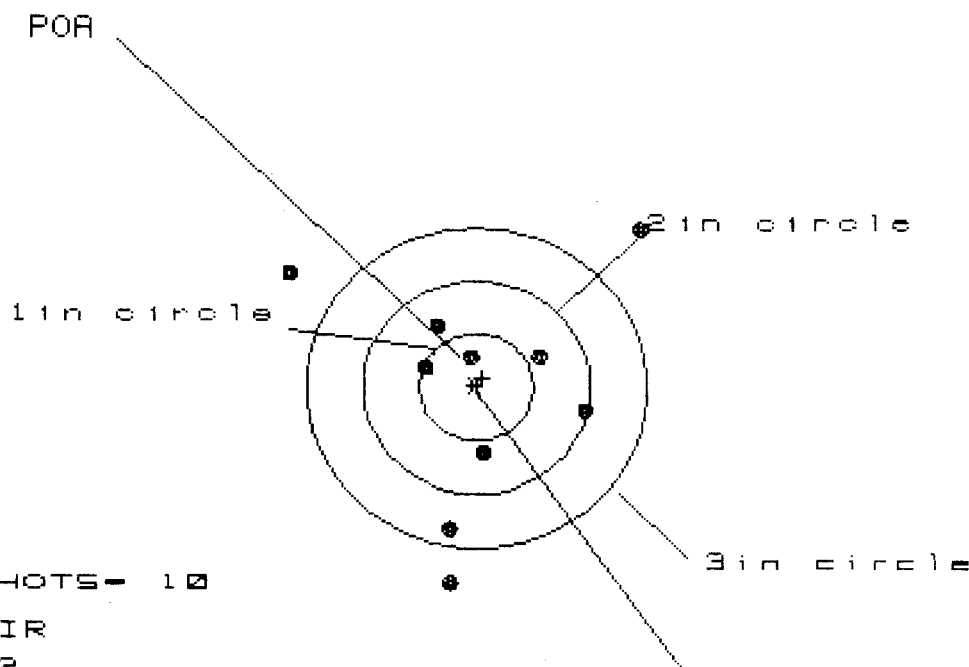

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 6

3 in = 7

HS = 3.122

VS = 3.319

GS = 3.737


CENTROID #

PATTERN #	:			
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.472	1.097	.911
MINIMUM X	:	-1.650	-1.487	-.455
MAXIMUM Y	:	1.521	1.257	.899
MINIMUM Y	:	-1.798	-1.629	-1.471
CENTROID X	:	-.054	-.217	-.032
CENTROID Y	:	-.082	-.251	-.409
POA TO CENTROID in.	:	.098	.332	.410
MIN RADIUS	:	.309	.462	.274
MEAN RADIUS	:	1.091	.985	.856
MAX RADIUS	:	2.117	1.947	1.495
HORIZONTAL SPREAD	:	3.122	2.584	1.366
VERTICAL SPREAD	:	3.319	2.886	2.370
EXTREME SPREAD	:	3.737	3.210	2.373
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		7	

16 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8594631

CENTERFIRE PATTERNS # 4

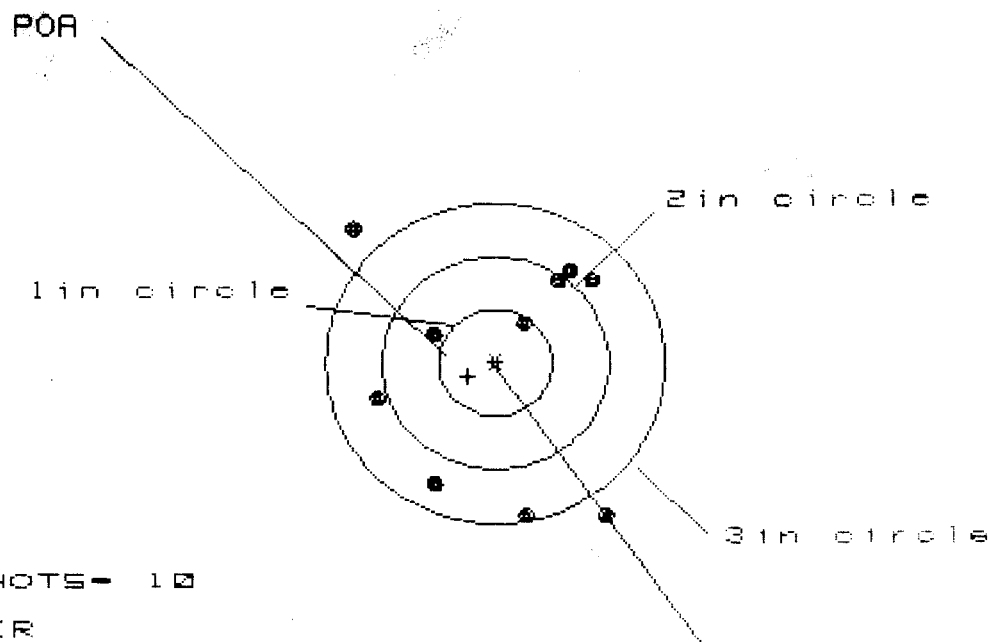

OF SHOTS- 10

IN CIR

1in - 1

2in - 3

3in - 8

HS- 2.175

VS- 2.729

GS- 3.437


CENTROID #

PATTERN #	:	4	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.912	.772	.783
MINIMUM X	:	-1.263	-1.219	-1.123
MAXIMUM Y	:	1.253	1.054	.896
MINIMUM Y	:	-1.476	-1.337	-1.495
CENTROID X	:	.241	.381	.285
CENTROID Y	:	.128	-.011	.147
POA TO CENTROID in.	:	.273	.381	.320
MIN RADIUS	:	.439	.517	.400
MEAN RADIUS	:	1.168	1.109	1.023
MAX RADIUS	:	1.779	1.485	1.508
HORIZONTAL SPREAD	:	2.175	1.991	1.906
VERTICAL SPREAD	:	2.729	2.391	2.391
EXTREME SPREAD	:	3.437	2.432	2.432
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	3		
NUMBER IN THREE INCH CIRCLE	=	8		

16 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8594631

CENTERFIRE PATTERNS # 5

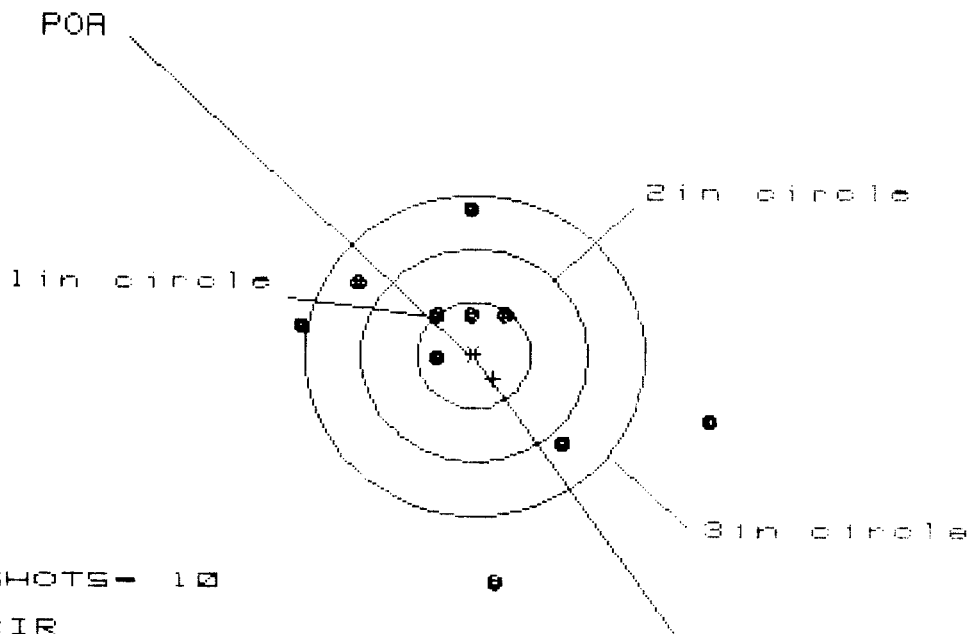

OF SHOTS - 10

IN CIR

1 in = 3

2 in = 4

3 in = 7

HS= 3.629

VS= 3.458

GS= 3.761

CENTROID *

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	2.107	.973	1.023
MINIMUM X	:	-1.522	-1.288	-1.338
MAXIMUM Y	:	1.369	1.295	1.625
MINIMUM Y	:	-2.089	-2.163	-1.212
CENTROID X	:	-.170	-.404	-.454
CENTROID Y	:	.219	.293	.563
POA TO CENTROID in.	:	.277	.499	.723
MIN RADIUS	:	.362	.158	.090
MEAN RADIUS	:	1.140	.968	.752
MAX RADIUS	:	2.210	2.199	1.586
HORIZONTAL SPREAD	:	3.629	2.261	2.261
VERTICAL SPREAD	:	3.458	3.458	2.237
EXTREME SPREAD	:	3.761	3.461	2.555
NUMBER IN ONE INCH CIRCLE =			3	
NUMBER IN TWO INCH CIRCLE =			4	
NUMBER IN THREE INCH CIRCLE =			7	

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6594631

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	3 25 91		RW
600	Proof	3 25 91		RW
607	Check Headspace	3 25 91		RW
610	Dis-assemble Gun	3 25 91		RW
612	Magnaflux Barrel Action	3 28 91		KR
	Magnaflux Bolt	3 28 91		4
615	Rollmark Caliber	3 28 91		28
617	Drill and Tap Sight Holes	APR	3 1991	LB
618	Polish Barrel	APR	3 1991	WB
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		4/16/91	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/16/91	RW
	C) Inspect Ejector Hole for Chamfer		4/16/91	RW
	D) Oil Firing Pin Ass'y		4/16/91	RW
	E) Adjust Trigger Pull to Min Setting and Stake		5-14-91	21

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			5-14-91	JH
	G) Safety Off Force	4	4	4			5-14-91	JH
	H) Trigger Pull Test & Retainability						5-14-91	JH
	I) Firing Pin Indent	.021	.022	.022			5-14-91	JH
	J) Assemble Stock						5/16/91	RW
	K) Assemble Swivel Studs						5-20-91	DH
	L) Attach Front and Rear Sight Assemblies						5/16/91	RW
	M) Iron Sight Alignment						5/16/91	RW
	N) Detach Front & Rear Sights & place in numbered container						5/16/91	RW
	O) Attach Scope to Rifle						5/16/91	RW
	P) Detach & Attach Scope 20 Times						5/16/91	RW
640	Gallery Target & Test						5/16/91	KT
	A) Time							KT
	B) Malfunctions							KT
	C) Pierced Primers							KT
	D) Optical Clarity of Scope							KT
645	Inspect for Live Ammo						5/16/91	KT
655	Final Inspection							
	A) Headspace						5-20-91	DH
	B) Trigger Pull	2.15	2.26	2.20	2.16	2.8	6/20/91	JH
	C) Function						5-20-91	DH
660	Pack						6-18-91	NF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C-6594631

DATE 5-14-91

TESTER JY

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.46	2.50	2.49	2.15	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.48	2.58	2.46	2.26	
PULL #3	2.54	2.54	2.54	2.20	
PULL #4	2.52	2.40	2.55	2.16	
PULL #5	2.59	2.58	2.46	2.18	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.21	3.43		
PULL #2	3.22	3.46		
PULL #3	3.19	3.18		
PULL #4	3.42	3.35		
PULL #5	3.46	3.42		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.24	4.45		4.53
PULL #2	4.49	4.50		4.53
PULL #3	4.49	4.29		4.49
PULL #4	4.49	4.50		4.57
PULL #5	4.58	4.42		4.52
TOTAL				
AVG.				

G-88

DON'T SAY IT - WRITE IT

To: _____

From: _____

C6594631

*W/ Scope, Scope Rings, Base,
Swivels & Swivel Studs.*

"THINK SAFETY AHEAD, DON'T BE MISLED, ACCI

[illegible]

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6594631
17 Nov 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0542
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0978
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .111814

THE AMR FOR THIS RIFLE IS: 1.178

CENTROIDAL DISTANCES

0	TO	1	.187446
1	TO	2	.575314
1	TO	3	.162265
1	TO	4	.232002
1	TO	5	.078492

4 5¹₃₊ 2 <----POA

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .187
 MIN RADIUS : .444
 MEAN RADIUS : 1.208
 MAX RADIUS : 1.779
 CENTROID X : -.120
 CENTROID Y : .144

17 Nov 1998

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/C6594631

CENTERFIRE PATTERN # 1

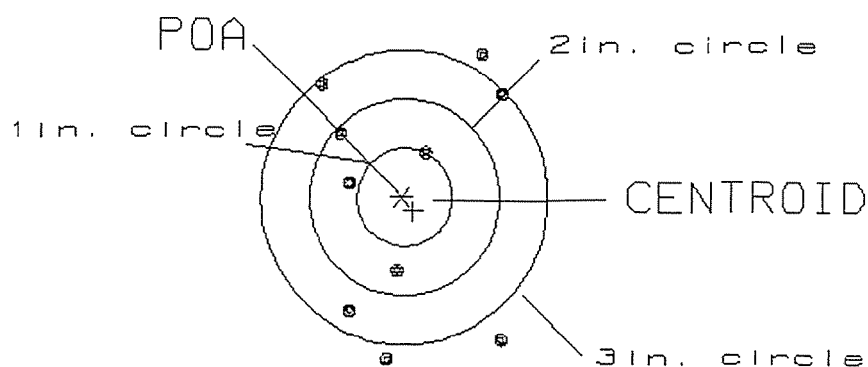

OF SHOTS= 10

IN CIRCLE

HS= 1.93
 VS= 3.12
 GS= 3.26

1
 4
 7

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .471

MIN RADIUS : .398

MEAN RADIUS : 1.090

MAX RADIUS : 2.275


CENTROID X : .455

CENTROID Y : .125

17 Nov 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594631

CENTERFIRE PATTERN # 2

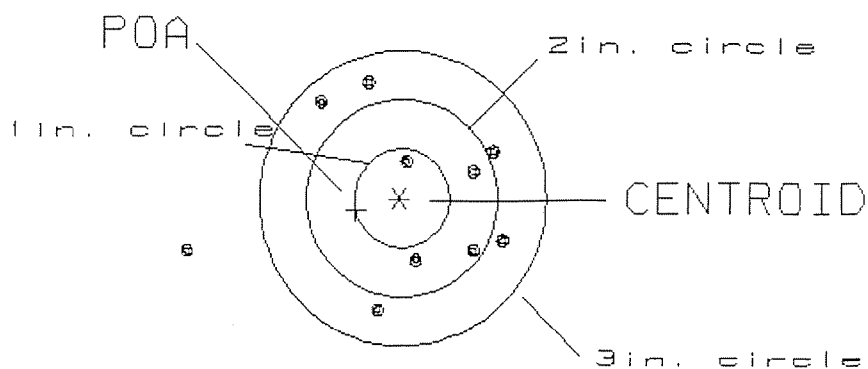

OF SHOTS= 10

IN CIRCLE

HS= 3.21

1

VS= 2.30

4

GS= 3.31

9

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 030

POA TO CENTROID: .080

MIN RADIUS : .660

MEAN RADIUS : 1.319

MAX RADIUS : 2.334


CENTROID X : -.079

CENTROID Y : -.013

17 Nov 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594631

CENTERFIRE PATTERN # 3

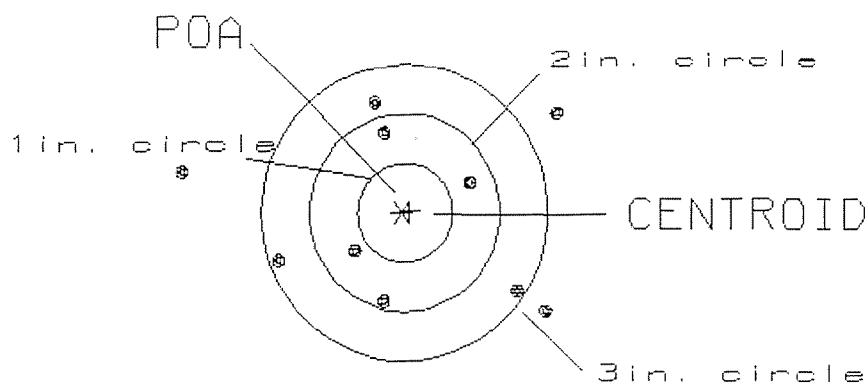

OF SHOTS= 10

IN CIRCLE

HS= 3.88

0

VS= 2.05

4

GS= 4.04

7

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 4

POA TO CENTROID: .381
 MIN RADIUS : .888
 MEAN RADIUS : 1.407
 MAX RADIUS : 2.220
 CENTROID X : -.352
 CENTROID Y : .145

17 Nov 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594631

CENTERFIRE PATTERN # 4

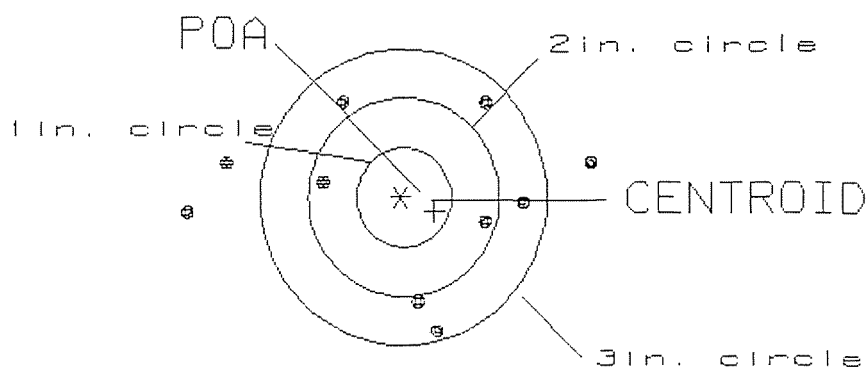

OF SHOTS= 10

IN CIRCLE

HS= 4.15

0

VS= 2.32

2

GS= 4.18

7

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 5 ☐

POA TO CENTROID: .196
 MIN RADIUS : .246
 MEAN RADIUS : .866
 MAX RADIUS : 2.219
 CENTROID X : -.175
 CENTROID Y : .088

17 Nov 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594631

CENTERFIRE PATTERN # 5

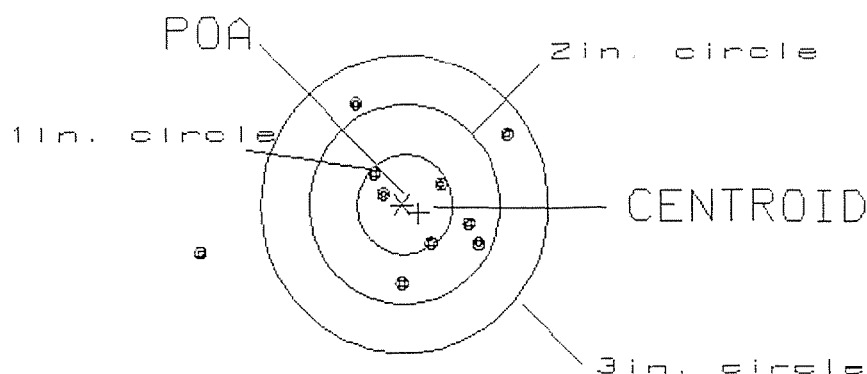

OF SHOTS= 10

IN CIRCLE

HS= 3.26

4

VS= 1.84

7

GS= 3.48

9