

C663B346

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington




VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.


MODEL 700TM H24

SERIAL NO.
C6636346

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

ORDER NO.
5716

UPC



0 47700 25716 7




5716 C6636346

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6636346

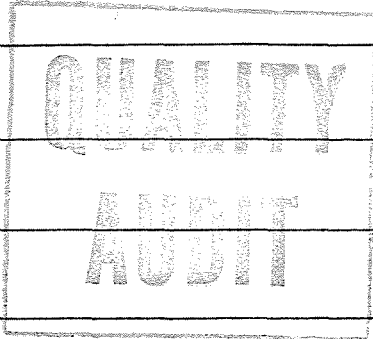OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		6/25/91	KA
600	Proof		6/25/91	KA
607	Check Headspace		6/25/91	KA
610	Dis-assemble Gun		6/25/91	KA
612	Magnaflux Barrel Action	JUL	1 1991	KR
	Magnaflux Bolt	JUL	1 1991	KR
615	Rollmark Caliber	JUL	1 1991	LS
617	Drill and Tap Sight Holes	JUL	1 1991	LS
618	Polish Barrel	JUL	2 1991	WB
620	Apply Coatings (Barrel Action)		7-23-91	SA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		8/1/91	KA
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/1/91	KA
	C) Inspect Ejector Hole for Chamfer		8/1/91	KA
	D) Oil Firing Pin Ass'y		8/1/91	KA
	E) Adjust Trigger Pull to Min Setting and Stake		8-3-91	KA

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	6			8-6-91	DH
	G) Safety Off Force	3	3	3			8-6-91	DA
	H) Trigger Pull Test & Retainability						8-5-91	SH
	I) Firing Pin Indent	.020	.020	.020			8-6-91	DH
	J) Assemble Stock						8/8/91	KA
	K) Assemble Swivel Studs						8/8-91	D/H
	L) Attach Front and Rear Sight Assemblies						8/8/91	KA
	M) Iron Sight Alignment						8/8/91	KA
	N) Detach Front & Rear Sights & place in numbered container						8/8/91	KA
	O) Attach Scope to Rifle						8/8/91	KA
	P) Detach & Attach Scope 20 Times						8/8/91	KA
640	Gallery Target & Test						8-8-91	N
	A) Time						"	N
	B) Malfunctions						"	N
	C) Pierced Primers						"	N
	D) Optical Clarity of Scope						"	N
645	Inspect for Live Ammo						8-8-91	N
655	Final Inspection							
	A) Headspace						8-12-91	DH
	B) Trigger Pull	2.49	2.18	2.51	2.18	2.43	8-9-91	DL
	C) Function						8-12-91	DH
660	Pack						8-17-91	DH

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C-6636346

DATE 8-5-91

TESTER JEP

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.44	2.29	2.26	2.49	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.60	2.28	2.30	2.18	
PULL #3	2.62	2.30	2.24	2.51	
PULL #4	2.61	2.25	2.24	2.18	
PULL #5	2.46	2.24	2.28	2.43	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.49	3.55		
PULL #2	3.57	3.55		
PULL #3	3.62	3.60		
PULL #4	3.35	3.44		
PULL #5	3.49	3.53		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.23	4.52		4.30
PULL #2	4.56	4.44		4.51
PULL #3	4.59	4.58		4.55
PULL #4	4.45	4.59		4.48
PULL #5	4.31	4.52		4.53
TOTAL				
AVG.				

WIND CALCULATIONS

WIND 0.536346

1001

WIND DISTANCES

1	.047955
2	.454757
3	.275182
4	.641038
5	.631064


2¹⁴ <----POR

COORDINATE OF THIS RIFLE IS: -1.0072
 COORDINATE OF THIS RIFLE IS: .0236
 WIND RADIUS FOR THIS RIFLE IS: .0246759

WIND RADIUS FOR THIS RIFLE IS: 1.004

000; PATTERNING/CENTERFIRE_PATT/C6636346

WIRE PATTERNS # 1

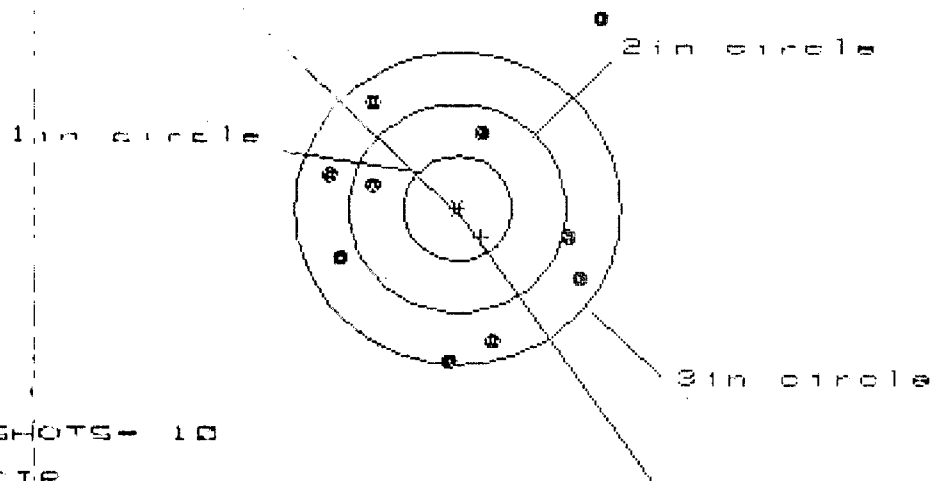

OF SHOTS- 10
 # IN CIR
 1in - 0
 2in - 2
 3in - 9
 MEAN X = 2.517
 MEAN Y = 3.276
 MEAN R = 3.567


CENTROID *

PATTERN #	:	010	011	012
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.309	1.256	1.261
MINIMUM X	:	-1.208	-1.063	-1.058
MAXIMUM Y	:	1.796	1.201	1.041
MINIMUM Y	:	-1.480	-1.281	-1.255
CENTROID X	:	-.217	-.362	-.367
CENTROID Y	:	.272	.073	.233
POP TO CENTROID in.	:	.348	.369	.435
MIN RADIUS	:	.796	.764	.677
MEAN RADIUS	:	1.260	1.134	1.097
MAX RADIUS	:	2.222	1.351	1.422
HORIZONTAL SPREAD	:	2.517	2.319	2.319
VERTICAL SPREAD	:	3.276	2.482	2.296
MEAN SPREAD	:	3.567	2.562	2.530
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		2	
NUMBER IN THREE INCH CIRCLE	=		9	

FILE: PATTERNING/CENTERFIRE_PATT/C6636346

CENTERFIRE PATTERNS # 3

POH

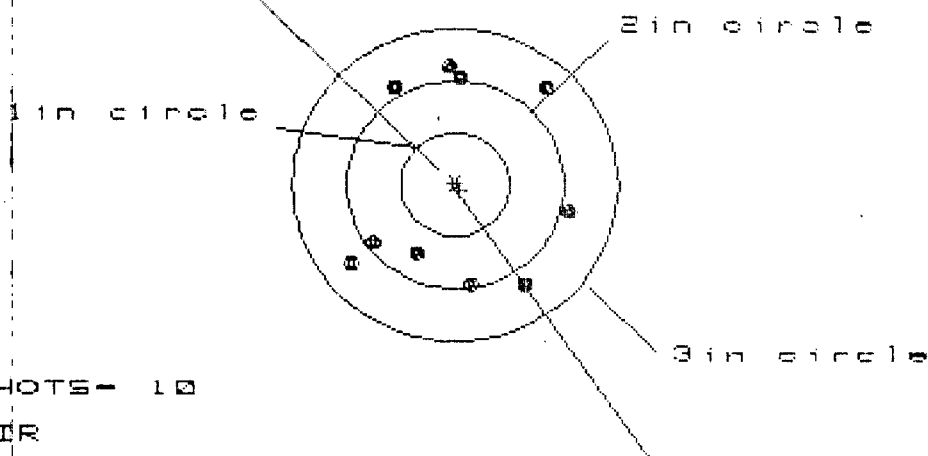

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 3

3 in = 10

HS= 2.013


VS= 2.043

GS= 2.484

CENTROID *

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.027	1.117	1.005
MINIMUM X	:	-.986	-.896	-.730
MAXIMUM Y	:	1.115	1.224	1.145
MINIMUM Y	:	-.928	-.819	-.898
CENTROID X	:	-.044	-.134	-.022
CENTROID Y	:	.058	-.051	.028
POA TO CENTROID in.	:	.073	.143	.036
MIN RADIUS	:	.708	.571	.692
MEAN RADIUS	:	1.044	.998	.990
MAX RADIUS	:	1.270	1.224	1.151
HORIZONTAL SPREAD	:	2.013	2.013	1.735
VERTICAL SPREAD	:	2.043	2.043	2.043
EXTREME SPREAD	:	2.484	2.209	2.209
NUMBER IN ONE INCH CIRCLE	=	0		
NUMBER IN TWO INCH CIRCLE	=	3		
NUMBER IN THREE INCH CIRCLE	=	10		

CENTERFIRE PATTERNS # 4

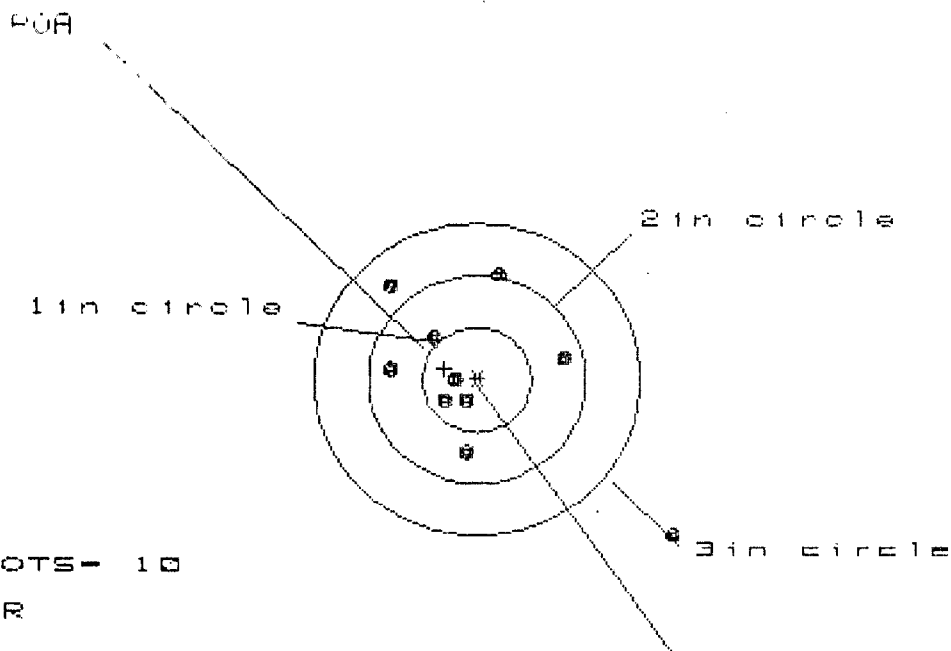

OF SHOTS - 10

IN CIR

1 in = 3

2 in = 8

3 in = 9


HS = 2.607

VS = 2.500

GS = 3.575

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.809	.968	.895
MINIMUM X	-.797	-.596	-.668
MAXIMUM Y	.975	.806	.902
MINIMUM Y	-1.525	-.880	-.784
CENTROID X	.300	.099	.171
CENTROID Y	-.107	.062	-.034
POA TO CENTROID in.	.319	.117	.175
MIN RADIUS	.228	.116	.094
MEAN RADIUS	.830	.612	.555
MAX RADIUS	2.366	.968	.950
HORIZONTAL SPREAD	2.607	1.564	1.564
VERTICAL SPREAD	2.500	1.686	1.686
EXTREME SPREAD	3.575	1.796	1.704
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	9		

CENTERFIRE PATTERNS # 5

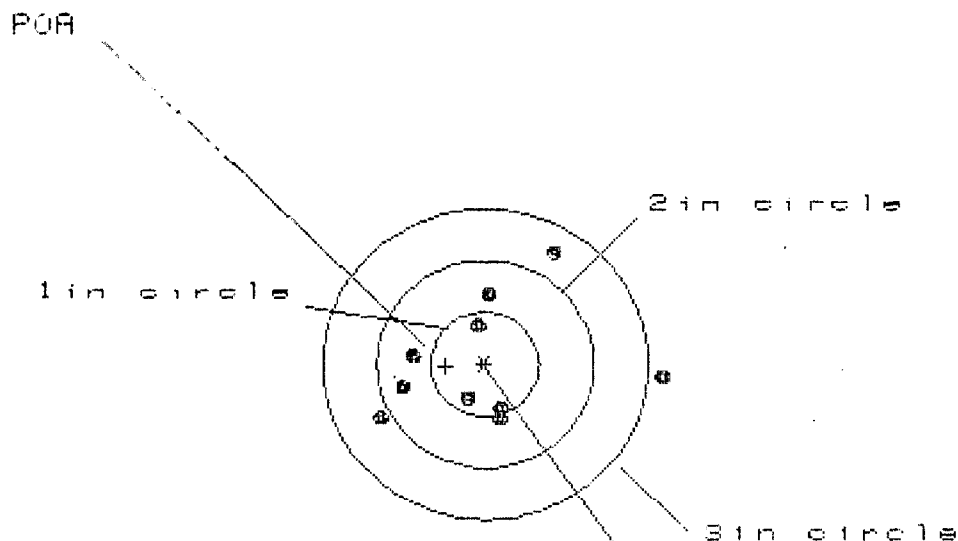

OF SHOTS - 10

IN CIR

1 in = 3

2 in = 7

3 in = 9

HS = 2.585

VS = 1.620


GS = 2.617

PATTERN #	15	16	17
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.646	.847	.415
MINIMUM X	-.939	-.756	-.650
MAXIMUM Y	1.065	1.049	.817
MINIMUM Y	-.555	-.571	-.440
CENTROID X	.362	.179	.073
CENTROID Y	.021	.037	-.094
POA TO CENTROID in.	.363	.183	.119
MIN RADIUS	.338	.319	.228
MEAN RADIUS	.782	.661	.549
MAX RADIUS	1.652	1.348	.885
HORIZONTAL SPREAD	2.585	1.603	1.065
VERTICAL SPREAD	1.620	1.620	1.257
EXTREME SPREAD	2.617	2.279	1.601
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

8 Aug 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6636346

CENTERFIRE PATTERNS # 2

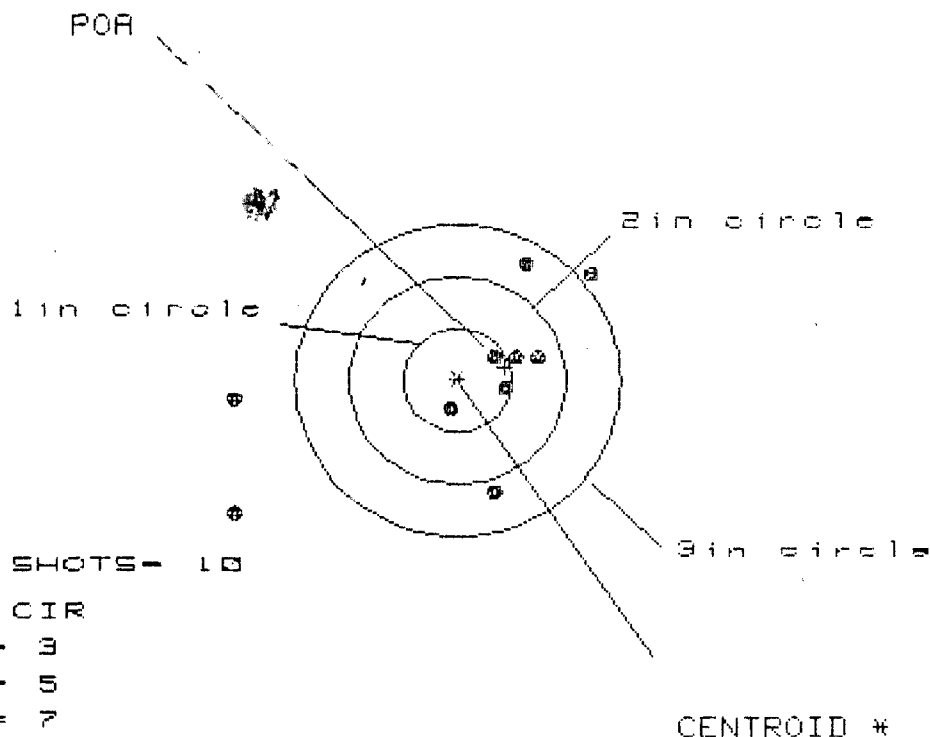

OF SHOTS- 10

IN CIR

1in = 3

2in = 5

3in = 7

HS= 3.369

VS= 2.344

GS= 4.055

CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.272	1.043	.752
MINIMUM X	:	-2.097	-2.326	-.615
MAXIMUM Y	:	1.112	.975	.933
MINIMUM Y	:	-1.232	-1.195	-1.237
CENTROID X	:	-.437	-.208	.083
CENTROID Y	:	-.126	.011	.053
POA TO CENTROID in.	:	.455	.208	.098
MIN RADIUS	:	.300	.168	.008
MEAN RADIUS	:	1.103	.862	.591
MAX RADIUS	:	2.404	2.350	1.252
HORIZONTAL SPREAD	:	3.369	3.369	1.367
VERTICAL SPREAD	:	2.344	2.170	2.170
EXTREME SPREAD	:	4.055	3.601	2.331
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		7	