

C6349087

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Serial
Number: C6349087

Model: 700



RE00057690

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6349087.___0
FILE DATE AND TIME: 01/16/2003 14:30

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.140
The Average Y Centroid of the Five Target Set:	-0.042
The Average Point of Impact of the Five Target Set:	0.146
The Average Mean Radius of the Five Target Set:	0.606
The Distance from POA to Centroid Target #1:	0.183
The Distance from Centroid Target #2 to Centroid Target #1:	0.090
The Distance from Centroid Target #3 to Centroid Target #1:	0.150
The Distance from Centroid Target #4 to Centroid Target #1:	0.052
The Distance from Centroid Target #5 to Centroid Target #1:	0.149

SERIAL NUMBER: C6349087. __0
TARGET NUMBER: 1
FILE DATE: 01/16/2003
FILE TIME: 14:30

X CENTROID: -0.160
Y CENTROID: -0.089
POA TO CENTROID: 0.183
HORZ SPREAD: 1.488
VERT SPREAD: 2.119
GROUP SPREAD: 2.282
MIN RADIUS: 0.087
MAX RADIUS: 1.297
MEAN RADIUS: 0.679
IN 1 IN DIAMETER: 9
IN 2 IN DIAMETER: 17
in 3 IN DIAMETER: 21

POINT#	X	Y
1:	0.181	0.367
2:	-0.087	0.404
3:	-0.442	-0.064
4:	-0.547	0.149
5:	-0.794	0.358
6:	-0.866	0.996
7:	-0.065	-1.091
8:	0.553	-0.779
9:	0.456	-0.639
10:	0.157	-0.305
11:	-0.095	-0.147
12:	0.125	0.330
13:	-0.130	0.371
14:	-0.387	-0.182

POINT#	X	Y
15:	-0.578	0.096
16:	-0.902	0.325
17:	-0.935	0.951
18:	0.099	-0.401
19:	0.546	-0.693
20:	0.409	-0.796
21:	-0.060	-1.123

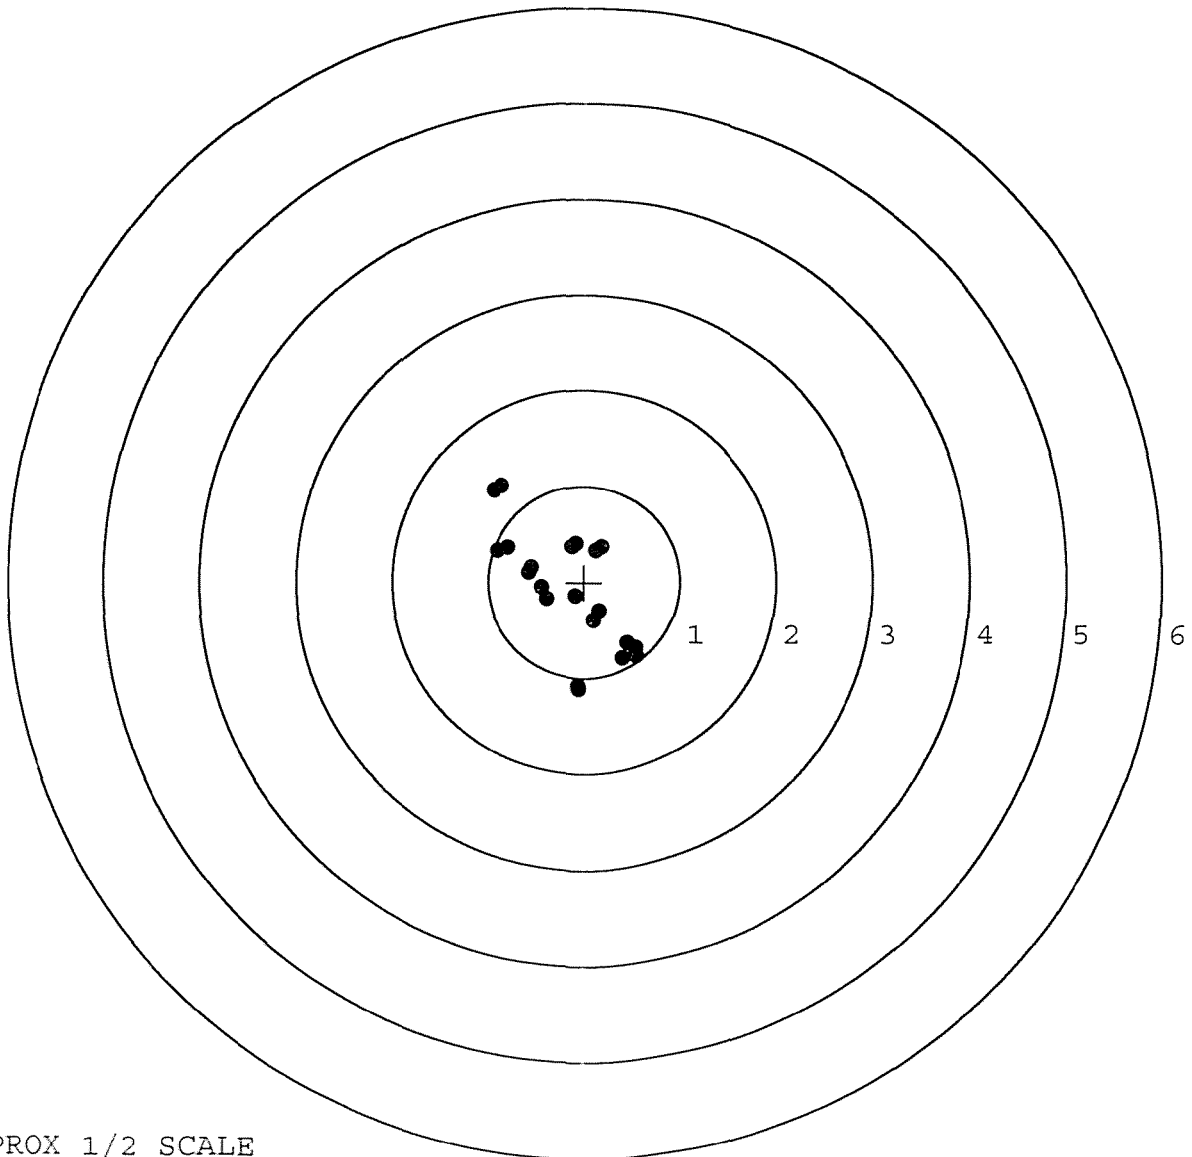


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349087. __0
TARGET NUMBER: 2
FILE DATE: 01/16/2003
FILE TIME: 14:30

X CENTROID: -0.083
Y CENTROID: -0.135
POA TO CENTROID: 0.158
HORZ SPREAD: 1.716
VERT SPREAD: 1.600
GROUP SPREAD: 2.141
MIN RADIUS: 0.204
MAX RADIUS: 1.163
MEAN RADIUS: 0.666
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.875	-0.898
2:	-1.158	-0.579
3:	-0.561	0.409
4:	-0.161	0.053
5:	0.136	-0.575
6:	0.286	-0.373
7:	0.235	0.069
8:	0.274	0.241
9:	0.558	0.702
10:	0.439	-0.401

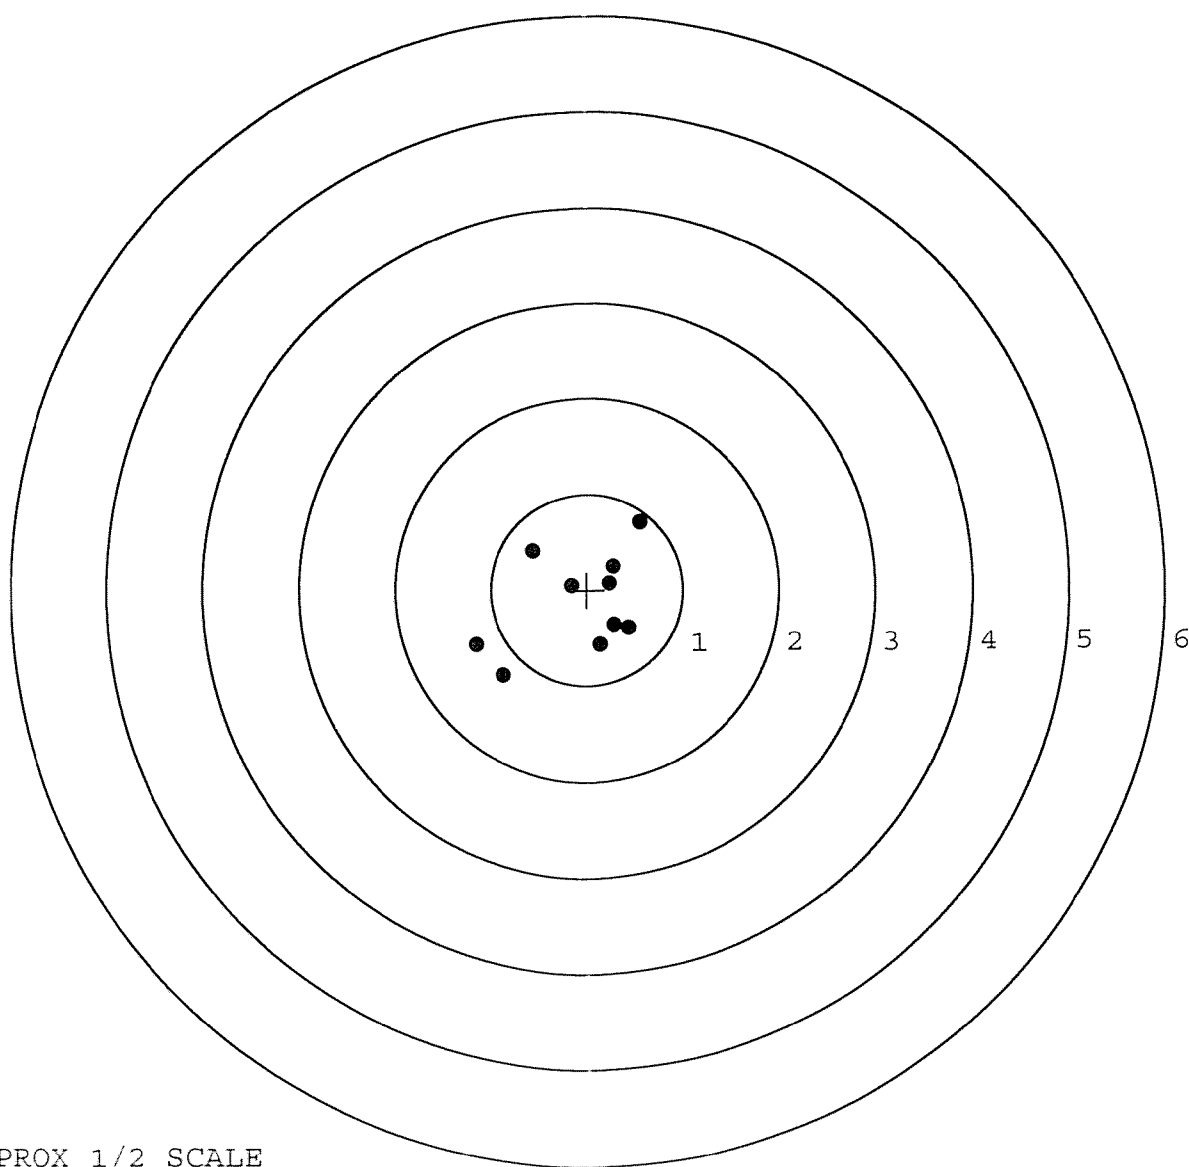


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349087. __0
TARGET NUMBER: 3
FILE DATE: 01/16/2003
FILE TIME: 14:30

POINT#	X	Y
1:	0.341	0.510
2:	-0.083	0.622
3:	-0.453	0.531
4:	-0.982	0.219
5:	-0.656	-0.548
6:	0.139	-0.439
7:	-0.227	-0.319
8:	-0.280	-0.038
9:	0.139	0.160
10:	0.390	-0.089

X CENTROID: -0.167
Y CENTROID: 0.061
POA TO CENTROID: 0.178
HORZ SPREAD: 1.372
VERT SPREAD: 1.170
GROUP SPREAD: 1.406
MIN RADIUS: 0.150
MAX RADIUS: 0.830
MEAN RADIUS: 0.543
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

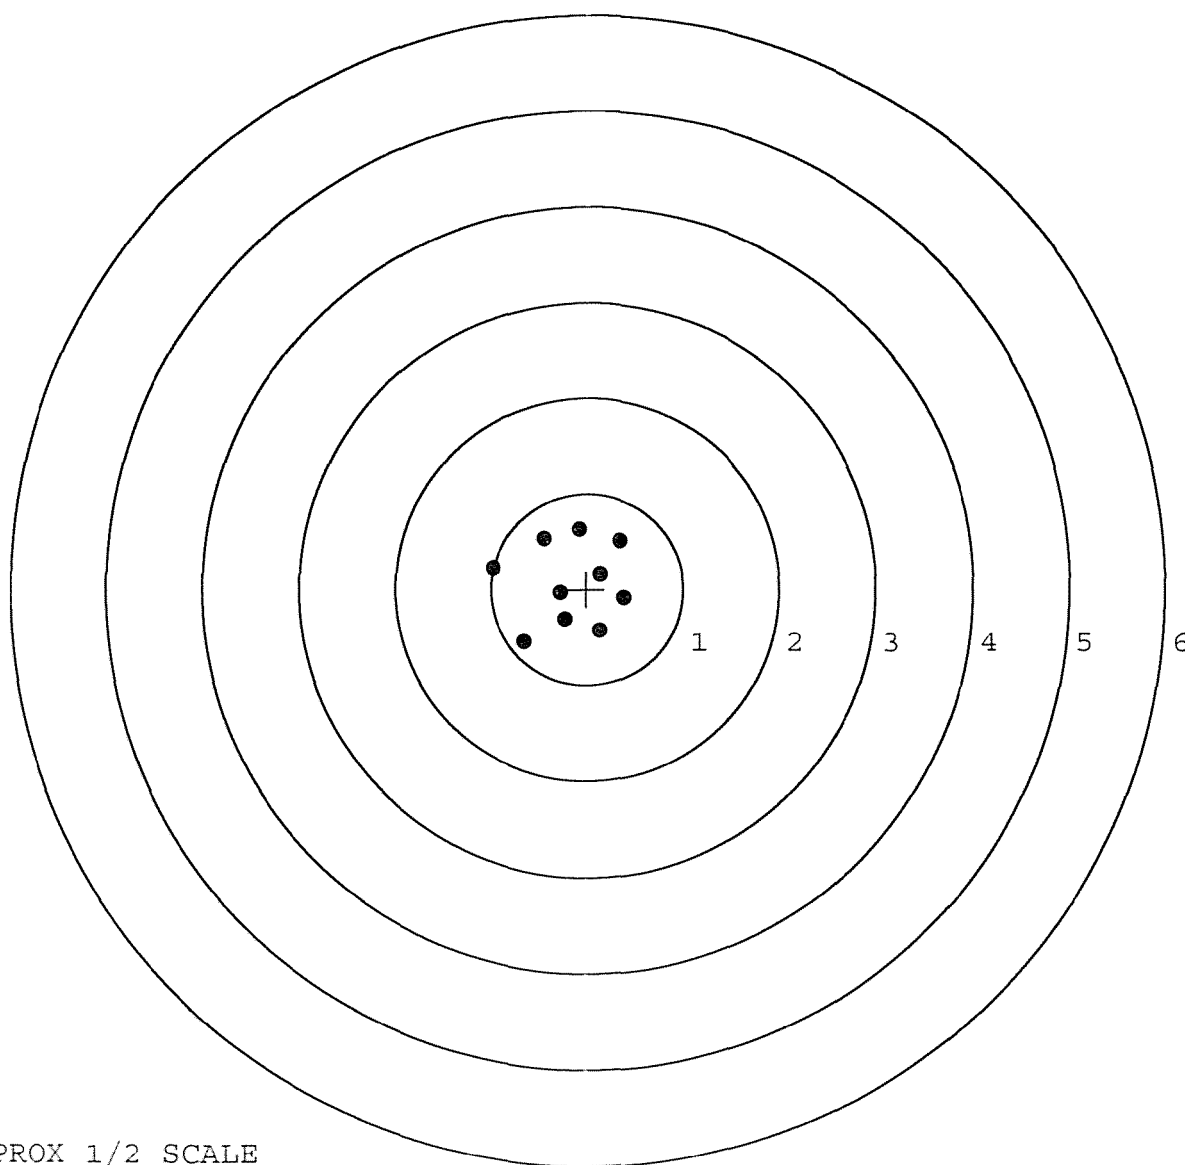


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349087. __0
TARGET NUMBER: 4
FILE DATE: 01/16/2003
FILE TIME: 14:30

X CENTROID: -0.110
Y CENTROID: -0.103
POA TO CENTROID: 0.151
HORZ SPREAD: 1.496
VERT SPREAD: 1.539
GROUP SPREAD: 1.648
MIN RADIUS: 0.236
MAX RADIUS: 0.947
MEAN RADIUS: 0.557
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.168	-0.846
2:	-0.309	-0.765
3:	-1.026	-0.127
4:	-0.294	-0.252
5:	0.017	-0.362
6:	0.182	-0.098
7:	-0.274	0.451
8:	0.470	0.118
9:	0.403	0.693
10:	-0.103	0.155

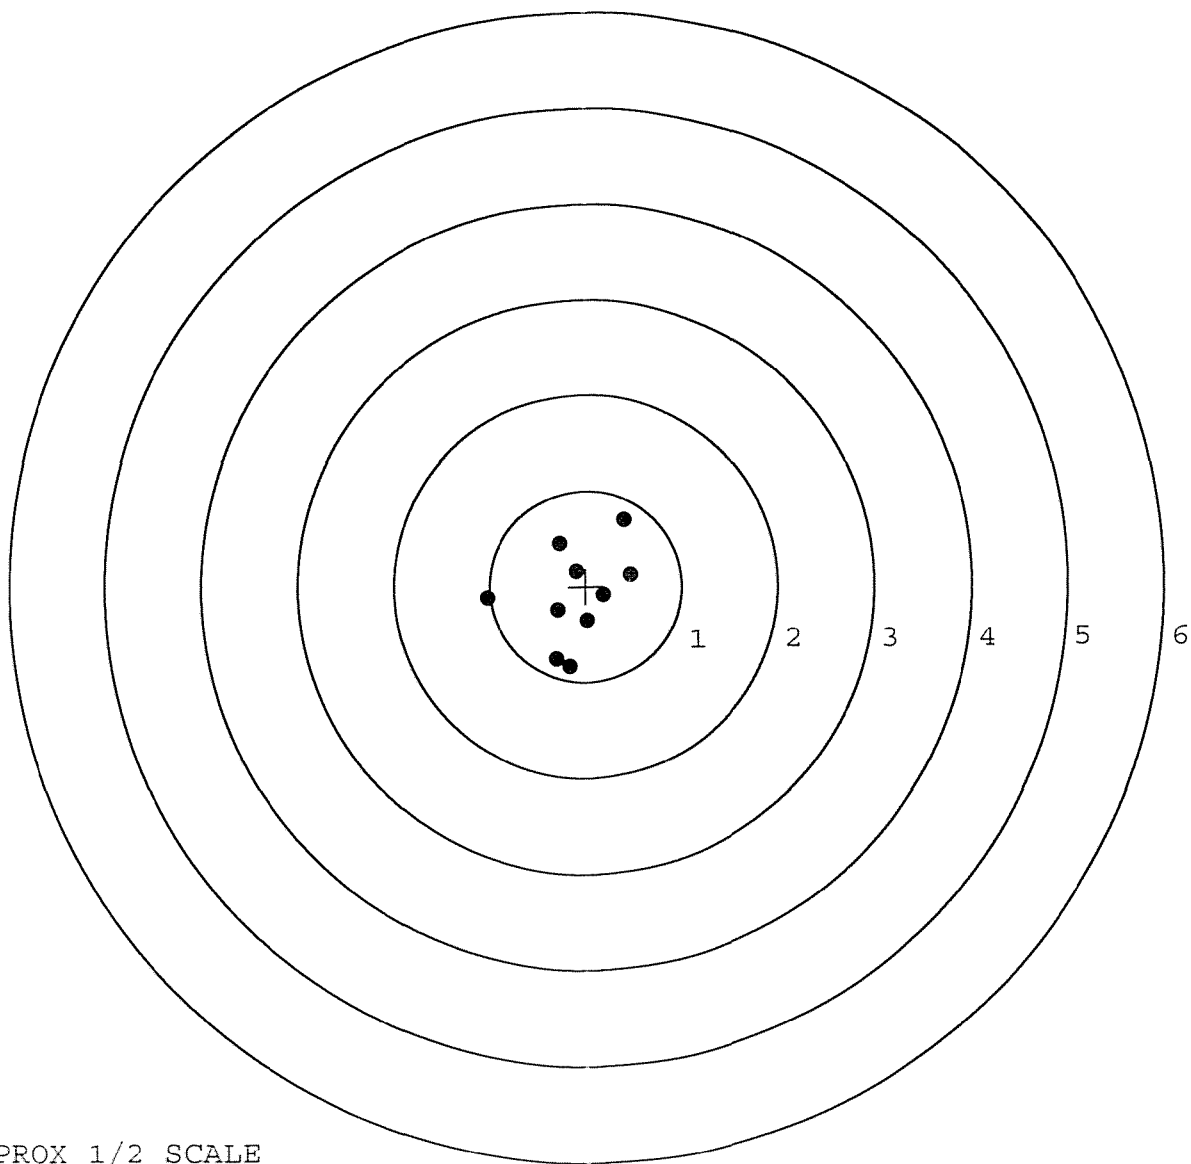


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349087. __0
TARGET NUMBER: 5
FILE DATE: 01/16/2003
FILE TIME: 14:30

POINT#	X	Y
1:	0.398	-0.728
2:	0.568	0.395
3:	0.141	-0.189
4:	0.026	1.011
5:	-0.581	0.452
6:	-0.538	0.266
7:	-0.559	0.115
8:	-0.554	-0.052
9:	-0.511	-0.313
10:	-0.166	-0.368

X CENTROID: -0.178
Y CENTROID: 0.059
POA TO CENTROID: 0.187
HORZ SPREAD: 1.149
VERT SPREAD: 1.739
GROUP SPREAD: 1.778
MIN RADIUS: 0.386
MAX RADIUS: 0.975
MEAN RADIUS: 0.585
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

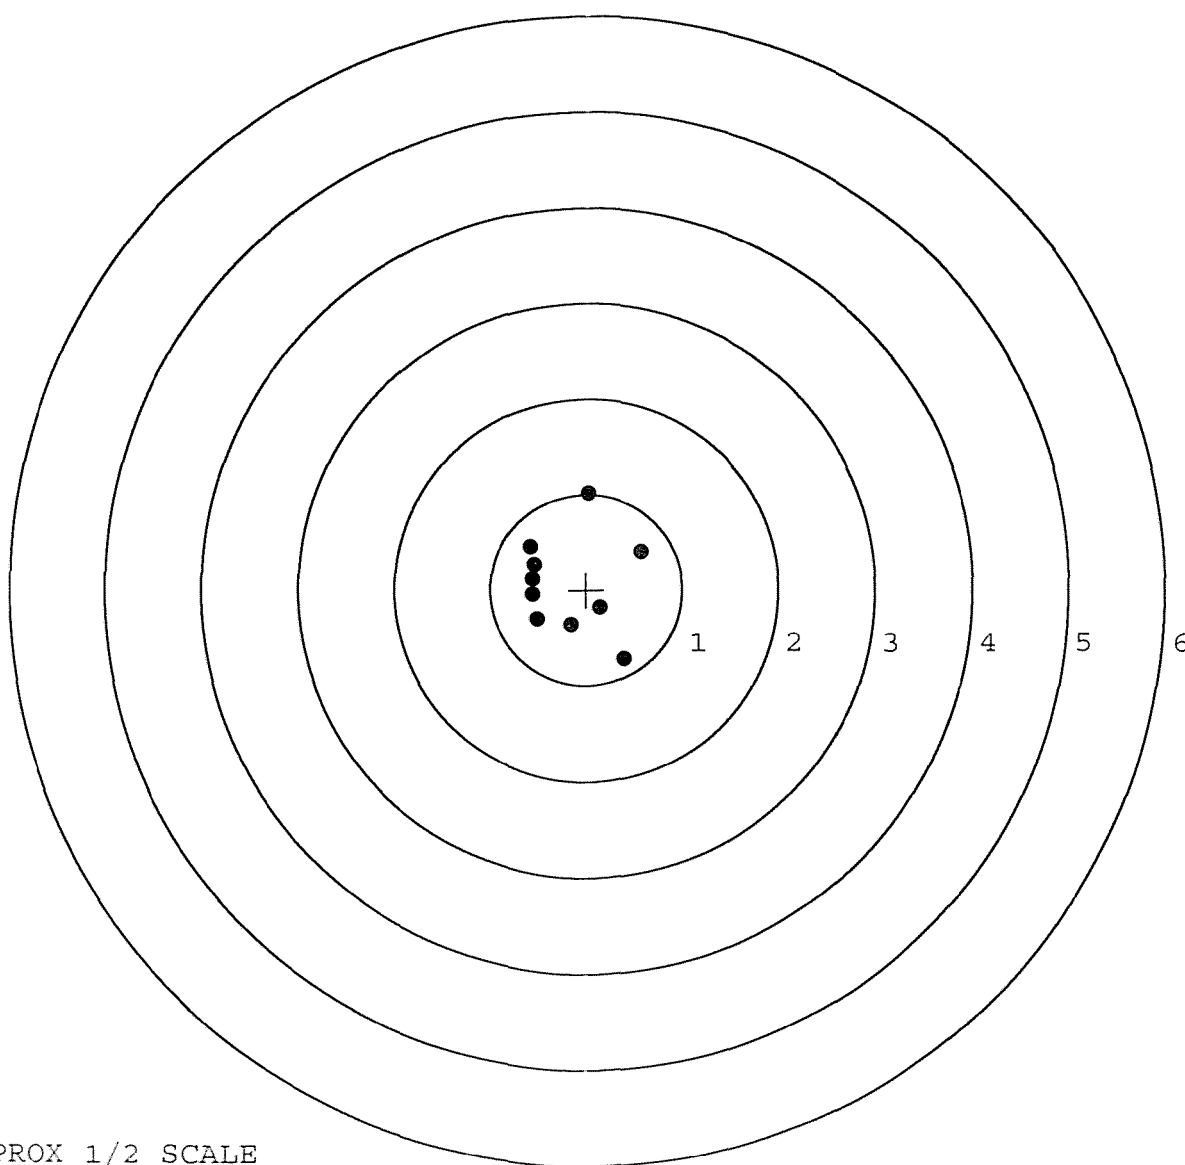

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER	57690		
SERIAL NUMBER	C6349087		
LOG-IN DATE	12-17-02		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	1-3-03	RTL
560 A	RE-BARREL	1-3-03	RA
B	DRILL AND TAP	1-7-03	TRW
575	ASSEMBLE	1-7-03	KL
600	PROOF	1-7-03	RW
605	CHECK HEADSPACE	1-7-03	RW
610	DIS-ASSEMBLE GUN	1-7-03	RW
612	MAGNAFLUX	1-8-03	LD
615	ROLLMARK CALIBER	1-7-03	RW
618	ROTO-BLAST	1-8-03	RL
620	APPLY COATINGS	1-10	TH
625 A	FINAL ASSEMBLY	1-14-03	RTL
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	1-15-03	TRW
655	FINAL INSPECT	1-16-03	RTL
660	PACK	1-16-03	RA
		SHIP DATE	
QAR INSPECTION DATE			

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG			PAGE NO /	NO OF PAGES /	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R7)
SECTION I - CUSTOMER DATA			SECTION II - MAINTENANCE ACTIVITY DATA		
1a. UIC CUSTOMER WDPRA1	1b. CUSTOMER UNIT NAME D. 172	1c. PHONE NO 384-0472	3a. WORK ORDER NUMBER (WON)	3b. SHOP	3c. PHONE NO
2a. SAMS-2 UIC/SAMS-I/TDA	2b. UTILIZATION CODE 0	2c. MCSR	4a. UIC SUPPORT UNIT	4b. SUPPORT UNIT NAME	
SECTION III - EQUIPMENT DATA					
5. TYPE MINT REQ CODE 1	6. ID A	7. NSN 100501124021361	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751		
8. MODEL M24			15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M K H R
9. NOUN 7.62 mm Sniper Weapon					
10a. ORG WON/DOC NO WDPRA1A2055571		10b. EIC WWV			
11. SERIAL NUMBER 16349087		12. QTY 1	13. PD 012	17. PROJECT CODE (if assigned)	18. ACCOUNT PROCESSING CODE
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			19. IN WARRANTY? (enter Y or N)		
			20. ADMIN NO		
			21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		
			22. LEVEL OF WORK		
			23. SIGNATURE		
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)					
Gunner states that the M24 has a "shot out barrel"					
25. REMARKS					
PREPARATION INSTRUCTIONS FOR THIS PAGE					
SECTION I			SECTION III (Cont'd)		
Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.			Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.		
SECTION II					
Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.					
SECTION III					
Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.					
34a. SUBMITTED BY [Signature]	35a. ACCEPTED BY	35c. DATE	Block 34a. Enter first initial and last name of submitter. Block 34b. Enter ordinal date submitted (YYDDD). Block 35a. Enter first initial and last name of person accepting maint. request. Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751. Block 35c. Enter ordinal date accepted (YYDDD). Block 35d. Enter military time.		
34b. DATE 012334	35b. STATUS	35d. TIME			

FINAL INSPECTION CHECKLIST M-24 REPAIRS
CONTRACT #: DAAE-20-02-D-0127

SERIAL # 06349087

INSPECTED BY: RTJ

DATE REC'D: 12-17-02

DATE RET'D: 1-16-03

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☐ SCOPE
☐ SCOPE RINGS
☐ MOUNTING SCREWS
☐ MOUNTING BASE
☐ SCREWS
☐ FINISH
☐ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☐ SCOPE CASE
☐ IRON SIGHTS
☐ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS:




VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.



MODEL 700™ H24

SERIAL NO.
C6349087

ORDER NO.
5716

Ø1

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

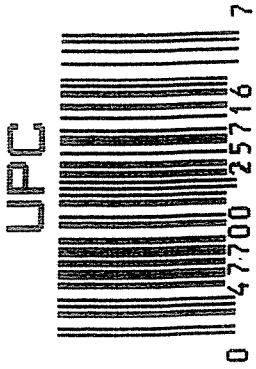

RC - 20
Replaced

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6349087

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		12-20 89	RW
600	Proof		12-20 89	✓
607	Check Headspace		12-20 89	✓
610	Dis-assemble Gun		12-20 89	RW
612	Magnaflux Barrel Action	1-5-90		KCR
	Magnaflux Bolt	1-5-90		
615	Rollmark Caliber		1/5/90	JS
617	Drill and Tap Sight Holes		1/8/90	LB
618	Polish Barrel RWB		1/9/90	W.B
620	Apply Coatings (Barrel Action)		1-15-90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		1/16/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		1/16/90	RW
	C) Inspect Ejector Hole for Chamfer		1/16/90	RW
	D) Oil Firing Pin Ass'y		1/16/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		25 Jan 90	JS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	6			1-26-90	JS
	G) Safety Off Force	3	3	3			1-26-90	JS
	H) Trigger Pull Test & Retainability						25/2/90	JS
	I) Firing Pin Indent	.022	.0225	.022			1-26-90	JS
	J) Assemble Stock						1/26/90	RW
	K) Assemble Swivel Studs						1/26/90	RW
	L) Attach Front and Rear Sight Assemblies						1/26/90	RW
	M) Iron Sight Alignment						1/26/90	RW
	N) Detach Front & Rear Sights & place in numbered container						1/26/90	RW
	O) Attach Scope to Rifle						2/27/90	WB
	P) Detach & Attach Scope 20 Times						2/27/90	WB
640	Gallery Target & Test						2/28/90	DH
	A) Time						2/28/90	DH
	B) Malfunctions						2/28/90	DH
	C) Pierced Primers						2/28/90	DH
	D) Optical Clarity of Scope						2/28/90	DH
645	Inspect for Live Ammo						2/28/90	DH
655	Final Inspection						3/13/90	WB
	A) Headspace							
	B) Trigger Pull	2.68	2.73	2.31	2.37	2.78	3/13/90	GS
	C) Function						3/13/90	WB
660	Pack						20/2/90	JS

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6349087
DATE 25 Jan 90
TESTER JDS

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.26	2.27	2.43	2.68	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.37	2.26	2.54	2.73	
PULL #3	2.21	2.32	2.42	2.31	
PULL #4	2.22	2.36	2.45	2.37	
PULL #5	2.32	2.36	2.29	2.78	
TOTAL	11.38	11.57	12.13		
AVG.	2.276	2.314	2.426		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.26	3.15		
PULL #2	3.14	3.18		
PULL #3	3.17	3.28		
PULL #4	3.16	3.21		
PULL #5	3.19	3.36		
TOTAL	15.92	16.24		
AVG.	3.184	3.248		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.05	3.89		3.90
PULL #2	4.16	4.02		3.86
PULL #3	4.02	4.15		3.95
PULL #4	4.12	4.09		3.89
PULL #5	4.05	4.02		3.91
TOTAL	20.40	20.17		19.51
AVG.	4.08	4.034		3.902

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6349087
28 Feb 1990

CENTROIDAL DISTANCES

0 TO	1	.849151
1 TO	2	.621055
1 TO	3	.517313
1 TO	4	.745076
1 TO	5	.822738

⁴
+3 1 <----POA
5


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .3802
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .021
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .38078

THE AMR FOR THIS RIFLE IS: .9532

28 Feb 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C8349067

CENTERFIRE PATTERNS # 1

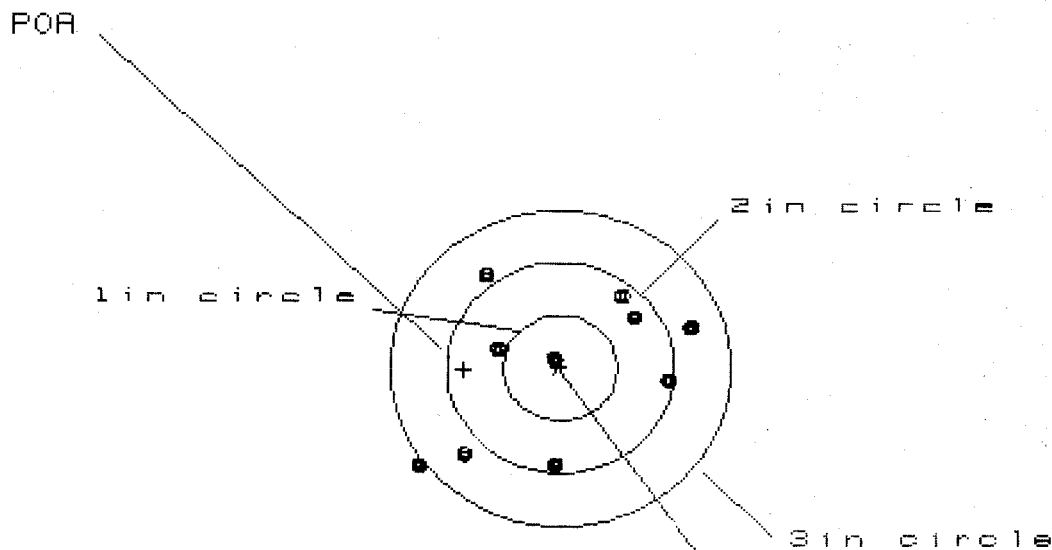

OF SHOTS- 10

IN CIR

1 in - 1

2 in - 6

3 in = 9

HS- 2.400

VS= 1.858

GS= 2.722

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.177	1.040	.959
MINIMUM X	:	-1.231	-1.001	-.871
MAXIMUM Y	:	.930	.830	.863
MINIMUM Y	:	-.928	-1.028	-.995
CENTROID X	:	.849	.986	.856
CENTROID Y	:	.016	.116	.083
POA TO CENTROID in.	:	.849	.993	.860
MIN RADIUS	:	.150	.224	.108
MEAN RADIUS	:	.938	.858	.818
MAX RADIUS	:	1.528	1.329	1.211
HORIZONTAL SPREAD	:	2.408	2.041	1.830
VERTICAL SPREAD	:	1.858	1.858	1.858
EXTREME SPREAD	:	2.722	2.337	2.048
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

26 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6349087

CENTERFIRE PATTERNS


2

POA

1in circle

2in circle

3in circle

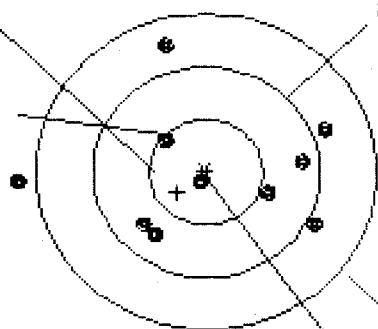

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 9

HS= 2.649

VS= 1.785

GS= 2.690


CENTROID #

PATTERN #	:	2	3	4
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.006	.823	.752
MINIMUM X	:	-1.643	-.783	-.854
MAXIMUM Y	:	1.175	1.164	.494
MINIMUM Y	:	-.610	-.621	-.476
CENTROID X	:	.254	.437	.508
CENTROID Y	:	.194	.205	.060
POA TO CENTROID in.	:	.320	.483	.511
MIN RADIUS	:	.138	.248	.269
MEAN RADIUS	:	.865	.769	.684
MAX RADIUS	:	1.647	1.293	.911
HORIZONTAL SPREAD	:	2.649	1.606	1.606
VERTICAL SPREAD	:	1.785	1.785	.970
EXTREME SPREAD	:	2.690	2.129	1.799
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	9		

28 Feb 1990

FILE:/PATTERNING/CENTERFIRE_PATT/06349007

CENTERFIRE PATTERNS # 3

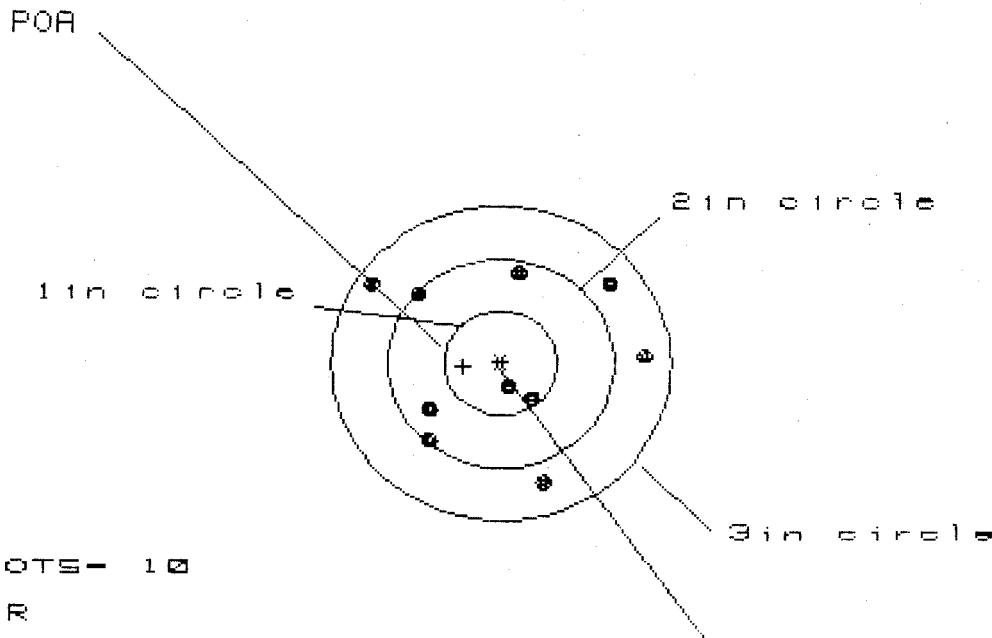

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 10

HS= 2.425

VS= 2.008

GS= 2.530


PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.269	1.140	.972
MINIMUM X	-1.156	-.881	-.738
MAXIMUM Y	.846	.930	.943
MINIMUM Y	-1.162	-1.078	-1.065
CENTROID X	.332	.461	.318
CENTROID Y	.034	-.050	-.063
POA TO CENTROID in.	.334	.463	.324
MIN RADIUS	.249	.164	.165
MEAN RADIUS	.949	.880	.837
MAX RADIUS	1.378	1.181	1.294
HORIZONTAL SPREAD	2.425	2.021	1.710
VERTICAL SPREAD	2.008	2.008	2.008
EXTREME SPREAD	2.530	2.194	2.194
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

28 Feb 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C6349087

CENTERFIRE PATTERNS

4

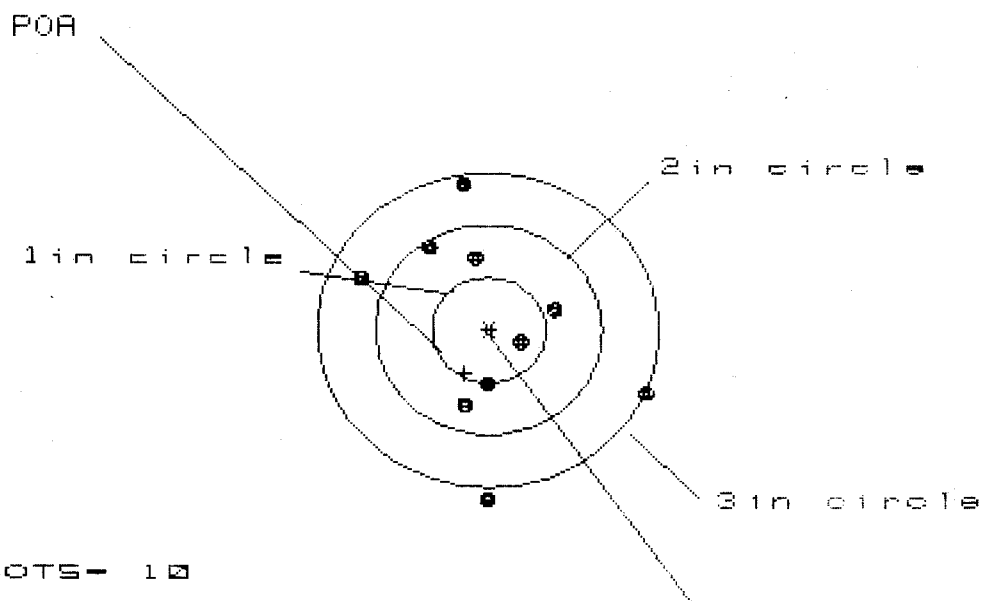

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 6

3 in = 9

HS= 2.482

VS= 3.057

GS= 3.068

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.371	1.374	.746
MINIMUM X	:	-1.111	-1.108	-.936
MAXIMUM Y	:	1.438	1.258	1.161
MINIMUM Y	:	-1.619	-.896	-.993
CENTROID X	:	.216	.213	.041
CENTROID Y	:	.409	.589	.686
POA TO CENTROID in.	:	.463	.627	.687
MIN RADIUS	:	.292	.397	.379
MEAN RADIUS	:	.957	.878	.784
MAX RADIUS	:	1.620	1.576	1.162
HORIZONTAL SPREAD	:	2.482	2.482	1.682
VERTICAL SPREAD	:	3.057	2.154	2.154
EXTREME SPREAD	:	3.068	2.697	2.154
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	9		


28 Feb 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C6349087

CENTERFIRE PATTERNS

5

POA

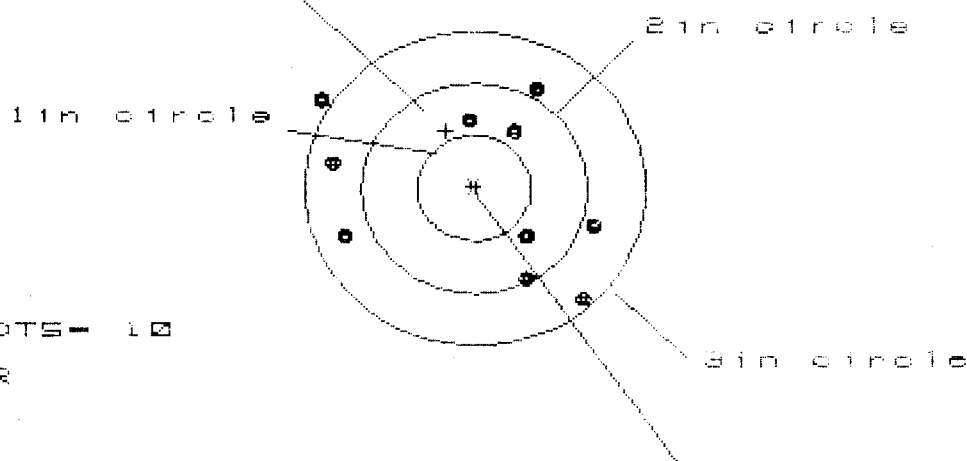

OF SHOTS- 10

IN CIR

1in = 0

2in = 4

3in = 9

HS= 2.445

VS= 1.959

GS= 3.019

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.051	.896	1.000
MINIMUM X	:	-1.394	-1.430	-1.326
MAXIMUM Y	:	.938	1.031	.915
MINIMUM Y	:	-1.021	-.928	-.863
CENTROID X	:	.250	.405	.301
CENTROID Y	:	-.548	-.641	-.525
POA TO CENTROID in.	:	.602	.758	.605
MIN RADIUS	:	.615	.445	.585
MEAN RADIUS	:	1.057	.966	.932
MAX RADIUS	:	1.627	1.469	1.345
HORIZONTAL SPREAD	:	2.445	2.326	2.326
VERTICAL SPREAD	:	1.959	1.959	1.778
EXTREME SPREAD	:	3.019	2.590	2.407
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		9	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-24048

INITIAL CUSTOMER ORDER NO.

JJM

W/LEUPOLD 10X SCOPE W/BI-POD M-24 SNIPER

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

08/19/94

08/19/94

XJ 12-89

C6349087

700 7.62

NATO

ACCESSORIES

SCOPE BASE

W/STUDS

W/SWIVELS

HARD CASE

FROM:

SHIP TO:

DEPT OF THE ARMY
DIRECTOR OF LOGISTICS
ATTN:APVR-DL-CS,BLDG 804
FT. RICHARDSON AK 99505

DEPT OF THE ARMY
DIRECTOR OF LOGISTICS
ATTN:APVR-DL-CS,BLDG 804
FT. RICHARDSON AK 99505

CUST NO:101197 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400107572

DEPARTMENT OF THE ARMY
1/501st AIRBORNE INF REG
FORT RICHARDSON, ALASKA

MEMORANDUM FOR: Sniper Department

SUBJECT: Sniper Rifle Services

1. Enclosed is one of two sniper rifles that we request be serviced by Remington. All material that was asked for is also included with each rifle.
2. Your department instructed that a complete 2404 be sent with each rifle. Each one is included in each case with its rifle. Also included are any additional notes from concerning each system. They should be attached to the 2404, otherwise none are included.
3. Since our unit has had possession of these rifles, no complete services have been done on them. The prior history of these rifles is also unknown. Any information you have that can assist us in caring for them would be appreciated.
4. Before any major work is done on any part of the sniper systems, we request that we be notified of the cost involved. If any additional time is required for services, besides the 21 day turn around, please notify us.
5. Serial numbers for each rifle are as follows:
~~-639087 6349087~~
C 6348986
6. Return shipping address is as follows:
DOL
Bldg 804
Ft. Richardson, Alaska 99505
7. POC for this memo are Lt Reese at (907) 384-7666, or Mr. Wilkerson. Property Book Office at (907) 384-3623.

DEPARTMENT OF THE ARMY
1/501st AIRBORNE INF REG
FORT RICHARDSON, ALASKA

MEMORANDUM FOR: Sniper Department

SUBJECT: Sniper Rifle Services

1. Enclosed is one of two sniper rifles that we request be serviced by Remington. All material that was asked for is also included with each rifle.
2. Your department instructed that a complete 2404 be sent with each rifle. Each one is included in each case with its rifle. Also included are any additional notes from concerning each system. They should be attached to the 2404, otherwise none are included.
3. Since our unit has had possession of these rifles, no complete services have been done on them. The prior history of these rifles is also unknown. Any information you have that can assist us in caring for them would be appreciated.
4. Before any major work is done on any part of the sniper systems, we request that we be notified of the cost involved. If any additional time is required for services, besides the 21 day turn around, please notify us.
5. Serial numbers for each rifle are as follows:
~~639087~~ 6349087
C 6348986
6. Return shipping address is as follows:
DOL
Bldg 804
Ft. Richardson, Alaska 99505
7. POC for this memo are Lt Reese at (907) 384-7666, or Mr. Wilkerson, Property Book Office at (907) 384-3623.