

E6374546

Ref. C6349014

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 98-10127

INITIALS CUSTOMER ORDER NO.

W/10 X SCOPE

SWS

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

05/05/98

05/05/98

C4349014

E6374546

700

7.62

NATO

ACCESSORIES

HARD CASE

SCOPE MNTS

SCOPE BASE

W/STUDS

FROM:

SHIP TO:

U S ARMY
CO D 2/29 INF REGT
FT BENNING

GA 31905

U S ARMY
CO D 2/29 INF REGT
FT BENNING

GA
31905

CUST NO: 187354 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY

B3

E3

F3

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D1

E5

F5

METAL

C2

MAIN FAULT

X

ARTS

COMMENTS

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6525 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400128469

MAINTENANCE REQUEST				PAGE NO.	NO. OF PAGES	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)	
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG							
SECTION I - EQUIPMENT DATA							
CONTROL NUMBER		WORK ORDER NO.		WESDC	ORG. PD	PD AUTHENTICATION	
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION <i>C 60 42nd AIR REGT</i>		B. LOCATION <i>FT. Benning Ga 31905</i>		C. UNIT IDENT CODE <i>W2LSK4</i>	
2. SERIAL NO. <i>C63490M</i>		3. NOUN NOMENCLATURE <i>M24 SWS</i>		4. LINE NO. <i>295387</i>	5. MODEL	6. NATIONAL STOCK NUMBER <i>1605-01-240-213C</i>	
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS
							11. MILES
							12. ROUNDS <i>8700</i>
							13. STARTS
14. FAILURE DETECTED DURING (Select one - use ☒ or X)				15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)			
☐ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other				☐ 068 Inoperative ☐ 258 Overheating ☐ 790 Out of Adjustment ☐ 008 Noisy ☐ 387 Low Performance ☐ Other			
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs) <i>Barrel chn guages & is stamped</i>							
B. REMARKS							
PREPARATION INSTRUCTIONS (Prior to using this form, read DA PAM 738-750 for detailed preparation instructions)							
1. Place a "✓" or an "X" in the box for the type of action required. 2. Enter the WESDC if the item is Materiel Condition Status Reportable. 3. Enter the priority designator as determined from the urgency of need and force activity designator. 4. The Unit Commander, Chief of TDA activity or their designated representative will authenticate, by signature, a priority of 01 through 08. 5. Block 1A. Enter the name of the organization submitting the request. 6. Block 1B. Enter the unit submitting the request; units overseas enter APO only. 7. Block 1C. Enter the unit identification code of the unit in block 1A. 8. Block 2. Enter the equipment serial number. For ammunition, enter the lot number. For administrative-use vehicles, enter the USA registration number. 9. Block 3. Enter the noun abbreviation of the item. 10. Block 4. Enter the item line number, if applicable. 11. Block 5. Enter the model number. 12. Block 6. Enter the National Stock Number of the item listed in Block 3.				13. Block 7. Enter the name of the support activity. 14. Block 7A. Enter the symbol of the maintenance category (O, F, H, D, or L). 15. Block 8. Enter the utilization code. 16. Block 9A. Enter the word "yes" if the item is Materiel Condition Status Reportable. 17. Block 9B. Enter the equipment readiness code, if applicable. 18. Block 9C. Enter the word "yes" if the item is a pacing item. 19. Block 10. Enter the hour reading, if applicable. 20. Block 11. Enter the mileage from the odometer, if applicable. 21. Block 12. Enter the total rounds fired, if applicable. 22. Block 13. For turbine engines, enter the number of hot starts. 23. Block 14. Enter a "✓" or "X" in the proper block. 24. Block 15. Enter a "✓" or "X" in the proper block. 25. Block 16. Describe briefly the fault or symptoms needing correction.			
23. SUBMITTED BY		24. RECEIVED BY					
JULIAN DATE		JULIAN DATE					

DA FORM 2407, AUG 88

EDITION OF MAY 81 MAY BE USED

RECEIPT COPY 1

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400128470

MAINTENANCE REQUEST				PAGE NO.		NO. OF PAGES		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG											
SECTION I - EQUIPMENT DATA											
CONTROL NUMBER		WORK ORDER NO.			WESDC		ORG PD		PD AUTHENTICATION		
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION <i>C604297 NIPRFG</i>			B. LOCATION <i>FT. Benning GA 31905</i>			C. UNIT IDENT CODE <i>W2L5K4</i>			
2. SERIAL NO. <i>C634950T</i>		3. NOUN NOMENCLATURE <i>M243WS</i>			4. LINE NO. <i>295377</i>		5. MODEL		6. NATIONAL STOCK NUMBER <i>1005-01-240-213C</i>		
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS		11. MILES	12. ROUNDS <i>8700</i>	13. STARTS
14. FAILURE DETECTED DURING (Select one - use ☒ or X)						15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)					
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 068 Inoperative		☐ 258 Overheating	
☐ B Handling		☐ D Normal Op		☐ F Inspection		☐ H Other		☐ 008 Noisy		☐ 387 Low Performance	
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). <i>Round gunner 9 is stopped</i>											
B. REMARKS											
SECTION II - WORK ACCOMPLISHED											
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)				19. AMS ACCT. CODE	
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor					
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST	
		CB CODE	(2) REF DESIGN.	(3) MFR. CODE							\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
					I. TOTAL MANHOURS		J. TOTAL MANHOURS COST \$		K. TOTAL PARTS COST \$		
21. DELAY (Select One) ☐ 1 Parts ☐ 2 Manpower ☐ 3 Facilities ☐ 4 Funds ☐ 5 Tools 22. Data Transcribed											
23. SUBMITTED BY		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)	
										☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged	
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE			

DA FORM 2407, AUG 88

EDITION OF MAY 81 MAY BE USED

NMP COPY 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400128471

LEUPOLD & STEVENS, INC.

MAILING: PO BOX 688
BEAVERTON OR 97075-0688
(503) 646-9171

SHIPPING: 14400 NW GREENBRIER PARKWAY
BEAVERTON OR 97006-5934
FAX (503) 526-1455

TELEX 15-1227

MAIL REMITTANCE IN U.S.
FUNDS TO:

LEUPOLD & STEVENS, INC.
PO BOX 4985
BEAVERTON OR 97076-4985 USA

B
I
L
L
T
O
REMINGTON ARMS CO., INC.
Attn:
14 HOEFLER AVE.
ILION NY 13357

S
H
I
P
T
O
REMINGTON ARMS CO., INC.
Attn:
14 HOEFLER AVE.
ILION NY 13357

Invoice No.	Date	Type of Service	Via
0152502	06/09/98	WARRANTY	
1 ea ULTRA M3A-10X S/N# 871143B			Charge
Complaints/Requests WARRANTY- INSPECTION			F7 BENNING
Service Activity: REPLACED OBJ LOCKRING REBUILT/REWORKED ADJUSTMENTS ALIGNED FOCUS ADJ SCREW REFILLED/WATER TESTED MECHANICAL INSPECTION VISUAL INSPECTION 100%			
CONTROL # M20295			
CLEANED, SEALED, RECOLLIMATED, VISUAL & MECHANICAL INSPECTION 100%			AMOUNT DUE
SHIPPING & HANDLING			NO CHG

For Customer Use Only:

Charge/Debit-Card Payment: ☐ Visa ☐ Master Card Card # _____

Expiration Date: _____ Signature: _____

VALUE FOR CUSTOMS PURPOSES ONLY \$ _____ THESE COMMODITIES ARE EXITING THE U.S.A. UNDER GENERAL LICENSE _____
"THESE COMMODITIES LICENSED BY THE UNITED STATES FOR ULTIMATE DESTINATION USA DIVERSION CONTRARY TO
UNITED STATES LAW PROHIBITED."

EXPORTER/MANUFACTURER: LEUPOLD & STEVENS INC.
PLACE: BEAVERTON, OREGON USA

ECCN: 0A985

SIGNATURE: _____
NAME: _____ EXPORT/INVOICING SPECIALIST

I.D. 93-0372974

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374546
16 Jul 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .106
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1004
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .146001

THE AMR FOR THIS RIFLE IS: .9604

CENTROIDAL DISTANCES

Ø TO	1	.280223
1 TO	2	.286191
1 TO	3	.552327
1 TO	4	.806067
1 TO	5	.615851

3
5 4
1 2 <----POA


PATTERN #: 1

POA TO CENTROID: .281
 MIN RADIUS : .537
 MEAN RADIUS : 1.066
 MAX RADIUS : 1.859
 CENTROID X : -.222
 CENTROID Y : -.171

16 Jul 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

CENTERFIRE PATTERN # 1

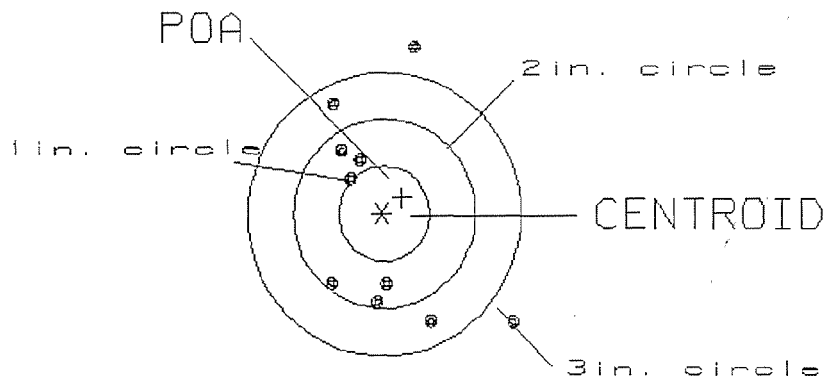

OF SHOTS= 10

IN CIRCLE

HS= 2.06

0

VS= 2.93

6

GS= 3.15


8

PATTERN #: 2
 POA TO CENTROID: .096
 MIN RADIUS : .295
 MEAN RADIUS : 1.152
 MAX RADIUS : 2.110
 CENTROID X : .050
 CENTROID Y : -.082

16 Jul 1998

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

CENTERFIRE PATTERN # 2

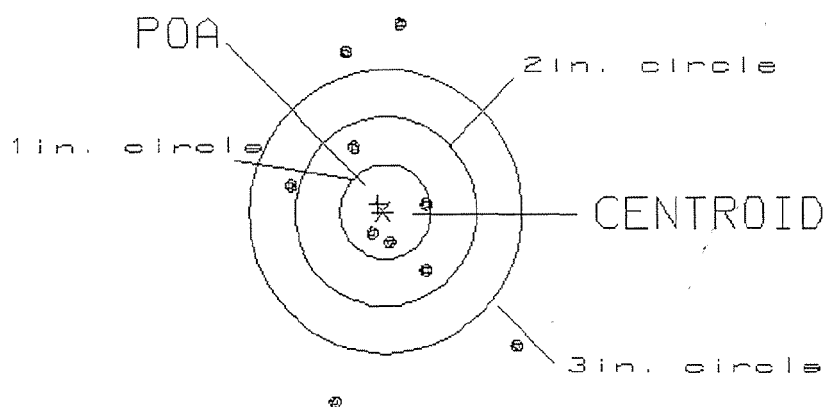

OF SHOTS= 10

IN CIRCLE

HS= 2.43

3

VS= 4.02

5

GS= 4.08


6

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .367
 MIN RADIUS : .023
 MEAN RADIUS : .755
 MAX RADIUS : 1.858
 CENTROID X : -.070
 CENTROID Y : .360

16 Jul 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

CENTERFIRE PATTERN # 3

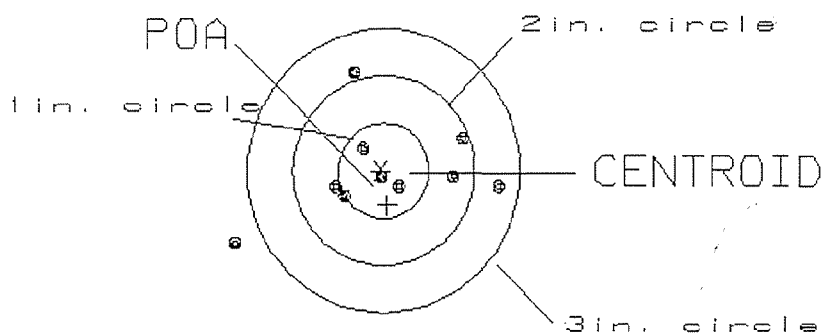

OF SHOTS= 10

IN CIRCLE

HS= 2.99

4

VS= 1.85

7

GS= 3.07


9

PATTERN #: 4
 POA TO CENTROID: .528
 MIN RADIUS : .425
 MEAN RADIUS : .887
 MAX RADIUS : 1.807
 CENTROID X : .466
 CENTROID Y : .249

16 Jul 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

CENTERFIRE PATTERN # 4

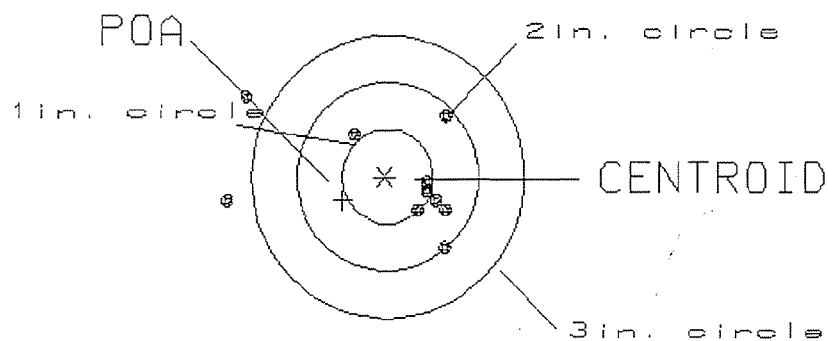

OF SHOTS= 10

IN CIRCLE

HS= 2.47

3

VS= 1.63

6

GS= 2.71


8

PATTERN #: 5
 POA TO CENTROID: .339
 MIN RADIUS : .261
 MEAN RADIUS : .942
 MAX RADIUS : 1.749
 CENTROID X : .306
 CENTROID Y : .146

16 Jul 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

CENTERFIRE PATTERN # 5

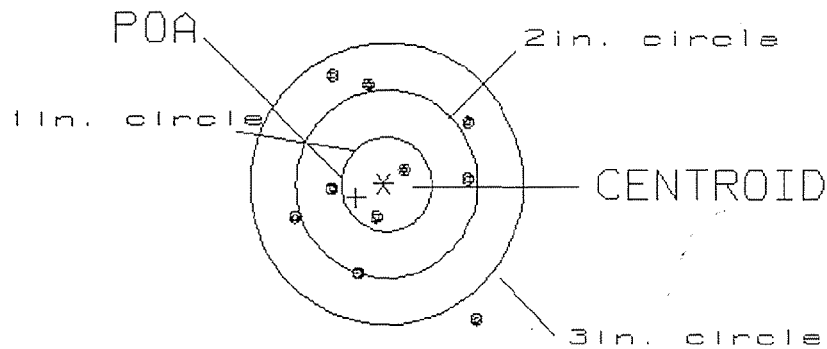

OF SHOTS= 10

IN CIRCLE

HS= 1.98

2

VS= 2.64

5

GS= 3.07

9