

G6300627

Rephae

C-62252444

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00082823** Serial: C6225444 Model M24 SWS CenterFire Caliber: 7.62 NATO Repairman: Status: New 7/14/2004 10:34:57 AM

Verify Repair

Address Information

Customer: Received From: Return To: Received From:

Name: **TRANSPORTATION OFFICE** **TRANSPORTATION OFFICE**

Address 1: **BLDG 5210 DOOR 30** **BLDG 5210 DOOR 30**

Address 2: **PO Box:** **PO Box:**

City: **FORT CAMPBELL** **FORT CAMPBELL**

State: **KY** Zip Code: **42223** Country: **US** State: **KY** Zip Code: **42223** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information: Phone: Fax: Email: Comments:

Received Condition: Good Condition Notes: CSR Notes:

Accessories Received:

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
C000	Fit and Rear Sgt Base	1

Repair Search Refresh Close

neglet 7/14/2004 11:10 PM CAPS NUM INS SCRL

start 3 3 3 3

6300627 (New)

Serial Number: **C6225444**

Model: **M24 SWS**



RE00082823

FINAL INSPECTION CHECKLIST M-24 REPAIRS

C6225444(047) CONTRACT #: DAAE-20-02-D-0127

SERIAL # C6300627 (New) INSPECTED BY: RTL

DATE REC'D: 7-14-04 DATE RET'D: 8-13-04

ITEM	ITEM
BARREL ASSEMBLY	STOCK ASSEMBLY
☒ BARREL	☒ STOCK
☒ RECEIVER	☒ SLING AWIVEL STUDS
☒ FRONT SIGHT BASE	☒ ADJUSTABLE
☒ REAR SIGHT BASE	☒ BUTT PLATE
☒ SCREWS	☒ LOCK NUTS
☒ FINISH	☒ BARREL CLEARANCE
	☒ COLOR / FINISH
SCOPE ASSEMBLY	SYSTEMS CASE
☒ SCOPE	☒ SCOPE CASE
☒ SCOPE RINGS	☒ IRON SIGHTS
☒ MOUNTING SCREWS	☒ DEPLOYMENT KIT
☒ MOUNTING BASE	
☒ SCREWS	TRIGGER ASSEMBLY
☒ FINISH	☒ SAFETY OPERATION
☒ CLARITY	☒ RE-SET TO FACTORY SPECS
	COMMENTS:

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300627.__0
FILE DATE AND TIME: 08/10/2004 03:52

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.097
The Average Y Centroid of the Five Target Set:	-0.136
The Average Point of Impact of the Five Target Set:	0.167
The Average Mean Radius of the Five Target Set:	0.756
The Distance from POA to Centroid Target #1:	0.092
The Distance from Centroid Target #2 to Centroid Target #1:	0.273
The Distance from Centroid Target #3 to Centroid Target #1:	0.237
The Distance from Centroid Target #4 to Centroid Target #1:	0.299
The Distance from Centroid Target #5 to Centroid Target #1:	0.311

SERIAL NUMBER: G6300627. __0

TARGET NUMBER: 1

FILE DATE: 08/10/2004

FILE TIME: 03:52

POINT#	X	Y
1:	0.456	1.687
2:	0.292	0.922
3:	-0.331	0.429
4:	-0.789	-0.028
5:	-0.357	-0.093
6:	0.201	0.248
7:	0.592	-0.332
8:	0.190	-0.441
9:	0.399	-0.795
10:	-0.051	-0.895

X CENTROID: 0.060

Y CENTROID: 0.070

POA TO CENTROID: 0.092

HORZ SPREAD: 1.381

VERT SPREAD: 2.582

GROUP SPREAD: 2.631

MIN RADIUS: 0.227


MAX RADIUS: 1.665

MEAN RADIUS: 0.770

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 9

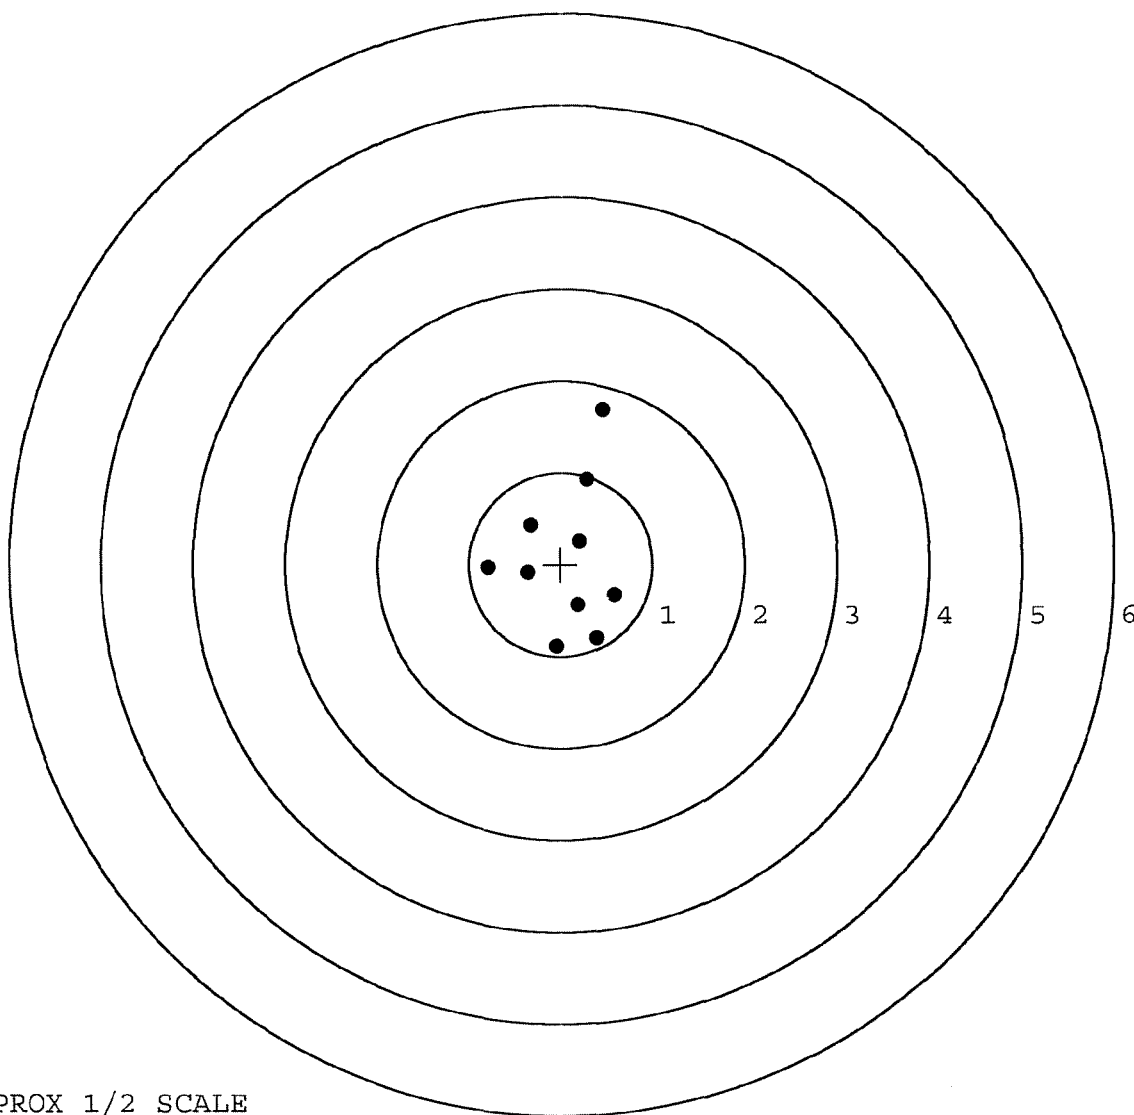

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300627. __0

TARGET NUMBER: 2

FILE DATE: 08/10/2004

FILE TIME: 03:52

POINT#	X	Y
1:	1.154	0.231
2:	0.462	0.976
3:	0.030	0.576
4:	-0.533	0.468
5:	-0.037	0.075
6:	-0.256	-0.444
7:	-0.361	-0.976
8:	-0.013	-0.926
9:	0.509	-0.787
10:	0.372	-1.123

X CENTROID: 0.133

Y CENTROID: -0.193

POA TO CENTROID: 0.234

HORZ SPREAD: 1.687

VERT SPREAD: 2.099

GROUP SPREAD: 2.118

MIN RADIUS: 0.317


MAX RADIUS: 1.214

MEAN RADIUS: 0.815

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

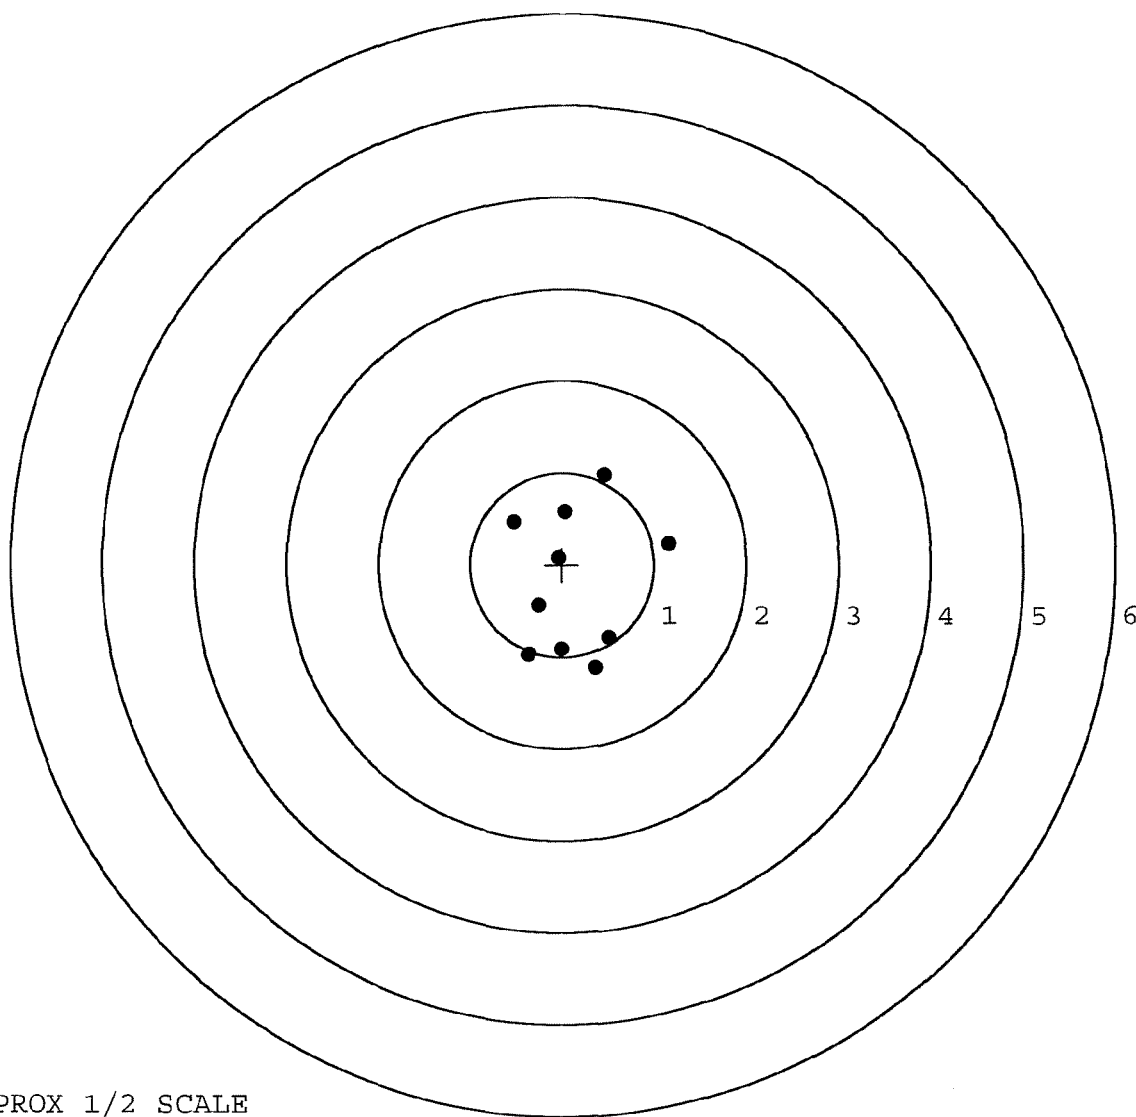

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300627. 0

TARGET NUMBER: 3

FILE DATE: 08/10/2004

FILE TIME: 03:52

X CENTROID: 0.003

Y CENTROID: -0.159

POA TO CENTROID: 0.160

HORZ SPREAD: 1.828

VERT SPREAD: 1.996

GROUP SPREAD: 2.000

MIN RADIUS: 0.341

MAX RADIUS: 1.035


MEAN RADIUS: 0.742

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.220	0.852
2:	0.257	0.466
3:	0.089	0.196
4:	0.852	-0.218
5:	0.541	-0.480
6:	0.253	-0.392
7:	-0.906	0.081
8:	-0.976	-0.360
9:	-0.401	-0.596
10:	0.101	-1.144

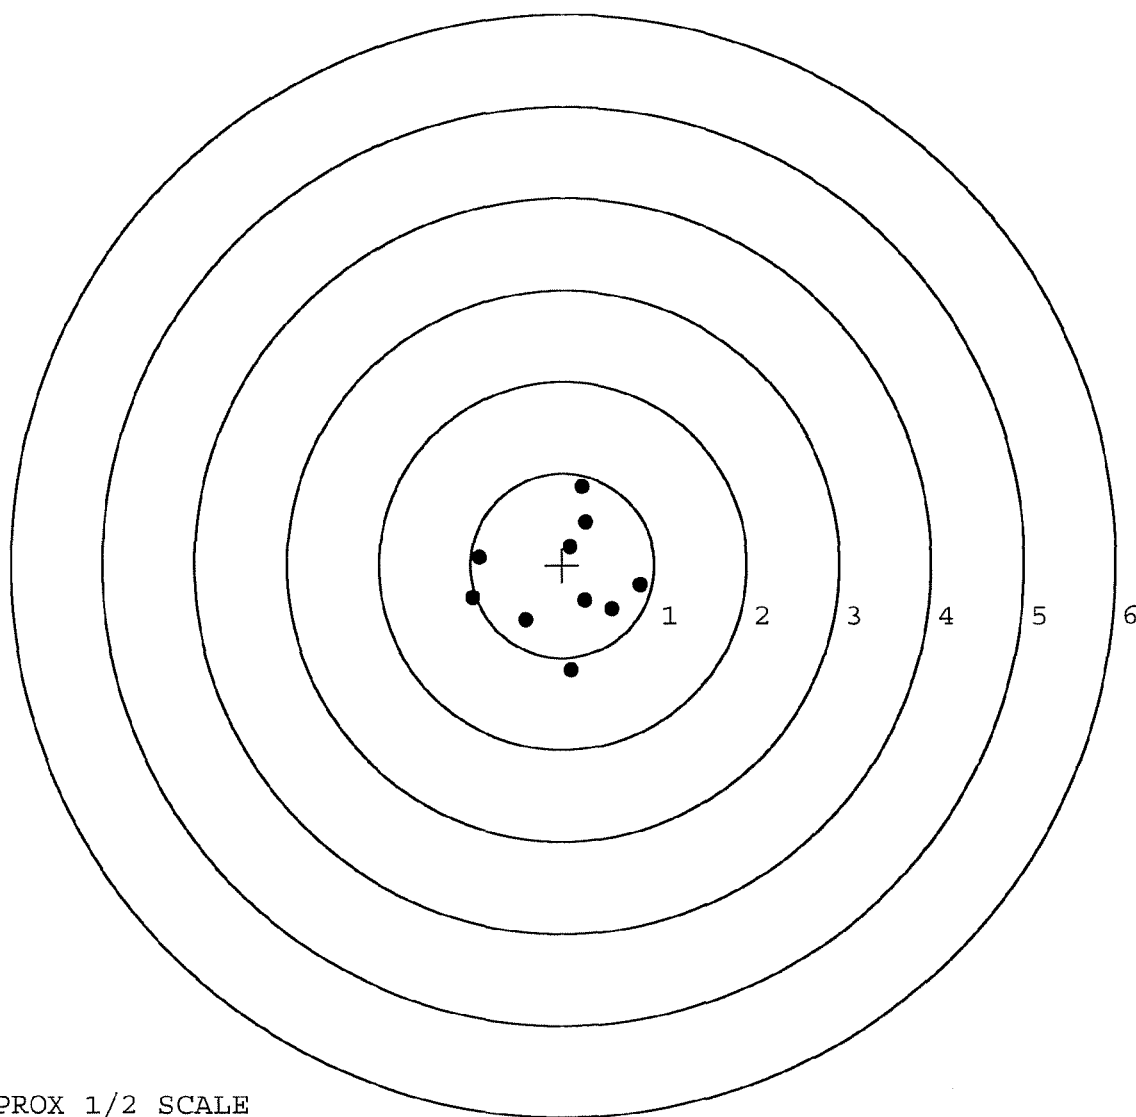

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300627. __0

TARGET NUMBER: 4

FILE DATE: 08/10/2004

FILE TIME: 03:52

POINT#	X	Y
1:	0.685	-1.014
2:	0.785	-0.525
3:	0.286	-0.621
4:	-0.186	-0.589
5:	-0.369	-0.301
6:	-0.216	0.427
7:	0.648	0.466
8:	0.029	0.022
9:	0.311	0.196
10:	0.552	0.346

X CENTROID: 0.252

Y CENTROID: -0.159

POA TO CENTROID: 0.299

HORZ SPREAD: 1.154

VERT SPREAD: 1.480

GROUP SPREAD: 1.699

MIN RADIUS: 0.288


MAX RADIUS: 0.958

MEAN RADIUS: 0.604

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

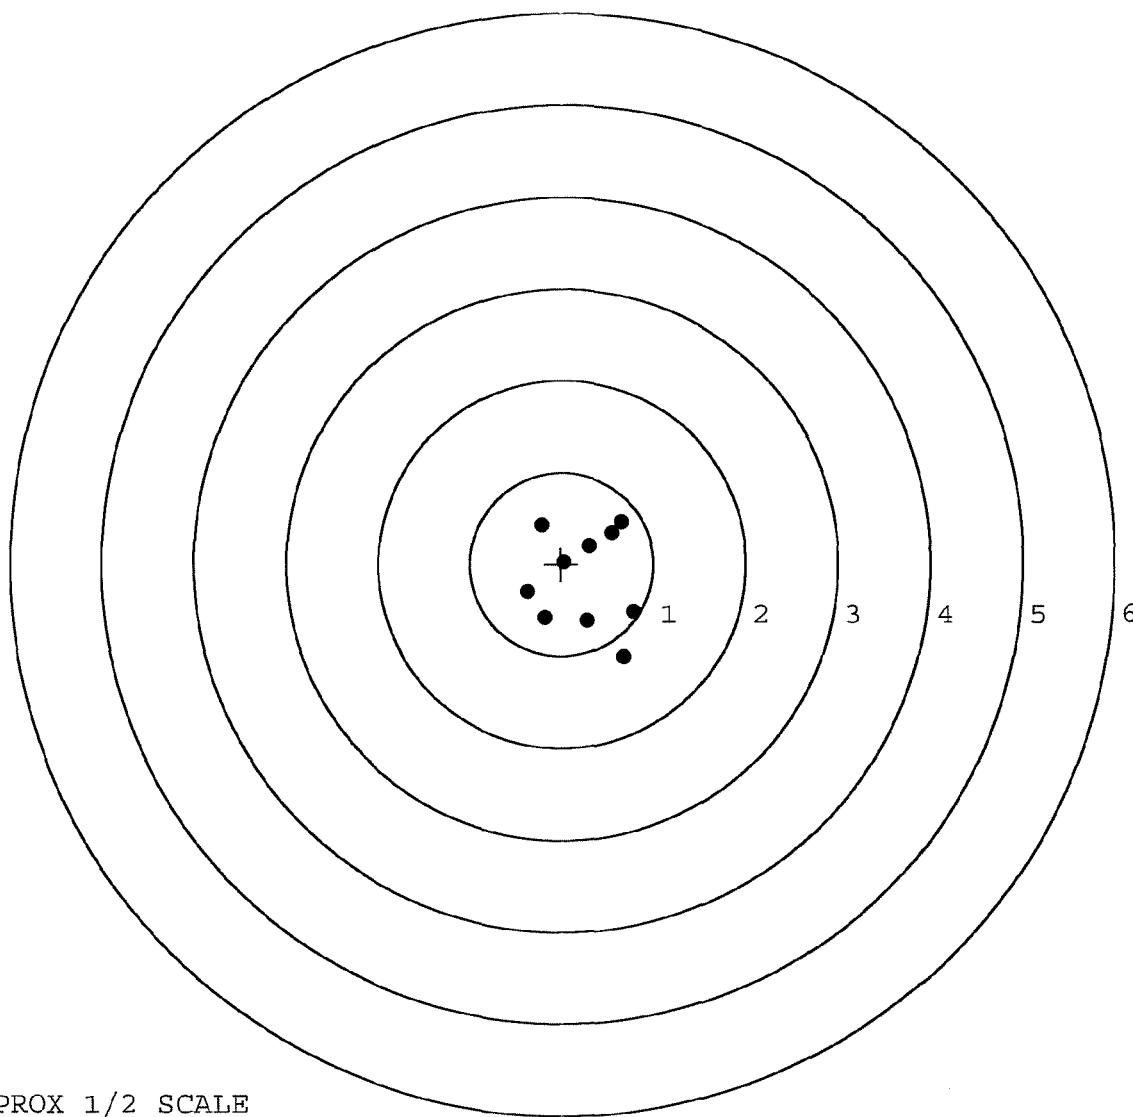

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300627. 0

TARGET NUMBER: 5

FILE DATE: 08/10/2004

FILE TIME: 03:52

POINT#	X	Y
1:	0.984	0.897
2:	-0.596	0.979
3:	-0.149	0.619
4:	0.003	-0.036
5:	0.510	-0.263
6:	0.820	-1.802
7:	-0.566	-1.082
8:	-0.273	-0.818
9:	-0.161	-0.323
10:	-0.225	-0.570

X CENTROID: 0.035

Y CENTROID: -0.240

POA TO CENTROID: 0.242

HORZ SPREAD: 1.580

VERT SPREAD: 2.781

GROUP SPREAD: 3.121

MIN RADIUS: 0.206


MAX RADIUS: 1.748

MEAN RADIUS: 0.848

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

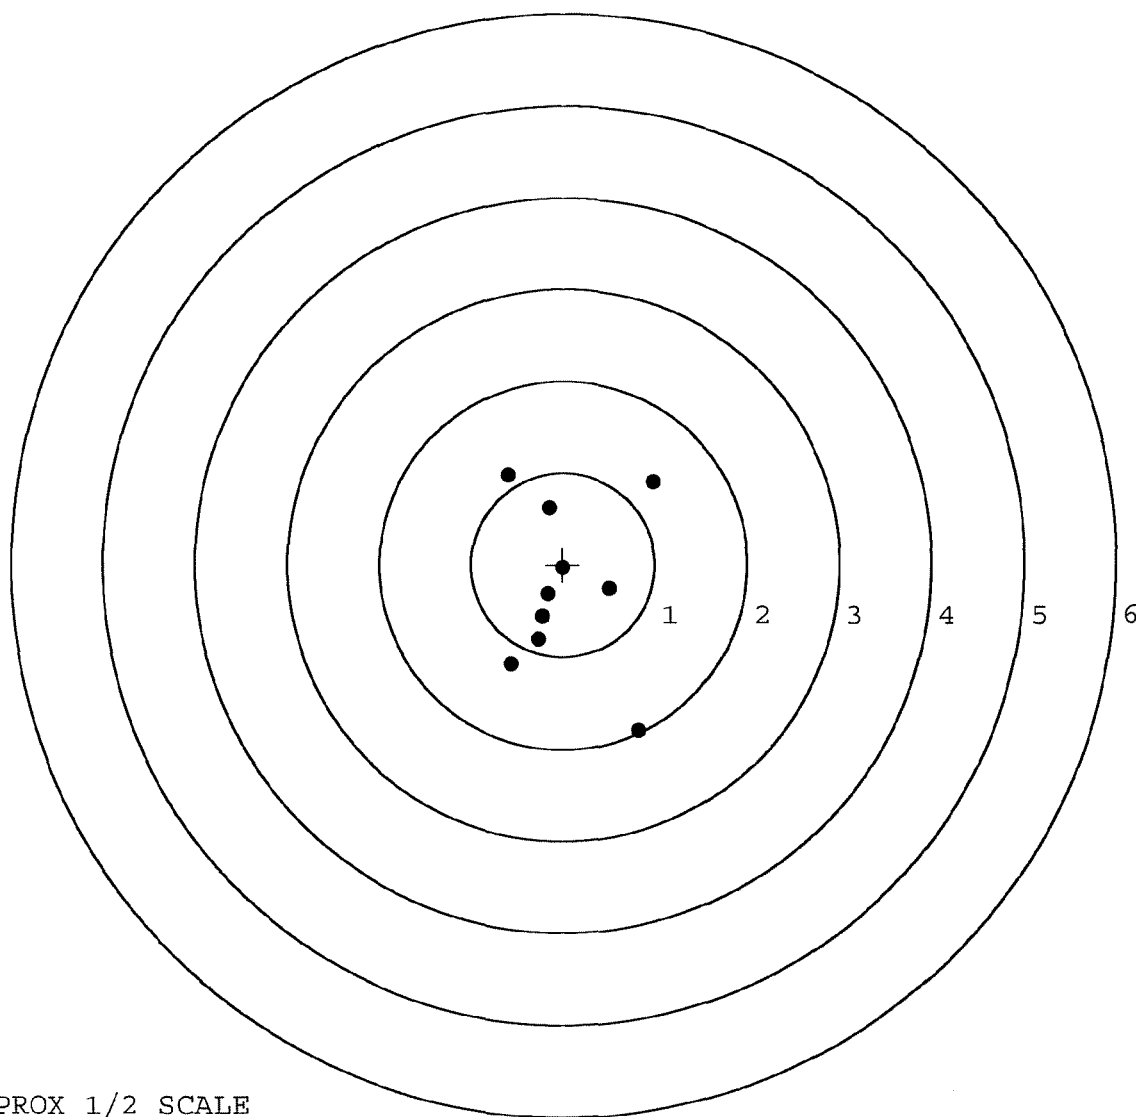

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 7-15-07

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.41	2.48		2.65	
PULL #2	2.38	2.28		2.63	
PULL #3	2.47	2.40		2.65	
PULL #4	2.54	2.37		2.67	
PULL #5	2.54	2.89		2.57	
TOTAL	12.34	12.42		13.27	
AVERAGE	2.46	2.48		2.65	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.07	3.13		
PULL #2	3.19	3.29		
PULL #3	3.06	2.97		
PULL #4	3.04	3.13		
PULL #5	2.93	3.07		
TOTAL	15.29	15.59		
AVERAGE	3.05	3.11		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.29	4.40		4.16
PULL #2	4.22	4.26		4.06
PULL #3	4.26	4.40		4.41
PULL #4	4.33	4.30		4.05
PULL #5	4.35	4.30		4.55
TOTAL	21.45	21.66		21.23
AVERAGE	4.29	4.33		4.24

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	82823		
SERIAL NUMBER	G6225444 G6300627 (New)		
LOG-IN DATE	7-14-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	7-15-04	RTL
560 A	RE-BARREL	7-15-04	RTL
B	DRILL AND TAP	7-19-04	TRL
575	ASSEMBLE	7-19-04	RTL
600	PROOF	7-19-04	RTL
605	CHECK HEADSPACE	7-19-04	RTL
610	DIS-ASSEMBLE GUN	7-19-04	RTL
612	MAGNAFLUX	7-19-04	RTL
615	ROLLMARK CALIBER	7-19-04	RTL
618	ROTO-BLAST	7/20/04	DL
620	APPLY COATINGS	7-21	JA
625 A	FINAL ASSEMBLY	7-22-04	RW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	8-10-04	AL
655	FINAL INSPECT	8-13-04	RTL
660	PACK	8-13-04	JA
		SHIP DATE	
QAR INSPECTION DATE			

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225444.___0
FILE DATE AND TIME: 02/21/2002 02:34


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.008
The Average Y Centroid of the Five Target Set:	0.069
The Average Point of Impact of the Five Target Set:	0.070
The Average Mean Radius of the Five Target Set:	0.658
The Distance from POA to Centroid Target #1:	0.136
The Distance from Centroid Target #2 to Centroid Target #1:	0.142
The Distance from Centroid Target #3 to Centroid Target #1:	0.418
The Distance from Centroid Target #4 to Centroid Target #1:	0.106
The Distance from Centroid Target #5 to Centroid Target #1:	0.067

SERIAL NUMBER: C6225444. __0
TARGET NUMBER: 1
FILE DATE: 02/21/2002
FILE TIME: 02:34

X CENTROID: 0.109
Y CENTROID: 0.083
POA TO CENTROID: 0.136
HORZ SPREAD: 1.895
VERT SPREAD: 2.146
GROUP SPREAD: 2.577
MIN RADIUS: 0.315
MAX RADIUS: 1.321
MEAN RADIUS: 0.868
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.423	1.270
2:	-0.786	1.054
3:	-0.189	0.515
4:	-0.789	0.043
5:	-0.152	-0.876
6:	0.408	-0.423
7:	0.265	-0.191
8:	0.645	-0.108
9:	1.106	-0.695
10:	1.001	0.237

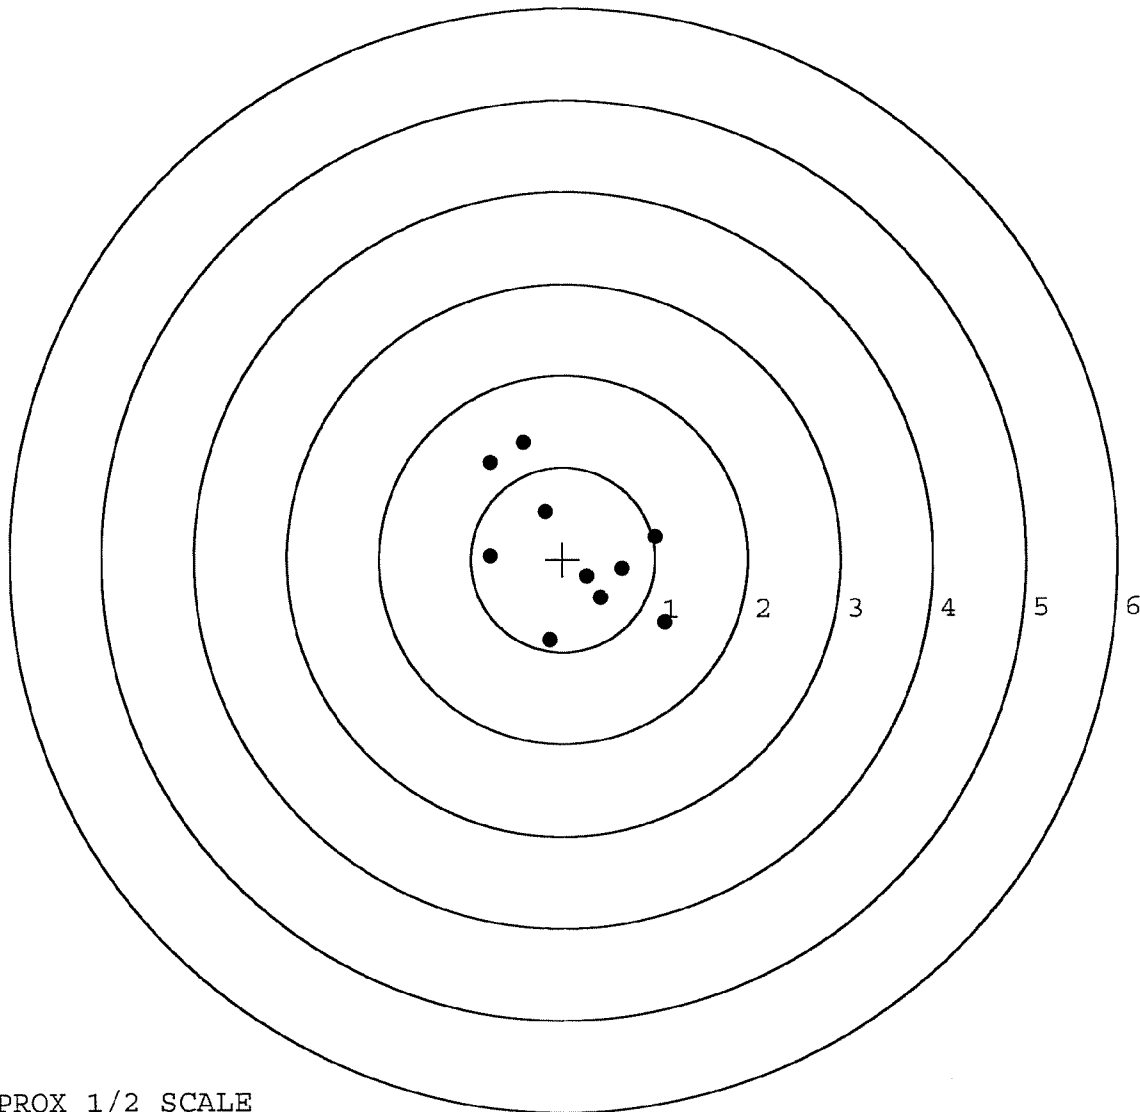

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225444. __0

TARGET NUMBER: 2

FILE DATE: 02/21/2002

FILE TIME: 02:34

POINT#	X	Y
1:	-0.065	1.000
2:	-0.894	0.738
3:	-1.001	0.228
4:	-0.662	-0.465
5:	0.144	-0.730
6:	0.348	-0.481
7:	0.631	-0.806
8:	0.753	-0.093
9:	0.349	0.092
10:	0.534	0.289

X CENTROID: 0.014

Y CENTROID: -0.023

POA TO CENTROID: 0.027

HORZ SPREAD: 1.754

VERT SPREAD: 1.806

GROUP SPREAD: 2.170

MIN RADIUS: 0.354


MAX RADIUS: 1.184

MEAN RADIUS: 0.805

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

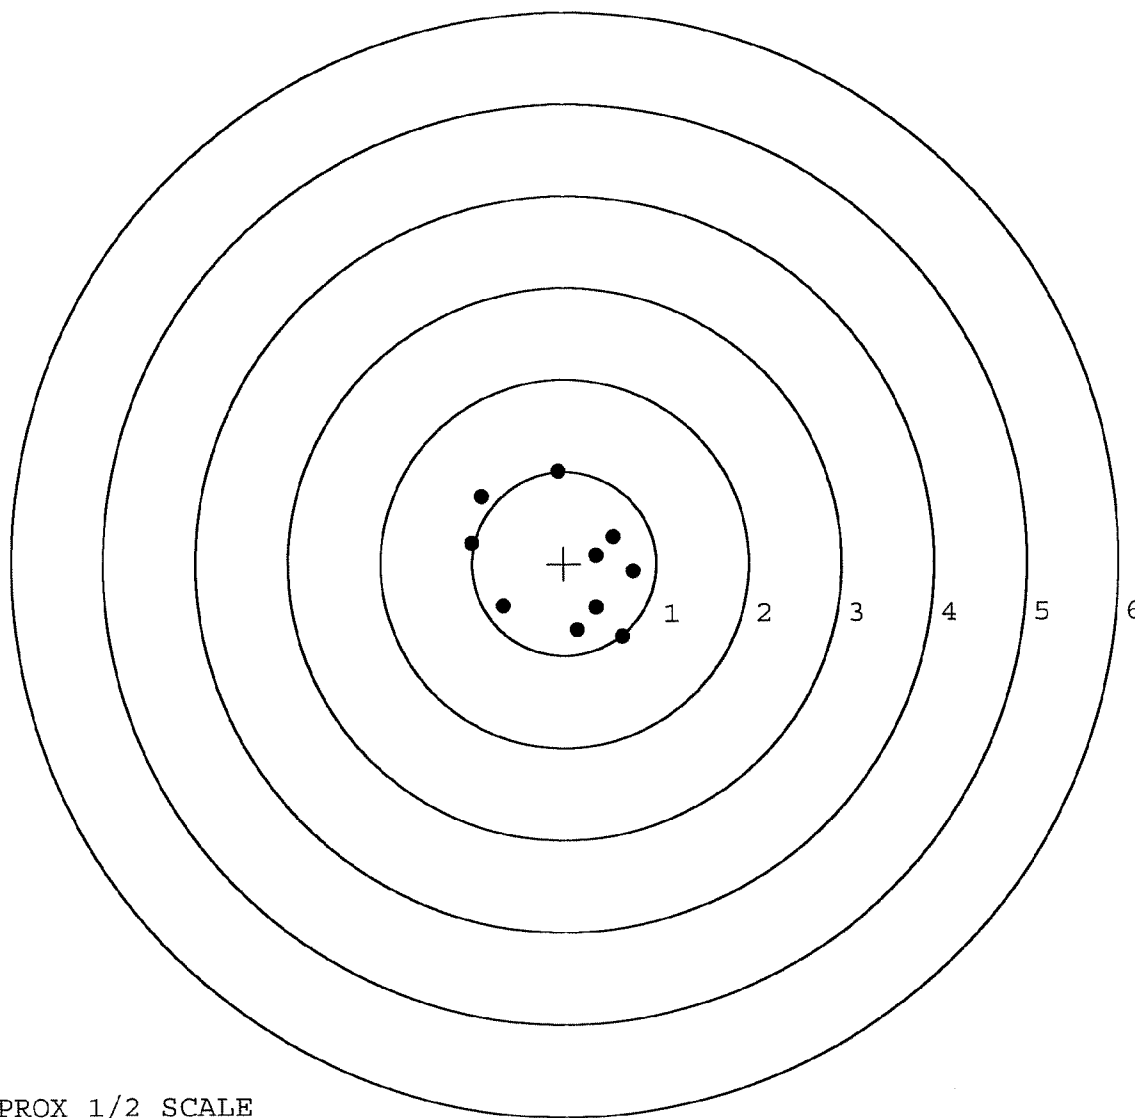


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225444. __ 0
TARGET NUMBER: 3
FILE DATE: 02/21/2002
FILE TIME: 02:34

POINT#	X	Y
1:	-1.364	0.674
2:	-0.747	0.388
3:	-0.418	-0.166
4:	-0.301	-0.390
5:	-0.330	0.347
6:	-0.098	0.174
7:	0.080	0.306
8:	-0.221	0.770
9:	0.766	0.105
10:	-0.103	0.315

X CENTROID: -0.274
Y CENTROID: 0.252
POA TO CENTROID: 0.372
HORZ SPREAD: 2.130
VERT SPREAD: 1.160
GROUP SPREAD: 2.205
MIN RADIUS: 0.110
MAX RADIUS: 1.169
MEAN RADIUS: 0.516
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

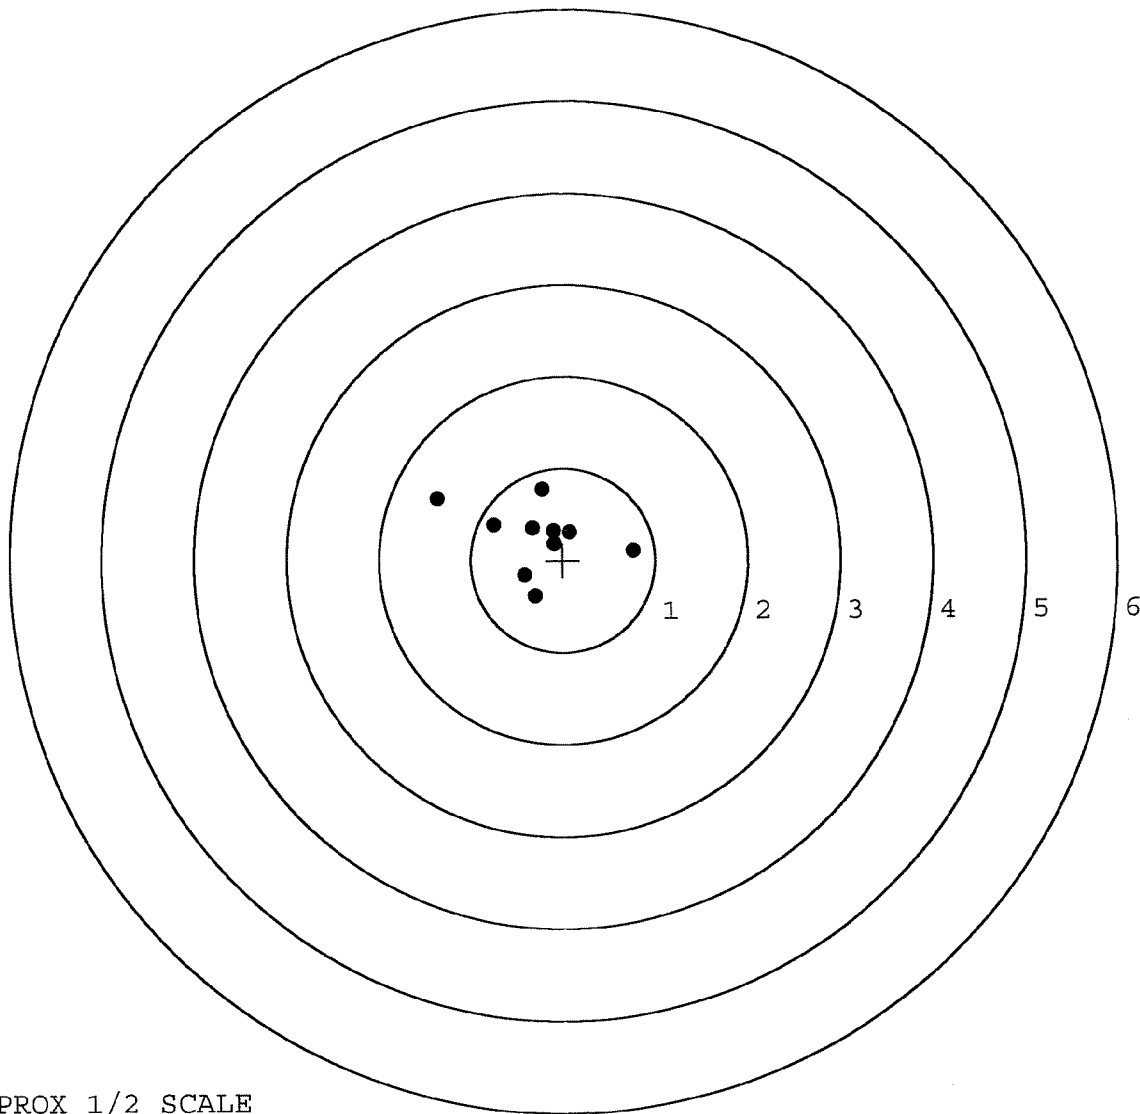

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225444. __0

TARGET NUMBER: 4

FILE DATE: 02/21/2002

FILE TIME: 02:34

POINT#	X	Y
1:	0.409	0.242
2:	0.222	0.307
3:	0.207	-0.036
4:	-0.279	0.308
5:	-0.327	0.460
6:	-0.406	0.158
7:	-0.283	0.131
8:	0.104	-0.518
9:	0.495	-0.928
10:	0.147	0.002

X CENTROID: 0.029

Y CENTROID: 0.013

POA TO CENTROID: 0.032

HORZ SPREAD: 0.901

VERT SPREAD: 1.388

GROUP SPREAD: 1.613

MIN RADIUS: 0.119


MAX RADIUS: 1.050

MEAN RADIUS: 0.448

IN 1 IN DIAMETER: 7

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

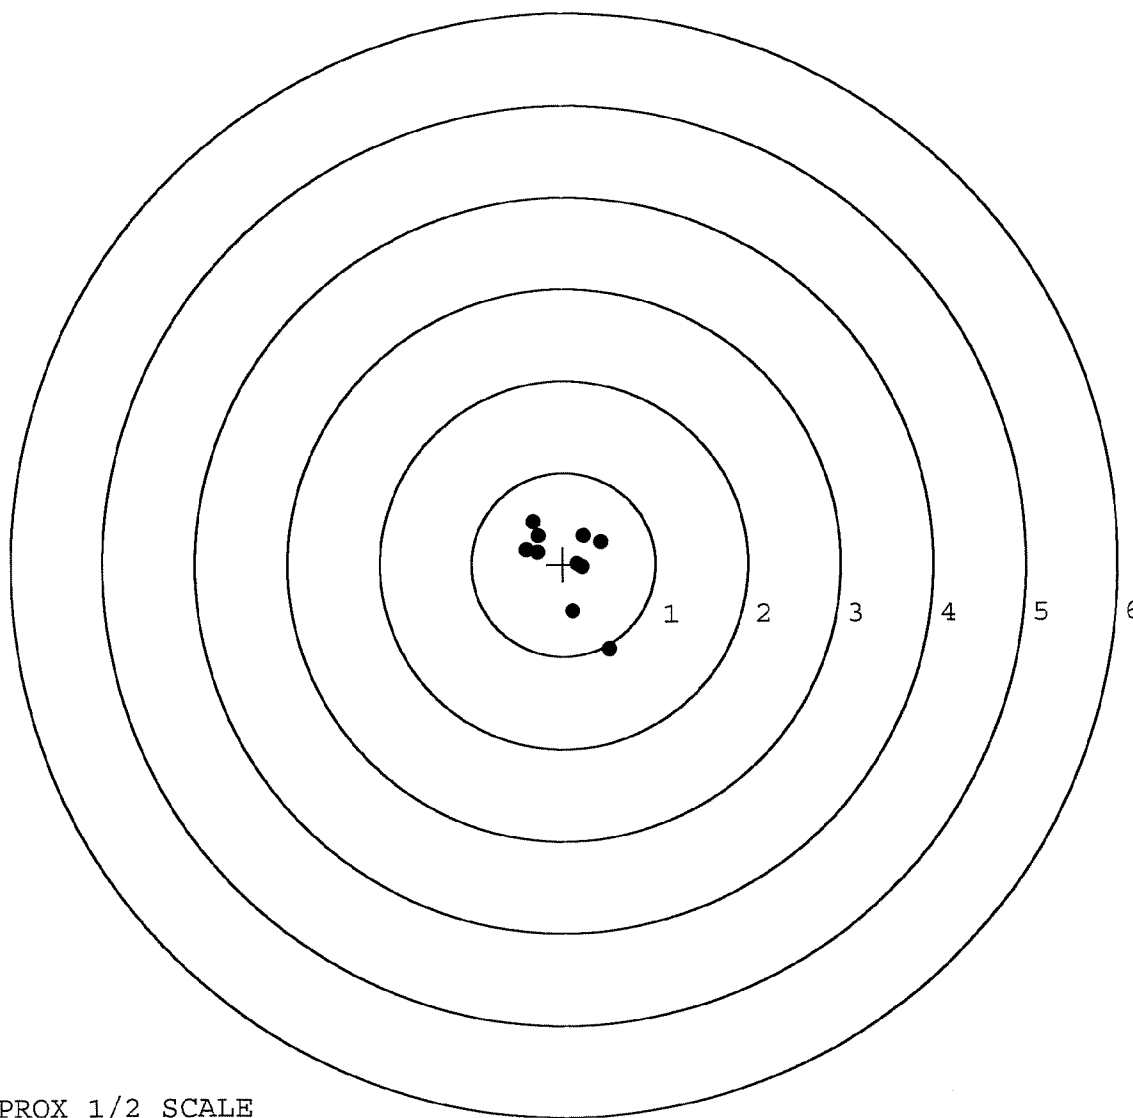


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225444. __0
TARGET NUMBER: 5
FILE DATE: 02/21/2002
FILE TIME: 02:34

X CENTROID: 0.080
Y CENTROID: 0.022
POA TO CENTROID: 0.083
HORZ SPREAD: 1.694
VERT SPREAD: 2.107
GROUP SPREAD: 2.157
MIN RADIUS: 0.249
MAX RADIUS: 1.367
MEAN RADIUS: 0.654
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.463	0.653
2:	0.232	0.318
3:	-0.002	0.414
4:	-0.144	0.947
5:	0.279	-0.127
6:	0.342	-0.309
7:	1.045	-0.024
8:	-0.160	-0.163
9:	-0.649	-0.328
10:	-0.607	-1.160

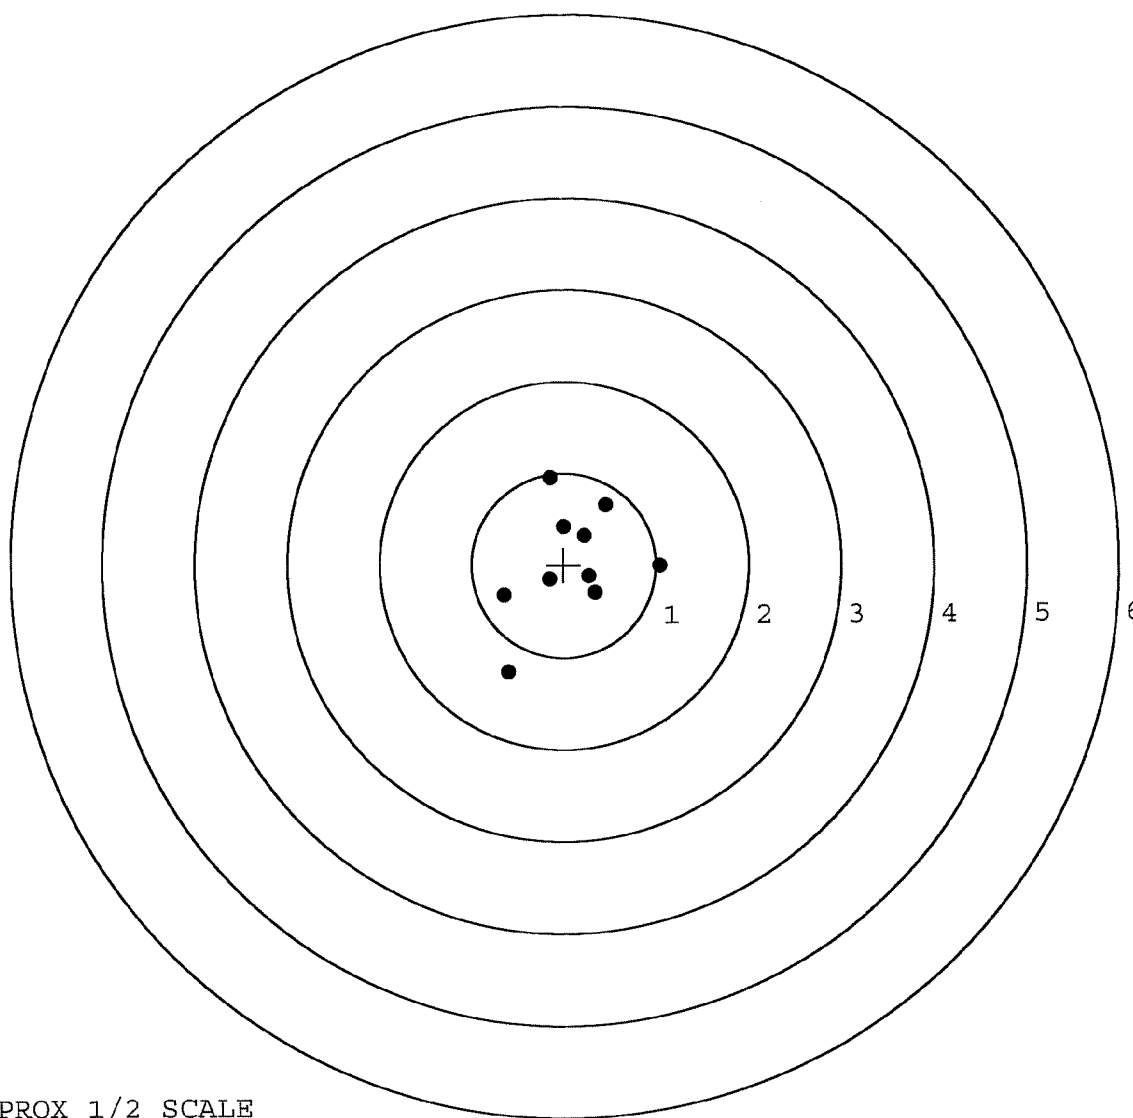

TARGET APPROX 1/2 SCALE

219

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER 40780			
SERIAL NUMBER C6225444			
LOG-IN DATE 1-4-02			
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2-6-02	RHK
560 A	RE-BARREL AT CUSTOM SHOP	2/9/02	BWT
B	DRILL AND TAP	2/9/02	BWT
C	POLISH	2-11-02	RHK
575	ASSEMBLE	2-21-02	RHK
600	PROOF	2-11-02	EW
605	CHECK HEADSPACE	2-11-02	RW
610	DIS-ASSEMBLE GUN	2-11-02	RW
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST	2-16-02	S-H-
620	APPLY COATINGS	2-20-02	TA
625 A	FINAL ASSEMBLY	2-21-02	RHK
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	2-21-02	AC
655	FINAL INSPECT	2-22-02	RHK
660	PACK	2-22-02	DA
		SHIP DATE	
		QAR INSPECTION DATE	

STOCK NUMBER																								QUANTITY		DOCUMENT NUMBER										SUPPLEMENTARY ADDRESS										UNIT PRICE																	
FSC																								NIN		ADD		REQUISITIONER										DATE		SERIAL		DISTRIBUTION										PROJECT		REQ'D DEL DATE		A D C		R		UNIT PRICE			
5A AW3 1005-01-240-2136																								EA00001		W34XC5-6184-0500										CMAH2W MGA										08								5145.00									
SHIP TO CONSOL PROPERTY ACCOUNT FT CAMPBELL, KY 42223-5000																								SHIP TO REMINGTON ARMS, CO., INC. 14 HOEFLER AVENUE ILTON, N.Y. 13357-1826																								MARK FOR		PROJECT MATCAT M										TOTAL PRICE			
WAREHOUSE LOCATION																								TYPE OF CARGO		UNIT PACK		UNIT WEIGHT		UNIT CUBE		UFC		NMFC		FREIGHT RATE		DOCUMENT DATE		MAT COND		QUANTITY				DOLLARS		CTS.															
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)																								FREIGHT CLASSIFICATION NOMENCLATURE																																							
ITEM NOMENCLATURE RIFLE, M24 SWS																								52x18x13-7.4 SER NR: C6225444																																							
SELECTED BY AND DATE																								TYPE OF CONTAINER(S)		TOTAL WEIGHT		RECEIVED BY AND DATE		INSPECTED BY AND DATE																																	
PACKED BY AND DATE																								NO. OF CONTAINER(S)		TOTAL CUBE		WAREHOUSED BY AND DATE		WAREHOUSE LOCATION																																	
REMARKS RETURNED FOR REPAIR PLEASE RETURN WEAPON TO TRANS OFFICER, CRP, BLDG 5207, FT CAMPBELL, KY 42223-5565																																																															
FIRST DESTINATION ADDRESS																								DATE SHIPPED																																							
13 TRANSPORTATION CHARGEABLE TO																								14 D/LADING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)																																							

DD Form 1348-1, SEP 87

Jun 86 edition may be used.

FORM APPROVED. OMB NO. 0704-0188

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

DATE: 03-JUN-96

MAINTENANCE REQUEST

DA FORM 5990-E

CUSTOMER DATA

UIC: WACGT0
UTIL CODE: 0

1ST BN 327TH INF

PHONE: (615)798-2807

ACTIVITY DATA

SUP WON: A601447
SUP UIC: WACKB0

A.CO.426 FSB

PHONE: 798-3255
SHOP SEC:

EQUIPMENT DATA

TYPE MNT REQ: 1

ID: A NSN:

MODEL: M24, 7.62MM

NOUN: SNIPER WEAPON SYSTEM SER NUM: C6225444

QTY: 00001

ORG WON: ACGT01606075 PRIORITY: 02

FAILURE DETECTED: 0

MI/KM: -----

HOURS: -----

ROUNDS:

IN WARRANTY:

LEVEL OF WORK: F

ADMIN NUM:

DEFICIENCY: T. I. FOR TURN-IN

PD AUTHENTICATING SIGNATURE:

William A. Buehner

SIGNATURE DATA

SUBMITTED BY:

Kevin Thompson

ORD DATE:

MIL TIME:

ACCEPTED BY:

Day

STATUS:

ORD DATE:

6/72
6/72

MIL TIME:

ACTION DATA

WORK STARTED BY:

STATUS:

ORD DATE:

MIL TIME:

INSPECTED BY:

[Signature]

STATUS:

ORD DATE:

6/72

MIL TIME:

PICKED UP BY:

W534096A7881 H342

STATUS:

ORD DATE:

6/72

MIL TIME:

Stack

Kevin Thompson

STATUS:

ORD DATE:

6/72

MIL TIME:

Magazine Spring

96018

COMPLETION:

[Signature]

QTY RPR:

15677

QTY CONDEMNED:

NRTS:

EVAC WON:

[Signature]

EVAC UNIT NAME:

KINZER V. REMINGTON

M2400163431

[illegible]

Jun 86 edition may be used.

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

SHIPPER:	CONSIGNEE: <i>Illion, NY.</i>
DESCRIPTION:	GBL NUMBER: <i>G-6578652</i>
ROUTE:	<i>W34XC560930500XXX</i>
<u>NOTICE:</u> HAND TO HAND SIGNATURE SERVICE IS REQUIRED FROM THE TIME THE SHIPMENT LEAVES THE HANDS OF THE CONSIGNOR UNTIL ITS DELIVERY TO THE CONSIGNEE.	
I, the undersigned, have handled (physically or otherwise) the shipment described above:	

BAGGETT TRANSPORTATION COMPANY
BIRMINGHAM, ALA.

[illegible]

M2400163436

SIGNATURE AND TALLY RECORD

FORM APPROVED
OMB No. 0702-0027
Expires Oct 31, 1988

DISTRIBUTION INSTRUCTIONS

- * The SHIPPER will prepare copies 1 through 4, retain copy 4 and deliver copies 1 through 3 to the Origin Carrier.
- * The CARRIER will deliver copies 1 through 3 to the Destination Carrier.
- * The DESTINATION CARRIER will attach copy 1 (reflecting all signatures) and Standard Form 1113 (Public Voucher for Transportation Charges) to the original Government Bill of Lading, and forward for payment. Copy 2 will be delivered to the Consignee. Copy 3 will be retained.
- * The CONSIGNEE will ensure Destination Carrier surrenders copy 2.

SECTION A - To be completed by the SHIPPER

1. SHIPPER		2. PROTECTIVE SERVICE REQUESTED	
a. NAME FORT CAMPBELL KY W34GNA		DN DUAL DRIVER PROTECTIVE SERVICE WITH NAC SM DTTTS SATELLITE MOTOR SURVEILLANCE SERVICE	
b. ORIGIN TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294		3. GBL OR CBL NUMBER G-6578652	
4. CONSIGNEE		5. PERMIT NUMBER (if any)	
a. NAME REMINGTON ARMS CO CMAH2W			
b. DESTINATION REMINGTON ARMS CO., INC. 14 HOEFLEER AVENUE ILION, NY 13357		6. TRANSPORTATION CONTROL NUMBER (FAAT-88-6180007 -01) W34XC560930500XXX	
7. ROUTING BAGGETT TRANSPORTATION CO		8. WEIGHT 140 POUNDS	9. CUBE 14.0
10. SPECIAL INSTRUCTIONS		11. DATE SHIPMENT TENDERED TO CARRIER 96.07.03	12. NAME OF CARRIER BAGT
13. NUMBER OF PIECES 2	14. TYPE OF PACKAGE(S) (For unsealed loads only) OR CONVEYANCE IDENTIFICATION & SEAL NUMBERS (for sealed loads only) BAGT-TRL #2507 X0799372X 0789164	15. FREIGHT CLASSIFICATION DESCRIPTION 146230 GUNS, MACHINE, OR PARTS, NOI, FOR USE OF SMALL ARMS AMMUNITON, IN BOXES	

SECTION B - To be completed by each person accepting custody of classified or protected material requiring the use of transportation protective service during transit.

16. CUSTODY RECORD				
a. PRINT NAME OF PERSON AND COMPANY REPRESENTED	b. STATION INTERCHANGE POINT DESTINATION	c. SIGNATURE OF PERSON ACCEPTING CUSTODY	d. TIME ACCEPTED	e. DATE ACCEPTED
BAGGETT MILLIE H. JONES	FORT CAMPBELL KY	M. H. Jones	13:00	7-3-96
BAGT MARIE L JONES	FORT CAMPBELL KY	Marie L Jones	13:00	7-3-96
R. HALL	Oxford, AL	R. Hall	1530	7/4/96
A. Land	Oxford, AL	A. Land	2300	7/4/96
T. HARRIS	Oxford, AL	T. Harris	0700	7-5-96
R. HALL	Oxford, AL	R. Hall	1525	7/5/96
A. Land	Oxford, AL	A. Land	2310	7/5/96
L. Sizemore	Oxford, AL	L. Sizemore	0700	7/6/96
R. HALL	Oxford, AL	R. Hall	1500	7/6/96
A. Land	Oxford, AL	A. Land	2305	7/6/96

DD FORM 1907, FEB 86

Previous editions are obsolete

PAGE 1

Consignee - Copy 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400163437

U.S. GOVERNMENT FREIGHT WAYBILL										ORIGINAL		B/L NO. G-6578652	
1. TRANSPORTATION COMPANY TENDERED TO BAGGETT TRANSPORTATION CO				2. SCAC BAGT		3. DATE B/L PREPARED 96.07.03		4. ROUTE ORDER/RELEASE NUMBER 7YBAADRAPA					
5. DESTINATION (Name, address and ZIP code) REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357				6. SPLC (Dest.) 172856000		8. ORIGIN TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294		7. SPLC (Orig.) 297980251					
9. CONSIGNEE (Name, address and ZIP code of installation) REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357				10. GBLOC (Cons.) IOOI CMAH2W		11. SHIPPER (Name, address and ZIP code) TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294				W34GNA			
12. APPROPRIATION CHARGEABLE 216202000000762020420000000002217000000GBLG6578652 000FAAD00015056						13. BILL CHARGES TO (Dept./agency, bureau/office mailing address and ZIP code) DEFENSE FINANCE AND ACCOUNTING SVC INDIANAPOLIS CENTER TRANSPORTATION OPS. (DFAS-I-THA) INDIANAPOLIS, IN 46249-0611							
14. VIA (Route shipment when advantageous to the Government)						AGENCY LOC CODE W53QRD							
15. MARKS AND ANNOTATIONS EQUIPMENT 1 DN: DUAL DRIVER PROTECTIVE SERVICE WIT SM: DTTS SATELLITE MOTOR SURVEILLANCE SO: STOP-OFF IN TRANSIT SO: STOP-OFF IN TRANSIT (114) CARRIER TO NOTIFY CONSIGNEE REMINGTON ARMY'S (DUTY PHONE (315) TP:3 DDD:96.07.07 FAAT-88-6180007-01 894-9661 AV- , NON-DUTY PHONE (205) 235-7501) AND CONSIGNOR TRANSPORTATION OFFICE (DUTY PHONE (502) 798-7154 AV-635-7154, NON-DUTY PHONE (502) 798-9793) IMMEDIATELY IF SHIPMENT IS DELAYED EN ROUTE BECAUSE OF AN SEE DESCRIPTION OF ARTICLES													
16. PACKAGES		17. HM		18. DESCRIPTION OF ARTICLES AND EXCEPTIONS				19. WEIGHT* (Pounds only)		FOR USE OF BILLING CARRIER ONLY			
NO.	KIND									Services	Rate	Charges	
9	MX	CLASSIFICATION ITEM NO. 146230		THIS BL CONSISTS OF 4 PAGES				5000					
		GUNS, MACHINE, OR PARTS, NOI, FOR USE OF SMALL ARMS AMMUNITITON, IN BOXES											
20. TARIFF/SPECIAL RATE AUTHORITY BAGT 546 -00				21. PICKUP SERV. FURNISHED ☐ YES VEHICLE FULLY LOADED ☐ YES				22. CARRIER WAY/FREIGHT BILL NO. AND DATE					
23. STOP THIS SHIPMENT AT SEE CONTINUATION SHEET				24. FURNISH INFORMATION ON CAR/TRUCKLOAD/CONTAINER SHIPMENTS									
FOR:				INITIALS & NO.		SEAL NUMBERS		LENGTH/CUBE		MARKED CAPACITY		DATE FURNISHED	
				BAGT:TRL #2507		0790372		ORDERED FURNISHED		ORDERED AV2 FURNISHED AV3		96.07.03	
25. CARRIER'S PICKUP DATE (Year, month, & day) 96.07.03				26a. SIGNATURE OF AGENT BILL JONES				26b. PER BAGT		B/L NUMBER G-6578652			
27. MODE B	28. ESTIMATE 2183	29. NO. OF CLS/TLS 1	30. TYPE RATE 1	31. PSC DN:SM	32. REASON		WEIGHED AT GROSS TARE ALLOWANCE NET						
FOR USE OF ISSUING OFFICE							OUTBOUND JUNCTION AGENT — Show junction stamps in space and order provided. Additional junction stamps and all yard stamps to be placed on back hereof.						
33a. ISSUING OFFICE (Name and complete address) TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294							33b. GBLOC FAAT		FIRST JUNCTION		SECOND JUNCTION	THIRD JUNCTION	
33c. ISSUING OFFICER MICHAEL F. BOWERS, CHIEF, ITO							33e. DATED		FOURTH JUNCTION		FIFTH JUNCTION	DESTINATION AGENT (Stamp herein station name and date reported)	
33d. CONTRACT/PURCHASE ORDER NO. OR OTHER AUTHORITY													
33f. FOB POINT NAMED IN CONTRACT													

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1105-121-01

WHITE

STANDARD FORM 1105 (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400163438

U.S. GOVERNMENT FREIGHT WAYBILL CONTINUATION SHEET

ORIGINAL

B/L NO. **G-65,8652**
SHEET NO. **2 OF 4**

(This form is to be used as a continuation sheet for SF 1105, U.S. Government Freight Waybill-Original, or SF 1205, U.S. Government Freight Waybill- Privately Owned Personal Property-Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICER
FORT CAMPBELL KY
ATTN: AFZB-DL-TO, BLDG 873
FORT CAMPBELL, KY 42223-1294

TRANSPORTATION COMPANY TENDERED TO

BAGGETT TRANSPORTATION CO

FROM(Shipping Point)

W34GNA
297980251

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			STOP-OFF: 01 (UNLOADING)				
			TRANSPORTATION OFFICER LETTERKENNY ARMY DEPOT ATTN: DDLP-TS CHAMBERSBURG, PA 17201-4150 SPLC: 209770250				
1	PT		TCN: W34QVB61500599XXX CU:35.0 FAAD SIGHT, OPTICAL GUIDE NSN: 1440-01-271-7428	400			
1	PT		TCN: W34QS260660521XXX CU:41.0 FAAD SIGHT, OPTICAL, GUIDE NSN: 1440-01-271-7428	250			
2	PT		STOP-OFF 01 TOTALS (UNLOADING)CU:76.0	650			
			RECEIVED BY: _____ DATE.....: _____				

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1111-114

WHITE

STANDARD FORM 1111, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400163439

U.S. GOVERNMENT FREIGHT WAYBILL CONTINUATION SHEET

ORIGINAL

B/L NO. **G-6** 52
SHEET NO. **3 OF 4**

(This form is to be used as a continuation sheet for SF 1105, U.S. Government Freight Waybill-Original, or SF 1205, U.S. Government Freight Waybill- Privately Owned Personal Property-Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICER
FORT CAMPBELL KY
ATTN: AFZB-DL-TO, BLDG 873
FORT CAMPBELL, KY 42223-1294

TRANSPORTATION COMPANY TENDERED TO

BAGGETT TRANSPORTATION CO

FROM(Shipping Point)

W34GNA
297980251

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			STOP-OFF: 02 (UNLOADING)				
			TRANSPORTATION OFFICER DEF DISTRIBUTION DEPOT TOBYHANNA 11 MIDWAY ROAD TOBYHANNA, PA 18466-5092 SPLC: 202230250				
1	PT		TCN: W34XC561566785XXX CU:60.0 FAAD IA Z-AHQ/TSC F/KY 58 NSN: 5810-01-026-9624	650			
1	PT		TCN: W34QS160873105XXX CU:35.0 FAAD NIGHT VIS G AN/PVS-5C NSN: 5855-01-228-0936	575			
1	PT		TCN: W81LDF60951108XXX CU:44.0 FAAD TRANSMITTER, COUNTER NSN: 5865-01-323-4999	325			
1	PT		TCN: W36Q2K60860019XXX CU:50.0 FAAD NSN: 5810-01-293-1348	300			
1	PT		TCN: W34QUD61163609XXX CU:35.0 FAAD CRYPTOGRAPHIC SPEECH	450			
5	PT		STOP-OFF 02 TOTALS (UNLOADING)CU:224.0	2300			
			RECEIVED BY: _____ DATE.....: _____				

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1111-114

WHITE

STANDARD FORM 1111, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400163440

U.S. GOVERNMENT FREIGHT WAYBILL CONTINUATION SHEET

ORIGINAL

B/L NO. **G-6578652**
SHEET NO. **4 OF 4**

(This form is to be used as a continuation sheet for SF 1105, U.S. Government Freight Waybill-Original, or SF 1205, U.S. Government Freight Waybill- Privately Owned Personal Property-Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICER
FORT CAMPBELL KY
ATTN: AFZB-DL-TO, BLDG 873
FORT CAMPBELL, KY 42223-1294

TRANSPORTATION COMPANY TENDERED TO

BAGGETT TRANSPORTATION CO

FROM(Shipping Point)

W34GNA
297980251

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			FINAL DESTINATION (UNLOADING)				
			REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357 SPLC: 172856000				
1	BX		TCN: W34XC560930500XXX CU:7.0 FAAD RIFLE, M24 SWS, SN: C6225599 NSN: 1005-01-240-2136	70			
1	BX		TCN: W34XC561840500XXX CU:7.0 FAAD RIFLE NSN: 1005-01-240-2136	70			
2	BX		FINAL DEST TOTALS (UNLOADING) CU:14.0	140			
=====							
			MARKS & ANNOTATIONS:				
			ACCIDENT OR INCIDENT. IF NEITHER CAN BE REACHED, CONTACT EASTERN AREA AT HOTLINE (800) 524-0331. USE HOTLINE NUMBER TO OBTAIN SAFE HAVEN OR REFUGE INSTRUCTIONS IN THE EVENT OF A CIVIL DISORDER, NATURAL DISASTER, CARRIER STRIKE OR OTHER EMERGENCY.				
			THIS IS A DTTS SHIPMENT!				
=====							
			BLOCK 24 EQUIPMENT DESCRIPTION CONT.:				
			TRACTOR: 155				

*Show also cubic measurements for shipments via air,
truck or water carrier in cases where required.

1111-114

WHITE

STANDARD FORM 1111, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400163441

MILITARY SHIPMENT LABEL		Form Approved. OMB No. 0704-0188	
1. TRANSPORTATION CONTROL NUMBER W34XC5 6093 0500 XXX GBL #G6578652		2. POSTAGE DATA	
3. FROM TRANSPORTATION OFFICE FORT CAMPBELL KY 42223		4. TYPE SERVICE	
5. SHIP TO/POE REMINGTON ARMS CO INC. 14 HOFFLER AVE ILION NY 13357		6. TRANS PRIORITY	
7. POD		8. PROJECT	
9. ULTIMATE CONSIGNEE OR MARK FOR	10. WT. <i>(This piece)</i> 70	11. RDD	
	12. CUBE <i>(This Piece)</i>	13. CHARGES	
	14. DATE SHIPPED	15. FMS CASE NUMBER	
	16. PIECE NUMBER 1		
	17. TOTAL PIECES 1		

DD Form 1387, NOV 86

Previous editions are obsolete.

Final Inspection

Sn: C6225444

DATE REC'D: 7/15/96

DATE RET'D:

AUDITOR: AW

Item:

BARREL ASSY.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

SCOPE ASSY.

☐ SCOPE☐ SCOPE RINGS☐ MOUNTING SCREWS☐ MOUNTING BASE☐ SCREWS☐ FINISH☐ LOOSENESS☐ CLARITY

MISC.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

STOCK ASSY.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

SYSTEMS CASE

☐ SCOPE CASE☐ IRON SIGHTS☐ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION☒ SET

Comments: _____

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

Remington
REG. U.S. PAT. & TM. OFF.

MODEL 700™ H24

**SERIAL NO.
C6225444**

**ORDER NO.
5716**


MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

Ø1



5716 C6225444

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225444

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	4 21	89	RW
600	Proof	4 21	89	RW
607	Check Headspace	4 21	89	RW
610	Dis-assemble Gun	4 21	89	RW
612	Magnaflux Barrel Action		4/26	KCR
	Magnaflux Bolt		4/27	KCR
615	Rollmark Caliber		4/27	GS
617	Drill and Tap Sight Holes	4 27	89	JB
618	Polish Barrel RB	4 27	89	BT
620	Apply Coatings (Barrel Action)		5-8-89	TA
	Apply Coating (Bolt)		-5-8-89	TA
625	Final Assembly A) Clean inside of Bolt Assembly		5/17/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/17/89	RW
	C) Inspect Ejector Hole for Chamfer		5/17/89	RW
	D) Oil Firing Pin Ass'y		5/17/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		5/23/89	GS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	4 3/4			5/23/89	WLB
	G) Safety Off Force	3 1/4	3 1/4	3 1/4			5/23/89	WLB
	H) Trigger Pull Test & Retainability						5/23/89	WLB
	I) Firing Pin Indent	.0207	.0207	.0205			5/23/89	WLB
	J) Assemble Stock						5/24/89	RW
	K) Assemble Swivel Studs						5/24/89	JS
	L) Attach Front and Rear Sight Assemblies						5/24/89	RW
	M) Iron Sight Alignment						5/24/89	RW
	N) Detach Front & Rear Sights & place in numbered container						5/24/89	RW
	O) Attach Scope to Rifle						5/24/89	JM
	P) Detach & Attach Scope 20 Times						5/24/89	JM
640	Gallery Target & Test	42R	111L				5-25-89	AC
	A) Time						"	AC
	B) Malfunctions						"	AC
	C) Pierced Primers						"	AC
	D) Optical Clarity of Scope						"	AC
645	Inspect for Live Ammo						5-25-89	A.C
655	Final Inspection							
	A) Headspace						30 May 89	JS
	B) Trigger Pull	2.49	2.48	2.43	2.45	2.46	30 May 89	JS
	C) Function						30 May 89	JS
660	Pack						26 June 89	JS

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6225444

DATE 4-6-90

TESTER DH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.49	2.40	2.58	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.47	2.50	2.56	
PULL #3	2.49	2.41	2.54	
PULL #4	2.50	2.30	2.46	
PULL #5	2.50	2.50	2.49	
TOTAL	12.45	12.11	12.63	
AVG.	2.49	2.42	2.52	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.28	3.19	
PULL #2	3.23	3.20	
PULL #3	3.30	3.24	
PULL #4	3.24	3.00	
PULL #5	3.35	3.22	
TOTAL	16.40	15.85	
AVG.	3.28	3.17	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.23	4.15		
PULL #2	4.05	4.18		
PULL #3	4.04	4.11		
PULL #4	4.04	4.22		
PULL #5	4.03	4.19		
TOTAL	20.39	20.85		
AVG.	4.07	4.17		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225444
25 May 1989

CENTROIDAL DISTANCES

Ø TO	1	.200584
1 TO	2	.491424
1 TO	3	.408649
1 TO	4	.336216
1 TO	5	.599921

50
lt <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.3528
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .2772
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .448673

THE AMR FOR THIS RIFLE IS: .8676

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS # 1

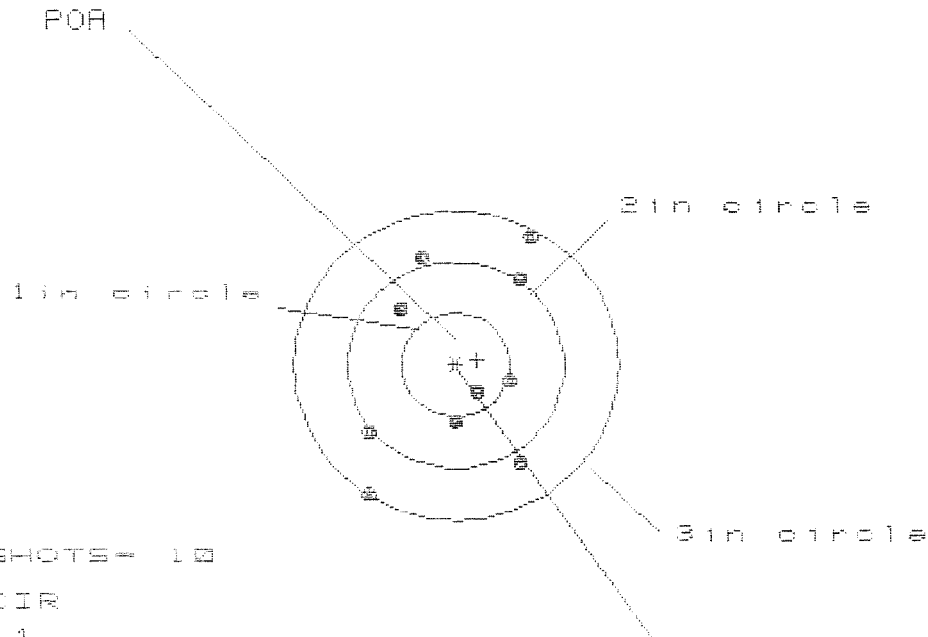

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 4

3 in = 10

CENTROID #

HE = 1.504

VS = 2.465

GS = 2.888

PATTERN #


1

SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.665	.572	.575
MINIMUM X	:	-.839	-.925	-.854
MAXIMUM Y	:	1.246	1.104	1.083
MINIMUM Y	:	-1.225	-1.077	-.939
CENTROID X	:	-.195	-.102	-.173
CENTROID Y	:	-.047	.089	-.049
POA TO CENTROID in.	:	.200	.135	.180
MIN RADIUS	:	.287	.367	.272
MEAN RADIUS	:	.933	.871	.802
MAX RADIUS	:	1.485	1.243	1.144
HORIZONTAL SPREAD	:	1.504	1.497	1.429
VERTICAL SPREAD	:	2.465	2.181	2.022
EXTREME SPREAD	:	2.888	2.393	2.212
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		10	

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225444

CENTERFIRE PATTERNS # 2

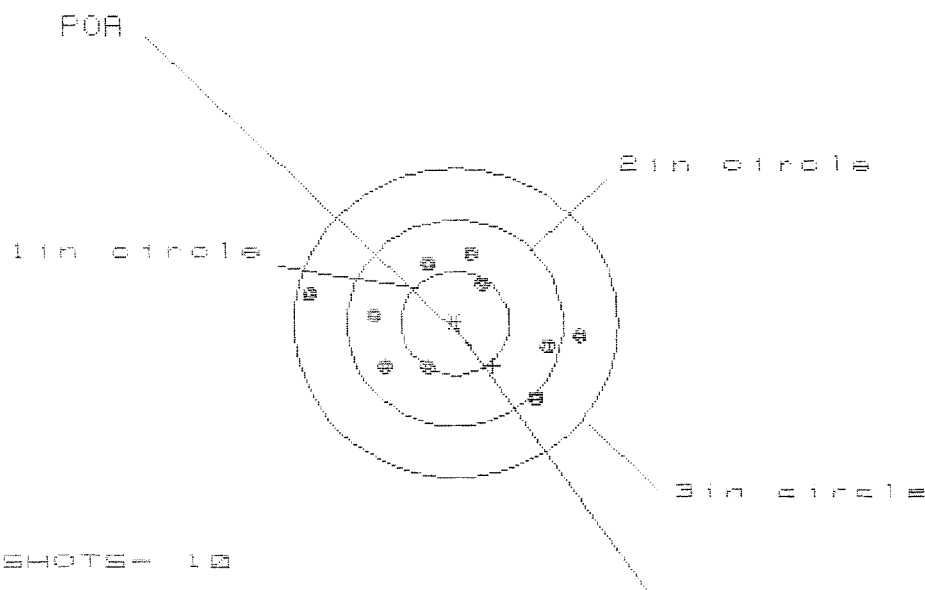

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 7

3 in = 10

MEI = 2.481

VB= 1.434

GB= 2.493


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.156	1.011	.832
MINIMUM X	-1.305	-.861	-.735
MAXIMUM Y	.710	.736	.719
MINIMUM Y	-.725	-.698	-.715
CENTROID X	-.348	-.283	-.329
CENTROID Y	.420	.393	.410
FOR TO CENTROID in.	.545	.442	.526
MIN RADIUS	.442	.423	.442
MEAN RADIUS	.811	.753	.704
MAX RADIUS	1.327	1.020	1.018
HORIZONTAL SPREAD	2.461	1.872	1.567
VERTICAL SPREAD	1.434	1.434	1.434
EXTREME SPREAD	2.493	1.882	1.644
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		10	

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225444

CENTERFIRE PATTERNS # 3

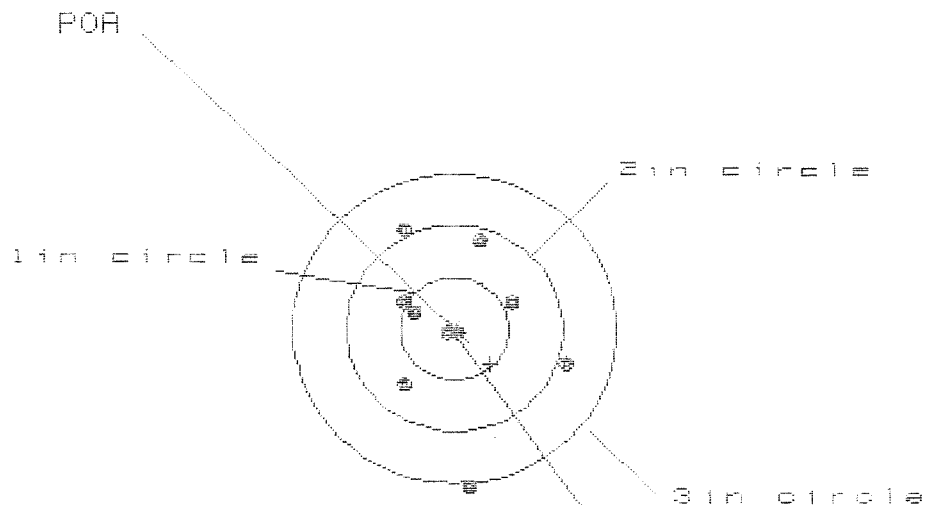

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 7

3 in = 9

HS= 1.542

VS= 2.544

GS= 2.600

CENTROID *


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.027	1.037	.982
MINIMUM X	:	-.515	-.505	-.550
MAXIMUM Y	:	.999	.828	.819
MINIMUM Y	:	-1.545	-.662	-.559
CENTROID X	:	-.332	-.342	-.287
CENTROID Y	:	.338	.509	.486
POA TO CENTROID in.	:	.474	.613	.497
MIN RADIUS	:	.047	.218	.125
MEAN RADIUS	:	.791	.613	.560
MAX RADIUS	:	1.547	1.159	1.066
HORIZONTAL SPREAD	:	1.542	1.542	1.542
VERTICAL SPREAD	:	2.544	1.490	1.378
EXTREME SPREAD	:	2.600	1.997	1.587
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		9	

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS

4

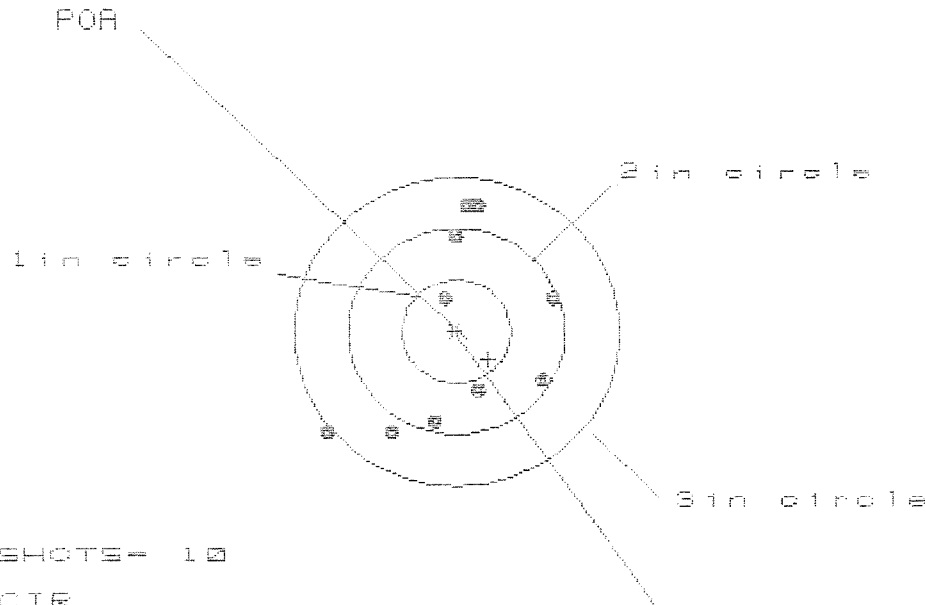

OF SHOTS= 10

IN CIR

1in = 1

2in = 6

3in = 3

HS= 2.032

VS= 2.270

ES= 2.562


CENTROID #

PATTERN #	4		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.856	.726	.719
MINIMUM X	-1.176	-.726	-.733
MAXIMUM Y	1.252	1.143	1.228
MINIMUM Y	-1.018	-1.127	-.984
CENTROID X	-.295	-.165	-.138
CENTROID Y	.274	.383	.240
POA TO CENTROID in.	.403	.417	.287
MIN RADIUS	.325	.309	.419
MEAN RADIUS	.974	.895	.858
MAX RADIUS	1.532	1.340	1.229
HORIZONTAL SPREAD	2.032	1.452	1.452
VERTICAL SPREAD	2.270	2.270	2.212
EXTREME SPREAD	2.562	2.367	2.342
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS # 5

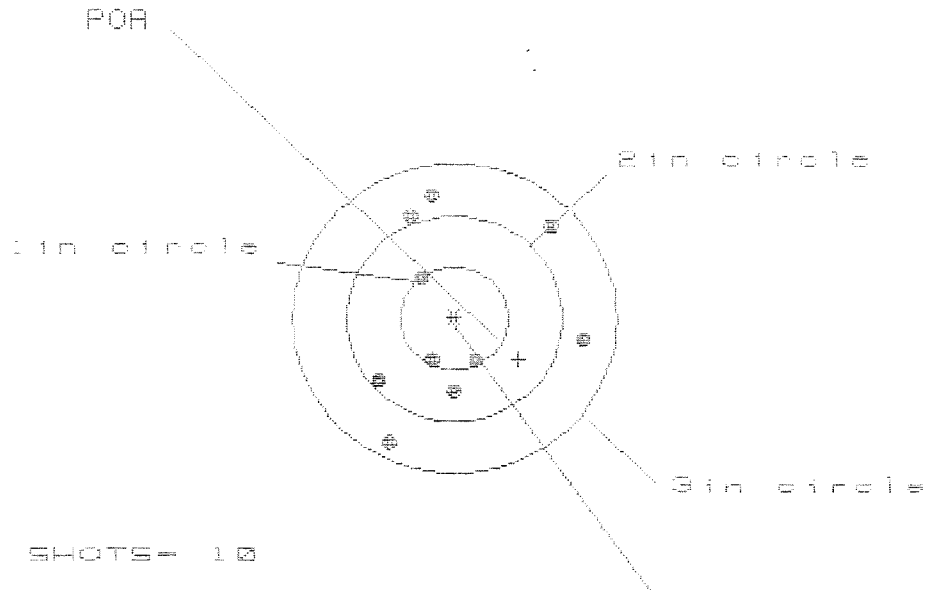

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 5

3 in = 10

HS= 1.882

VS= 2.418

GS= 2.552

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.180	1.114	1.223
MINIMUM X	:	-.572	-.739	-.630
MAXIMUM Y	:	1.236	1.105	1.195
MINIMUM Y	:	-1.182	-.860	-.770
CENTROID X	:	-.594	-.527	-.636
CENTROID Y	:	.401	.532	.442
POA TO CENTROID in.	:	.716	.749	.775
MIN RADIUS	:	.442	.481	.465
MEAN RADIUS	:	.919	.883	.826
MAX RADIUS	:	1.326	1.174	1.255
HORIZONTAL SPREAD	:	1.853	1.853	1.853
VERTICAL SPREAD	:	2.418	1.965	1.965
EXTREME SPREAD	:	2.552	2.149	2.034
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 95-14840

INITIAL JJM	CUSTOMER ORDER NO.	M-24 SNIPER W/10X-M3A SCOPE # 0038				
DATE RECEIVED 05/16/95	DATE OPENED 05/17/95	DATE CODE CJ 4-89	SERIAL NUMBER C6225444	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO
ACCESSORIES SCOPE BASE HARD CASE W/STUDS w/1 Swivel						

FROM:

TRANSPORTATION OFFICE
FT CAMPBELL KY 42223

SHIP TO:

TRANSPORTATION OFFICE
FT CAMPBELL KY
42223

CUST NO: 087942 C.M.D.L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	------------

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.	New	B4 Barrel		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

Barrel Shot out

PARTS	COMMENTS
Barrel - 96003	Repowder Coat - Trigger Guard Assy, Front & Rear Sight Bases. Re-zinc - Scope Base Rings, Swivels & Swivel Stud
REPAIRMAN RW	PROOF C
GALLERY TESTER RW	DATE 5/30/95
	CLEAN ✓
	DATE 6/14/95
	TEST L
	DATE 6/19/95
	TARGET L
	DATE 6/19/95
	PATTERN
	DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400163454

Final Inspection

Sn: C6225444

DATE REC'D: 5/16/95

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ Screws☒ Finish☒ Looseness☒ CLARITY

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☒ Scope Case☒ Iron SIGHTS☒ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Misc.

☒ DD-250☒ BAR CODE☒ PACKAGING

Comments: _____

New Barrel

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225444

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		5/30/85	RW
600	Proof		5/30/85	RW
607	Check Headspace		5/30/85	RW
610	Dis-assemble Gun		5/30/85	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		6/16/85	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		6/16/85	RW
	C) Inspect Ejector Hole for Chamfer		6/16/85	RW
	D) Oil Firing Pin Ass'y		6/16/85	RW
	E) Adjust Trigger Pull to Min Setting and Stake		6/16/85	RW

op. #	OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock			
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
640	Gallery Target & Test		6/19/95	RW
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo		6/19/95	RW
655	Final Inspection		6/20/95	RW
	A) Headspace		6/20/95	RW
	B) Trigger Pull		6/20/95	RW
	C) Function		6/20/95	RW
660	Pack			

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225444
11 Jul 1995

CENTROIDAL DISTANCES

0 TO	1	.414237
1 TO	2	.25787
1 TO	3	.474806
1 TO	4	.468796
1 TO	5	.28677

14 <----POB


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0702
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2258
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .236461
THE AMR FOR THIS RIFLE IS: .9704

11 Jul 1995

FILE:/PATTERNING/CENTERFIRE_PATT/C8225444

CENTERFIRE PATTERNS

1

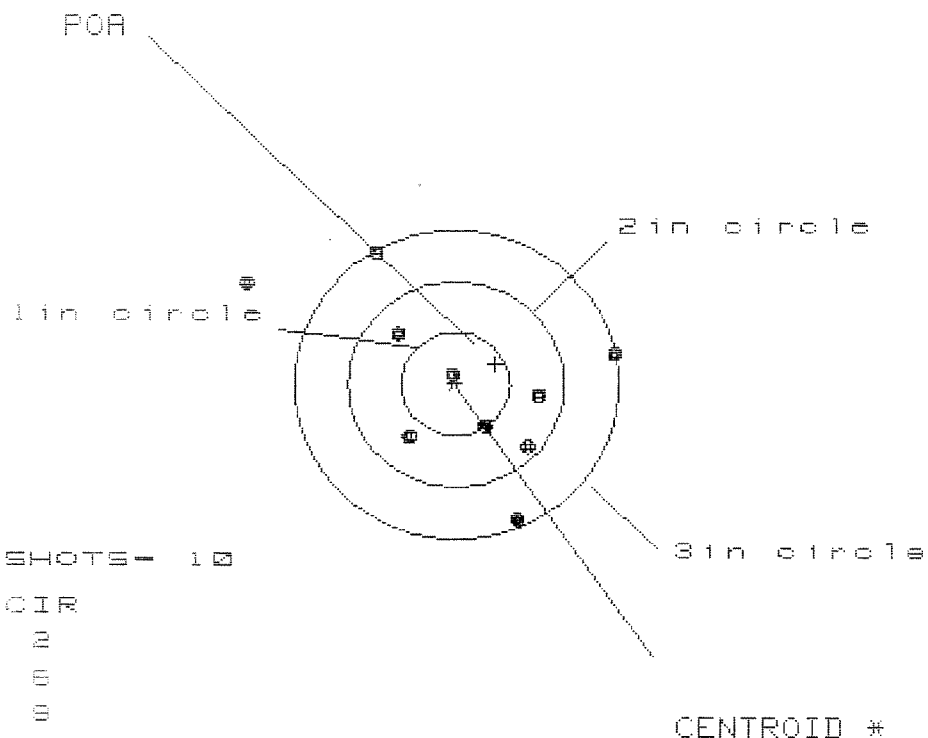

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 9

HS= 3.392

VS= 2.549


GS= 3.465

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.424	1.205	1.080
MINIMUM X	:	-1.968	-1.001	-.857
MAXIMUM Y	:	1.251	1.358	.738
MINIMUM Y	:	-1.298	-1.191	-1.022
CENTROID X	:	-.366	-.147	-.022
CENTROID Y	:	-.194	-.301	-.470
POA TO CENTROID in.	:	.414	.335	.471
MIN RADIUS	:	.099	.310	.214
MEAN RADIUS	:	1.021	.864	.731
MAX RADIUS	:	2.191	1.687	1.203
HORIZONTAL SPREAD	:	3.392	2.206	1.937
VERTICAL SPREAD	:	2.549	2.549	1.760
EXTREME SPREAD	:	3.465	2.883	2.063
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	9		

11 JUL 1995

FILE:/PATTERNING/CENTERFIRE_PATT/C8225444

CENTERFIRE PATTERNS # 2

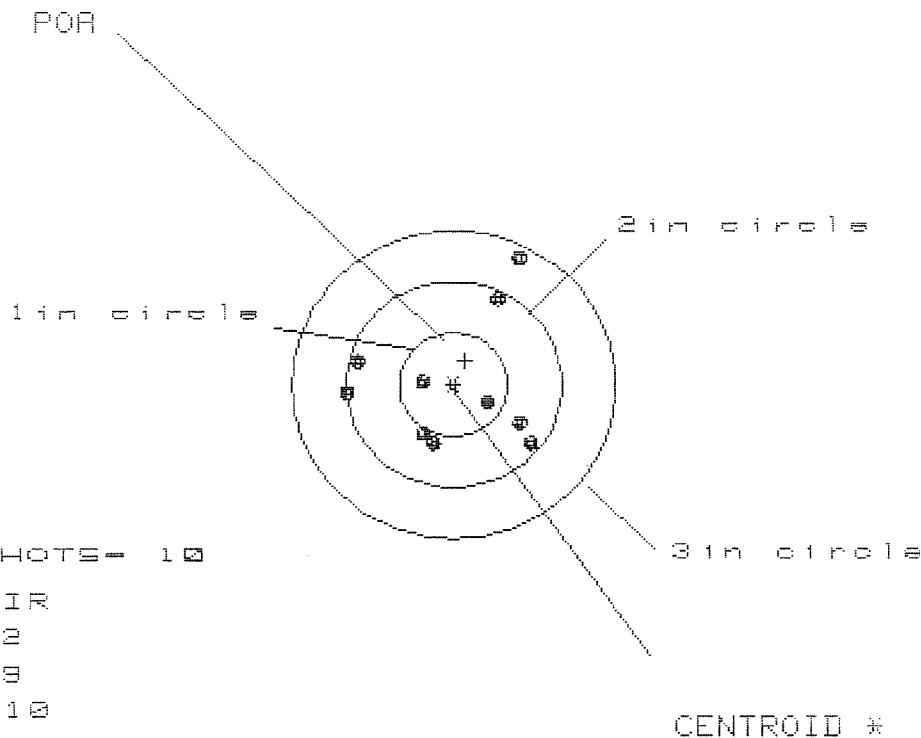

OF SHOTS= 10

IN CIR

1in = 2

2in = 9

3in = 10

HS= 1.756

VS= 1.784

GS= 2.038


PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.757	.827	.711
MINIMUM X	:	-.999	-.929	-.925
MAXIMUM Y	:	1.183	.969	.980
MINIMUM Y	:	-.601	-.469	-.458
CENTROID X	:	-.111	-.181	-.065
CENTROID Y	:	-.231	-.363	-.374
POA TO CENTROID in.	:	.257	.406	.380
MIN RADIUS	:	.316	.298	.293
MEAN RADIUS	:	.768	.678	.640
MAX RADIUS	:	1.341	1.064	1.032
HORIZONTAL SPREAD	:	1.756	1.756	1.636
VERTICAL SPREAD	:	1.784	1.438	1.438
EXTREME SPREAD	:	2.039	1.833	1.802
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	

11 Jul 1995

FILE:/PATTERNING/CENTERFIRE_PATT/C6225444

CENTERFIRE PATTERNS

3

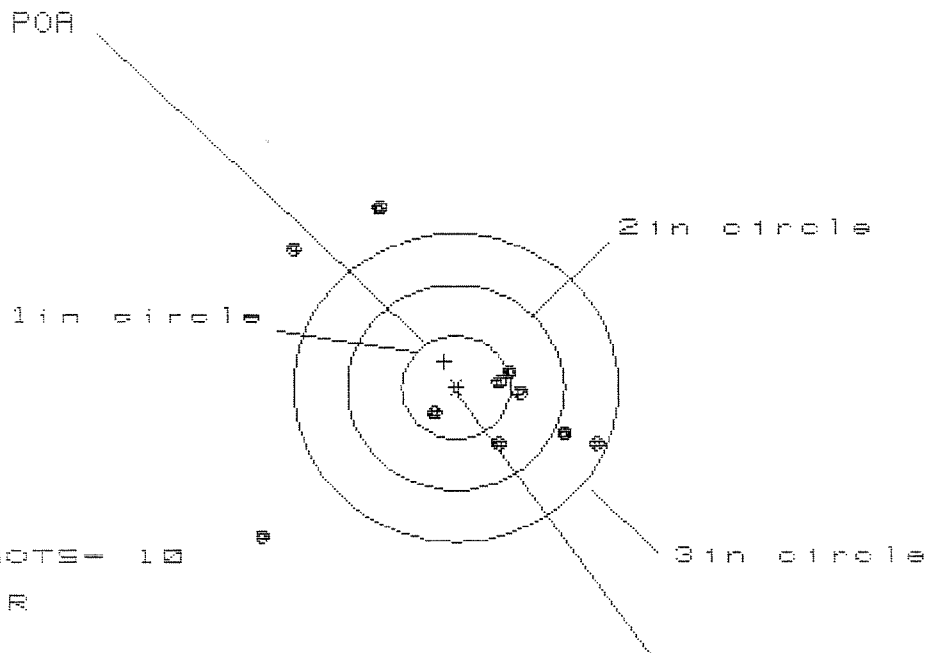

OF SHOTS- 10

IN CIR

1in = 3

2in = 5

3in = 7

HS= 3.081

VS= 3.147

GS= 3.376

CENTROID *

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.292	1.093	.880
MINIMUM X	:	-1.789	-1.706	-1.087
MAXIMUM Y	:	1.704	1.543	1.695
MINIMUM Y	:	-1.443	-1.702	-1.550
CENTROID X	:	.105	.304	.517
CENTROID Y	:	-.254	-.093	-.245
POA TO CENTROID in.	:	.274	.318	.572
MIN RADIUS	:	.314	.182	.080
MEAN RADIUS	:	1.117	.938	.686
MAX RADIUS	:	2.299	2.093	2.013
HORIZONTAL SPREAD	:	3.081	2.799	1.967
VERTICAL SPREAD	:	3.147	2.245	2.245
EXTREME SPREAD	:	3.376	3.376	2.965
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		7	


11 Jul 1995

FILE:/PATTERNING/CENTERFIRE_PATT/C8225444

CENTERFIRE PATTERNS

4

POA

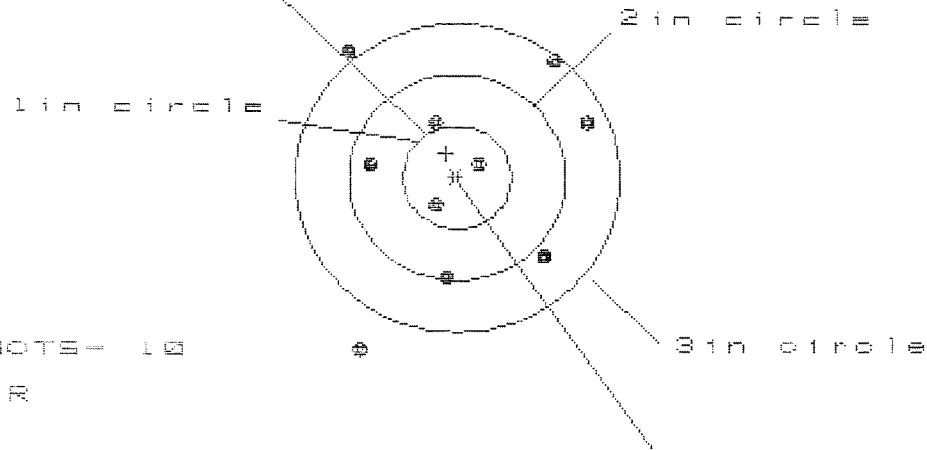

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 4

3 in = 8

ME = 2.144

VS = 2.930

GS = 3.330

CENTROID *


PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.190	1.093	.962
MINIMUM X	-.955	-1.051	-1.056
MAXIMUM Y	1.239	1.051	1.072
MINIMUM Y	-1.691	-1.197	-1.066
CENTROID X	.101	.197	.328
CENTROID Y	-.235	-.047	-.178
POA TO CENTROID in.	.255	.202	.374
MIN RADIUS	.268	.142	.082
MEAN RADIUS	1.037	.929	.848
MAX RADIUS	1.901	1.486	1.268
HORIZONTAL SPREAD	2.144	2.144	2.018
VERTICAL SPREAD	2.930	2.248	2.138
EXTREME SPREAD	3.330	2.635	2.351
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

11 Jul 1995

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS

5

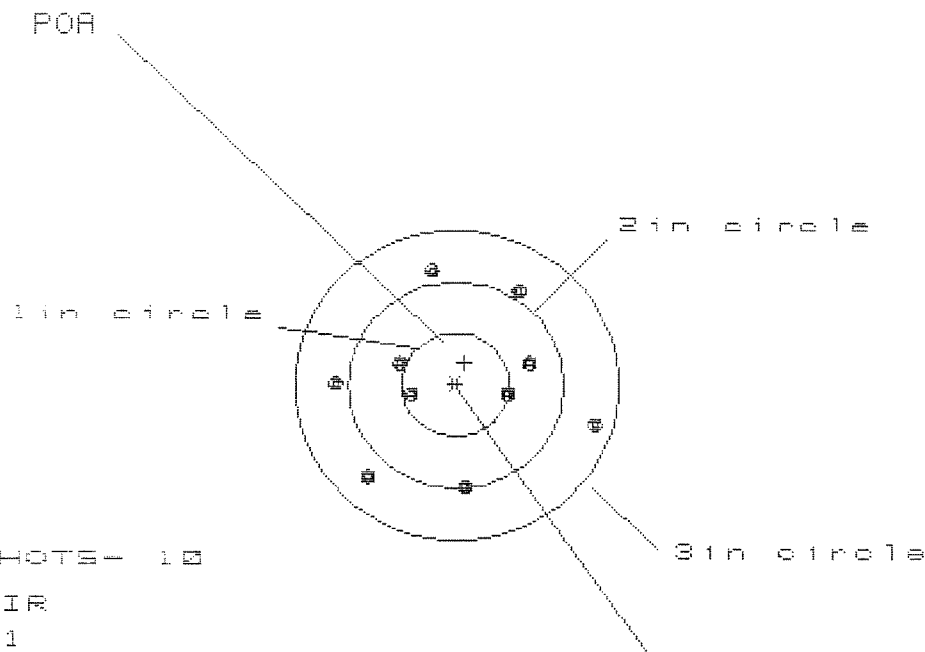

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 10

HS= 2.459

VS= 2.105

GS= 2.494

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.301	.806	.727
MINIMUM X	:	-1.158	-1.013	-1.092
MAXIMUM Y	:	1.118	1.078	.963
MINIMUM Y	:	-.987	-1.027	-1.142
CENTROID X	:	-.080	-.225	-.146
CENTROID Y	:	-.215	-.175	-.060
POA TO CENTROID in.	:	.229	.285	.158
MIN RADIUS	:	.458	.338	.439
MEAN RADIUS	:	.909	.845	.809
MAX RADIUS	:	1.349	1.115	1.153
HORIZONTAL SPREAD	:	2.459	1.819	1.819
VERTICAL SPREAD	:	2.105	2.105	2.105
EXTREME SPREAD	:	2.494	2.228	2.136
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	