

G 6590152
Replaces
E 6413458

Repair Inquiry

Repair Number: RE00124985

Serial: C6413458 Model M24 SWS Center Fire

Repairman:

Verify Repair

Status:

New 2/7/2007 8:34:50 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: POST ARMS ROOM

POST ARMS ROOM

Address 1: BLDG 330

BLDG 330

Address 2: 4851 CHILES AVE.

PO Box:

4851 CHILES AVE.

PO Box:

City: FT. CARSON

FT. CARSON

State: CO

Zip Code: 80913

Country: US

State: CO

Zip Code: 80913

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information:

Phone: NA

Fax:

Email:

Comments:

Received Condition:

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A006	Sling Strap	1
A007	With Stud	3
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
A057	Frt and Rear Sgt Base	2

Repair Search

Refresh

Close

magletj

2/7/2007

10:22 AM

CAPS

NUM

CIR

SCRL



G6590152 (New)

Serial Number: ~~C6413458~~

Model: M24 SWS



RE00124985

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6590152.___0
FILE DATE AND TIME: 03/07/2007 14:08

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.068
The Average Y Centroid of the Five Target Set:	-0.171
The Average Point of Impact of the Five Target Set:	0.184
The Average Mean Radius of the Five Target Set:	0.987
The Distance from POA to Centroid Target #1:	0.251
The Distance from Centroid Target #2 to Centroid Target #1:	0.101
The Distance from Centroid Target #3 to Centroid Target #1:	0.284
The Distance from Centroid Target #4 to Centroid Target #1:	0.163
The Distance from Centroid Target #5 to Centroid Target #1:	0.430

SERIAL NUMBER: G6590152. 0

TARGET NUMBER: 1

FILE DATE: 03/07/2007

FILE TIME: 14:08

X CENTROID: 0.047

Y CENTROID: -0.246

POA TO CENTROID: 0.251

HORZ SPREAD: 3.366

VERT SPREAD: 2.482

GROUP SPREAD: 3.536

MIN RADIUS: 0.572

MAX RADIUS: 1.913


MEAN RADIUS: 1.230

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 6

POINT#	X	Y
1:	1.839	-0.250
2:	1.087	-1.629
3:	0.829	-0.439
4:	0.528	-0.556
5:	0.113	-0.829
6:	0.365	0.521
7:	-0.759	0.850
8:	-1.073	0.853
9:	-0.930	0.349
10:	-1.527	-1.334

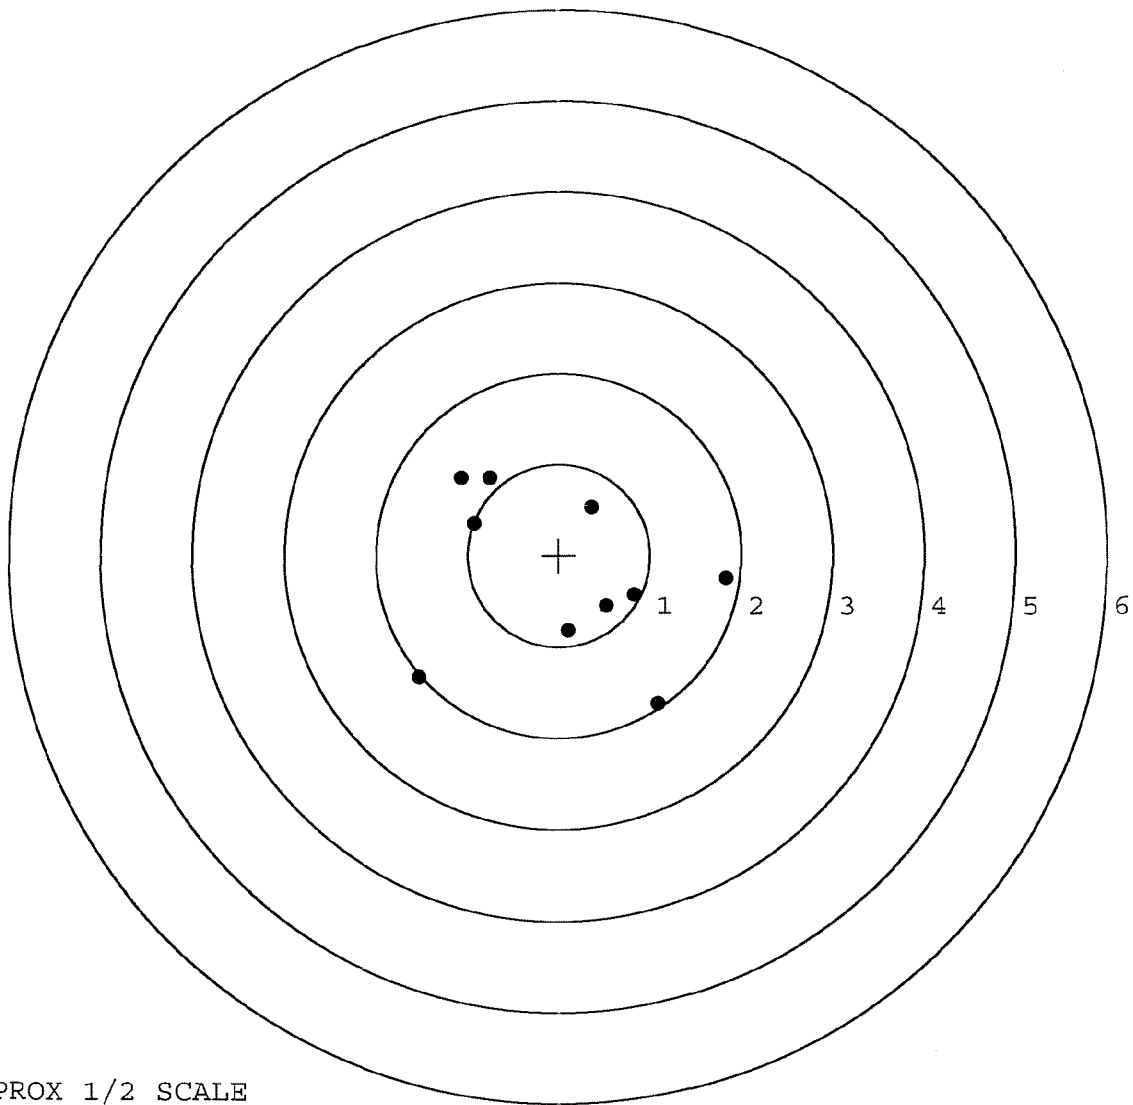

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590152. 0

TARGET NUMBER: 2

FILE DATE: 03/07/2007

FILE TIME: 14:08

POINT#	X	Y
--------	---	---

1:	1.601	-1.101
----	-------	--------

2:	1.559	-0.606
----	-------	--------

3:	0.357	-1.130
----	-------	--------

4:	-0.259	-0.958
----	--------	--------

5:	-1.519	-1.026
----	--------	--------

6:	-0.446	-0.276
----	--------	--------

7:	-0.108	-0.058
----	--------	--------

8:	-0.111	0.535
----	--------	-------

9:	0.448	0.640
----	-------	-------

10:	-1.520	0.619
-----	--------	-------

X CENTROID: 0.000

Y CENTROID: -0.336

POA TO CENTROID: 0.336

HORZ SPREAD: 3.121

VERT SPREAD: 1.770

GROUP SPREAD: 3.564

MIN RADIUS: 0.298


MAX RADIUS: 1.795

MEAN RADIUS: 1.106

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 6

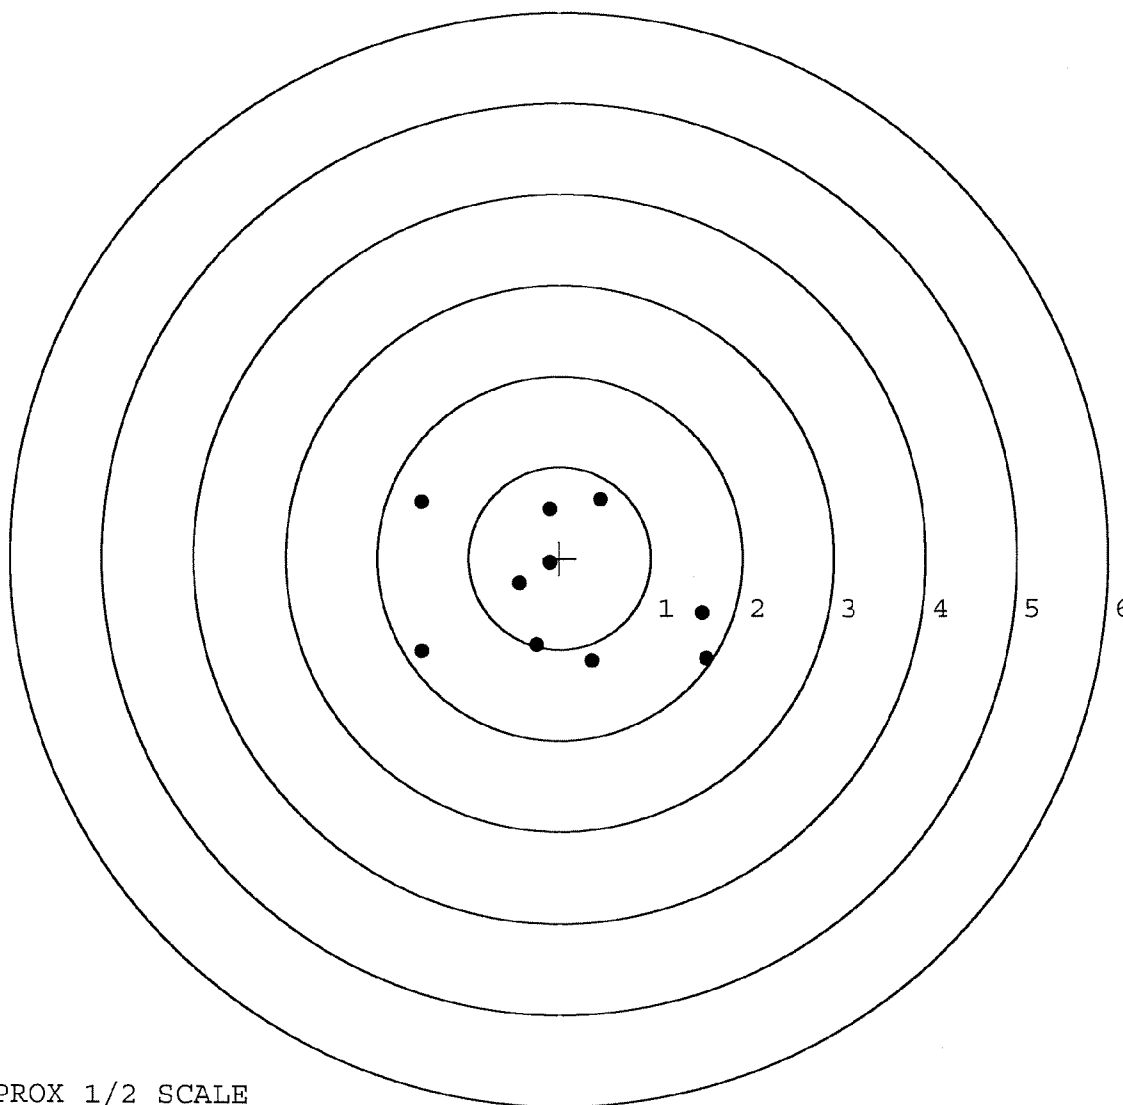

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590152. 0

TARGET NUMBER: 3

FILE DATE: 03/07/2007

FILE TIME: 14:08

POINT#	X	Y
--------	---	---

1:	0.584	-1.741
----	-------	--------

2:	-1.747	-0.740
----	--------	--------

3:	-1.846	-0.533
----	--------	--------

4:	0.726	-0.071
----	-------	--------

5:	-0.340	0.749
----	--------	-------

6:	0.220	0.314
----	-------	-------

7:	0.291	0.036
----	-------	-------

8:	0.289	-0.404
----	-------	--------

9:	-0.163	0.095
----	--------	-------

10:	-0.385	-0.212
-----	--------	--------

X CENTROID: -0.237

Y CENTROID: -0.251

POA TO CENTROID: 0.345

HORZ SPREAD: 2.572

VERT SPREAD: 2.490

GROUP SPREAD: 2.714

MIN RADIUS: 0.153


MAX RADIUS: 1.702

MEAN RADIUS: 0.929

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 7

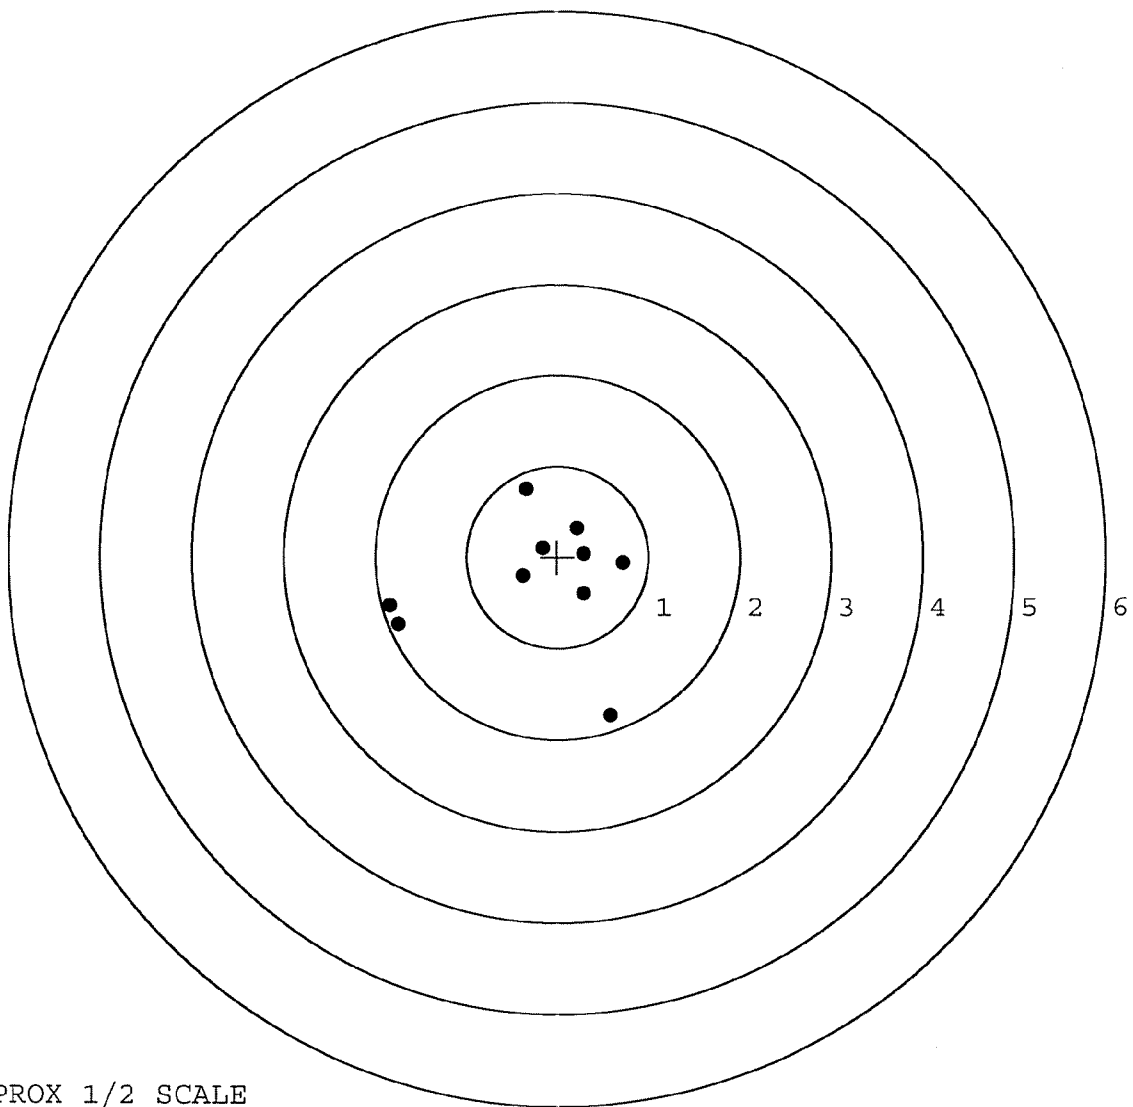

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590152. 0

TARGET NUMBER: 4

FILE DATE: 03/07/2007

FILE TIME: 14:08

POINT#	X	Y
--------	---	---

1:	0.390	-0.637
----	-------	--------

2:	0.290	-0.542
----	-------	--------

3:	-0.609	-1.006
----	--------	--------

4:	-0.682	-0.940
----	--------	--------

5:	0.636	0.937
----	-------	-------

6:	0.166	0.187
----	-------	-------

7:	-0.172	0.331
----	--------	-------

8:	-0.218	-0.168
----	--------	--------

9:	-0.523	-0.039
----	--------	--------

10:	-0.356	-0.086
-----	--------	--------

X CENTROID: -0.108

Y CENTROID: -0.196

POA TO CENTROID: 0.224

HORZ SPREAD: 1.318

VERT SPREAD: 1.943

GROUP SPREAD: 2.308

MIN RADIUS: 0.114


MAX RADIUS: 1.356

MEAN RADIUS: 0.627

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

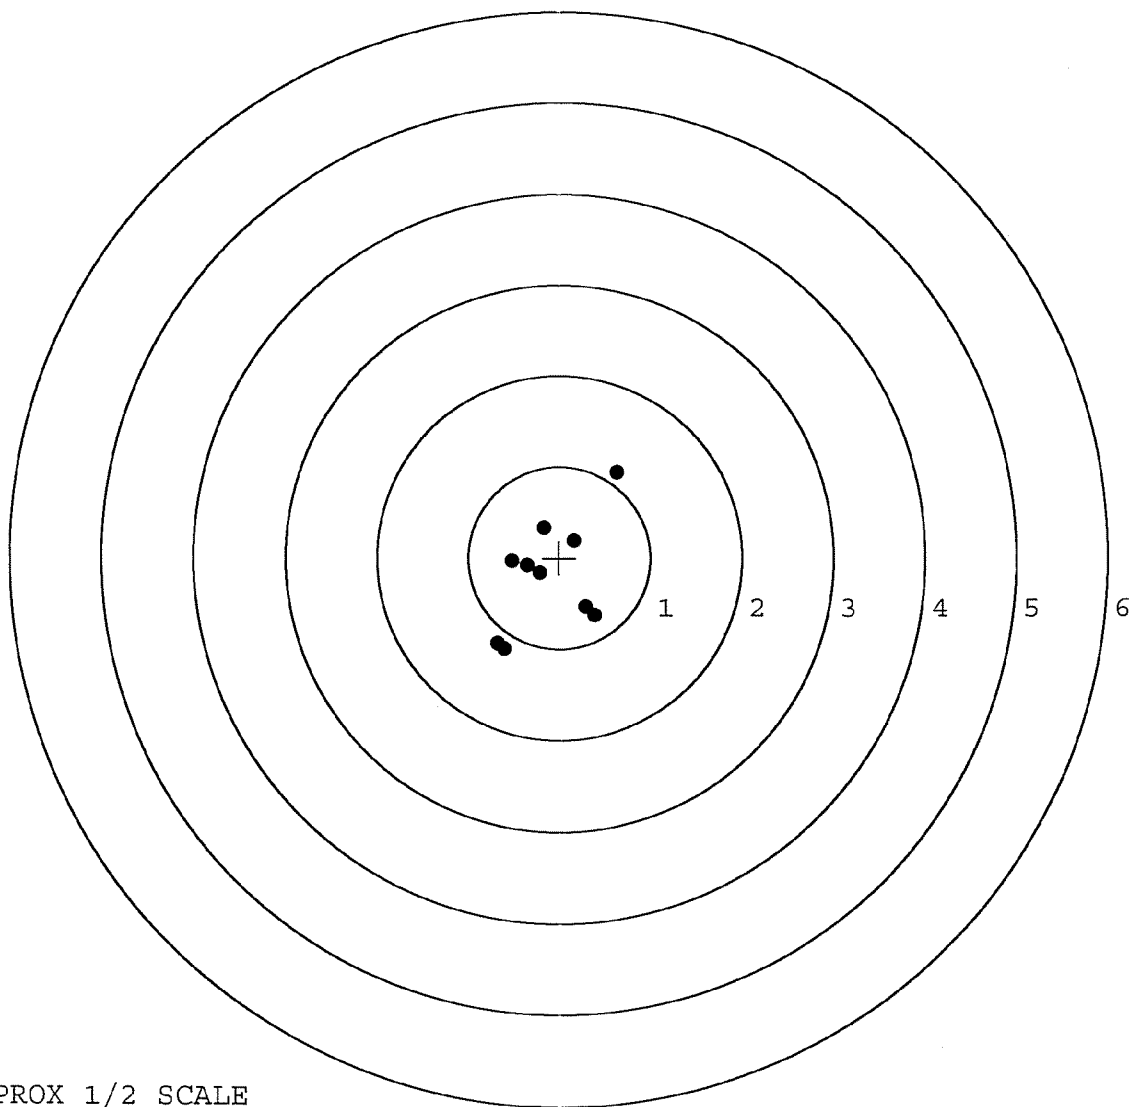

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590152. 0

TARGET NUMBER: 5

FILE DATE: 03/07/2007

FILE TIME: 14:08

POINT#	X	Y
1:	0.701	-0.875
2:	0.392	-0.940
3:	0.468	-0.653
4:	-0.001	-0.781
5:	0.458	-0.097
6:	-0.556	-0.086
7:	-0.102	0.812
8:	-0.352	1.478
9:	-0.755	1.549
10:	-0.683	1.337

X CENTROID: -0.043

Y CENTROID: 0.174

POA TO CENTROID: 0.180

HORZ SPREAD: 1.456

VERT SPREAD: 2.489

GROUP SPREAD: 2.828

MIN RADIUS: 0.570


MAX RADIUS: 1.548

MEAN RADIUS: 1.041

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 5


in 3 IN DIAMETER: 9

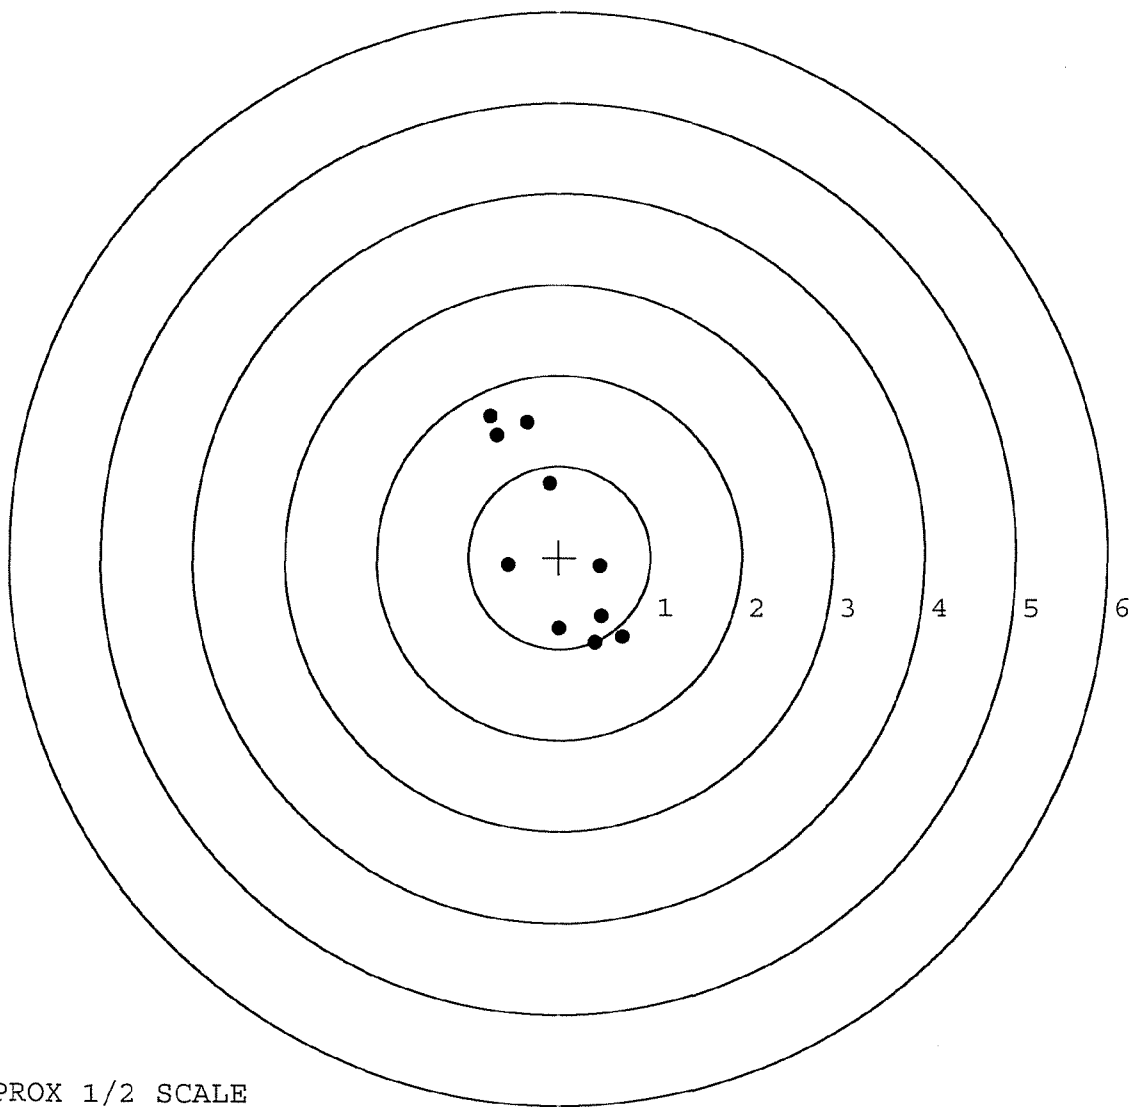

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs. ini. +/- .50 lbs.

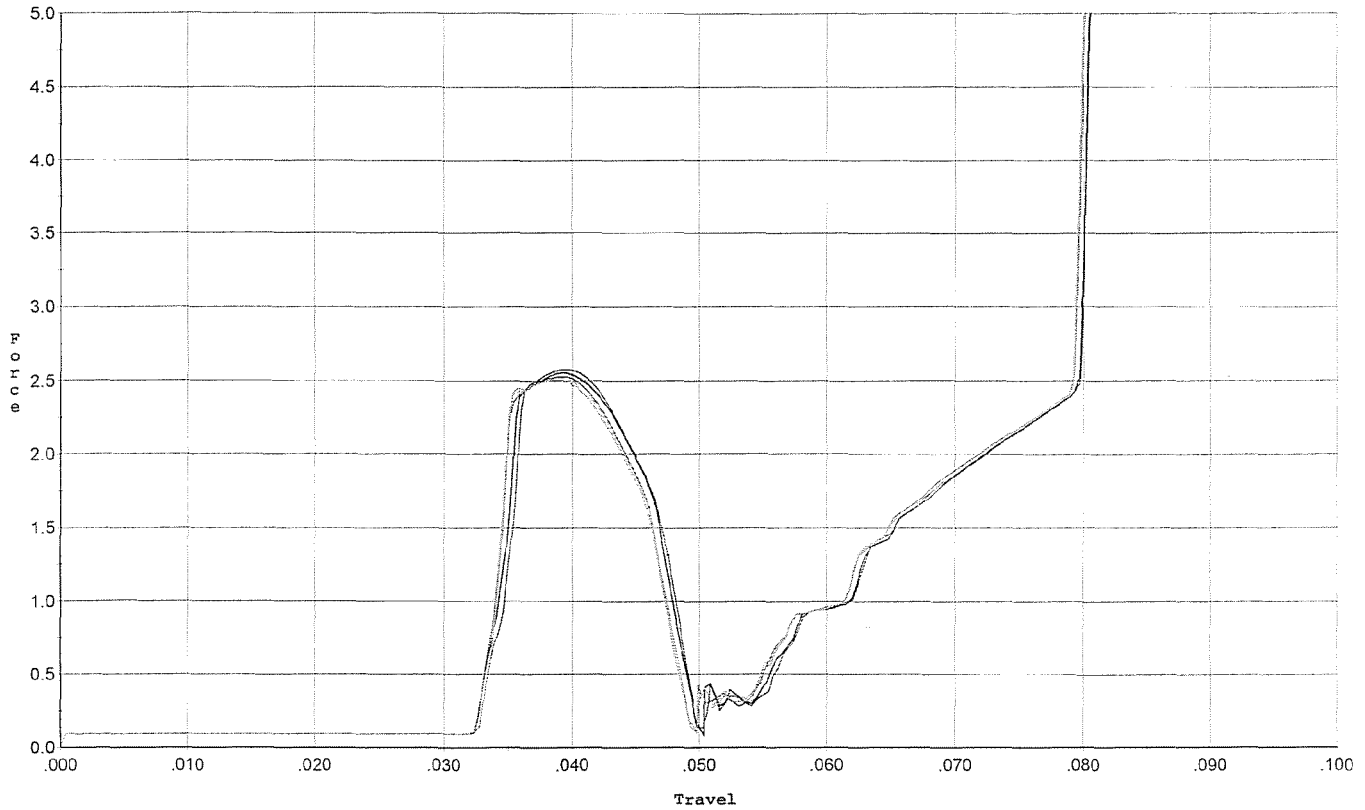


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.578	0.047	0.033	0.037	0.033		Set Trigger
2	2.555	0.046	0.033	0.037	0.032		Set Trigger
3	2.529	0.046	0.033	0.038	0.031		Set Trigger
4	2.518	0.048	0.033	0.037	0.032		Set Trigger
5	2.507	0.046	0.033	0.037	0.031		Set Trigger

AVG 2.53

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

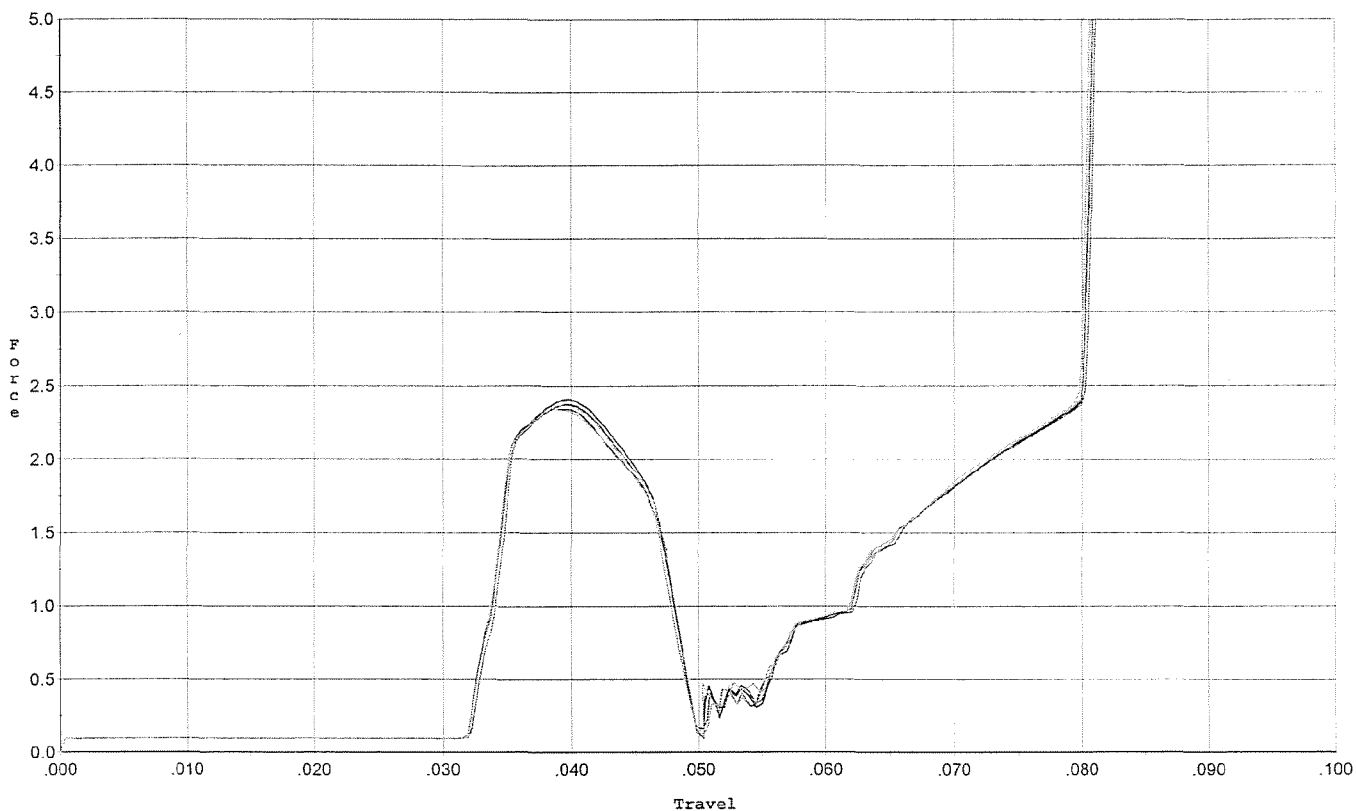


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.374	0.047	0.032	0.038	0.032		Set Trigger
2	2.411	0.048	0.032	0.037	0.033		Set Trigger
3	2.347	0.047	0.032	0.038	0.031		Set Trigger
4	2.344	0.047	0.032	0.038	0.031		Set Trigger
5	2.370	0.047	0.032	0.038	0.032		Set Trigger

Avg 2.36

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs. ini. +/- .75 lbs.

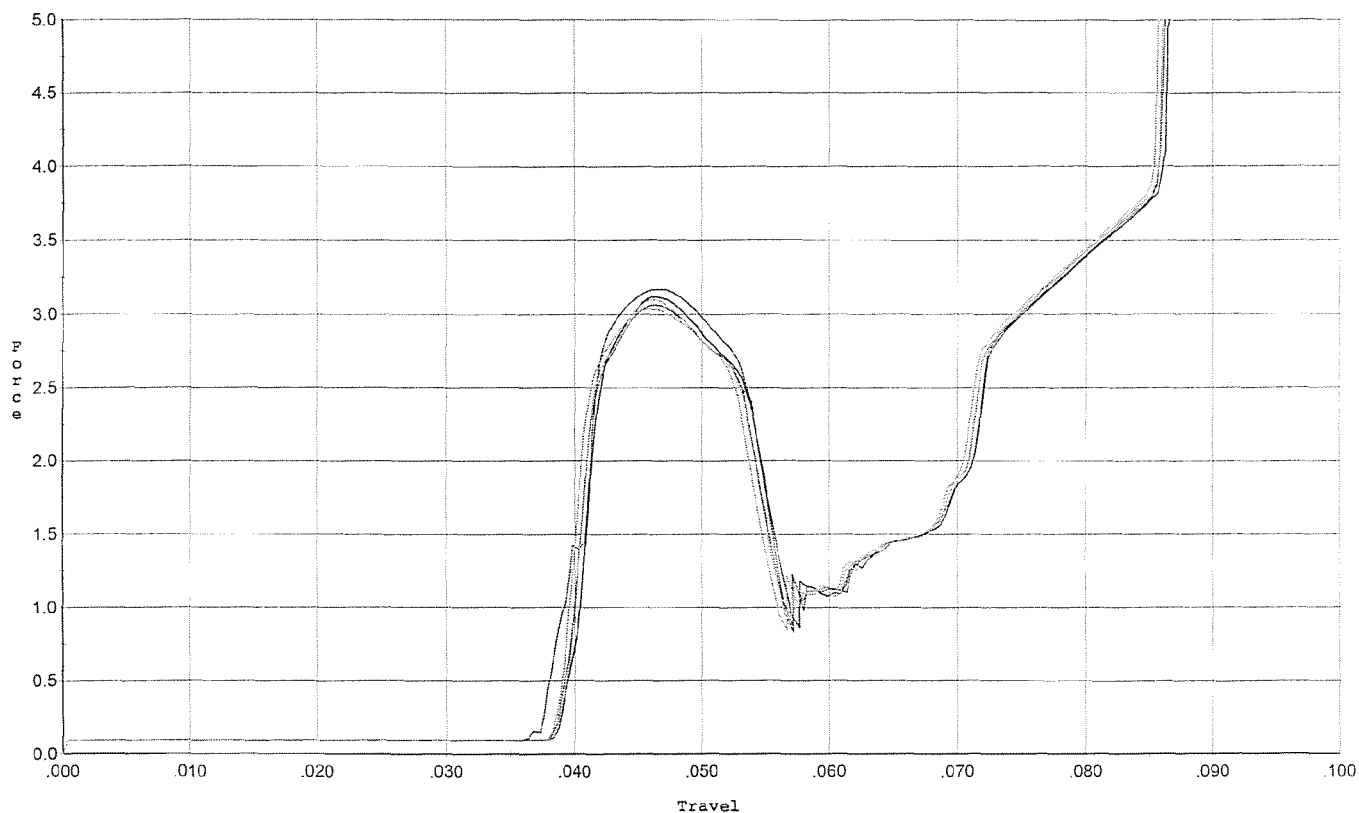


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.169	0.054	0.038	0.038	0.046		Set Trigger
2	3.120	0.054	0.039	0.038	0.044		Set Trigger
3	3.065	0.053	0.039	0.039	0.043		Set Trigger
4	3.101	0.053	0.039	0.039	0.043		Set Trigger
5	3.034	0.053	0.038	0.039	0.042		Set Trigger

Avg. 3.09

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs. after 20 cycles +/- .75 lbs.

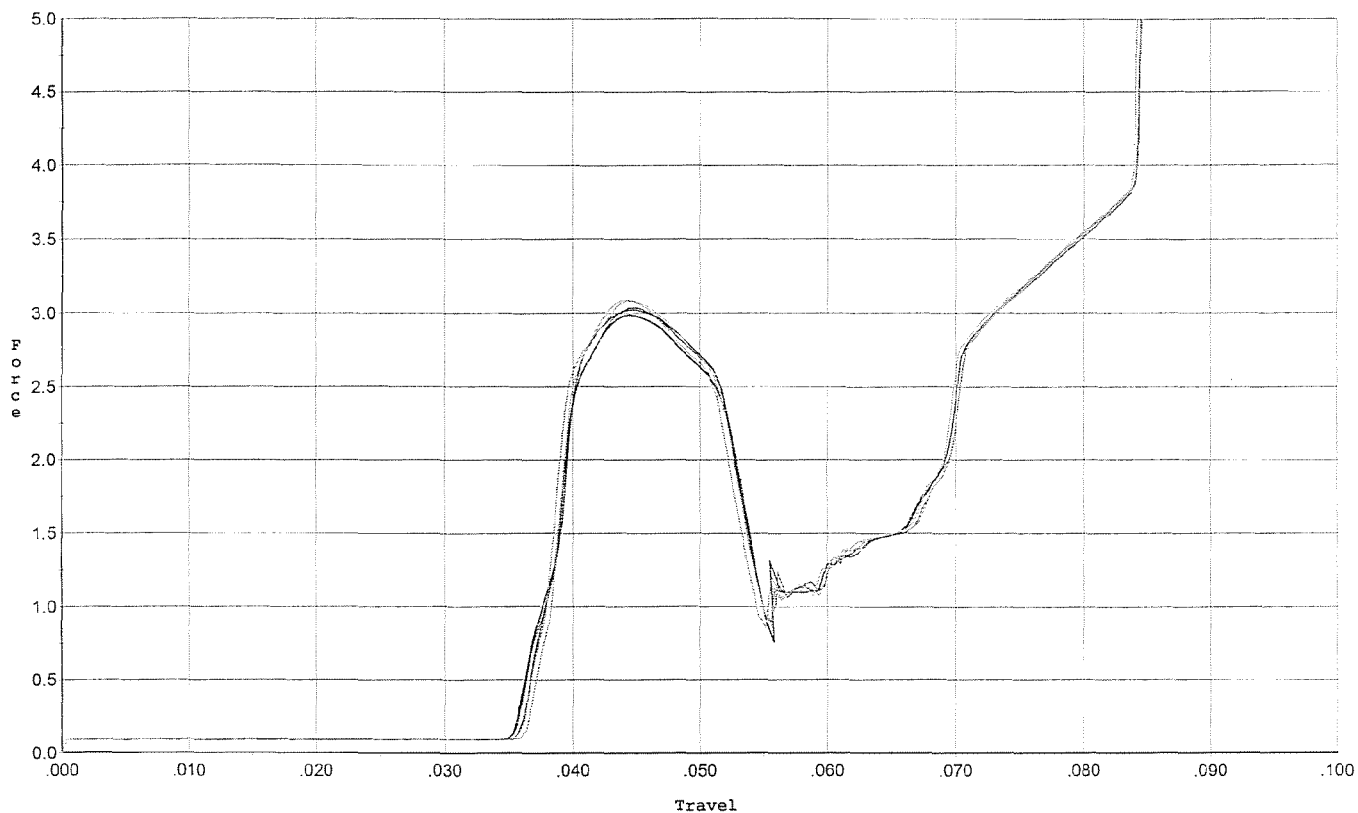


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.021	0.052	0.036	0.038	0.043		Set Trigger
2	2.989	0.052	0.036	0.037	0.043		Set Trigger
3	3.034	0.053	0.036	0.037	0.045		Set Trigger
4	3.090	0.052	0.037	0.037	0.044		Set Trigger
5	3.086	0.051	0.036	0.038	0.043		Set Trigger

Avg 3.04

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. ini. +/- 1.0 lbs.

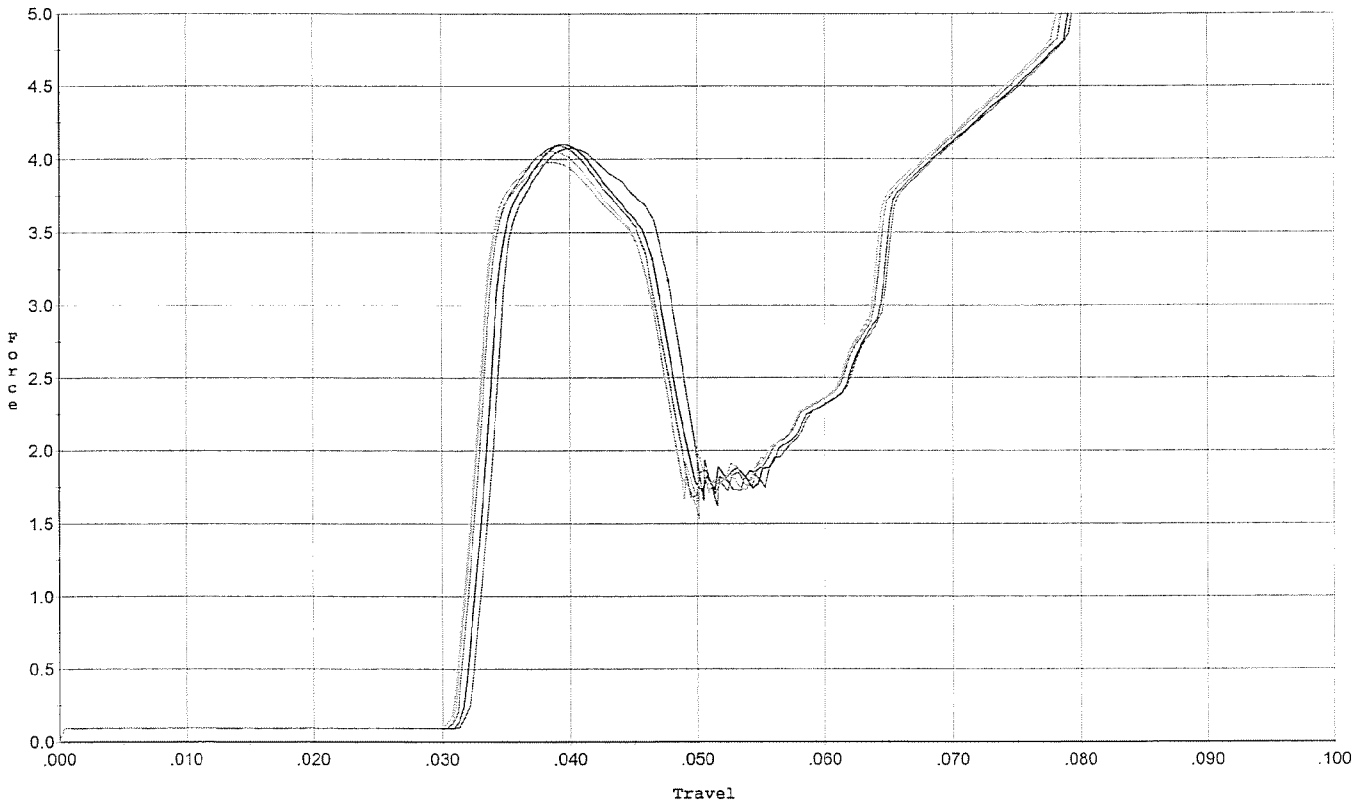


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.074	0.048	0.032	0.034	0.059		Set Trigger
2	4.102	0.046	0.032	0.034	0.056		Set Trigger
3	4.092	0.048	0.031	0.033	0.059		Set Trigger
4	4.052	0.046	0.031	0.033	0.058		Set Trigger
5	3.981	0.046	0.031	0.033	0.057		Set Trigger

AVG 4.06

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. after 20 cycles +/- 1.0 lbs.

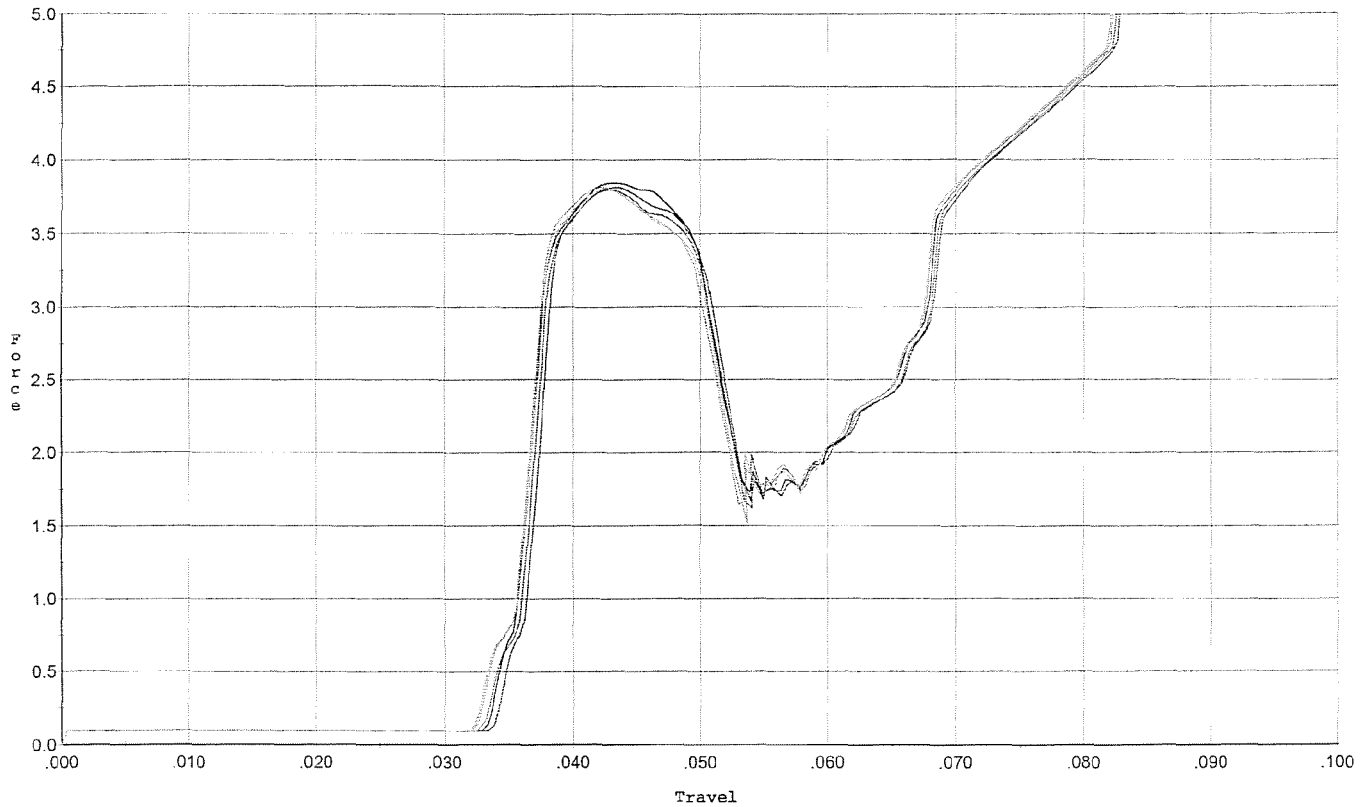


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.815	0.051	0.034	0.036	0.057		Set Trigger
2	3.845	0.050	0.034	0.036	0.057		Set Trigger
3	3.799	0.052	0.033	0.035	0.058		Set Trigger
4	3.799	0.050	0.033	0.036	0.057		Set Trigger
5	3.812	0.051	0.033	0.036	0.058		Set Trigger

Avg 3.81

Trigger Profile [lbs,inch]

Profile: SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: reset to 2.5 lbs. +/- .50 lbs. for final test

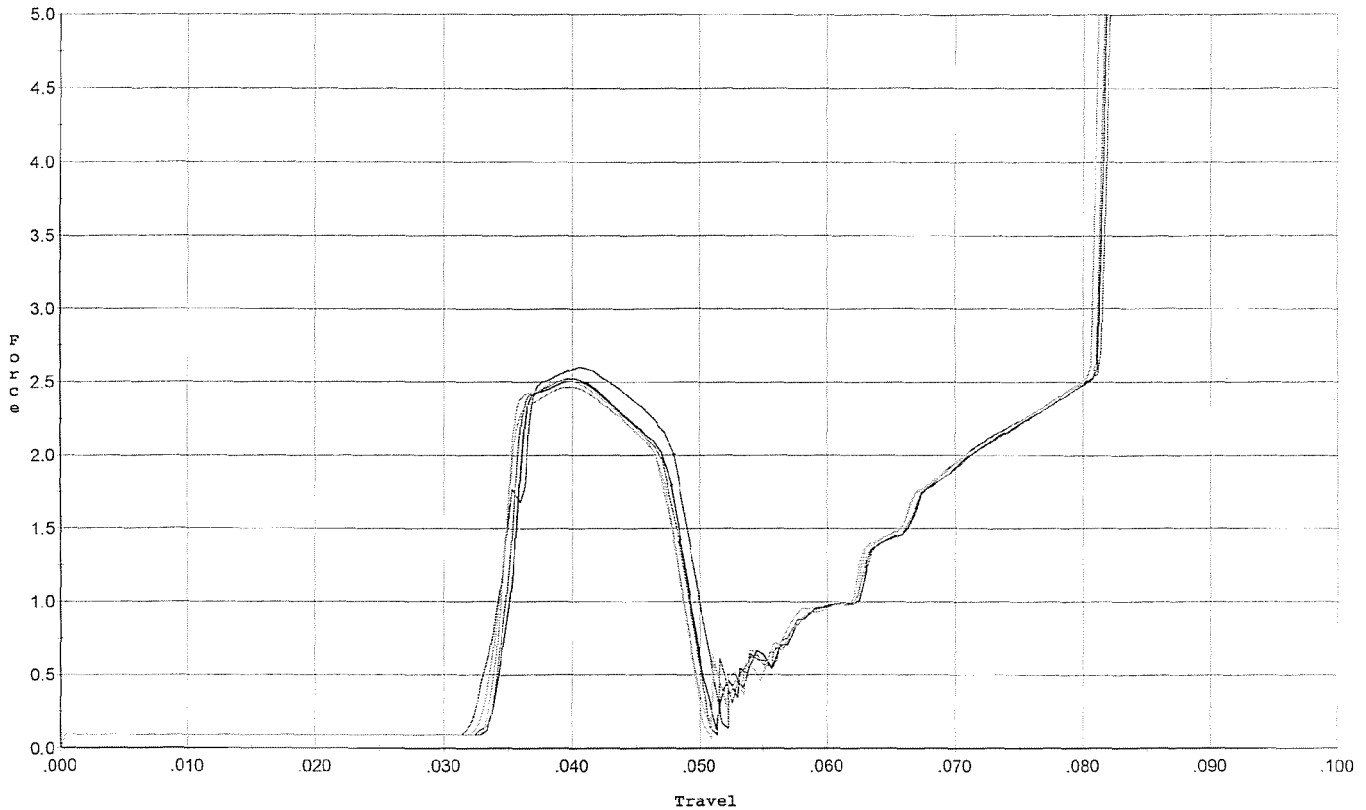


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.601	0.048	0.032	0.037	0.037		Set Trigger
2	2.503	0.048	0.034	0.037	0.034		Set Trigger
3	2.526	0.048	0.034	0.037	0.034		Set Trigger
4	2.514	0.048	0.033	0.037	0.034		Set Trigger
5	2.469	0.047	0.033	0.037	0.033		Set Trigger

AVG 2.52

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putsch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: set to 4.0 lbs. +/- 1.0 lbs. for target & accuracy

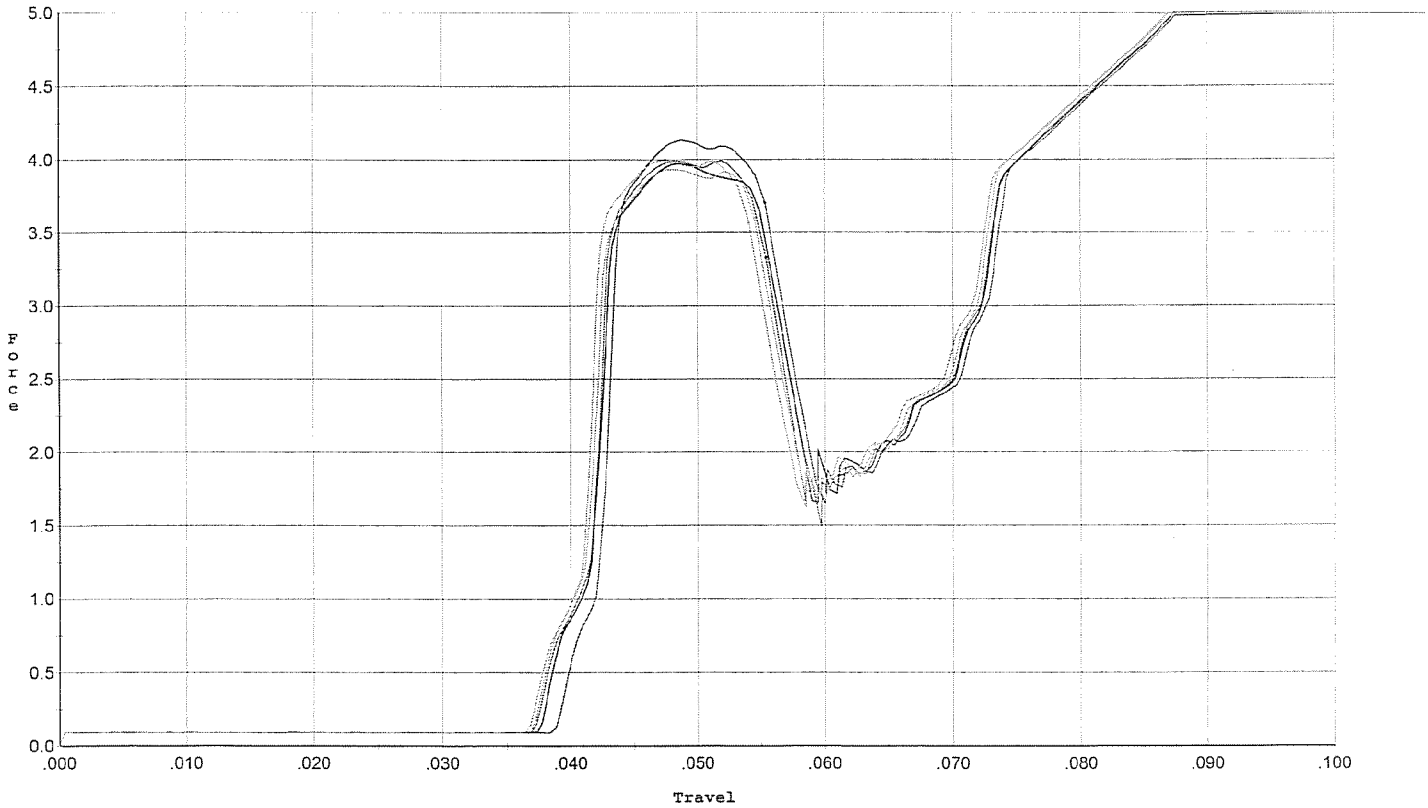

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.133	0.055	0.039	0.036	0.061		Set Trigger
2	3.973	0.057	0.038	0.036	0.063		Set Trigger
3	3.991	0.055	0.038	0.036	0.061		Set Trigger
4	3.934	0.055	0.037	0.037	0.060		Set Trigger
5	3.996	0.054	0.037	0.037	0.060		Set Trigger

Avg 4.00

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	124985		
SERIAL NUMBER	66413458 G6590152 (New)		
LOG-IN DATE	2-7-07		
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	2-13-07	RTZ
505	RE-BARREL	2-16-07	RTZ
560	ASSEMBLE	2-16-07	TRW
600	PROOF	2-16-07	Fm
605	CHECK HEADSPACE	INSPECTED 2-16-07	Fm
610	DIS-ASSEMBLE GUN	FEB 20 2007 2-16-07	RTZ
612	MAGNAFLUX	OPERATOR CPD 2-20-07	APD
510	DRILL AND TAP	2-19-07	TRW
615	ROLLMARK CALIBER	2-19-07	CW
618	ROTO-BLAST	2-20-07	LB
620	APPLY COATINGS	2-20-07	WJ
625	FINAL ASSEMBLY	3-6-07	RTZ
640	FUNCTION TEST AND	PASS FAIL 3-6-07	RTZ
650	TARGET	PASS FAIL 3-6-07	RTZ
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	3-9-07	RTZ
	A) HEADSPACE	PASS FAIL 3-9-07	RTZ
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS 2.64 2.49 2.22 2.28 2.32 3-8-07	TRW
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX 6.25 6.25 6.25 3-8-07	TRW
	G) SAFETY OFF FORCE	2 LBS MIN 3.0 3.0 2.75 3-8-07	TRW
	I) FIRING PIN INDENT	.020 .0235 .024 .0245 3-8-07	TRW
690	PACK	3-9-07	RA

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413458.__0
FILE DATE AND TIME: 09/10/2004 06:09


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.142
The Average Y Centroid of the Five Target Set:	-0.227
The Average Point of Impact of the Five Target Set:	0.268
The Average Mean Radius of the Five Target Set:	0.621
The Distance from POA to Centroid Target #1:	0.206
The Distance from Centroid Target #2 to Centroid Target #1:	0.067
The Distance from Centroid Target #3 to Centroid Target #1:	0.206
The Distance from Centroid Target #4 to Centroid Target #1:	0.625
The Distance from Centroid Target #5 to Centroid Target #1:	0.132

SERIAL NUMBER: E6413458. __0
TARGET NUMBER: 1
FILE DATE: 09/10/2004
FILE TIME: 06:09

X CENTROID: -0.049
Y CENTROID: -0.200
POA TO CENTROID: 0.206
HORZ SPREAD: 1.722
VERT SPREAD: 1.884
GROUP SPREAD: 2.103
MIN RADIUS: 0.065
MAX RADIUS: 1.403
MEAN RADIUS: 0.692
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.776	-1.335
2:	0.182	-1.350
3:	-0.040	0.534
4:	-0.270	0.431
5:	-0.646	-0.055
6:	-0.946	-0.127
7:	-0.247	0.135
8:	0.525	-0.029
9:	0.221	0.057
10:	-0.049	-0.265

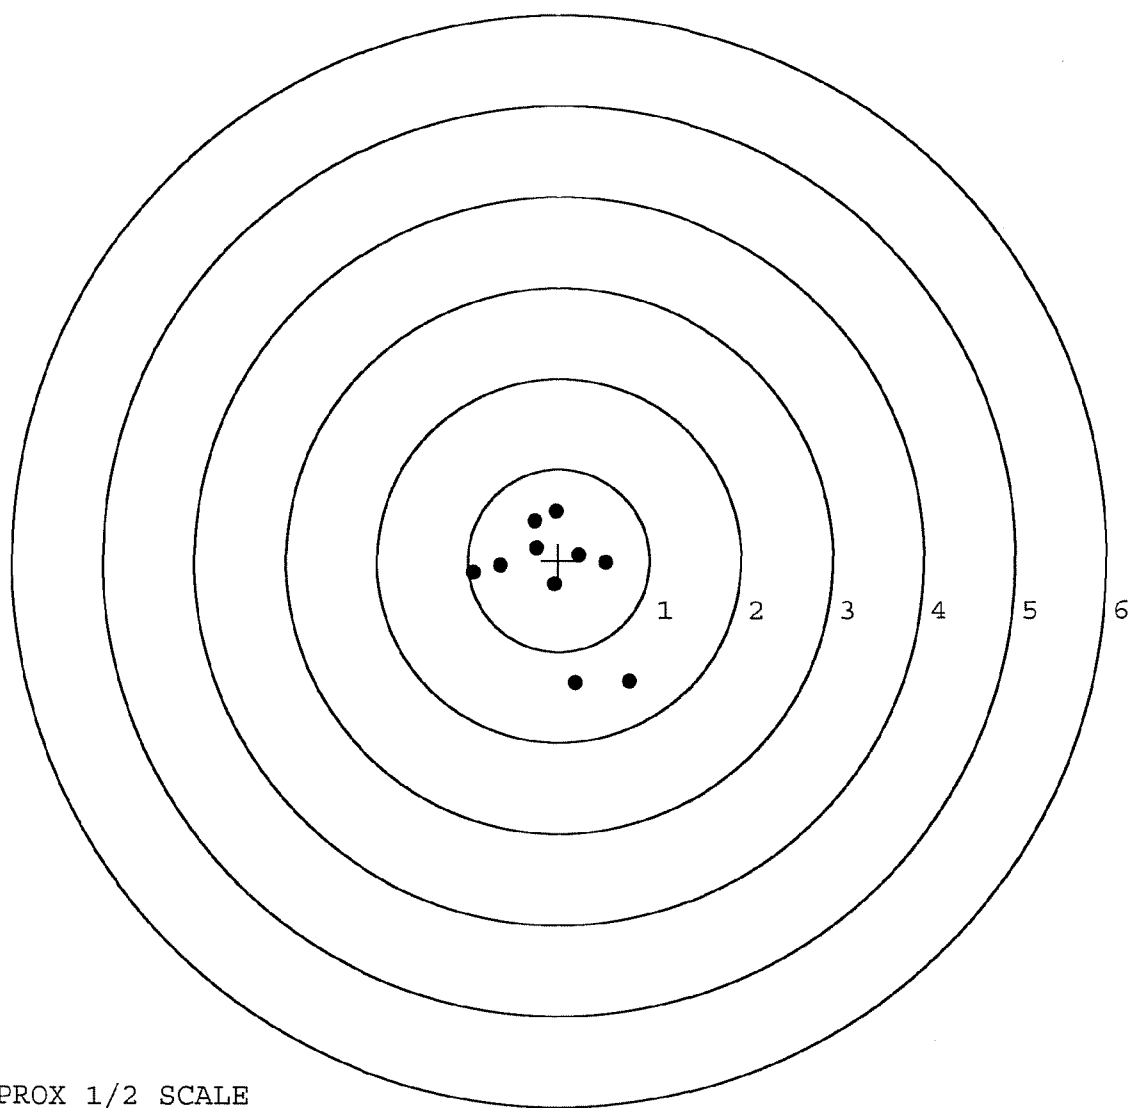


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413458. 0
TARGET NUMBER: 2
FILE DATE: 09/10/2004
FILE TIME: 06:09

X CENTROID: -0.056
Y CENTROID: -0.133
POA TO CENTROID: 0.145
HORZ SPREAD: 1.585
VERT SPREAD: 1.743
GROUP SPREAD: 1.706
MIN RADIUS: 0.366
MAX RADIUS: 1.023
MEAN RADIUS: 0.650
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.924	-0.425
2:	0.671	-0.123
3:	-0.327	-1.045
4:	-0.014	-0.497
5:	-0.260	-0.471
6:	-0.537	-0.331
7:	0.066	0.214
8:	-0.661	0.206
9:	-0.295	0.440
10:	-0.128	0.698

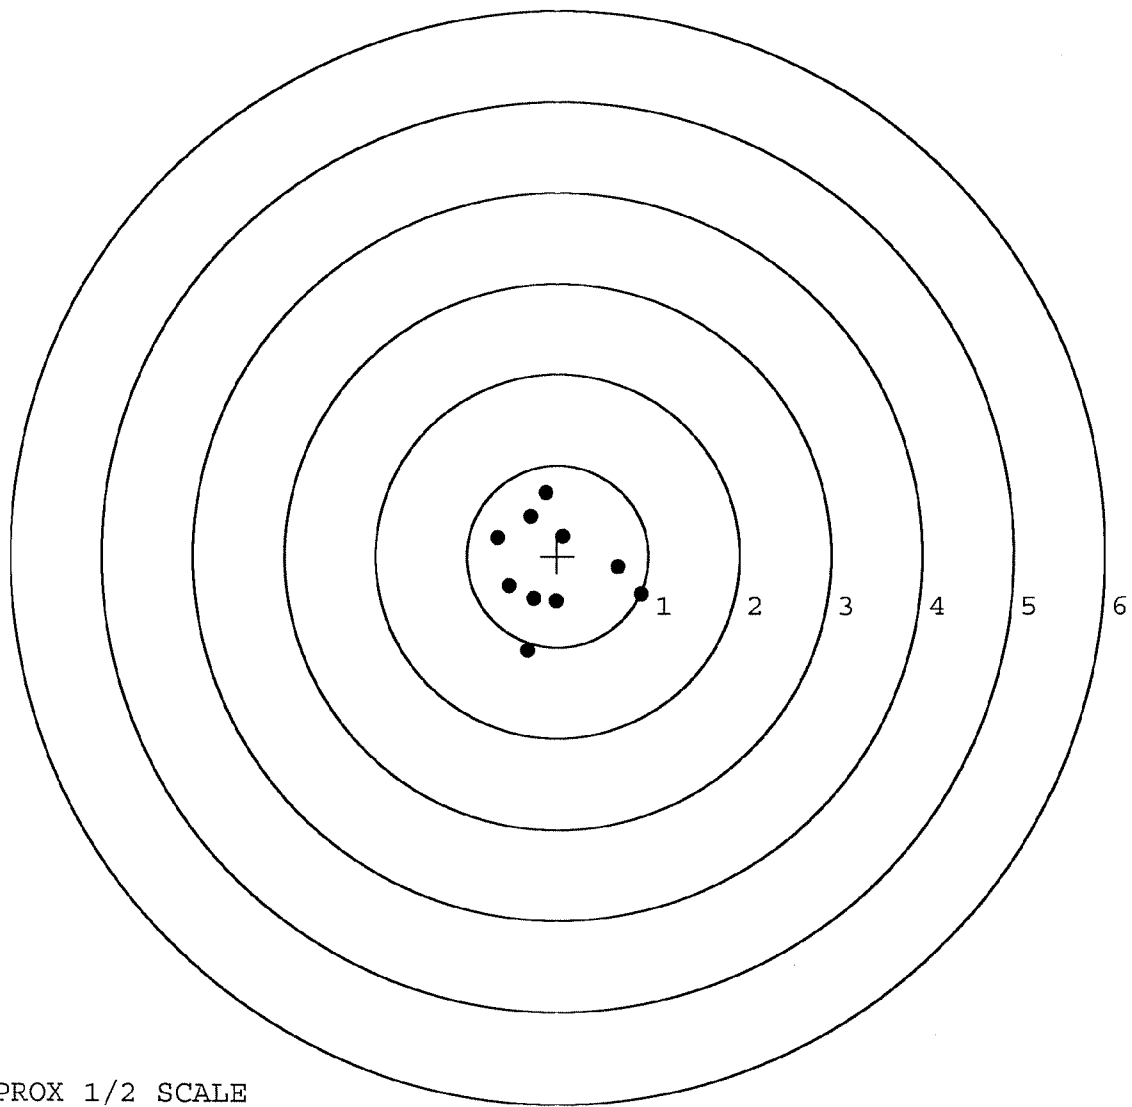

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413458. 0

TARGET NUMBER: 3

FILE DATE: 09/10/2004

FILE TIME: 06:09

POINT#	X	Y
1:	0.337	-0.789
2:	0.671	-0.218
3:	0.117	-0.332
4:	-0.581	-0.415
5:	-0.265	0.065
6:	-0.540	0.017
7:	-1.224	0.117
8:	-0.180	0.599
9:	0.103	0.525
10:	0.367	0.361

X CENTROID: -0.120

Y CENTROID: -0.007

POA TO CENTROID: 0.120

HORZ SPREAD: 1.895

VERT SPREAD: 1.388

GROUP SPREAD: 1.924

MIN RADIUS: 0.162


MAX RADIUS: 1.111

MEAN RADIUS: 0.623

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 9


in 3 IN DIAMETER: 10

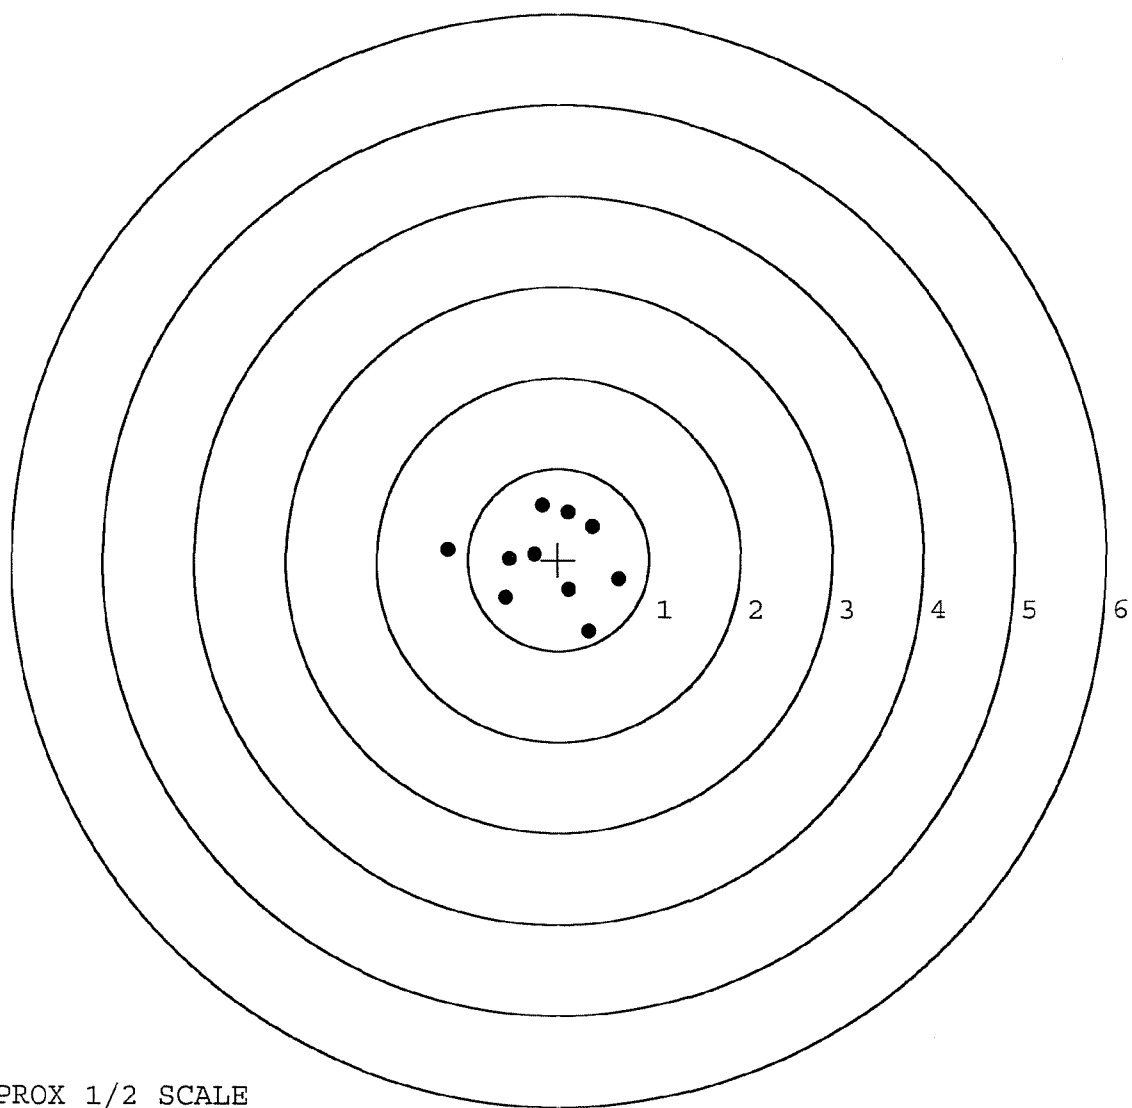

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413458. __0
TARGET NUMBER: 4
FILE DATE: 09/10/2004
FILE TIME: 06:09

	POINT#	X	Y
	1:	0.177	-0.658
	2:	0.254	-0.927
	3:	-0.054	-0.841
	4:	-0.413	-0.361
	5:	-0.725	-0.449
	6:	-1.051	-0.622
	7:	-0.927	-0.951
	8:	-0.512	-0.980
	9:	-0.338	-0.680
X CENTROID:		-0.399	
Y CENTROID:		-0.719	
POA TO CENTROID:		0.822	
HORZ SPREAD:		1.305	
VERT SPREAD:		0.980	
GROUP SPREAD:		1.340	
MIN RADIUS:		0.072	
MAX RADIUS:		0.685	
MEAN RADIUS:		0.445	
# IN 1 IN DIAMETER:		5	
# IN 2 IN DIAMETER:		9	
# in 3 IN DIAMETER:		9	

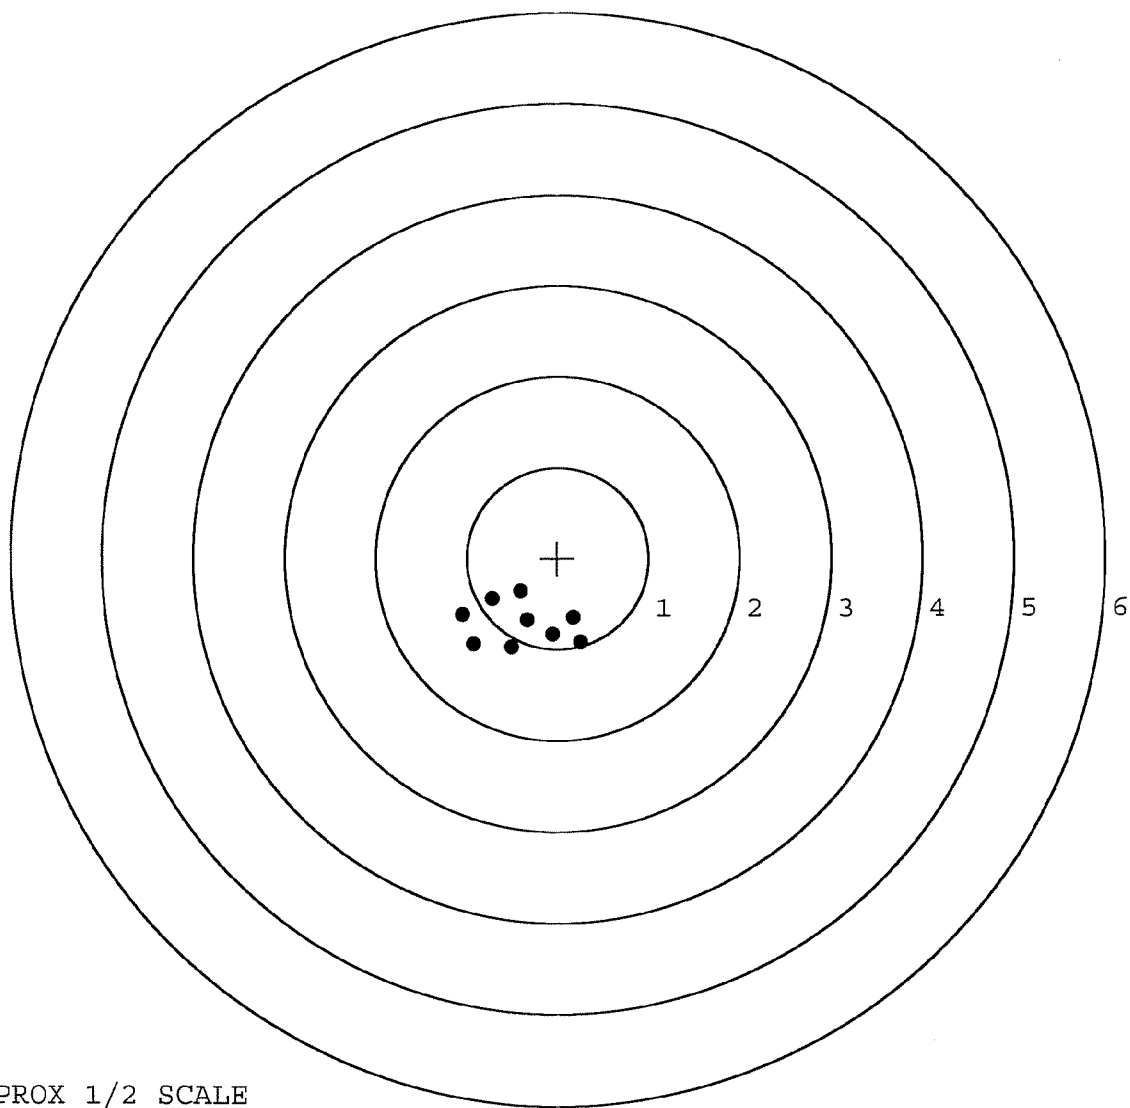

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413458. __0

TARGET NUMBER: 5

FILE DATE: 09/10/2004

FILE TIME: 06:09

POINT#	X	Y
1:	-1.432	1.148
2:	-0.817	-0.126
3:	-0.434	-0.068
4:	-0.031	0.090
5:	0.320	0.166
6:	0.375	0.489
7:	0.482	-0.479
8:	0.218	-0.521
9:	0.045	-0.340
10:	0.392	-1.104

X CENTROID: -0.088

Y CENTROID: -0.074

POA TO CENTROID: 0.115

HORZ SPREAD: 1.914

VERT SPREAD: 2.252

GROUP SPREAD: 2.898

MIN RADIUS: 0.174


MAX RADIUS: 1.817

MEAN RADIUS: 0.694

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 9

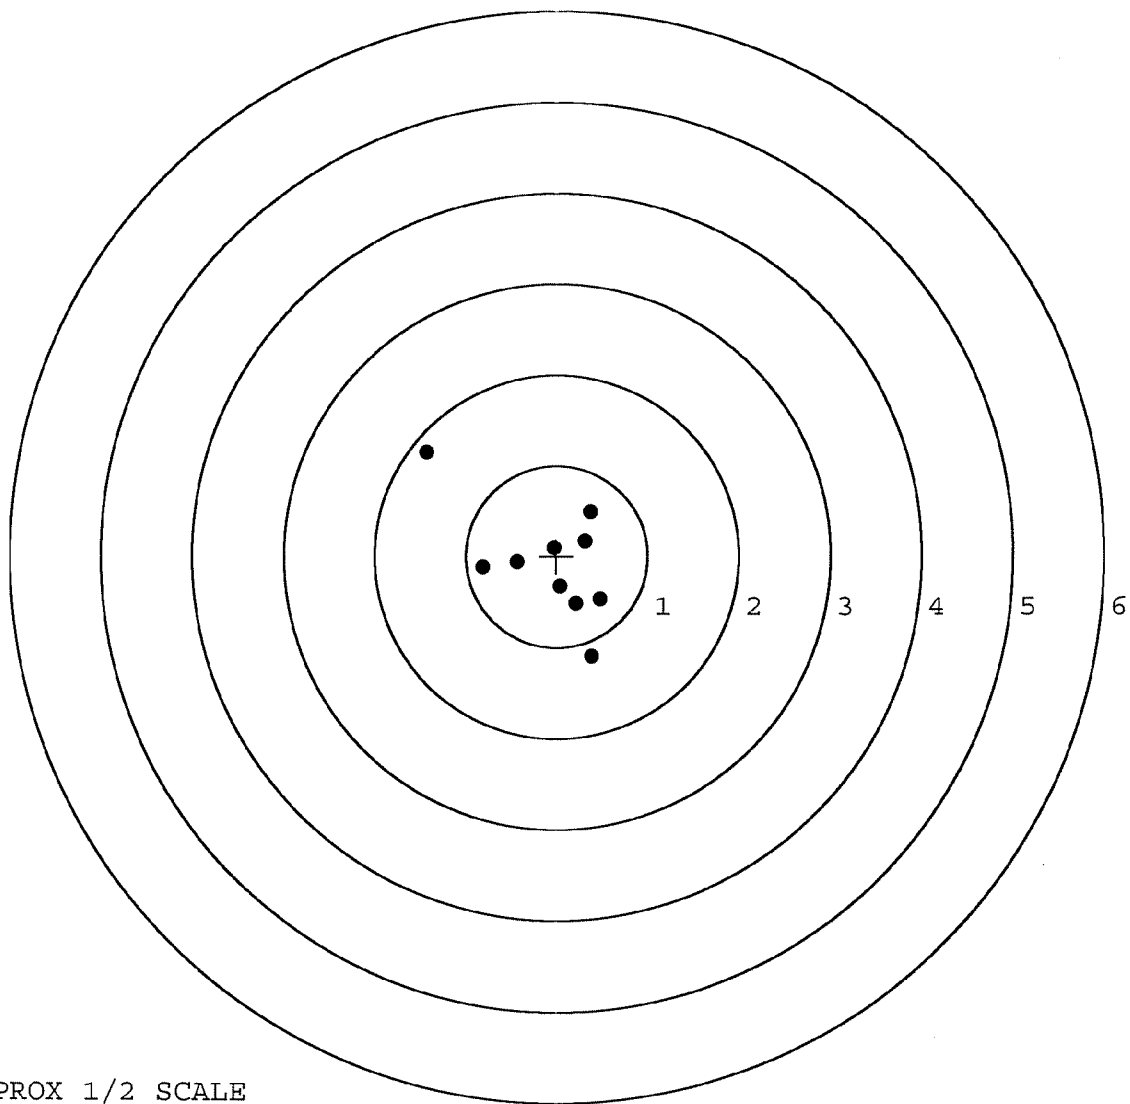

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	84162		
SERIAL NUMBER	E6413458		
LOG-IN DATE	8-24-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	8-26-04	RTL
560 A	RE-BARREL	8-26-04	RTL
B	DRILL AND TAP	9-1-04	TRW
575	ASSEMBLE	8-26-04	RTL
600	PROOF	8-30-04	RTL
605	CHECK HEADSPACE	8-31-04	RTL
610	DIS-ASSEMBLE GUN	8-31-04	RTL
612	MAGNAFLUX		
615	ROLLMARK CALIBER	9/3/04	LB
618	ROTO-BLAST	9-3-04	LB
620	APPLY COATINGS	9/7/04	HP
625 A	FINAL ASSEMBLY	9-9-04	RLW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	9-10-04	AC
655	FINAL INSPECT	9-13-04	RT
660	PACK	10-4-04	DA
		SHIP DATE	
QAR INSPECTION DATE			

Serial Number: **C649887**



E6413458

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6413458
11 Apr 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0354
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2848
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .286992

THE AMR FOR THIS RIFLE IS: 1.159

CENTROIDAL DISTANCES

0	TO	1	.655369
1	TO	2	.762378
1	TO	3	.611465
1	TO	4	.15959
1	TO	5	.639212

²
5 ←----POA

¹
4

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .655

MIN RADIUS : .586

MEAN RADIUS : 1.384

MAX RADIUS : 2.901


CENTROID X : -.022

CENTROID Y : -.655

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 1

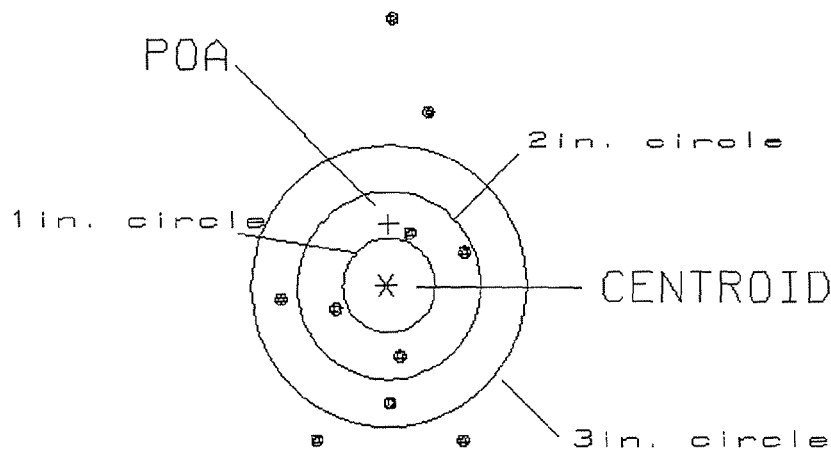

OF SHOTS= 10

IN CIRCLE

HS= 2.05

0

VS= 4.59

4

GS= 4.66

6


PATTERN #: ☐ 2 ☐

POA TO CENTROID: .107
 MIN RADIUS : .110
 MEAN RADIUS : 1.019
 MAX RADIUS : 1.954
 CENTROID X : .002
 CENTROID Y : .107

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 2

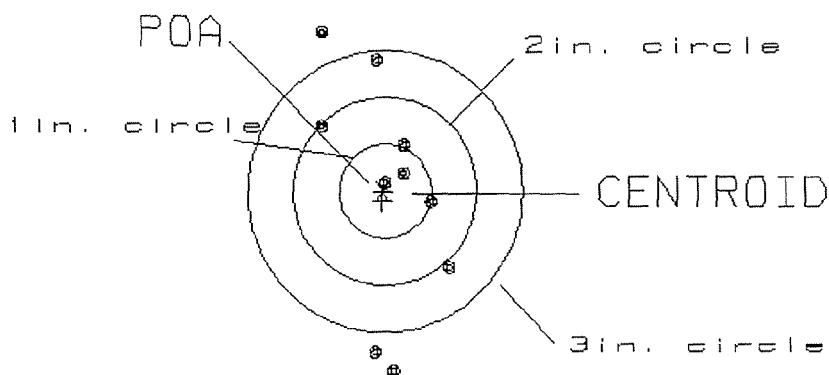

OF SHOTS= 10

IN CIRCLE

HS= 1.44

4

VS= 3.60

4

GS= 3.70

7


PATTERN #: 3

POA TO CENTROID: .099
 MIN RADIUS : .066
 MEAN RADIUS : .988
 MAX RADIUS : 1.521
 CENTROID X : -.087
 CENTROID Y : -.047

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 3

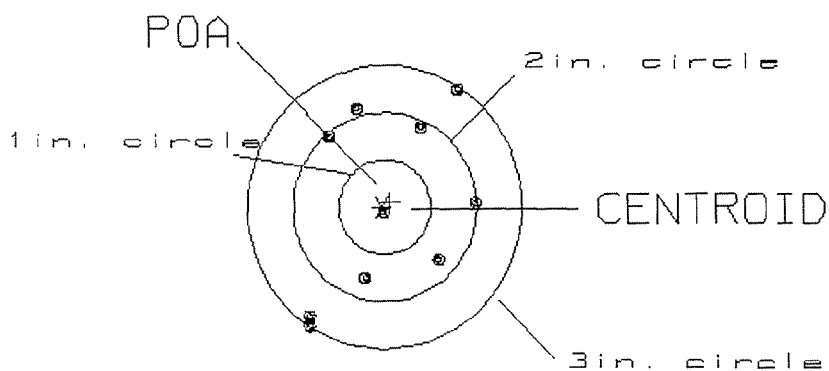

OF SHOTS= 10

IN CIRCLE

HS= 1.86

1

VS= 2.50

5

GS= 2.98

9

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .811

MIN RADIUS : .438

MEAN RADIUS : 1.386

MAX RADIUS : 2.922


CENTROID X : .016

CENTROID Y : -.810

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 4

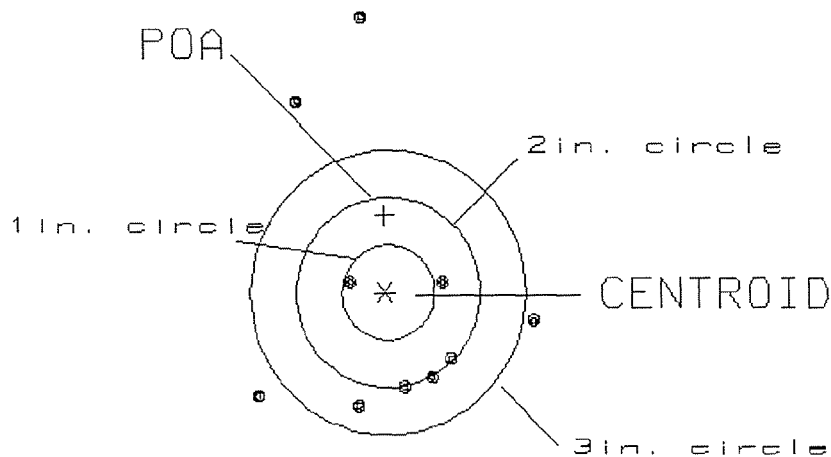

OF SHOTS= 10

IN CIRCLE

HS= 3.00

1

VS= 4.06

3

GS= 4.20

6


PATTERN #: L 5 □

POA TO CENTROID: .088
 MIN RADIUS : .160
 MEAN RADIUS : 1.016
 MAX RADIUS : 2.358
 CENTROID X : -.086
 CENTROID Y : -.019

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 5

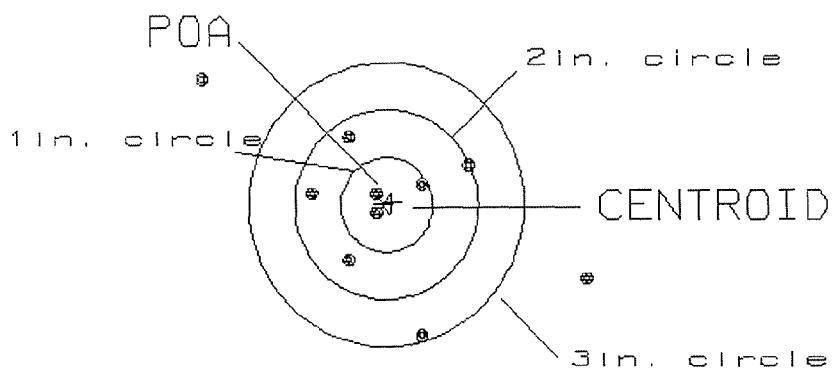

OF SHOTS= 10

IN CIRCLE

HS= 4.13

3

VS= 2.66

7

GS= 4.62

8

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6413458
10 Apr 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0732

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0092

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0737759

THE AMR FOR THIS RIFLE IS: 1.38

CENTROIDAL DISTANCES

0 TO 1	.183505
1 TO 2	.0363456
1 TO 3	.353804
1 TO 4	.226179
1 TO 5	.160016


$\frac{4}{3} + \frac{5}{5}$ <----POA

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .183
 MIN RADIUS : .328
 MEAN RADIUS : 1.570
 MAX RADIUS : 2.720
 CENTROID X : .157
 CENTROID Y : .095

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458

CENTERFIRE PATTERN # 1

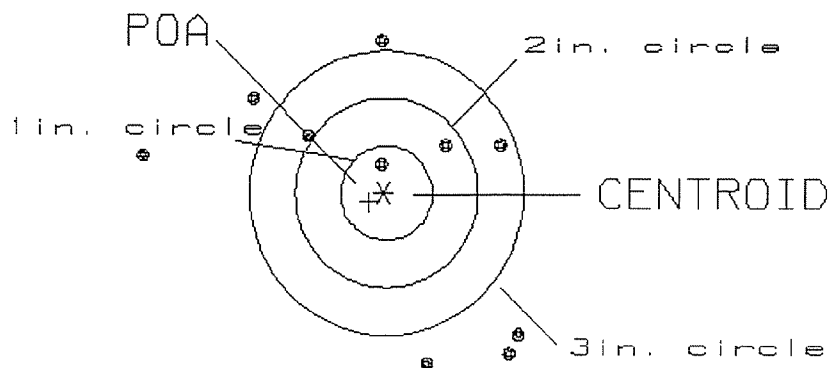

OF SHOTS= 10

IN CIRCLE

HS= 4.13
 VS= 3.36
 GS= 4.56


1
 2
 4

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .217
 MIN RADIUS : .423
 MEAN RADIUS : 1.300
 MAX RADIUS : 2.535
 CENTROID X : .193
 CENTROID Y : .100

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458

CENTERFIRE PATTERN # 2

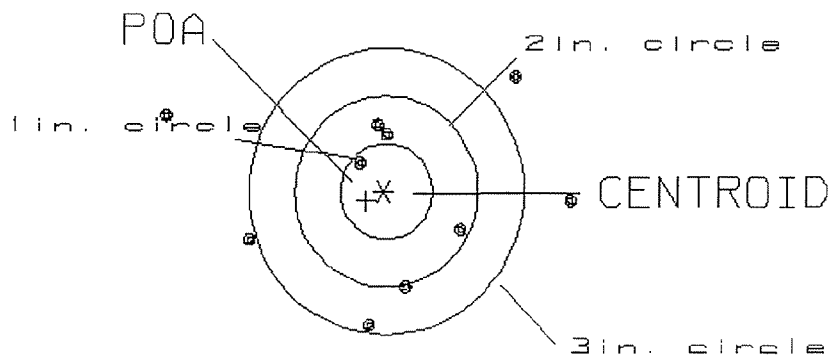

OF SHOTS= 10

IN CIRCLE

HS= 4.40
 VS= 2.62
 GS= 4.48


1
 4
 6

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .196
 MIN RADIUS : .418
 MEAN RADIUS : 1.390
 MAX RADIUS : 2.033
 CENTROID X : -.054
 CENTROID Y : -.189

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458

CENTERFIRE PATTERN # 3

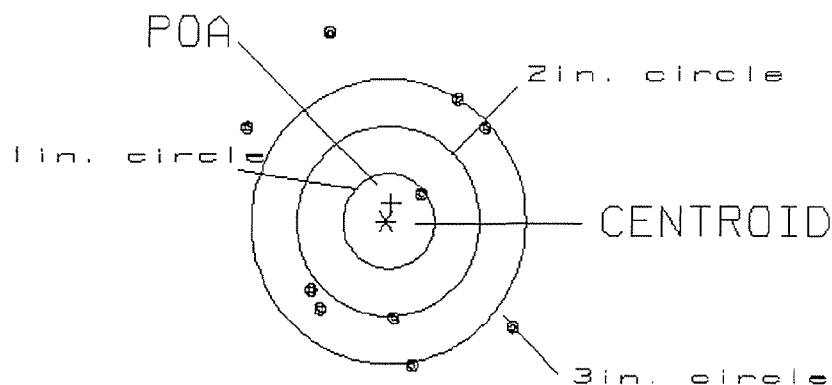

OF SHOTS= 10

IN CIRCLE

HS= 2.93

1

VS= 3.49

1

GS= 3.65


6

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .124
 MIN RADIUS : .375
 MEAN RADIUS : 1.318
 MAX RADIUS : 2.157
 CENTROID X : -.069
 CENTROID Y : .104

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458

CENTERFIRE PATTERN # 4

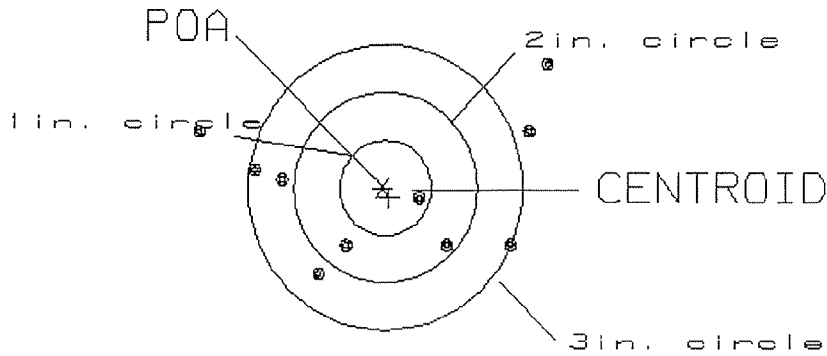

OF SHOTS= 10

IN CIRCLE

HS= 3.72
 VS= 2.23
 GS= 3.78


1
 3
 7

PATTERN #: ☐ 5 ☐
 POA TO CENTROID: .153
 MIN RADIUS : .836
 MEAN RADIUS : 1.323
 MAX RADIUS : 2.061
 CENTROID X : .139
 CENTROID Y : -.064

18 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458

CENTERFIRE PATTERN # 5

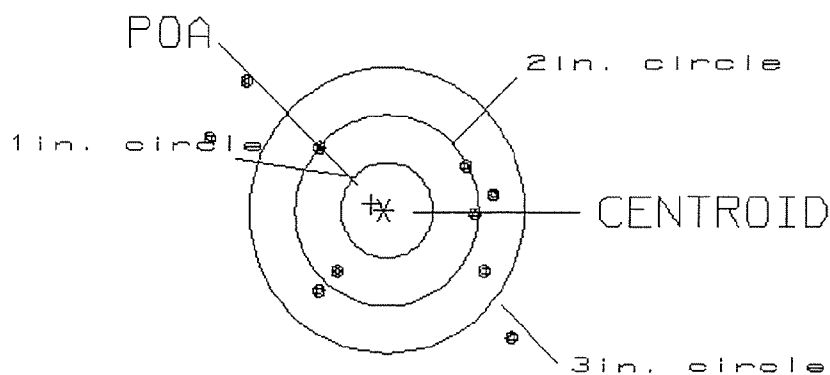

OF SHOTS= 10

IN CIRCLE

HS= 3.25

0

VS= 2.66

3

GS= 3.96

7

Remington®



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

SERIAL NO.
C6498871

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off., Marca Registrada Marque Deposee.

Ø1



5716 C6498871

UPC



CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6498871

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	5 17	90	RW
600	Proof	5 17	90	RW
607	Check Headspace	5 17	90	RW
610	Dis-assemble Gun	5 17	90	RW
612	Magnaflux Barrel Action		5/22/90	KCP
	Magnaflux Bolt		5/22/90	KCR
615	Rollmark Caliber		5/22/90	GS
617	Drill and Tap Sight Holes		5/23/90	FB
618	Polish Barrel <i>RB</i>		5/24/90	UB
620	Apply Coatings (Barrel Action)		6/4/90	TA
	Apply Coating (Bolt)		6/4/90	TA
625	Final Assembly A) Clean inside of Bolt Assembly		6/4/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		6/4/90	RW
	C) Inspect Ejector Hole for Chamfer		6/4/90	RW
	D) Oil Firing Pin Ass'y		6/4/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		6/7/90	JA

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			6/7/90	WB
	G) Safety Off Force	2 1/2	2 1/2	2 1/2			6/7/90	WB
	H) Trigger Pull Test & Retainability						6/7/90	gll
	I) Firing Pin Indent	.0235	.0225	.0225			6/7/90	WB
	J) Assemble Stock						6/11/90	RW
	K) Assemble Swivel Studs						6/14/90	gll
	L) Attach Front and Rear Sight Assemblies						6/11/90	RW
	M) Iron Sight Alignment						6/11/90	RW
	N) Detach Front & Rear Sights & place in numbered container						6/11/90	RW
	O) Attach Scope to Rifle						6/11/90	gll
	P) Detach & Attach Scope 20 Times						6/11/90	gll
640	Gallery Target & Test						6-12-90	A
	A) Time						"	A
	B) Malfunctions						"	A
	C) Pierced Primers						"	A
	D) Optical Clarity of Scope						"	A
645	Inspect for Live Ammo						6-12-90	A
655	Final Inspection							
	A) Headspace						6/14/90	gll
	B) Trigger Pull	2.34	2.32	2.32	2.34	2.31	6/13/90	gll
	C) Function						6/14/90	gll
660	Pack						6-20-90	DA

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6408871

DATE 6-7-90

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.32	2.12	2.30	2.34	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.30	2.20	2.41	2.32	
PULL #3	2.19	2.41	2.35	2.32	
PULL #4	2.21	2.29	2.31	2.34	
PULL #5	2.26	2.31	2.30	2.31	
TOTAL	11.28	11.33	11.67		
AVG.	2.256	2.266	2.334		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.42	3.45		
PULL #2	3.11	3.27		
PULL #3	3.45	3.49		
PULL #4	3.53	3.50		
PULL #5	3.45	3.47		
TOTAL	16.96	17.18		
AVG.	3.392	3.436		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.11	4.41		4.26
PULL #2	4.46	4.42		4.36
PULL #3	4.49	4.45		4.38
PULL #4	4.50	4.33		4.23
PULL #5	4.33	4.30		4.48
TOTAL	21.89	21.91		21.71
AVG.	4.378	4.382		4.342

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6498871
13 Jun 1990

CENTROIDAL DISTANCES

0 TO	1	.485148
1 TO	2	.172905
1 TO	3	.285611
1 TO	4	.353386
1 TO	5	.386804


$\frac{P}{45} +$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.409
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1604
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .439328
THE AMR FOR THIS RIFLE IS: .7582

13 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CS498871

CENTERFIRE PATTERNS # 1

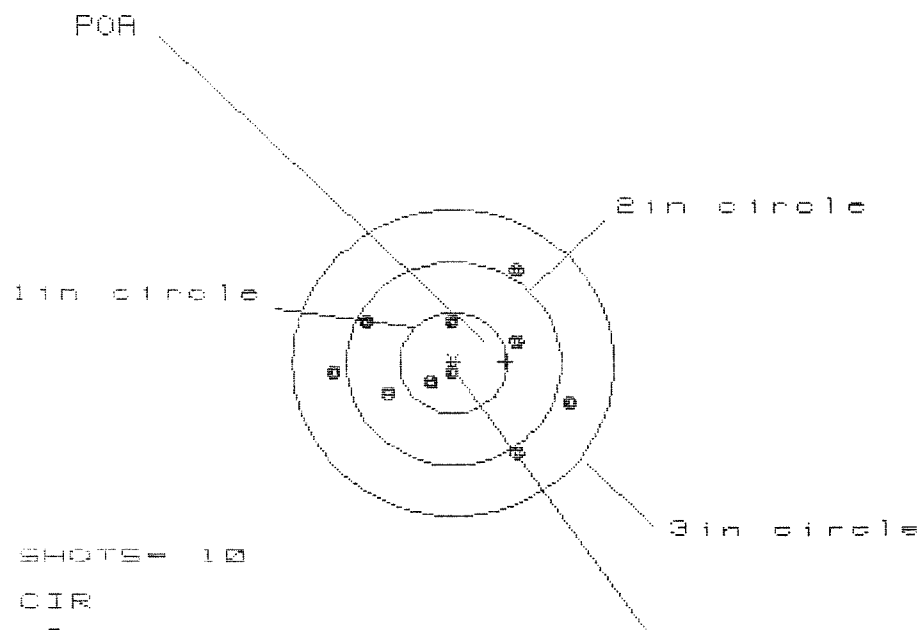

OF SHOTS = 10

IN CIR

1in = 3

2in = 6

3in = 10

HS = 2.191

VS = 1.883

GS = 2.213


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.105	.757	.769
MINIMUM X	-1.086	-.963	-.868
MAXIMUM Y	.958	.914	.793
MINIMUM Y	-.925	-.969	-.481
CENTROID X	-.485	-.608	-.703
CENTROID Y	-.012	.032	.153
POR TO CENTROID in.	.485	.609	.719
MIN RADIUS	.114	.196	.323
MEAN RADIUS	.756	.699	.637
MAX RADIUS	1.174	1.230	1.095
HORIZONTAL SPREAD	2.191	1.720	1.637
VERTICAL SPREAD	1.883	1.883	1.274
EXTREME SPREAD	2.213	1.960	1.931
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		10	

13 Jun 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6498871

CENTERFIRE PATTERNS # 2

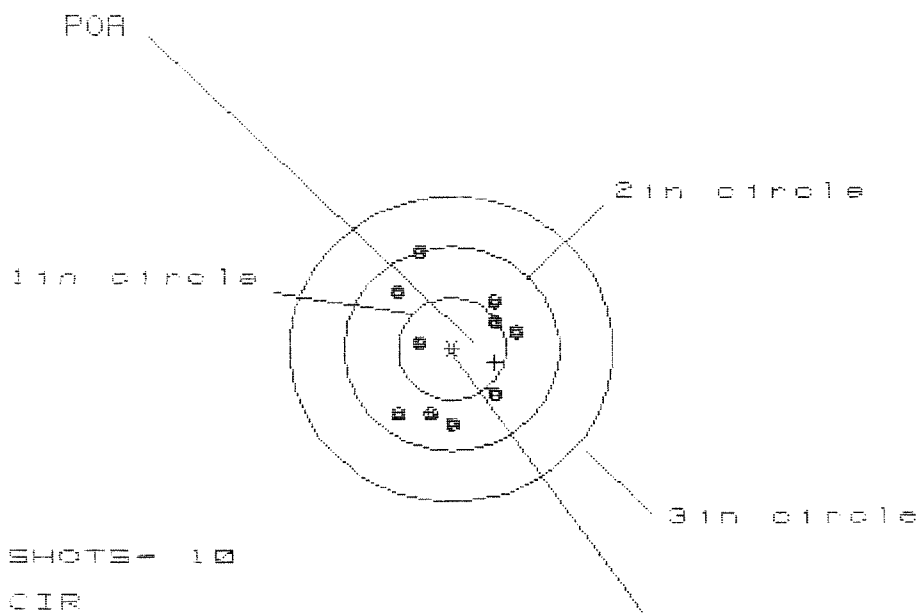

OF SHOTS- 10

IN CIR

1in = 2

2in = 8

3in = 10

HS= 1.0880

VS= 1.6900

GS= 1.724


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.585	.549	.481
MINIMUM X	:	-.505	-.541	-.594
MAXIMUM Y	:	.954	.712	.640
MINIMUM Y	:	-.736	-.630	-.702
CENTROID X	:	-.399	-.363	-.295
CENTROID Y	:	.138	.032	.104
POA TO CENTROID in.	:	.422	.364	.313
MIN RADIUS	:	.310	.382	.393
MEAN RADIUS	:	.662	.614	.583
MAX RADIUS	:	1.009	.885	.873
HORIZONTAL SPREAD	:	1.090	1.090	1.075
VERTICAL SPREAD	:	1.690	1.342	1.342
EXTREME SPREAD	:	1.724	1.495	1.432
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	

13 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C649B071

CENTERFIRE PATTERNS # 3

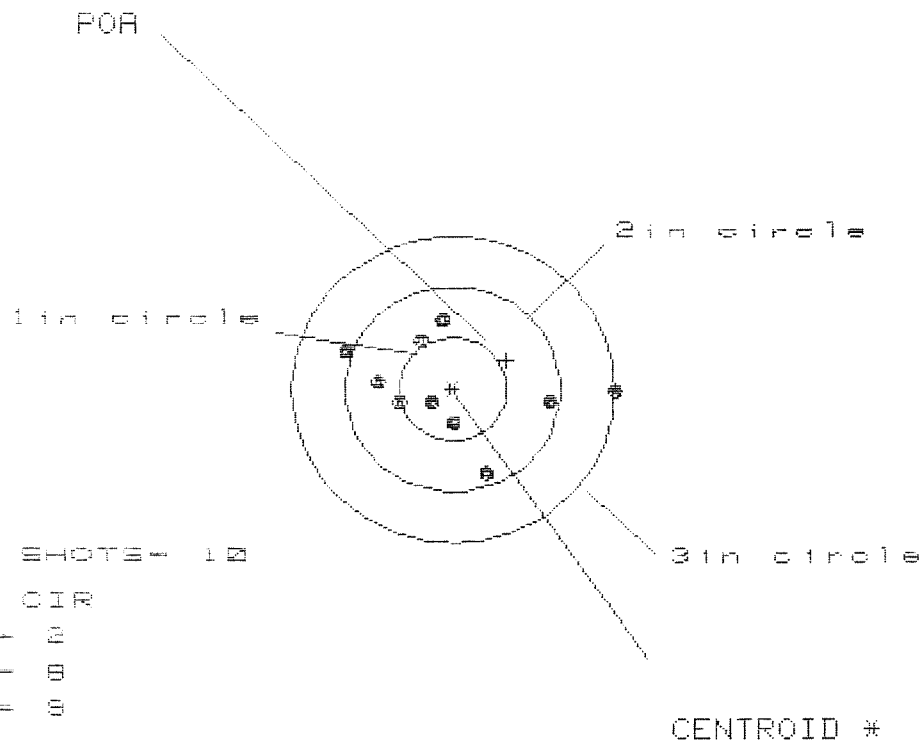

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 8

3 in = 9

HS= 2.474

VS= 1.442

GS= 2.487


PATTERN #	3
SHOTS (BEST OF)	10
MAXIMUM X	1.526
MINIMUM X	-.949
MAXIMUM Y	.657
MINIMUM Y	-.785
CENTROID X	-.503
CENTROID Y	-.277
POA TO CENTROID in.	.574
MIN RADIUS	.226
MEAN RADIUS	.722
MAX RADIUS	1.526
HORIZONTAL SPREAD	2.474
VERTICAL SPREAD	1.442
EXTREME SPREAD	2.497
NUMBER IN ONE INCH CIRCLE =	2
NUMBER IN TWO INCH CIRCLE =	8
NUMBER IN THREE INCH CIRCLE =	9

13 Jun 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C849B871

CENTERFIRE PATTERNS

4

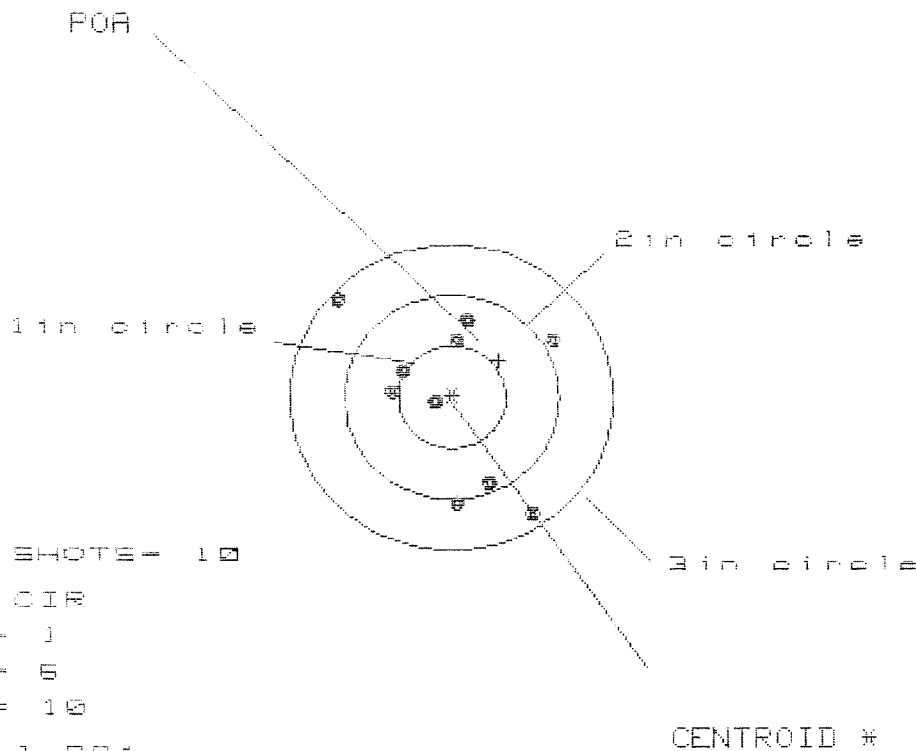

OF SHOTS = 10

IN CIR

1in = 1

2in = 6

3in = 10

HS = 1.884

VS = 2.092

ES = 2.735


PATTERN #	4		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.975	1.058	.942
MINIMUM X	-1.009	-.926	-.616
MAXIMUM Y	.917	.787	.706
MINIMUM Y	-1.175	-1.194	-1.096
CENTROID X	-.444	-.527	-.411
CENTROID Y	-.363	-.233	-.331
POA TO CENTROID in.	.573	.576	.528
MIN RADIUS	.179	.221	.223
MEAN RADIUS	.846	.758	.716
MAX RADIUS	1.395	1.215	1.096
HORIZONTAL SPREAD	1.984	1.984	1.558
VERTICAL SPREAD	2.092	1.981	1.802
EXTREME SPREAD	2.735	2.234	1.870
NUMBER IN ONE INCH CIRCLE	=	1	
NUMBER IN TWO INCH CIRCLE	=	6	
NUMBER IN THREE INCH CIRCLE	=	10	

13 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CB49B871

CENTERFIRE PATTERNS

5

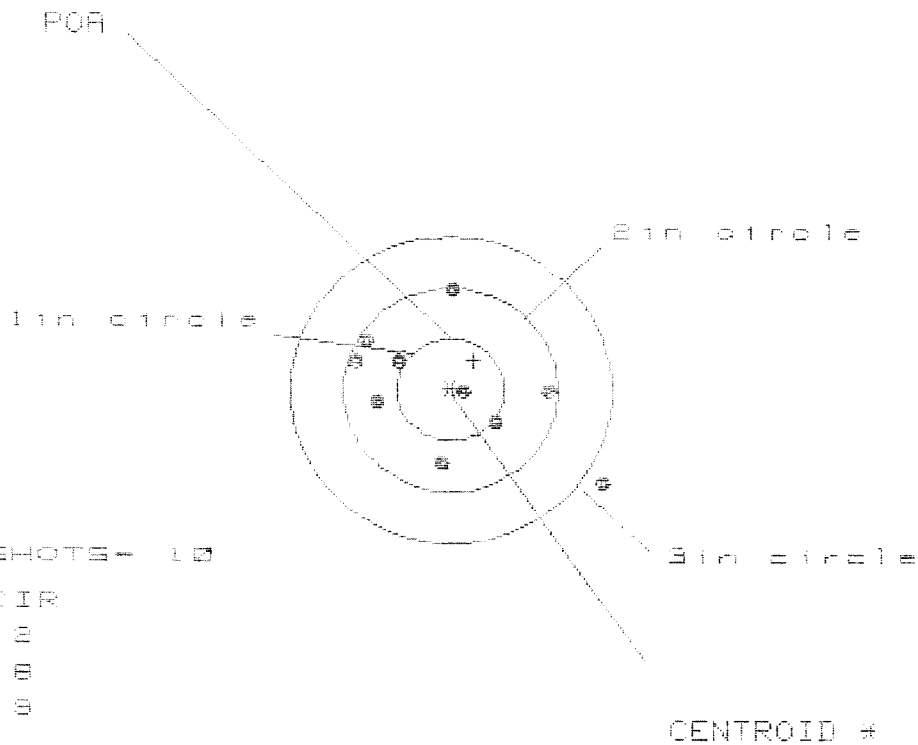

+ OF SHOTS- 10

IN CIR

1in = 2

2in = 8

3in = 9

hS= 2.311

VS= 1.938

GS= 2.627

CENTROID +

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.444	1.065	1.093
MINIMUM X	-.867	-.706	-.678
MAXIMUM Y	1.032	.933	.516
MINIMUM Y	-.898	-.789	-.673
CENTROID X	-.214	-.375	-.403
CENTROID Y	-.288	-.189	-.305
POA TO CENTROID in.	.359	.419	.505
MIN RADIUS	.104	.288	.292
MEAN RADIUS	.805	.693	.649
MAX RADIUS	1.700	1.073	1.093
HORIZONTAL SPREAD	2.311	1.771	1.771
VERTICAL SPREAD	1.938	1.722	1.189
EXTREME SPREAD	2.627	1.793	1.793
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		9	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 95-01251

INITIAL FPS	CUSTOMER ORDER NO.		M24 W/ULTRA 10X-M3A SCOPE & DEPLOYMENT KIT			
DATE RECEIVED 01/11/95	DATE OPENED 01/11/95	DATE CODE KK 5-90	SERIAL NUMBER C6498871	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO
ACCESSORIES	W/STUDS	W/SWIVELS	HARD CASE	SCOPE BASE		

FROM:

SHIP TO:

DEPT. OF THE ARMY
CO. D., 1ST BAT. (MECHANIZED)
8TH INFANTRY
FT CARSON
CO 80913

DEPT. OF THE ARMY
CO. D., 1ST BAT. (MECHANIZED)
8TH INFANTRY
FT CARSON
CO 80913

CUST NO: 112442 C.D.D.L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	------------

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

Broken Stock

PARTS

COMMENTS

Stock Assy - 96018

REPAIRMAN PROOF CLEAN TEST TARGET PATTERN

GALLERY TESTER DATE DATE DATE DATE DATE

W52 H09 4060H 226

RW

RW

1/12/95

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400165772

CONTRACT # DAAA21-87-C-0086

New Stock

GUN SERIAL #

C6498871

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock		1/12/95	RW
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
640	Gallery Target & Test		1/13/95	RW
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo		1/13/95	RW
655	Final Inspection		1/13/95	RW
	A) Headspace			
	B) Trigger Pull			
	C) Function		1/13/95	RW
660	Pack			

Final Inspection

Sn: C6498871

DATE REC'D:

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: _____

DOC IDENT	RI FROM	M & S	STOCK NUMBER	QUANTITY	DOCUMENT NUMBER	SUPPLEMENTARY ADDRESS	FUND	DISTRIBUTION	PROJECT	PRIORITY	REQ'D DEL DATE	ACQV	RI	UNIT PRICE
A5ABXN			1005012402136	00001	W51HU84049AAL9	CMAH2WMGA			MR213018	BXNMF				514500
SHIPPED FROM			CMAH2W			CMAH2W			PROJECT MR2			TOTAL PRICE		
SUP AND SERV DIV DOL			REMINGTON ARMS CO INC.			PPL			MATCAT MJ			DOLLARS CTS		
FORT CARSON CO 80913			14 HOFELER AVE						RECEIVED 4354			5145.00		
WAREHOUSE LOCATION			TYPE OF CARGO	UNIT PACK	UNIT WEIGHT	UNIT CUBE	UFC	NMFC	FREIGHT RATE	QUANTITY	SHELF	STD 4360		
ARMSROOM			AED00		.00	.000			LTL	4	LIFE	TTD 4365		
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)			FREIGHT CLASSIFICATION NOMENCLATURE									SKD 359		
RECEIVED			50X18X12											
RECEIVED			RIFLE, SNIP 7.62						SENSITIVE ITEM					
MAJOR ITEM														
SELECTED BY AND DATE			TYPE OF CONTAINER(S)			TOTAL WEIGHT			RECEIVED BY AND DATE			INSPECTED BY AND DATE		
4363			CASE			58.0								
PACKED BY AND DATE			NO OF CONTAINER(S)			TOTAL CUBE			WAREHOUSED BY AND DATE			WAREHOUSE LOCATION		
4AU633001/001			1			6.25								
REMARKS			INSPECTION REQUIRED			W800UD-3138-3000								
SIGNATURE REQUIRED			SERIAL NO. C6498871/SCOPE:890865			SIMS LABEL REQ								
FIRST DESTINATION ADDRESS			DATE SHIPPED			PKG REF								
13 TRANSPORTATION CHARGEABLE TO			14 BRADING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)			15 RECEIVER'S DOCUMENT NUMBER								
						TCN W51HU8 4049 AAL9 XXX								

DD FORM 1348-1A, SEP 87 (BLUE)

Jun 86 edition may be used.

FORM APPROVED. OMB NO. 0704-0188

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

DD PROT SERV CAT II

1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80	
DOC IDENT		RI FROM		M & S		STOCK NUMBER		QUANTITY		DOCUMENT NUMBER		SUPPLEMENTARY ADDRESS		DISTRIBUTION		PROJECT		PRIORITY		REQ'D DEL DATE		A D V I C E		RI		UNIT PRICE																																																																																																																																					
1005012402136		1005012402136		1005012402136		1005012402136		00001		REQUISITIONER		DATE		SERIAL		S U P P L Y		S U P P L Y		S U P P L Y		S U P P L Y		S U P P L Y		S U P P L Y																																																																																																																																					
SHIPMENT FROM		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO		SHIPMENT TO																																																																																																																																					
GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL		GUP AND SERV DIV DOL																																																																																																																																					
FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913		FORT CARSON CO 80913																																																																																																																																					
A		A		A		A		A		A		A		A		A		A		A		A		A		A																																																																																																																																					
WAREHOUSE LOCATION		TYPE OF CARGO		UNIT PACK		UNIT WEIGHT		UNIT CUBE		NMFC		FREIGHT RATE		DOCUMENT		MAT COND		QUANTITY		SHELF		STD 4300		TTO 4300		SKD 350																																																																																																																																					
ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM		ARMSROOM																																																																																																																																					
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE		FREIGHT CLASSIFICATION NOMENCLATURE																																																																																																																																					
T		T		T		T		T		T		T		T		T		T		T		T		T		T																																																																																																																																					
W		W		W		W		W		W		W		W		W		W		W		W		W		W																																																																																																																																					
SELECTED BY AND DATE		TYPE OF CONTAINER(S)		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT		TOTAL WEIGHT																																																																																																																																					
4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363																																																																																																																																					
PACKED BY AND DATE		NO OF CONTAINER(S)		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE		TOTAL CUBE																																																																																																																																					
4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363		4/15/4363																																																																																																																																					
REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS																																																																																																																																					
INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED		INSPECTION REQUIRED																																																																																																																																					
W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000		W800UD-3138-3000																																																																																																																																					
SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865		SERIAL NO. C6498871/SCOPE:890865																																																																																																																																					
SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED		SIGNATURE REQUIRED																																																																																																																																					
FIRST DESTINATION ADDRESS		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED		DATE SHIPPED																																																																																																																																					
11		11		11		11		11		11		11		11		11		11		11		11		11		11																																																																																																																																					
13 TRANSPORTATION CHARGEABLE TO		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)		14 BILLING, AWW, OR RECEIVER'S SIGNATURE (AND DATE)																																																																																																																																							
15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER		15 RECEIVER'S DOCUMENT NUMBER																																																																																																																																					
1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136		1005012402136																																																																																																																																					

DD FORM 1348-1A, SEP 87 (BLUE)

Jun 86 edition may be used.

FORM APPROVED OMB NO. 0704-0188

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

2135

B

SCOPE # 890865

Mel Cott
Shirley Blum

END DATE 93120
A JPD DATE 93120

Shirley Blum
Mel Cott

R END DATE 93120
A CDD DATE 93120

CC / F IAW
AR 725-50.

AG 29-B 1.0 HR

WAKBDO

DATE: 13 MAY 93

MEMORANDUM FOR RECORD

SUBJECT: Damage Statement

1. Item Damaged: 1005-01-240-2136 Nomenclature: M24 SNIPER RIFLE
SER# C6498871 ^{NSN} SCOPE# 890865 Price: _____

2. Description of loss/damage/destruction: STOCK IS CRACKED BELOW THE SAFETY.

3. Damaged item was removed from: ARMOROOM
Type of Vehicle _____

Bumper Number: N/A Driver: N/A NCOIC: N/A

4. Cause of damage was: Unknown/Fair Wear and Tear/Negligence.

5. Explanation of damage: THE SOLDIER WAS ON A FOOTMARCH DURING SNIPER TRAINING WHEN HE TRIPPED AND DROPPED THE WEAPON.

6. I have reviewed the circumstances surrounding the damage to the above equipment and find: ...

RWB

- a. ☒ No evidence of negligence or willful misconduct.
b. ☐ Evidence of negligence and willful misconduct. See exhibit:

- (1) Cash Collection Voucher
(2) Statement of Charges
(3) Report of Survey

Robert W. Borders

ROBERT W. BORDERS
CPT, IN
Commanding

An investigation has been conducted on the equipment identified above IAW AR 735-AS. I concur ~~with the findings~~ with the findings. The equipment is released for repair.

Clifford M. Dickman

CLIFFORD M. DICKMAN
LTC, IN
Commanding

DEPARTMENT OF THE ARMY
DELTA COMPANY, 1ST BATTALION (MECHANIZED) 8TH INFANTRY
FORT CARSON COLORADO, 80913-5000

WAK8DO

18 MAY 1993


MEMORANDUM FOR RECORD

SUBJECT: Missing parts statement.

1. The following component was lost during past Field Training Exercise within this unit;

7.62mm, M24 Sniper Weapon System serial no., C6498871.

<u>Missing Item</u>	<u>QTY</u>	<u>NSN</u>	<u>PRICE</u>	<u>TOTAL PRICE</u>
SLING, SMALL ARMS	1 ea.	1005-00-714-1245	\$ 7.88	\$ 7.88



ROBERT W. BORDERS
CPT, IN
Commanding

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET																																														
For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG																																														
1. ORGANIZATION <i>B Co 64th Spt Bn Fwd</i>					2. NOMENCLATURE AND MODEL <i>Sniper Weapon System M-24</i>																																									
3. REGISTRATION/SERIAL NO. <i>6498871</i>		4. MILES		5. HOURS		6. ROUNDS FIRED		7. DATE <i>30 April 93</i>																																						
APPLICABLE REFERENCE																																														
TM NUMBER <i>9-1005-306-10</i>			TM DATE <i>June 89</i>			TM NUMBER			TM DATE																																					
COLUMN a - Enter TM item number.					COLUMN d - Show corrective action for deficiency or shortcoming listed in Column c.																																									
COLUMN b - Enter the applicable condition status symbol.					COLUMN e - Individual ascertaining completed corrective action initial in this column.																																									
COLUMN c - Enter deficiencies and shortcomings.																																														
STATUS SYMBOLS																																														
"X"-Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"-Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "-"-Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.					DIAGONAL "/"-Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL-Indicates that a completely satisfactory condition exists. FOR AIRCRAFT-Status symbols will be recorded in red.																																									
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.																																														
8a. SIGNATURE (Person(s) performing inspection) <i>Sgt Peter Steven B</i>				8b. TIME		9a. SIGNATURE (Maintenance Supervisor)		9b. TIME		10. MANHOURS REQUIRED																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">ITEM NO. a</th> <th style="width: 10%;">STATUS b</th> <th style="width: 40%;">DEFICIENCIES AND SHORTCOMINGS c</th> <th style="width: 40%;">CORRECTIVE ACTION d</th> <th style="width: 10%;">INITIAL WHEN CORRECTED e</th> </tr> </thead> <tbody> <tr> <td></td> <td style="text-align: center;">X</td> <td>STOCK Broken has a small piece missing on Right side of safety</td> <td></td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">X</td> <td>Stock has hair-line crack across Top of Thumb Groove</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>ZAW AR 715-50</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>This Equipment is classified Condition Code "F" unserv. Repairable</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>B Co 64th Spt</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>Small Arms Repair Shop</td> <td></td> <td></td> </tr> </tbody> </table>												ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e		X	STOCK Broken has a small piece missing on Right side of safety				X	Stock has hair-line crack across Top of Thumb Groove					ZAW AR 715-50					This Equipment is classified Condition Code "F" unserv. Repairable					B Co 64th Spt					Small Arms Repair Shop		
ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e																																										
	X	STOCK Broken has a small piece missing on Right side of safety																																												
	X	Stock has hair-line crack across Top of Thumb Groove																																												
		ZAW AR 715-50																																												
		This Equipment is classified Condition Code "F" unserv. Repairable																																												
		B Co 64th Spt																																												
		Small Arms Repair Shop																																												

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

U.S. GOVERNMENT BILL OF LADING

MEMORANDUM
COPY

B/L
NO.

D-2886678

1. TRANSPORTATION COMPANY TENDERED TO UNIVERSAL TRANSPORT		2. SCAC UTEE	3. DATE B/L PREPARED 950105	4. ROUTE ORDER/RELEASE NUMBER
5. DESTINATION (Name, address and ZIP code) ILION, NY 13357		6. SPLC (Dest.) 172856000	8. ORIGIN (Name, address and ZIP code) TRANSPORTATION OFFICER FORT CARSON, CO 80913-5025	
TP: 1 RDO: 9 JUAN 95		7. SPLC (Orig.) 746693250		
9. CONSIGNEE (Name, address and ZIP code of installation) RECEIVING/REMINGTON ARMS CO INC 14 HOEPLER AVE ILION, NY 13357		10. GBLOC (Cons.) 1001 /701	11. SHIPPER (Name, address and ZIP code) TRANSPORTATION OFFICER FORT CARSON, CO 80913-5025	
12. APPROPRIATION CHARGEABLE SEE BLOCK 15 OR 18 BELOW		13. BILL CHARGES TO (Dept./agency, bureau/office mailing address and ZIP code) TRANSPORTATION OPERATIONS US ARMY FINANCE & ACCTG CTR INDIANAPOLIS, IN 46249		
14. VIA (Route shipment when advantageous to the Government)		AGENCY LOC CODE		
15. MARKS AND ANNOTATIONS FUNDS: 97X4930 AC60 65 SH2870 2215 811173 AQ15 REF: W800UD 3138-3000				

16. PACKAGES		17. HM	18. DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible, otherwise use a clear nontechnical description)		19. WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND					Services	Rate	Charges
1	CS		CLASSIFICATION ITEM NO. 995912 PAK W51HUB 4049-AAL9 CU: 6.25 38 105--"USE OF SIGNATURE AND TALLY RECORD REQUESTED. DD FORM 1907 FURNISHED TO CARRIER." "SECOND DAY SERVICE"					EST 38 94 30 00 68 94
						TOTAL CHARGES		
20. TARIFF/SPECIAL RATE AUTHORITY HTS14018			21. PICKUP SERV. FURNISHED ☒ YES VEHICLE FULLY LOADED ☐ YES		SHIPPER'S INITIALS LLS	22. CARRIER WAY/FREIGHT BILL NO. AND DATE		
23. STOP THIS SHIPMENT AT			24. FURNISH INFORMATION ON CAR/TRUCKLOAD/CONTAINER SHIPMENTS					
			INITIALS & NO.	SEAL NUMBERS	LENGTH/CUBE ORDERED FURNISHED		MARKED CAPACITY ORDERED FURNISHED	DATE FURNISHED
FOR:			APPLIED BY:					
25. CARRIER'S PICKUP DATE (Year, month, & day) 95/01/05			26a. SIGNATURE OF AGENT		26b. PER SOLE	B/L NUMBER D-2886678		
27. MODE RR	28. ESTIMATE 69	29. NO. OF CLS/TLS	30. TYPE RATE	31. PSC	32. REASON	Received by the transportation company named above, subject to conditions named on the reverse hereof, the property hereinafter described, in apparent good order and condition (contents and value unknown), to be forwarded to destination by the said company and connecting lines, there to be delivered in like good order and condition to said consignee.		

FOR USE OF ISSUING OFFICE					MEMORANDUM COPY—CONSIGNEE				
33a. ISSUING OFFICE (Name and complete address) TRANSPORTATION DIVISION, FREIGHT MOVEMENTS BR ATTN: AFZC-DL-TD, BLDG 347 FORT CARSON, CO 80913-5025									
33c. ISSUING OFFICER THOMAS E. WRIGHT, JR.									
33d. CONTRACT/PURCHASE ORDER NO. OR OTHER AUTHORITY									
33e. DATED 950105					34d. DELIVERED THIS CONSIGNMENT COMPLETE & IN APPARENT GOOD ORDER EXCEPT AS MAY BE INDICATED ☐ SHORTAGE ☐ DAMAGED				
33f. FOB POINT NAMED IN CONTRACT									

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1103-321

STANDARD FORM 1103-B (Rev. 4-85)
PRESCRIBED BY GSA, FPMR (41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400165783

INSTRUCTIONS TO CONSIGNEE

1. The consignee, upon receipt of the shipment, shall sign the carrier's delivery receipt or freight bill as well as the consignee's copy thereof with his own receipt and evidence of receipt. The consignee shall make certain that the Government bill of lading number is shown on the delivery carrier's document and on the consignee's copy. If the number is not shown, the consignee shall write it on said documents. If the number is not shown, the consignee shall receipt for the shipment and add the number to his copy when it becomes available.

2. If the consignee discovers an apparent loss or damage or other discrepancy in the quantity or condition of property while said property is in process of being unloaded from carrier's equipment, he shall note such loss, damage or other discrepancy on the delivery carrier's documents and on the consignee's copy of those documents. Both the consignee and the carrier must sign these documents and sign the bill of lading.

3. Should the consignee not discover the loss, damage, or discrepancy until after delivery of the shipment and receipt therefor, he shall, as soon as such loss, etc., is known, notify the nearest office of the last delivering carrier and extend privilege of examining the shipment. This information is to be conveyed by telephone if the office is located within the vicinity, with written confirmation, including the name and title of the contacted carrier representative, sent to the carrier and copy of the confirmation made a part of the official record.

4. The consignee shall forward an appropriate loss or damage report to the administrative office as soon as possible but no later than 30 days after receipt of the shipment or discovery of the loss or damage. In case of non-delivery of an entire shipment, the consignee shall file a written report of all the facts with the administrative office as soon as possible but no later than 30 days after date of anticipated delivery or date of election of an entire shipment. The consignee shall immediately file a written report of all the facts with the administrative office responsible for payment of the charges.

5. The consignee shall make every effort to resolve overages or shortages within 40 working days after their detection. Upon detection of such overages or shortages, the consignee must notify the delivering carrier of its agency so that the carrier may investigate the matter. When overages or shortages are ascertained after a loss and damage report has been filed, the consignee shall immediately notify the administrative office responsible for payment of the charges.

6. Where a consignment of special services is shown as ordered but have not been furnished, the consignee must immediately notify the administrative office responsible for payment of the charges.

IMPORTANT - Issuing office is to send this copy to consignee immediately after surrender of original to initial carrier.

NOTICE

Contractors will return unused or canceled bills of lading to the Government office from which received.

SPECIAL SERVICES ORDERED

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

REMARKS AND DISPOSITION

REMARKS AND DISPOSITION

REMARKS AND DISPOSITION

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

STANDARD FORM 1108-B BACK (Rev. 4-85)

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80																			
DOC IDENT		R FROM		STOCK NUMBER		QUANTITY		DOCUMENT NUMBER		SUPPLEMENTARY ADDRESS		DISTRIBUTION		PROJECT		REQ'D DEL DATE		UNIT PRICE	
A5ABXN				1005012402136		00001		W51HU84049AAL9		CMAH2WMGA		MR213018		BXNMF				5145.00	
SHIPPED FROM		CMAH2W		REMINGTON ARMS CO. INC.		14 HOFER AVE		ILION NY 13357		CMAH2W		MR2		MATCAT MJ		PPL		5145.00	
SUP AND SERV DIV DOL		FORT CARSON CO 80913																	
WAREHOUSE LOCATION		TYPE OF CARGO		UNIT PACK		UNIT WEIGHT		UNIT CUBE		UFC		FREIGHT RATE		MAT COND		QUANTITY		SHELF	
ARMSROOM		AE000				.00.000						LTL		4		TIME		STD 4360	
																FO0001		TTD 4365	
																1615		SKD 359	
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)		FREIGHT CLASSIFICATION NOMENCLATURE		ITEM NOMENCLATURE		SENSITIVE ITEM		MAJOR ITEM											
RECEIVED		50X18X12		RIFLE, SNIP 7.62															
SELECTED BY AND DATE		TYPE OF CONTAINER(S)		TOTAL WEIGHT		RECEIVED BY AND DATE		INSPECTED BY AND DATE											
4363		CASE		58.0															
PACKED BY AND DATE		NO OF CONTAINER(S)		TOTAL CUBE		WAREHOUSED BY AND DATE		WAREHOUSE LOCATION											
4AU633001/001		1		6.25															
REMARKS		INSPECTION REQUIRED		W800UD-3138-3000		SERIAL NO. C6498871/SCOPE:890865													
AA		SIGNATURE REQUIRED		CC		SIMS LABEL REQ													
FIRST DESTINATION ADDRESS		DATE SHIPPED		PKG REF															
13 TRANSPORTATION CHARGEABLE TO		14 BLADING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)		15 RECEIVER'S DOCUMENT NUMBER		TCN W51HU8 4049 AAL9 XXX													

DD FORM 1348-1A, SEP 87 (BLUE) Jun 86 edition may be used. FORM APPROVED. OMB NO. 0704-0188 DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

DD PROT. SERV. CAT. II