- 1 REMINGTON'S NEW MODEL 710
- 2 | MEW REMINGTON MODEL 710 BOLT-ACTION RIFLE.

BARREL ACTION

- 22" Ordinance steel barrel with hunting contour
- 3 BARREL/ACTION
 - 22" Ordinance steel barrel with hunting contour
 - · Matt glass bead metal finish
- 4 BARREL/ACTION
 - 22° Ordinance steel barrel with hunting contour
 - Matt glass bead metal finish
 - 6 Groove Remington button rifling
- 5 BARREL/ACTION
 - 22" Ordinance steel barrel with hunting contour
 - Matt glass bead metal finish
 Groove Remington button rifling


 - Right-hand rifle twist 1 in 10"
- 6 SE BARREL/ACTION
 - 22" Ordinance steel barrel with hunting contain
 - Matt glass bead metal finish
 - 6 Groove Remington button rifling


 - Right-hand rifle twist 1 in 189
 Recessed crown muzzle response.

7 TRECESSED CROWN MUZZLE

- 8 BARREL/ACTION
 - 22" Ordinance steel barrel with tophing pooreid
 Matt glass lead notal finish

 - 6 Groove Remingion button rifling Right-hand rifle twist high 32
 - Recessed crown muzzië treatment Bore sited 33 9 x 40 Bushnell scope
- 9 84 BARRELACTION
 - 22 Ordinance steel barrel with hunting contour
 seat place based model finish
 6 Ordine Rectificity button rifting
 Right hand the solat if it is 40°
 Recessed ordin space is bestimped
 Barrels and 3 x 9 x 40 Bashhell scope
- BUSHNELL 3X3X AS MATTE SHARPSHOOTER RIFLE SCOPE Egilig seatem content foggroup
- 11 RUSHNELL 3 X 9 X 40 MATTE SHARPSHOOTER RIFLE SCOPE
 - Pully waterproof and fogproof Fully coated lenses
- 12 RUSHNELL 3 X 9 X 40 MATTE SHARPSHOOTER RIFLE SCOPE
 - Figlik waterproof and fogproof Fully object lenses Lifebrie limited warranty

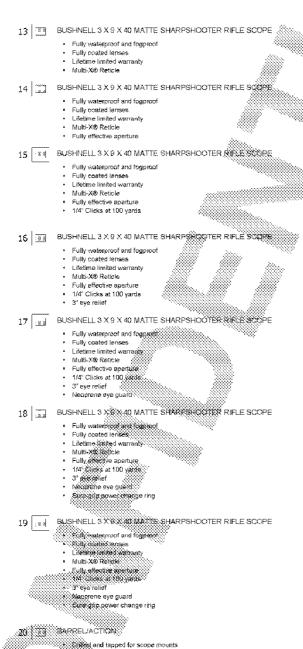

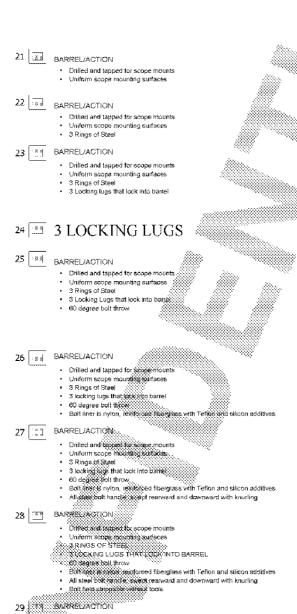


Diffied and tapped for scope mounts
 Uniform scope mounting surfaces
 3 RINGS-OF STEEL
 S LOCKINGS-DISS THAT LOCK INTO BARREL

Soft liner is nylon, reinforced fiberglass with Teflon and silicon additives All seed bolt handle, swept rearward and downward with knurling

§80.degree bolt throw

Edit hight strippable without tools



30 ISS/J-KEY

31 BARRELIACTION

- Drilled and tapped for scope mounts
- Uniform scope mounting surfaces 3 RINGS OF STEEL
- 3 LOCKING LUGS THAT LOCK INTO BARREL
- 60 degree balt throw
- Bolt liner is nylon, reinforced fiberglass with Teffori and six consideratives. All steel bolt handle, swept rearward and downward with knighting

- Bolt field strippable without tools ISS (Integrated Security System), J key operated
- External bolt release lever

32 BARREL/ACTION

- Drilled and tapped for scope mounts
- Uniform scope mounting surfaces
- 3 RINGS OF STEEL 3 LOCKING LUGS THAT LOCK INTO BARREL

- 60 degree bolt throw Bolt liner is nylon, reinforced fiberglass with terion and silicon addition All steel bott handle, swept rearward and downward with knurling Bolt field strippable without tools
- ISS (Integrated Security System), J key operated External bolt release lever
- Bolt operable with safety switch to pay position (recipiot lock)

33 BARREL/ACTION

- Orilled and tapped for scope mounts Uniform scope mounting sugares
- 3 RINGS OF STEEL 3 LOCKING LUGS THAT LOCK INTO BARREE
- 60 degree bolt through Bolt liner is nylon, reinfolded fiberglass with Teffor and silicon additives
- All steel bult handle, everyt rearward and downwerd with knurling Bolt field strippathe without bots.
- ISS (Integrated Security System), J. New operated External bolt release lever
- Entermine pure crosso lever Bolt operable with safety switch in any position (by bolt lock) Factory sectioger at 3.5., 5 pounds

34 3 BARREL/ACTION

- Drilled and tapped for scope mounts

- United and appea to sappe mounts
 United to be a specific process

 RINGS OF STEEL

 REGISTRY LUGS THAT LOCK INTO BARREL

 BERNELS THAT LOCK INTO BARREL

 BOT INTO THE TRANSPORT OF THE PROCESS OF THE PROCES
- All steel bolt handle exceptible ward and downward with knurling Bolt-field strippable without boots

- Bolt operation with salety system in any position (no bolt lock)
 Factory set trigger at 3.5 5 pounds
 Trigger appropriate from M/700

35 TRIGGER VIEW

36 BARREL/ACTION

- Critical and tapped for scope mounts
 Unitern scope mounting surfaces



- · 3 LOCKING LUGS THAT LOCK INTO BARREL
- 60 degree bolt throw
- Bolt liner is nylon, reinforced fiberglass with Teflon and silicon additives All steel bolt handle, swept rearward and downward with knurling

- Bolt field strippable without tools ISS (Integrated Security System), J key operated
- External bolt release lever
- Bolt operable with safety switch in any position (no bolt look)
- Factory set trigger at 3.5 5 pounds Trigger components from M/700
- · Barrel pressed into the receiver

37 3 BARREL/ACTION

- Drilled and tapped for scope mounts
- Uniform scope mounting surfaces 3 RINGS OF STEEL
- 3 LOCKING LUGS THAT LOCK INTO BARREL 60 degree bolt throw
- Bolt liner is nylon, reinforced fiberglass with Tellipp and spicon additives
- All steel bolt handle, swept resilvard and downward with historing
- Bolt field strippable without tools
- ISS (Integrated Security System), J key operated
- External bolt release lever
- Bolt operable with safety switch in any position (no bolt lock)
- Factory set trigger at 3.5 5 pounds.
 Trigger components from M/700
- Barrel pressed into the receiver
- Barrel and Action are pillar bedded

38 3 PILLAR-BEDDED BARREI

39 BARRELIACTION

- Drilled and tapped for spope mounts
 Uniform scope mounting surfaces
 a number of extremely surfaces
- 2 RINGS OF STEELS
- 3 LOCKING LUGS TRATILOCK INTO BARREL
- 60 degree bolt threst. Bolt liner is nylon: settlocest fiberglass with Teflox acts silicon additives
- All steel both handle, উপন্টো চিহ্নাস্থলী ইন্দ্ৰ downwistd with knurling Both field strippable without জিটাই

- Both held strippable without 1999.
 ISS (Integrated Security System), 3 key opinional
 External bilt release lever.
 Both operable (with addity stollers of any position (no both lock)
 Factory set trigger at 3.6, 3 pionals
 Trigger opinionals from MY208.
 Barrel presided into the receiver
 Barrel presided into the receiver


40 MAGAZINE BOX

- Removable box positive steel magazine front latch
- 41 MAGAZINE BOX
 - % წელიvable ხი∞ poditive chiego magazine front latch d-round capacity (total gun sapacity = 5)
- 42 MAGAZINE BOX
 - Removable box 60000000 steel magazine front latch
 identified expecting (code gin capacity = 5)
 (Allabox 1 in chamber)

43 MAGAZINE BOX

- Removable sex positive steel magazine front latch 4-rourid zajsable dotal gun capacity = 5 (4 in box, 1 in chamber)


Wefal box easily disassembled for cleaning

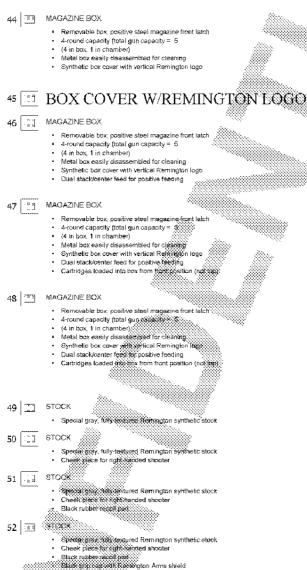

53 GRIP CAP W/RA SHIELD

Special gray, fully-textured Remington synthetic stock Siegel, piece for right-handed shooter Plack rubber recoil pad Black grigo cap with Remington Arms shield


54. A. STOCK

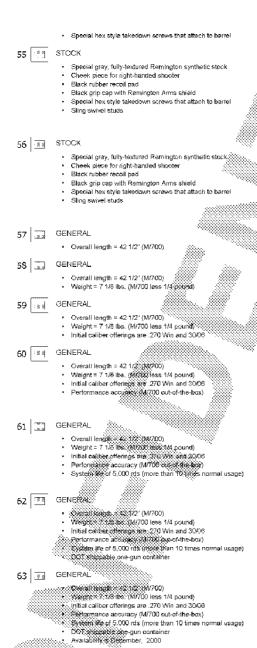



7

64 GENERA

Oversil Dength = 42 1/2" (M/700) Weight = 7 1/8 lbs. (M/700 less 1/4 pound)

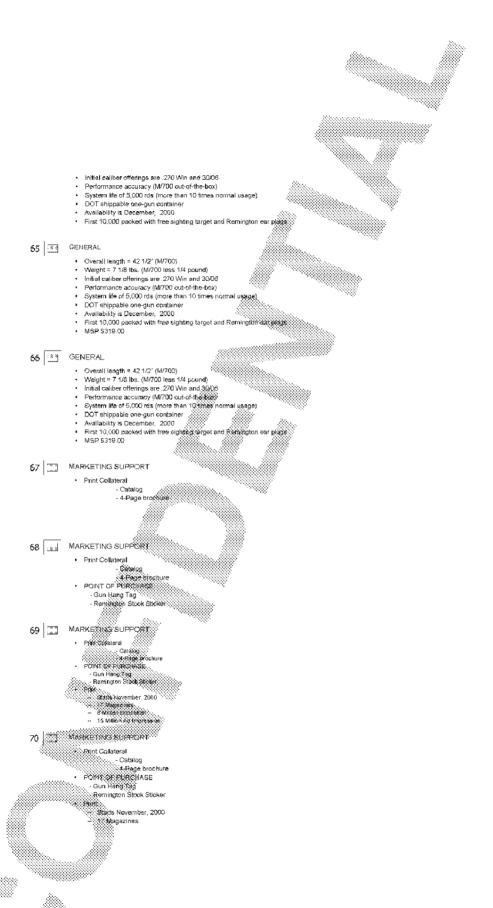

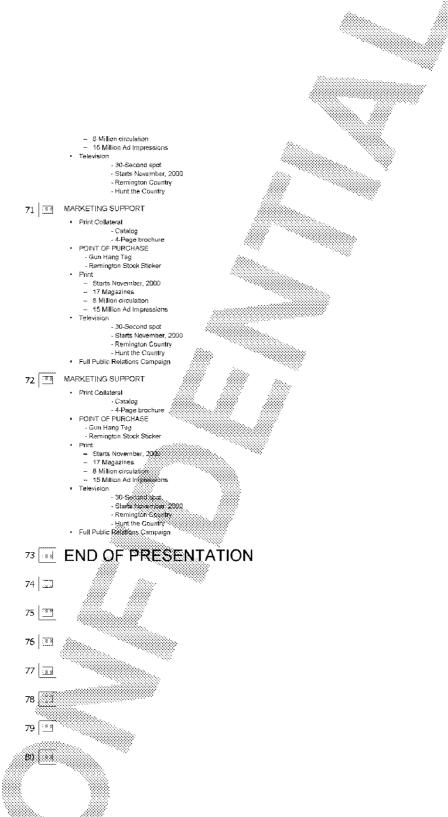

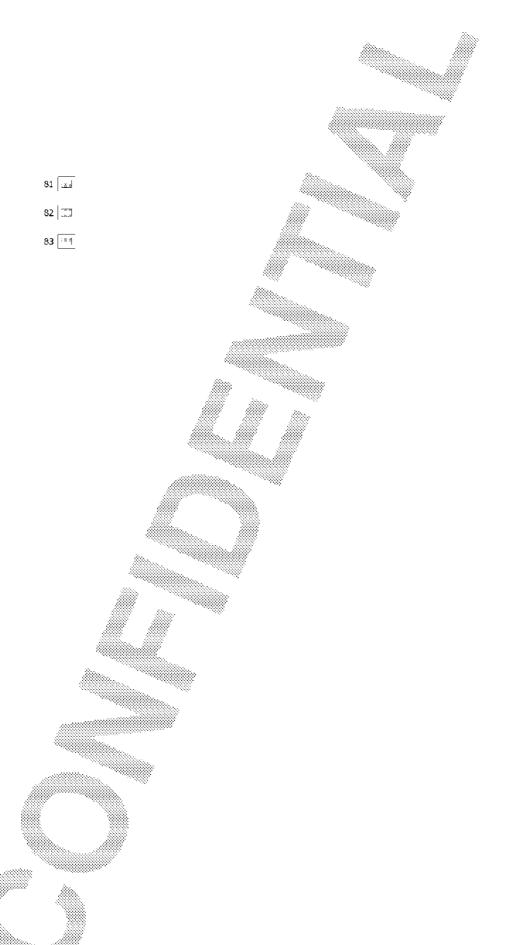

Subject to Protective Order - Williams v. Remington