


Owner's Manual

Instruction Book for
MODEL 7400
AUTOLOADING CENTERFIRE RIFLE

Remington



PAGE 4 ... THE TEN COMMANDMENTS OF
GUN SAFETY

PAGE 7 ... AN OVERVIEW OF THE RIFLE

PAGE 10 ... HOW TO LOAD AND UNLOAD

PAGE 11 ... LUBRICATION AND MAINTENANCE

PAGE 13 ... HOW TO OBTAIN PARTS AND SERVICE

A Tradition of Performance and Safety.

In 1816 Eliphalet Remington was confident he could make a flintlock that was as good or better than any he could buy. His confidence was well founded. The barrel he handcrafted set a new standard for firearm accuracy and spawned generations of products that have made Remington® Arms America's leading gun maker. While performance and style are certainly hallmarks of Remington firearms, one factor ultimately drives their performance: Safety. Eliphalet Remington never lost sight of the fact that his rifles were potentially lethal and could kill someone if handled improperly. And after more than 180 years, the same holds true for any firearm, including your new Remington. Eliphalet Remington's first flintlock launched a proud tradition of accuracy and responsibility.



Eliphalet Remington's first flintlock launched a proud tradition of accuracy and responsibility.

Safety is Critical to Performance.

A superbly crafted gun is only as good as the hands that hold it. You can never be too careful. Shooting accidents are often caused by careless oversights such as failing to control the direction of the muzzle, failing to fully engage the safety, leaving ammunition in the chamber or using improper loads. These oversights can result in the destruction of life, limb or property. There's no calling back a bullet once it's been fired, so it's critical that you know the principles of safe gun handling and storage before you ever take your new Remington firearm out of the box.

The proper use and performance of your firearm depends on correct assembly and maintenance, so it's critical that you familiarize yourself with the information in this instruction book. Even if you're a veteran shooter with a collection of Remington firearms, take the time to read this literature. Not all firearms are the same. That means the first step in safe handling is to learn the features and requirements of your new Remington.

The Ten Commandments of Firearm Safety

The Ten Commandments of Firearm Safety should be etched in your memory to eternalize them govern your action wherever and whenever you're involved with firearms, in the field, on the range, or in your home. Please take the time to review and understand these rules.

1st COMMANDMENT

Always Keep the Muzzle Pointed in a Safe Direction.

This is the most important gun safety rule. A safe direction is one in which an accidental discharge will not cause injury to yourself or others. Never allow your gun to point at anything you don't intend to shoot. Be especially careful when you're loading or unloading. Treat every gun as if it were loaded. And make it a habit to know where the muzzle is pointed at all times, even when your firearm is unloaded. No one will be injured by an accidental discharge if you keep your firearm pointed in a safe direction. It's as simple as that.



2nd COMMANDMENT

Firearms Should Be Unloaded When Not Actually in Use.

Carry your firearm only when you're in the field or on the target range and ready to fire. Never let a loaded gun out of your sight or out of your hands. Unload it as soon as you're finished shooting — before you bring it into your car, camp or home. Remember, unloading your firearm means unloading it completely, so there's no ammunition in the chamber, in the magazine. Before handling a firearm or passing it to someone else, visually check the chamber, receiver and magazine to be certain they do not contain ammunition. Always keep the guns action open when not in use. Never assume a gun is unloaded even if you were the last person to use it. Always check for yourself.


Let common sense rule when you carry a loaded gun. If you're in a situation that could risk accidental discharge — such as crossing a fence, wading through a stream or climbing a tree — always unload your gun. Never pull or push a loaded firearm toward yourself or another person. And never carry a loaded gun in a scabbard, detached holster or gun case.

Certain firearms (including some Remington® rifles and shotguns) are equipped with internal security devices to prevent unauthorized use. In addition, some firearms owners use external devices, such as cable locks and trigger blocks, for the same purpose. Even if you use such a device, you should still keep your firearm unloaded when stored or not in use. And, using internal or external devices cannot substitute, however, for securing your firearms and ammunition in a separate, locked location.

Safe storage of firearms is just as critical as safe handling. Never store guns loaded. Be sure to keep your firearms in a secure place where unauthorized persons cannot get their hands on them without your knowledge.

Take special care if there are children around. Kids are fascinated by guns. It's a natural curiosity that can have tragic consequences when not properly supervised. Store your firearms in a locked gun safe or some other location that physically bars a child from gaining access.

Ammunition should be stored and locked in a location separate from your firearm. Never keep an unsecured firearm or ammunition in a closet, dresser drawer or under the bed. Remember, it is your responsibility to make sure that children and others unfamiliar with firearms cannot get access to your firearm and ammunition.



Firearms that are stored in a secure place should still be unloaded. Access to the gun safe is a responsibility of the owner.

3rd COMMANDMENT

Don't Rely on Your Gun's Safety.

Treat every gun as if it can fire at any time, whether or not there's pressure on the trigger. Your firearm has been carefully designed to maximize performance and safety. However, because a gun's safety is a mechanical device, it could fail.

Human error is a more likely reason for a gun safety to fail. By mistake, you may think the safety is on when it really isn't. Or the safety may have been disengaged without your knowledge. Or you could think your gun is unloaded when there's actually a cartridge or shell in it. A mechanical safety is not a substitute for common sense. It's merely a supplement to your proper handling of a firearm.

Never touch the trigger of a firearm until you are ready to shoot. Keep your fingers away from the trigger when you're loading or unloading. And don't pull the trigger when the safety is engaged or positioned between you and fire.

Before using your gun, read this instruction book to understand the exact location and operation of your firearm's safety. Even when the safety is on, maintain control of your loaded firearm and control the direction of the muzzle. In other words, don't rely on your safety for just careless handling. If your firearm's internal mechanisms are broken or have been altered, your firearm may fire even when the safety is on. Remember, you and your safe gun handling practices are your gun's best safety.

4th COMMANDMENT

Be Sure of Your Target and What's Beyond It.

You can't stop a shot in mid-air, so never fire unless you know exactly where your shot is going and what it will strike. Never fire at a sound, a movement or a patch of color. A hunter in camouflage can easily be mistaken for a target by an impulsive shooter. Before you pull the trigger, be absolutely sure of your target and what's behind it.

Make sure the shot has a backstop such as a hillside or dense material like sand. Remember, bullets can travel great distances with tremendous velocity. Know how far your shot will go if you miss your target or the bullet ricochets.



5th COMMANDMENT

Use Proper Ammunition.

Every firearm is designed to use a certain caliber or gauge of ammunition. Using the wrong ammunition, mixing ammunition or using improperly reloaded ammunition can cause serious personal injury or death. And it only takes one cartridge or shotshell of the incorrect caliber or gauge, or which has been improperly reloaded, to destroy your firearm. It's your responsibility to make sure the ammunition you use exactly matches the caliber or gauge of your gun. Refer to this instruction book to find out the specific requirements of your firearm. Always read and heed the instructions on ammunition boxes.

Confusing shells or cartridges can cause serious personal injury or death and destroy your firearm. Examine your shells or cartridges closely and use only the precise caliber or gauge for your specific firearm. For example, suppose you accidentally loaded a 20 ga. shell into a 12 ga. shotgun. Because the 20 ga. shell is too small for the chamber, the 20 ga. shell could travel down the barrel and get lodged in the bore. If you then load a standard 12 ga. shell behind it and fired, the 12 ga. shot will slam into the lodged 20 ga. shell and may cause the barrel to explode right in your hand. This is commonly called a 12/20 burst, and it can kill you.

Check all ammunition before you load it to make sure it matches your gun's requirements. Every Remington® cartridge and shell is head-stamped with its caliber or gauge for easy identification. Likewise, you'll find the caliber or gauge of your new Remington firearm imprinted on the barrel.

Reloading Requires Extra Diligence.

If you're an ammunition reloader, you are responsible for ensuring that the loads and components of your reloaded ammunition meet your gun's factory-tested standards. Never use ammunition which has been reloaded by someone else!

Many shooters handload as a hobby or to save money on commercial, factory-made ammunition. However, it requires a thorough knowledge of reloading procedures and a deep respect for the explosive potential of gunpowder.

Firearms are designed, manufactured and proof-tested to standards based on factory-loaded ammunition. Hand-cased or reloaded ammunition that deviates, either intentionally or accidentally, from load or component recommendations can be very dangerous.

Reloaders must observe all possible safety precautions and practices related to the proper handling of explosives. Whether you're a seasoned reloader or just starting out, you should always be subject, when reloading, to demonstrations and talks to experienced reloaders.

The first rule of reloading is to always follow the manufacturer's instructions for the components you're using. They'll tell you to follow certain guidelines. Namely:

1. Don't mix or substitute powders or primers.
2. Don't use unknown or suspect card components.
3. Use only suitable components that have been factory-tested by reputable ammunition, powder and primer manufacturers.
4. Always be sure to use the manufacturer's recommended recipe when reloading.

Not following these guidelines could result in severe injury to yourself or severe damage to your firearm. Dangerously high pressure and explosions can result from an overcharge of powder or other deviations from established reloading guidelines. Be very careful. The process of reloading exposes you to environmentally hazardous material. Lead, which is known to cause cancer and birth defects, is the most common substance in bullets and shot. It is important to handle and bullets and shot with extreme care. Work only in a well-ventilated area and always wash your hands after exposure and before eating. Never smoke while reloading.

Primers and powders are also highly toxic and flammable. So after reloading be sure to clean up all materials from your work area. Don't leave primer or powder spills anywhere on the floor or bench top. Dispose of all waste material in accordance with the manufacturer's recommendations.

Finally, when reloading or handloading, concentrate on what you're doing at all times. Do not be distracted by talking to others, listening to the radio or watching TV while reloading. Never reload after consuming alcoholic beverages or drugs of any kind. You are working with extremely hazardous materials and you can't risk even a few seconds of distraction. Remember, if you reload, you are the ammunition manufacturer and you are responsible for the performance and safety of your reloaded ammunition.

6th COMMANDMENT

If Your Gun Fails to Fire When the Trigger is Pulled, Handle With Care.
If for some reason the ammunition doesn't fire when you pull the trigger, stop and remember the 1st Commandment of Firearm Safety – always keep the muzzle pointed in a safe direction. Keep your face away from the breech, then put the safety on, carefully open the action, unload the firearm and dispose of the cartridge safely. Remember that anytime there's a shell in the chamber, your gun is loaded and ready to use. Even if you tried to shoot and your gun didn't fire, treat your firearm as if it could still discharge.

7th COMMANDMENT

Always Wear Eye and Ear Protection When Shooting.
Your sight and hearing risk injury from shooting and should be protected at all times. Wear protective shooting glasses to guard against falling shot, clay target chips, powder residue, ruptured cartridge cases and even twigs and branches in the field. Also, best practice is to wear eye protection when you're disassembling or cleaning a gun so that tensioned parts (like springs) and cleaning solvents don't come in contact with your eyes. Continued exposure to shooting noise can permanently damage your hearing. On the range, where shooting volume is the loudest, be sure to use the maximum protection available. And earn to use ear protection in the field, especially in confined locations like duck blinds.



8th COMMANDMENT

Be Sure the Barrel is Clear of Obstructions Before Shooting.
Before loading your gun, open the action and make sure there's no ammunition in the chamber or magazine. Check the barrel for any obstructions or debris. Even a small amount of snow, mud, excess lubricant or grease in the bore can dangerously increase pressure and cause the barrel to bulge or burst when firing. Use a cleaning rod and patch to wipe away anti-rust compounds or any other residues or obstructions in the barrel. Never try to shoot out an obstruction by loading another shell and firing.

When firing, rely on your instincts. If the noise or recoil of your firearm seems weak, stop everything, unload your firearm and be sure nothing is lodged in the barrel. Remember the 12/20 burst? That's what can happen when the barrel is obstructed. So always be sure you're using the correct ammunition in your firearm and that it's free of obstructions.

9th COMMANDMENT

Don't Alter or Modify Your Gun and Have it Serviced Regularly.
Your firearm has been designed to operate according to certain factory specifications. You'll jeopardize your safety and that of others around you by altering or modifying the trigger, mechanism, safety or other mechanisms. So never alter or modify your firearm in any way.



Like any mechanical device, a firearm is subject to wear. It must be maintained and periodically serviced to assure optimum safety and performance. Only a qualified service facility should service, repair or modify your Remington® firearm. Consult your instruction book for instructions on how to send your firearm to the factory or for the location of the nearest Remington repair station.

Proper cleaning and lubrication are also important to firearm maintenance and are necessary to assure accuracy, safety and reliability. Before cleaning, always make sure that your gun is completely unloaded. And always clean the barrel from the chamber and to the muzzle when possible.

Make it a practice to clean your bore every time you're going to shoot. Be sure to clean your rifle the gun before and after long term storage and no less than once a year. It's so important to clean your gun whenever it's been exposed to adverse conditions such as rain, dirt, mud, snow, sleet or saltwater.

For safe and dependable operation of your firearm, all parts of your gun must be properly cleaned and lubricated. Periodically inspect the internal workings of your firearm to be sure they're clean and free of rust, unwanted dirt and debris.

Use recommended lubricants on your gun and do not over-lubricate. Excessive use of a non-recommended lubricant could adversely affect the function and safe operation of your firearm. Remember, you are responsible for the proper care and maintenance of your firearm. Failure to properly maintain your firearm can not only damage or ruin your firearm, it can expose you and others to unnecessary risks of personal injury or death.

Remington® has a wide range of firearm care products and resources for best results when cleaning your gun. Everything from solvents and lubricants to rods and patches. They're available from your Remington dealer.



10th COMMANDMENT

Learn the Mechanics and Handling Characteristics of Your Firearm.

Not all guns are alike. They have different mechanical characteristics that dictate how you should carry and handle them. Anyone who plans to use a firearm should first become totally familiar with the type of firearm it is and the safe handling procedures for loading, unloading, carrying, shooting and storing it.

Before you even unpack your new Remington® firearm, read the instruction book from cover to cover and familiarize yourself with the different component parts of the gun. Then read, understand and follow the Ten Commandments of Firearm Safety in this book.

WARNING: Discharging firearms in poorly ventilated areas, cleaning firearms, or working ammunition may result in exposure to lead and substances known to cause birth defects, reproductive harm, and other serious physical injury. Have adequate ventilation and wash your hands thoroughly after exposure.



SHOOT SODER!

There's one other rule that must be followed when handling firearms. In fact, respect for this rule is necessary in order to effectively practice the Ten Commandments of Firearm Safety. The rule is: **SHOOT SODER!** Guns and alcohol or drugs make a deadly combination. **Never** consume anything that would mildly impair your judgment or physical coordination when you're using a firearm. A staggering percentage of the shooting accidents that occur every year involve alcohol or drugs. Be smart. Always shoot sober and stay alive.

WARNING: Failure to follow any of these safety rules may result in serious injury or death to the shooter or bystanders and damage to property. Do not consume alcohol or drugs while using a firearm, and practice the Ten Commandments of Firearm Safety. If you have any questions about the safe use of a Remington® firearm, write to: Remington Arms Company, Inc., 5000 Eastman Avenue, P.O. Box 700, Madison, NC 27255-4700, or call us at 1-800-234-5700.

DON'T KEEP THIS TO YOURSELF.


Now that you're a gun owner you have the obligation to be positive that shooting sports are safe for everyone — participants and bystanders alike. You can do this by practicing these principles of firearm safety and passing them on to others — especially new shooters. Set an example for beginners. Be a guide to their safe entry into the exciting world of shooting sports. Invest your time and patience in the love of the sport and its future. After all, it's your love of the sport that led you to buy a new Remington.

Firearm ownership is a right and privilege. It's a right guaranteed in this nation's Constitution. It's a privilege which carries with it a personal responsibility to use your firearm in a way which will ensure your safety and the safety of others. The preservation of this right and privilege depends on the personal commitment of you and your fellow shooters to the safe and responsible use of firearms. I.e. the Ten Commandments of Firearm Safety outlined in the book guide you at all times. Teach and promote these rules whenever you can. Remember, firearm safety depends on you. That's the only way to really enjoy your new Remington® firearm and to preserve sport shooting as we know it today.


Remington® Model 7400™ Autoloading Centerfire Rifle

Congratulations on your choice of a Remington®. With proper care, it should give you many years of dependable use and enjoyment. For best results, we recommend that you use Remington Ammunition – the ammunition used in factory testing your firearm against our exacting function and performance standards.

PICTURE 1 This picture shows the main parts of a Remington Model 7400™ Autoloading Rifle. The picture will aid in understanding the instructions in this book.

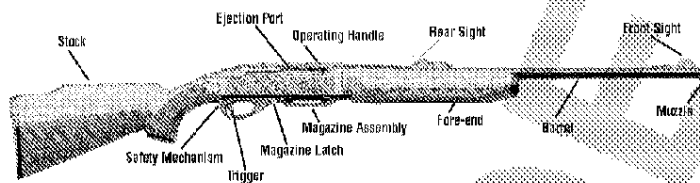

PICTURE 2 This picture shows the parts of the ammunition.



Important Parts of the Firearm

The Safety Mechanism

The safety mechanism on the Model 7400™ Autoloading Centerfire Rifle is a button located behind the trigger. See Pictures 3 and 4.

The safety mechanism provides protection against accidental or unintentional discharge under normal usage when properly engaged and in good working order.

To engage the safety mechanism, push the button so that the **RED BAND MARKING CANNOT BE SEEN**.

Always engage the safety mechanism when the firearm is loaded and you do not intend to shoot.


Never pull the trigger when the safety mechanism is engaged.

When you are ready to fire the firearm, press the safety mechanism so that the **RED BAND MARKING IS SHOWING**.


Do not touch the trigger while pulling the safety mechanism. Your fingers and all other objects should be kept outside of the trigger guard and away from the trigger until you are actually ready to fire by pulling the trigger.

WARNING: The firearm will fire when the trigger is pulled and the **RED BAND IS SHOWING**.

Even when the safety mechanism is engaged, careless handling can cause the firearm to fire. See the *Ten Commandments of Firearm Safety* on page 2.



PICTURE 3



PICTURE 4

The Security System

The firearm you have purchased is equipped with an integrated security system. The security system enables the owner to lock the safety mechanism on the firearm in the "SAFE" position with the use of a special key.

THIS SECURITY SYSTEM DOES NOT ELIMINATE THE NEED FOR SAFE GUN HANDLING AND STORAGE INCLUDING KEEPING THIS AND EVERY GUN UNLOADED AND LOCKED IN A SECURE PLACE WHEN NOT IN USE. READ AND FOLLOW THESE AND OTHER SAFETY RULES IN THIS INSTRUCTION BOOK. FAILURE TO READ, UNDERSTAND AND OBEY THESE RULES CAN RESULT IN SERIOUS PERSONAL INJURY OR DEATH TO YOU OR OTHERS. SEE THE TEN COMMANDMENTS OF FIREARM SAFETY ON PAGE 2.

The safety mechanism on the firearm you have purchased is a button located behind the trigger, commonly known as the cross-bolt safety. See Picture 5.

The safety mechanism provides additional protection against accidental or unintentional discharge under normal usage when properly engaged and in good working order.

On the safety mechanism there is a "J" shaped slot. See Picture 5. This "J" slot is the key hole for securing your safety mechanism. Also on the safety mechanism is a pointer which will point and fire up with either the RED or WHITE DOT on the trigger plate when the safety mechanism is locked. See Picture 5. The position of the pointer indicates whether the safety system is engaged. The existence of the security system does not change the basic operation of the safety mechanism. It does not change the manner in which the safety mechanism should be used.

With your new firearm you will receive a capkey. To use the key, remove the cap. On the key is an indicator line which will line up with the pointer on the safety mechanism. See Picture 6.

To engage the security system, press the safety mechanism to the "SAFE" position so the RED BAND DOES NOT SHOW. Insert the key into the "J" slot as far as it can go. Next, turn the key counter-clockwise so that the indicator line on the key and the pointer on the safety mechanism line up with the WHITE DOT on the trigger plate.

THE SECURITY SYSTEM IS NOW ENGAGED.

In operating the security system, NEVER use excessive force to turn the key. If the key will not turn freely, contact a Remington® authorized dealer.

Keep your security system engaged and your safety mechanism in the "SAFE" position when your firearm is not in use. Keep your key in a secure place, inaccessible to others. DO NOT leave your key or any ammunition with your firearm, which should be kept unloaded and locked in a safe place.



If you lose the key, DO NOT attempt to disengage the safety mechanism using a foreign object. This will damage your firearm. Contact your Remington authorized dealer for a replacement key.

Even if you think the security system and safety mechanism are engaged, careless handling can cause the firearm to fire. See the Ten Commandments of Firearm Safety on page 2.

The Operating Handle


The operating handle is used to pull the bolt rearward to open the action. See Picture 7.

WARNING: When the operating handle is forward as shown in Picture 7, the bolt is locked and the firearm can be fired.



TO REMOVE THE MAGAZINE:

1. Point the firearm in a safe direction.
2. Engage the safety mechanism. **RED BAND WILL NOT SHOW.**
3. **CAUTION:** Keep your fingers away from the ejection port and operating handle.
4. Push the bolt release to close the action. See Picture 8.
5. Push the magazine latch forward. See Picture 7. Pull the magazine from the receiver.




The Trigger Assembly

Putting the trigger fires the firearm.

The weight of the trigger pull is preset at the factory.

All adjustments to the trigger and trigger plate assembly must be made by the factory or a REMINGTON® AUTHORIZED GUNSMITH.

WARNING: NEVER put your finger on the trigger unless you are going to fire the firearm.



The Barrel

The inside of the barrel must be clean and free of obstructions.

I. TO CHECK THE INSIDE OF THE BARREL:

WARNING: Look into the ejection port. Check the throat of the barrel for obstructions from fired cartridges in the firearm.

1. Point the firearm in a safe direction.
2. Engage the safety mechanism. Make sure the **RED BAND IS NOT SHOWING.**
3. Pull the operating handle fully rearward until the bolt is locked by the magazine follower.
4. Insert a cleaning rod into the muzzle. Push the rod steadily through the barrel until the rod can be seen in the ejection port.

II. TO REMOVE OBJECT FROM INSIDE THE BARREL:

WARNING: Never try to remove an object from the barrel without discharging cartridge and firing. This may cause the barrel to burst or a cartridge case to rupture and cause serious personal injury.

1. Use the correct size cleaning rod.
2. Insert the cleaning rod into the muzzle and lightly tap rod to free object.
3. Push the cleaning rod all the way through the barrel until the rod can be seen in the ejection port.
4. If an object cannot be easily pushed out of the barrel with a cleaning rod, return the firearm to the factory or a REMINGTON RECOMMENDED GUNSMITH.

III. TO CLEAN THE BARREL FOLLOW THE INSTRUCTIONS SHOWN ON PAGE 11.

BEFORE LOADING THE FIREARM: Never put a live round of live barrel or fired shell or other objects.


To Load the Firearm

I. TO LOAD ONE CARTRIDGE ONLY:

NOTE: The chamber should be cleaned before loading and firing the firearm the first time. Follow cleaning instructions shown on page 12.

1. Point the firearm in a safe direction.
2. Engage the safety mechanism. **RED BAND WILL NOT SHOW.**
3. Pull the operating handle fully rearward until the bolt is held open by the magazine to lower.
4. Put one cartridge of the correct caliber through the ejection port and into the chamber. See Picture 9.
5. Keep your fingers away from the ejection port and operating handle.
6. Push the bolt release to close the action.

THE FIREARM IS NOW LOADED.



PICTURE 9

II. TO LOAD THE CHAMBER AND MAGAZINE:

1. Point the firearm in a safe direction.
2. Engage the safety mechanism. **RED BAND WILL NOT SHOW.**
3. Pull the operating handle fully rearward until the action is held by the magazine to lower.
4. Put one cartridge of the correct caliber through the ejection port and into the chamber.
5. Keep your fingers away from the ejection port and operating handle.
6. Push the bolt release to close the action.
7. Push the magazine latch forward and pull the magazine from the receiver.
8. Push out cartridges of the correct caliber one at a time into the magazine. Keep the bullets aligned toward the chamber. See Picture 10.
9. Replace the magazine into the firearm.
10. Make sure the magazine is fully latched into position.


THE CHAMBER AND MAGAZINE ARE NOW FULLY LOADED.

11. To fire the firearm, disengage the safety mechanism. **RED BAND WILL SHOW.**

THE FIREARM IS READY TO FIRE.

12. The firearm will fire each time the trigger is pulled until the magazine and chamber are empty.

WARNING: Always check the chamber and magazine before loading the firearm.




PICTURE 10

To Unload the Firearm

1. Point the firearm in a safe direction.
2. Engage the safety mechanism. **RED BAND WILL NOT SHOW.**
3. Push the magazine latch forward and pull the magazine from the firearm.
4. Pull the operating handle forward to remove the cartridge from the chamber.
5. Remove the cartridges from the magazine. See Picture 11.
6. Replace the magazine and open the action.

WARNING: Check the chamber and magazine before loading the firearm.



PICTURE 11

To Adjust the Sights

TO ADJUST THE REAR SIGHT



All models with sights are adjusted at the factory to hit a target at 100 yards.


For elevation (up and down adjustments) and windage (left and right adjustments), move the rear sight in the same direction as you need to move the bullet on the target. See Picture 12.

NOTE: For more information on ballistics and the factory, see the REMINGTON® catalog.

TELESCOPIC SIGHTS:

The top of the receiver has holes for the installation of telescopic sights.

PICTURE 12



POSITION ON TARGET	ADJUSTMENTS
	a. Loosen the elevation screw on the rear sight. b. Slide the rear sight down (downward on the target). c. Tighten the elevation screw.
	a. Loosen the elevation screw on the rear sight. b. Slide the rear sight up (upward on the target). c. Tighten the elevation screw.
	a. Loosen the windage screw on the rear sight. b. Slide the rear sight aperture to the right. c. Tighten the windage screw.
	a. Loosen the windage screw on the rear sight. b. Slide the rear sight aperture to the left. c. Tighten the windage screw.

Lubrication and Maintenance

NOTE: The chamber should be cleaned before loading and firing the firearm. For full cleaning instructions, see page 12.



Over-lubrication should be avoided at all times. A thin coat of Rem® Oil is needed to prevent the possibility of rusting. See note below.

When the firearm is to be stored, it should be carefully cleaned and thoroughly dried. Outside surfaces should be wiped with a cloth coated with Rem® Oil occasionally.

When the firearm is to be stored, all excess lubrication must be removed. The chamber and bore must be thoroughly wiped dry.

NOTE: Rem® Oil (Rem® Oil) is available from your local dealer. If your dealer is out of stock, call 1-800-ORDER-REM or Rem® is Remington's trademark.

TO CLEAN THE BARREL:

WARNING: Check the chamber and magazine if made sure there are no cartridges in the firearm.

1. Use the instructions and the equipment provided for cleaning the barrel. For recommendations, see your Remington Authorized Gunsmith.
2. Select the correct caliber cleaning brush and attach the brush to the cleaning rod.
3. Put the cleaning brush into the gun cleaning solvent.
4. Push the cleaning brush through the barrel several times.

NOTE: Always clean the barrel from the breech to the chamber.

5. Remove the brush from the rod. Attach tip with correct size cleaning patch and push through the bore.
6. Repeat several times using a new cleaning patch each time until the patch is not dirty.
7. Push a clean patch saturated with Rem® Oil through the barrel.
8. Push a clean, dry patch through the barrel to remove excess lubricant.
9. Apply a thin coat of Rem® Oil to the outside of the barrel with a soft, clean cloth.

WARNING: After cleaning, always re-lubricate the firearm as directed.


TO CLEAN THE CHAMBER:

Use the chamber brush that comes with the firearm.

WARNING: Check the chamber and magazine to make sure there are no cartridges in the firearm.

1. Engage the safety mechanism. **RED BAND WILL NOT SHOW.**
2. Pull the opening handle rearward until held open by the magazine follower.
3. Put the brush into the cleaning solvent.
4. Push the brush into the chamber through the ejection port. Repeat several times. See Picture 13.
5. Using the rear of the cleaning brush with attached cleaning patch, dry chamber. Repeat using a clean patch each time, until patch is not dirty.


WARNING: After cleaning, make sure the barrel is free of obstructions.



TO CLEAN THE ACTION SPRING AND ACTION TUBE:

WARNING: Check the chamber and magazine to make sure there are no cartridges in the firearm.


1. Loosen the fore-end screw and remove the fore-end. See Picture 14.
2. Brush action spring and action tube with gun cleaning solvent. See Picture 15.
3. Dry with clean cloth.
4. Apply a thin coat of Rem[™] Oil to prevent rusting.
5. Replace the fore-end and tighten fore-end screw.



TO CLEAN THE TRIGGER PLATE ASSEMBLY:

WARNING: Make sure there are no cartridges in the magazine or chamber.

1. Engage the safety mechanism. **RED BAND WILL NOT SHOW.**
2. Close the action.
3. Tap out front and rear trigger plate pins. See Picture 16.
4. Lift rear of the trigger plate assembly and remove the assembly from the receiver.





NOTE: Clean trigger plate assembly as a unit with Rem[™] Oil.

5. Spray the trigger plate assembly with Rem[™] Oil as shown. See Picture 17. Let sit for 15 minutes. Spray again to wash off contaminants. Shake off excess lubricant.

WARNING: Excessive use of a non-proprietary lubricant could adversely affect the function and safe operation of your firearm.

6. Check to make sure that the end of the disconnecter is below end of left connector. See Picture 18.
7. Carefully insert the trigger plate assembly into the receiver.
8. Position to align holes and pins in front and rear trigger plate pins.

WARNING: This firearm needs to be checked periodically by a Remington Arms Company, Inc. or a REMINGTON RECOMMENDED SERVICE CENTER. This will ensure proper fit, function and safety of the firearm. If worn or damaged, fix it.



How to Obtain Parts and Service From Remington®

TO ORDER PARTS:

Many Remington Dealers and Authorized Repair Centers carry a full line of parts. Please check with them first before ordering parts.

To expedite your PARTS order or request REPAIR SERVICE visit our web site at www.remington.com. Detailed instructions are provided along with parts and/or service order forms. You may also reach Remington by calling our toll free customer service number, 1-800-243-9700, Mon.-Fri., 9:00 AM-5:00 PM Eastern Time.

1. Fax completed order form (from the web site) to 1-336-548-7801.
2. To order by phone without the order form call 1-800-243-9700.

Please have the following information ready before you call.

- Firearm model and serial number.
- Part description and quantity. Part descriptions can be found on the parts listing page on the website.
- Your complete mailing address (P.O. Box and Street Address), including zip code, telephone number and e-mail address.
- Method of payment: Mastercard, Visa, Amex or Discover card number and expiration date. Payment may be made by check or money order. A quote may be made to you over the phone. (Sorry, no C.O.D.s.)

WARNING! USE ONLY REMINGTON PARTS IN REMINGTON FIREARMS.

NOTE: SOME PARTS MAY BE RESTRICTED. See parts list for details. Owners' manuals/instruction books may be requested via our web site at www.remington.com or by calling 1-800-243-9700.

REPAIR SERVICES


1. To locate the Remington Authorized Repair Center nearest you visit our web site at www.remington.com and use our Repair Service Locator. If you need additional on-line assistance, e-mail Us at: Rc@remington.com to obtain a listing of Authorized Repair Centers. Contact the Authorized Repair Center of your choice for evaluation of your firearm and/or additional shipping instructions.
2. If your Remington Authorized Repair Center cannot provide the service or repair you require and you need further assistance, please call our toll free number 1-800-243-9700, Mon.-Fri., 9:00 AM-5:00 PM Eastern Time and select the option for repairs. Then, if shipment of your firearm is required, please:
 - Record the serial number of your firearm and sendencing it to us.
 - Pack your firearm for safety and to prevent further damage in shipping and handling. Preferably, ship in a firearm box.
 - Remove all accessories from the firearm to prevent loss or damage.
 - Enclose a letter with the firearm detailing the model number, number of your firearm and serial number along with a full description of the problem. Be sure to include your full name and address (P.O. Box and Street Address), including zip code, telephone number and e-mail address.
 - Ship your firearm by either United Parcel Service (UPS) or Parcel Post (US Post Office). Remington is not responsible for damage or loss during shipment, so you are asked to purchase insurance from your carrier.

Ship to:

Remington Arms Company, Inc.
Attn: Arms Service Division/Repairs
14 Hoefer Ave.
Illion, NY 13357

WARNING: DO NOT SEND LIVE OR SPENT SHELLS IN YOUR FIREARM OR IN THE MAIL. INSTEAD, THE FIREARM MUST BE EVALUATED BY A QUALIFIED LAW ENFORCEMENT AGENT OR ANOTHER REMINGTON AUTHORIZED SERVICE CENTER. IF YOU ARE NOT SURE OF THE STATUS OF THE FIREARM, PLEASE SEND IT IN A SEPARATE PACKAGE AND INCLUDE NAME, ADDRESS WITH ZIP CODE, TELEPHONE NUMBER, MODEL AND SERIAL NUMBER OF YOUR FIREARM.

MODEL 7400™
Autoloading Centerfire Rifle

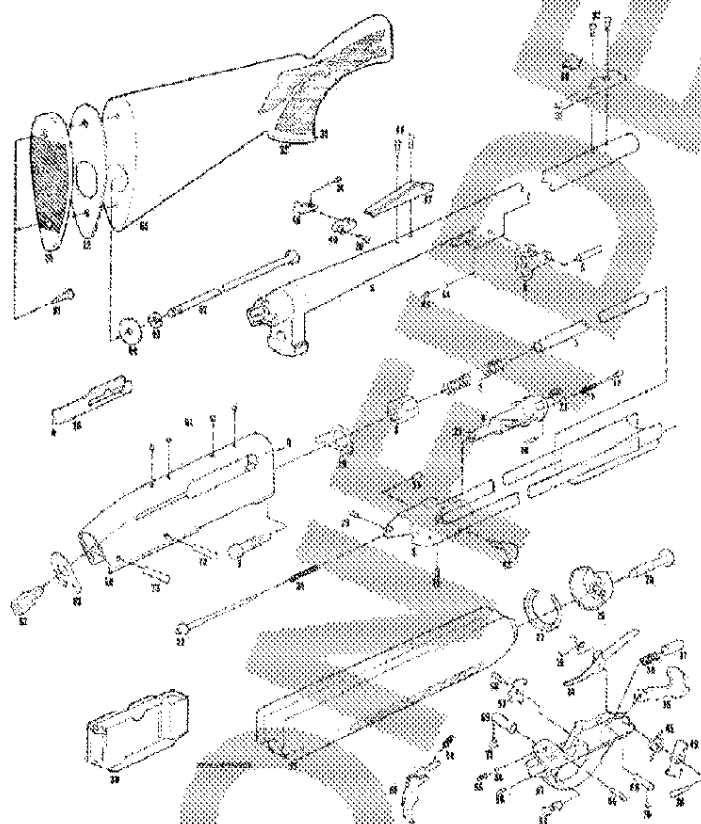

MODEL 7400™
Autoloading Centerfire Rifle
PARTS LIST

VIEW # PART NAME

NOTE: Basic .30-06 Caliber listed below.
 See Exploded View for proper identification of parts.

- 1 Action Bar Assembly
- 2 Action Spring
- 3 Action Tube
- 4 Action Tube Support
- 5 Action Tube Support Pin
- 6 Barrel Assembly
- 7 Barrel Extension Bolt
- 8 Barrel Take Down Nut (.30-06)
- 9 Breach Bolt
- 10 Butt Plate Frame (New Style not Shown)
- 11 Butt Plate Frame Screw
- 12 Butt Plate Insert (New Style not Shown)
- 13 Butt Plate Insert Screw
- 14 Cam Pin
- 15 Disconnect
- 16 Disconnect Spring
- 17 Ejector Port Cover
- 18 Ejector
- 19 Ejector Retaining Pin
- 20 Ejector Spring
- 21 Elevation Screw
- 22 Extractor
- 23 Firing Pin
- 24 Firing Pin Retaining Pin
- 25 Firing Pin Retracting Spring
- 26 Fore-End Assembly
- 27 Fore-End Reinforcement Assembly
- 28 Fore-End Cap
- 29 Fore-End Cap Spacer
- 30 Fore-End Screw
- 31 Fore-End Spring
- 32 Front Sight
- 33 Front Sight Ramp
- 34 Front Sight Ramp Screw
- 35 Grip Cap
- 36 Hammer
- 37 Hammer Pin
- 38 Hammer Plunger

VIEW # PART NAME

NOTE: Parts subject to change without notice.
 FOB Ilion, New York

- 38 Hammer Spring
- 39 Magazine Assembly
- 40 Magazine Latch
- 41 Magazine Latch Spring
- 42 Operating Handle
- 43 Operating Handle Retaining Pin
- 44 Operating Ball
- 45 Operating Screw
- 46 Rear Sight Aperture
- 47 Rear Sight Base
- 48 Rear Sight Base Screw
- 49 Rear Sight Slide
- 50 Receiver Assembly
- 51 Receiver Plug Screw
- 52 Receiver Stop
- 53 Safety Mechanism
- 54 Safety Mechanism Detent Ball
- 55 Safety Mechanism Spring
- 56 Safety Mechanism Spring Retaining Pin
- 57 Sear
- 58 Sear Pin
- 59 Sear Spring
- 60 Stock Assembly
- 61 Stock Bearing Plate
- 62 Stock Bolt
- 63 Stock Bolt Lock Washer
- 64 Stock Bolt Washer
- 65 Trigger Assembly
- 66 Trigger Pin
- 67 Trigger Plate
- 68 Trigger Plate Assembly
- 69 Trigger Plate Pin Bushing, Front
- 70 Trigger Plate Pin Bushing, Rear
- 71 Trigger Plate Pin Detent Spring, Front
- 72 Trigger Plate Pin Detent Spring, Rear
- 73 Trigger Plate Pin, Front
- 74 Trigger Plate Pin, Rear
- 75 Windage Screw

Firearm Owner's Record

Model _____ Serial # _____ Date Purchased _____

Purchased From _____ Price Paid _____

Remember to complete and return the Firearm Warranty Registration Card in order to obtain full benefit of your Limited Two Year Firearm Warranty.

A WORD ON THE MAINTENANCE AND CARE OF YOUR REMINGTON FIREARM

Don't Alter or Modify Your Gun and Have it Serviced Regularly.
Your firearm has been designed to operate according to certain factory specifications. You'll jeopardize your safety and that of others around you by attempting to alter its trigger-mechanical safety or other mechanisms. So never alter or modify your firearm in any way.

Like any mechanical device, a firearm is subject to wear. It must be maintained and periodically serviced to assure optimum safety and performance. Only a qualified service facility should service, repair or modify your Remington® firearm. Consult your instruction book for instructions on how to send your firearm to the factory or for the location of the nearest Remington repair station. Remington recommends that you have your firearm professionally serviced annually. You should also have your firearm professionally serviced after prolonged storage, or if there is ever any question pertaining to the proper functioning characteristics of your firearm.

Proper cleaning and lubrication are also important firearm maintenance and are necessary to assure accuracy, safety and reliability. Before cleaning, always make sure that your gun is completely unloaded. And always clean the barrel from the chamber end to the muzzle when possible.

[illegible]

[illegible]

[illegible]

