

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE [0.1] - TOLERANCE ± 0.015
2 PLACE [0.01] - TOLERANCE ± 0.010
3 PLACE [0.001] - TOLERANCE ± 0.005
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm 0.5^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED,

FINISH ROUGHNESS TO BE  OR BETTER.
DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE
WITH ASME Y14.5-1994.

MATERIAL AND HEAT TREAT

MATERIAL: ASME B18.3 STAINLESS

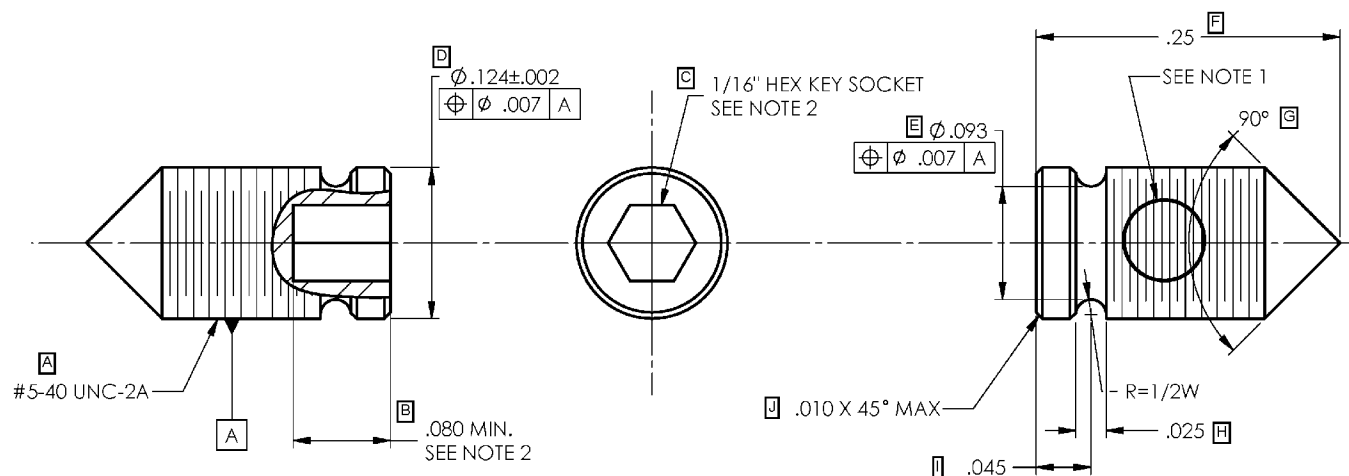

HEAT TREAT : VENDOR'S SPEC

HARDNESS : HRb 80-100

FINISH : NONE

~~HEAT TREAT AND FINISH TO BE DONE BY REMINGTON~~

ALTERATIONS

[illegible]

NOTES:

- NOTES:
1. NYLON LOCKING ELEMENT OR ENGINEERING APPROVED EQUIVALENT REQUIRED ON THREADS AS INDICATED.
 2. HEX KEY SOCKET TO CONFORM TO ASME B18.3-1998.

MODEL		PART NO.		PART USE	
DES. BY DATE JWR 8-30-06		DRN. BY DATE JWR 8-31-06		CHK. BY DATE	
TITLE TRIGGER PULL ADJUSTMENT SCREW					
SHEET SIZE		NUMBER		SCALE	SUPERSEDES
				10X	
B		301429		REMINGTON ARMS CO., INC. Madison, NC 27025	

SolidWorks Filename: 301429 - Trigger Pull Adjustment Screw

NOT RELEASED FOR PRODUCTION