

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (0.1) - TOLERANCE ± 0.015
2 PLACE (0.01) - TOLERANCE ± 0.010
3 PLACE (0.001) - TOLERANCE ± 0.005
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm 0.5^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE. UNLESS OTHERWISE SPECIFIED,

FINISH ROUGHNESS TO BE
DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE
WITH ASME Y14.5-1994.


MATERIAL AND HEAT TREAT

MATERIAL : ASME B18.3 STAINLESS
HEAT TREAT : VENDOR'S SPEC
HARDNESS : HRb 80-100
FINISH : NONE

~~HEAT TREAT AND FINISH TO BE DONE BY REMINGTON~~

ALTERATIONS

ALT.	ZONE	WAS	REF.	BY	DATE
A	E1, E2	CORRECTED THREAD IN VIEW		JWR	10-17-06

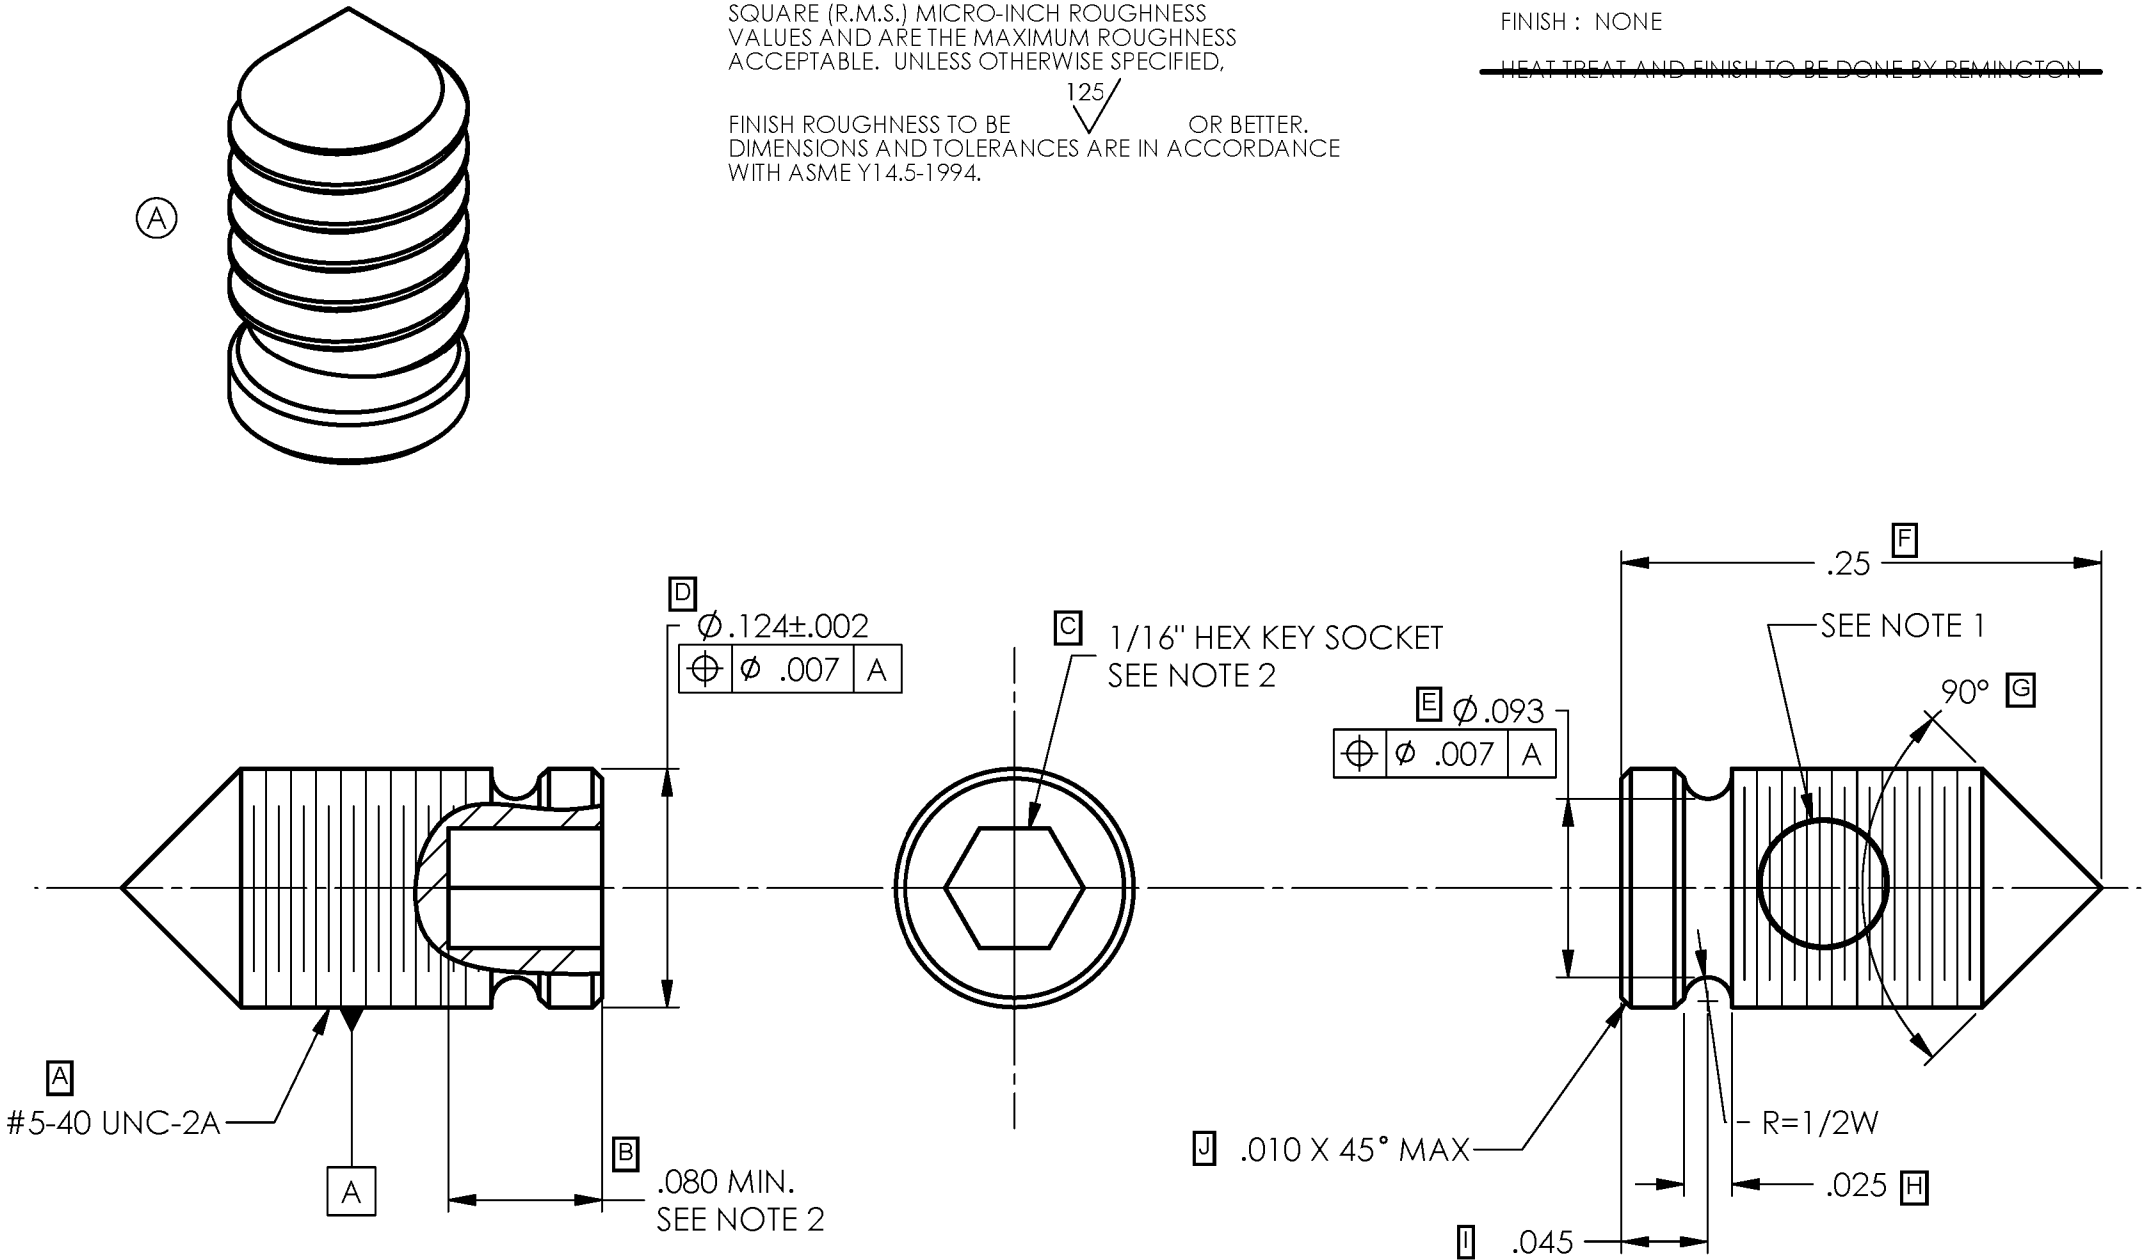

- NOTES:
1. NYLON LOCKING ELEMENT OR ENGINEERING APPROVED EQUIVALENT
REQUIRED ON THREADS AS INDICATED.
 2. HEX KEY SOCKET TO CONFORM TO ASME B18.3-1998.

SolidWorks Filename: 301429 - Trigger Pull Adjustment Screw

NOT RELEASED FOR PRODUCTION

MODEL	PART NO.	PART USE
DES. BY DATE JWR 8-30-06	DRN. BY DATE JWR 8-31-06	CHK. BY DATE
TITLE TRIGGER PULL ADJUSTMENT SCREW		
SHEET SIZE B	NUMBER 301429	SCALE 10X
SUPERSEDES REFERENCE REMINGTON ARMS CO., INC. Madison, NC 27025		