
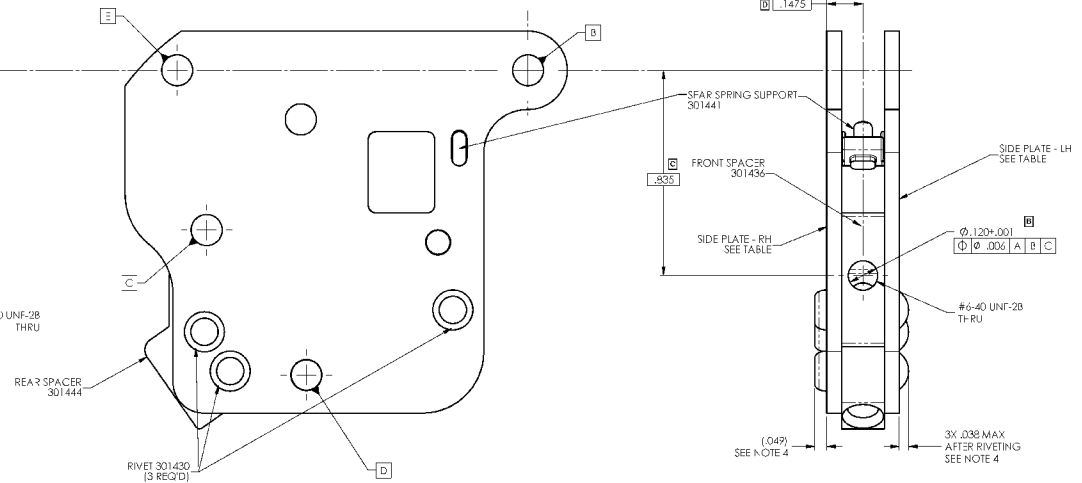


A diagram of a horizontal beam supported by a central triangular support. A rectangular weight labeled 'A' is hanging from the center of the beam. The beam is divided into three sections by the support. The left section contains a vertical dashed line and a horizontal dashed line. The right section contains a vertical dashed line and a horizontal dashed line. The beam is also supported by two circular supports at the ends.

ALTERATIONS					
A.I.	ZONE	WAS	REI.	BR	DATE
A		WAS D-EX-9572		MRB	1-6-02
B		REVISED NOTE 5		MRB	1-6-02
C		REVISED AND REDRAWN		MRB	2-26-01
D	A3	NOT RELEASED FOR PRODUCTION		MRB	4-24-01
E	A7	ADDED MODEL USAGE (2X)		MRB	6-24-01

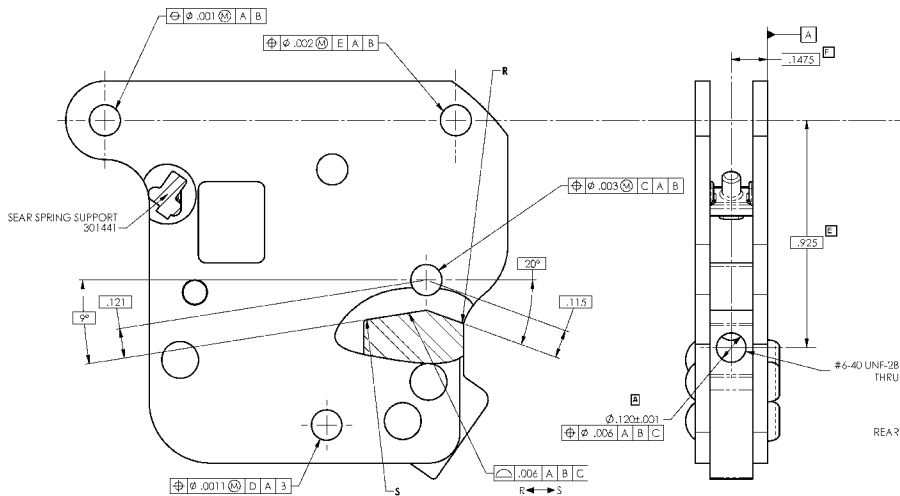

NOTES:

1. ASSEMBLY TO BE PLATED WITH 0.0002" - 0.0004" HIGH PHOSPHORUS ELECTROLESS NICKEL. ALL COMPONENTS MUST FINISHED AND BAKED AT 375° F FOR 24 HOURS, OR POST-PROCESS HEAT TREATED PER ASTM B850, CLASS ER-1 OR ER-17, WHICHEVER IS APPLICABLE.
2. DRILL AND TAP HOLES AFTER PLATING.
3. ALL DRILLED AND TAPPED HOLES TO BE DEBURRED.
4. NOTE THAT RIVET ORIENTATION S REVERSED ON ASSEMBLY 306366. ASSEMBLY 306365 SHOWN UNLESS OTHERWISE SPECIFIED.

(P)	XR100	306366	TRIGGER HOUSING - LH		
	XR100	306365	TRIGGER HOUSING - RH		
	MODEL PART NO.		PART USE		
	C.S. BY DATE		DHL SV DATE		CFL BY DATE
JWR	T-12-16-05		JWR 01-10-06		
TWIG TRIGGER HOUSING ASSEMBLY					
99-11-18 100378		ACAI 4X		9-8-04-195	99-09-04-3
D	305365		REMINGTON ARMS CO., INC. (Madison, NC 27205)		

© RELEASED FOR PRE-PRODUCTION ONLY