


DATE

SUBJECT OF EXPT.

M 700 F.C. Design Sear

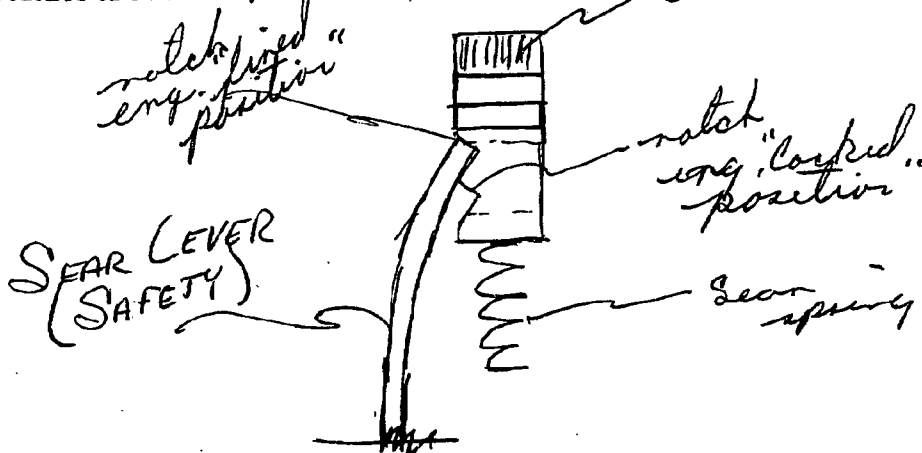

The sketch shows the sear in the fired condition and the safety lever engaged as the bolt is opened and drawn rearward the sear spring forces the sear upward the safety lever springs outward and then returns to the lower notch. With this done the sear has been effectively blocked in two conditions.

EXPERIMENTER

F.E. Martin

WITNESS

Jack East

DATE

4-8-80

DATE

4/9/80