


The bolt head contains two large locking lugs positioned 120° apart and a plunger(pin) type spring loaded ejector which is located in the bolt face. The right locking lug also contains an anti-bind slot. (Photo #3)

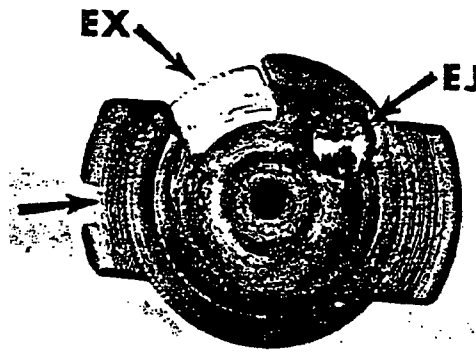

The extractor is a claw type that pivots in a recessed cut along the side of the bolt head. This cut goes through the bolt shroud and back along the bolt approximately one inch. (Photos #3 and #4)