

September 22, 1981

Remington Arms Company
Mr. George A. Jackson, Sr. Buyer
Main Street
Ilion, NY 13357

Dear Mr. Jackson:


Enclosed you will find a Kwik Klip 700 magazine conversion in 30-06 caliber, as ordered under P.O. I-74709, along with our news release.

The Remington 700 has always been my favorite rifle for accuracy, dependability, and looks. However, I was never very happy with breechloading and floorplate unloading. Therefore, I designed and patented the Kwik Klip conversions. It is my endeavor to offer bolt action shooters the advantages and conveniences of a clip-fed rifle without sacrificing the classic appearance of a modern sporter.

Simplicity of installation, efficiency in operation, quality construction, and superb finish were the goals that resulted in Kwik Klip 700. This product has its place in the sporting goods market to bridge the gap between a Savage 110 C and a Colt Sauer.

Please inform me of Remington's comments and test evaluations. Contact me for quantity pricing or any other interests Remington Arms Company may have in Kwik Klip 700.

Respectfully,



President, Mag-Con, Inc.

KWIK KLIP CONVERSIONS BY MAG-CON, Inc., P.O. Box 2047A, ALLENTOWN, PA 18001

TEL: 215-691-6888

INSTRUCTIONS FOR INSTALLING A KWIK KLIP IN A REMINGTON 700

CAUTION: It is highly recommended that a gunsmith or qualified dealer install Kwik Klip in your Remington 700. Read instructions thoroughly. If you are not sure of the procedure, contact your Gunsmith.

1. **MAKE SURE THE RIFLE IS NOT LOADED!** Select a good-fitting screwdriver and remove both trigger guard screws. Lift the barrelled-action from the stock and place it in a safe place. Remove the factory trigger guard from the stock along with the metal magazine wall section.
2. Remove clip from Kwik Klip trigger guard by pushing latch forward. Carefully insert Kwik Klip trigger guard into stock opening. If you experience any difficulty inserting the Kwik Klip trigger guard into the stock, stop, and remove the trigger guard. Examine the inside of the stock opening. The stepped-in section of the stock side walls may have to be sanded or filed. The area which may require sanding is the shaded area set forth in Figure #1 below. (It is highly recommended that a Gunsmith or dealer perform the sanding or filing.) Sand or file the stock side walls lightly and reinsert the Kwik Klip trigger guard into the stock opening. Repeat light sanding until the Kwik Klip trigger guard fits smoothly into the stock opening. Sand only the stepped-in section shown in Figure #1. With the trigger guard in the stock, insert the clip several times to see if it has been properly installed. The Kwik Klip has been properly installed to this point if the clip drops out when the release latch is pushed forward.
3. Place the barrelled-action in the stock and replace both guard screws. Insert the clip. If the clip does not latch, add washer(s) between the trigger guard and stock at rear guard screw. See Figure #1. The front guard screw requires a shim washer if the bolt binds or rubs against the clip when chambering rounds. Use only the shim washers packaged with your Kwik Klip conversion. These shim washers have been designed for this product and it is essential to use only Mag-Con, Inc.'s shim washers. If you have not received any washers with your Kwik Klip or have misplaced them, contact Mag-Con, Inc. at P.O. Box 2047A, Allentown, PA 18001 for replacements. Use "dummy" rounds for checking the feeding cycle.
4. If you have any difficulty installing your Kwik Klip, consult your gunsmith, dealer, or Mag-Con, Inc. We know you will enjoy the convenience of Kwik Klip and do your part to keep hunting both a safe and enjoyable sport. Drop us a note with your comments on Kwik Klip and advise us of any other rifles you would like Kwik Klips for.
5. Mag-Con, Inc. disclaims any and all responsibility for damages to a Remington 700 as a result of installation of a Kwik Klip by other than a reputable dealer or gunsmith. Mag-Con, Inc. further disclaims any responsibility for any damages incurred as a result of improper installation or use of a Kwik Klip. Any claims for defects of a Kwik Klip are limited to the replacement of the Kwik Klip by Mag-Con, Inc. upon timely receipt of notice of said defect by Mag-Con, Inc.
6. **Note to Magnum Owners:** The magnum clip is designed to be loaded like a standard caliber clip. A little pressure applied to the cartridge will cause it to "snap" down into the clip. Magnum clips hold only three rounds. Standard calibers hold four rounds.

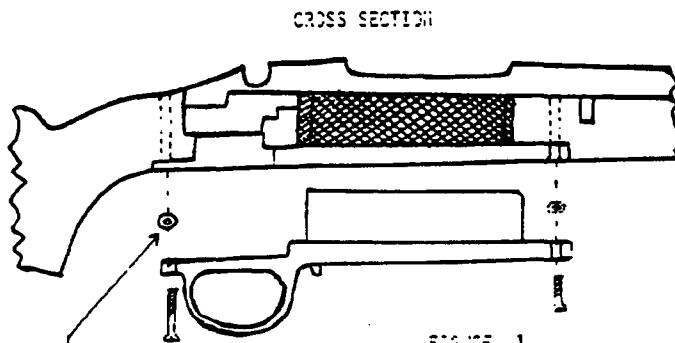


FIGURE 1

Shim Washer(s) (if required)

U.S. PATENT 4,237,638

MAG-CON, INC., P.O. BOX 2047A, ALLENTOWN, PA 18001 PHONE (215) 691-6888

