


ALL DIMENSIONS ARE TO FIGURES
UNLESS OTHERWISE SPECIFIED. TOLERANCES
ON DECIMAL DIMENSIONS ARE ±.005
ON FRACTIONAL DIMENSIONS ±.01
ON ANGLED DIMENSIONS ±.005
ON RADIUS DIMENSIONS ±.005
SURFACE FINISH DESIGNATED BY ROUGHNESS
SYMBOLS INDICATE THE MAXIMUM ROUGHNESS
IS ACCEPTABLE UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
160 OR BETTER.

REV.	DATE	BY	CHKD.	DATE
1	ASDEO	11/20/61	13	11/20/61

① FOR BLANK DRAWING
SEE B-16506

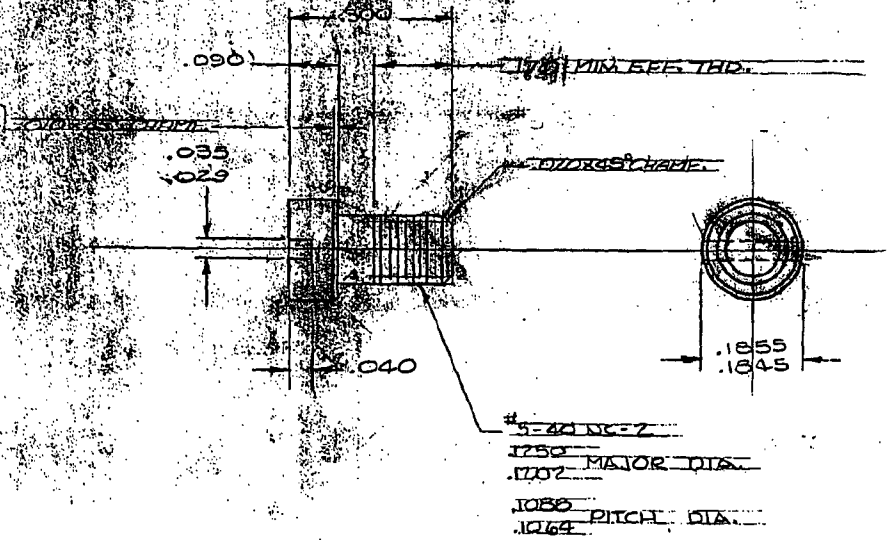

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL SS-10-C Steel
HEAT TREAT Cyanide
HARDNESS
COLOR White Black
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

XPS 100 TRIG. HOUSING SCREW 2.			
MODEL	PART USE	QUAN.	SEX
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE
	11/20/61		11/20/61
TITLE <u>SCREW</u>			
NUMBER	SCALE	SUPERSEDED-REFERENCE	
B-15474	5X	REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT.	

1754 REV. 2