


B-17043

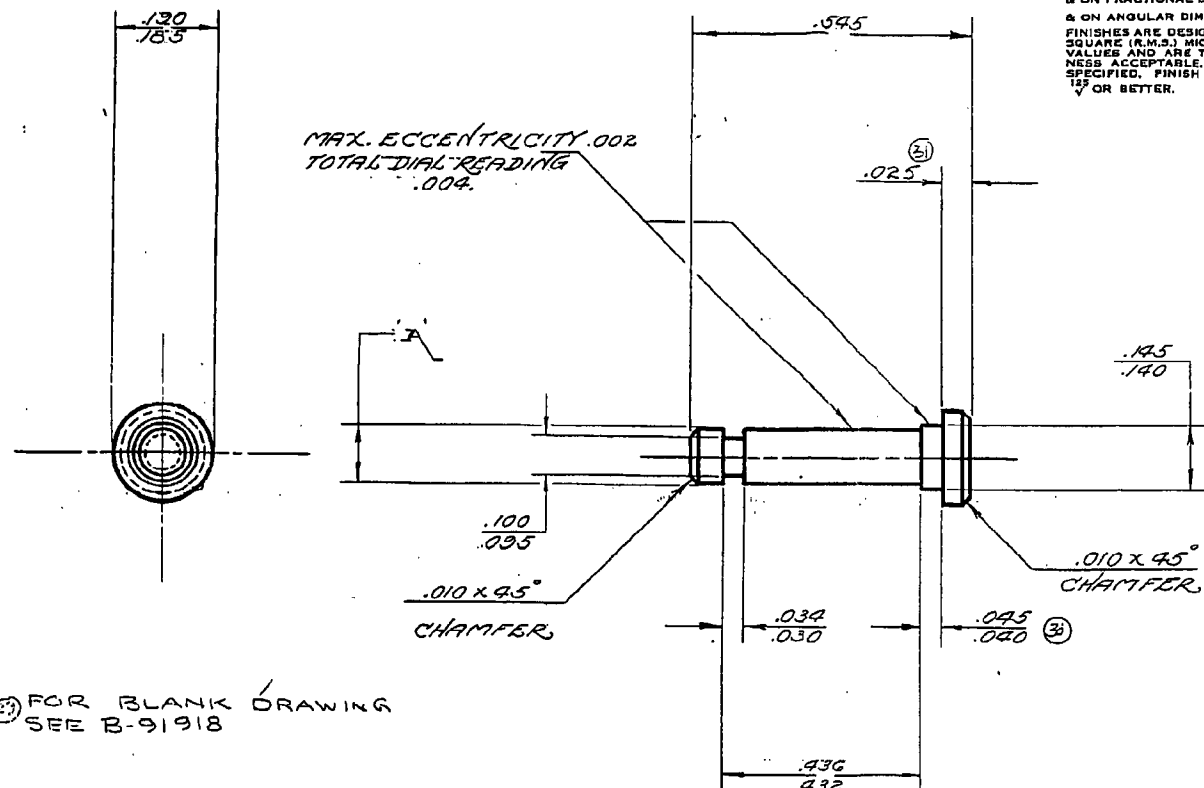

FOR BLANK DRAWING
SEE B-91918

DIM.	MANUFACTURING DIM.	DIM. AFTER HEAT TREAT
A	.1245 - .1225	.123 - .125

*NOTE

THIS DIA. MUST PASS THRU
A .125 DIA. RING GAGE FREELY

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL: .08% C, .14% CARBON, STA...
HEAT TREAT: 003-006 CASE
FINISH: .003-006 CASE
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

B-17043

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED, TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

LET.	WAS	REFERENCE	BY	DATE
23	REDRAWN	4671	DR	5-3-62
24	B-17043	"	DR	5-3-62
25	ADD USE 600	5120	DR	1-29-62
26	ADDED USE	6473	DD	3-14-62
27	ADD USE 660	6664	DR	11-11-62
28	ADD MOHAWR USE 600	8444	DR	11-11-70
29	ADDED	11204	DR	11-11-70
30	WAS .035-.040	11614	DR	11-11-70
31	WAS .030	"	"	"
32	ADD USE 76WT	11667	"	11-11-70

76WT	SAFETY PIVOT PIN	1	P.L.
MOHAWR 600	SAFETY PIVOT PIN	1	C-26795
660	SAFETY PIVOT PIN	1	D-26345
76WT	SAFETY PIVOT PIN	1	D-26345
40X-8	SAFETY PIVOT PIN	1	D-27565
40X-8	SAFETY PIVOT PIN	1	D-27565
600	SAFETY PIVOT PIN	P.L.	
76WT	SAFETY PIVOT PIN	P.L.	
76WT	SAFETY PIVOT PIN	D-26345	
76WT	SAFETY PIVOT PIN	D-26345	
40X-8	SAFETY PIVOT PIN	P.L.	
76WT	SAFETY PIVOT PIN	D-24575	
40-X	SAFETY PIVOT PIN	P.L.	
76WT	SAFETY PIVOT PIN	D-170364	
76WT	SAFETY PIVOT PIN	D-170364	
MODEL	PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE
DR	DR	DR	DR
11-11-62	11-11-62	11-11-62	11-11-62
TITLE PIN			
NUMBER	SCALE	SUPPLEMENT-REFERENCE	
B-17043	5:1	A-17043	
REMINGTON ARMS CO. INC.			
RESEARCH & DEV. DEPT.			

29

130

23
24
25
26
27
28
29
30
31
32