


008201-D

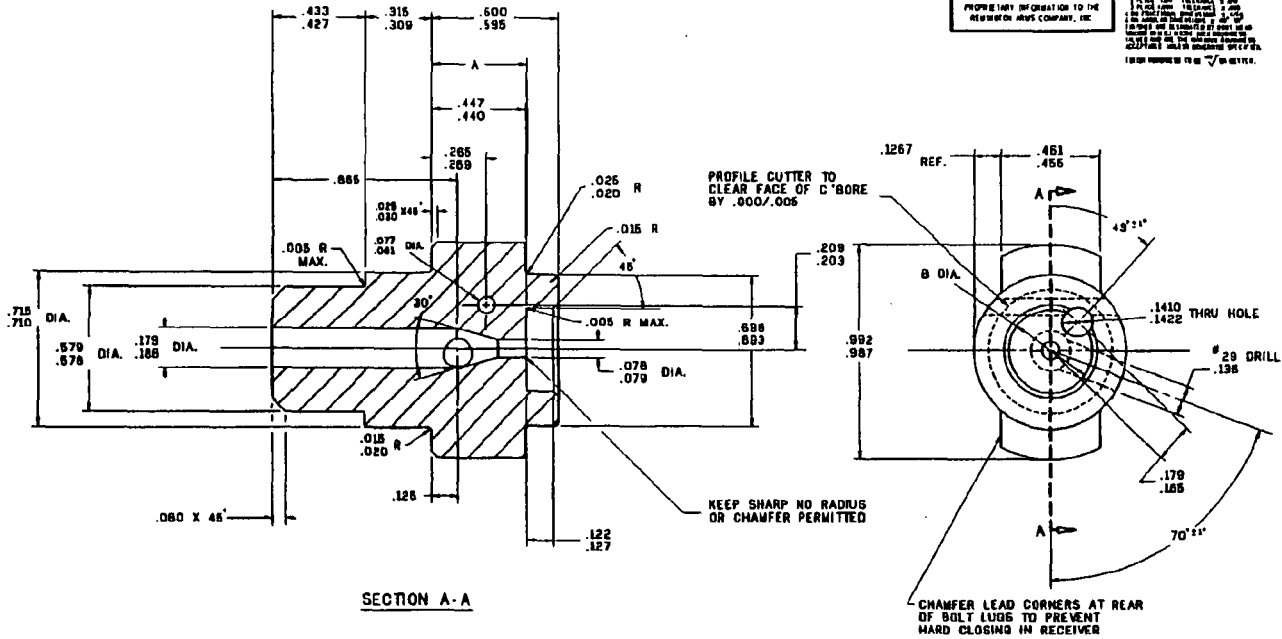

NOTE:
ALLOWABLE ECCENTRICITY OF FIRING PIN HOLE Q O.D. (FRONT) .0045(.008 IND. READING)
ALLOWABLE ECCENTRICITY OF FIRING PIN HOLE Q O.D. (REAR) .0031(.006 IND. READING)
ALLOWABLE ECCENTRICITY OF LUG DIA. Q BOLT DIA. 1.668/.666(.001/.002 IND. READING)

CALIBER	A DIM.	B DIA.	BOLT HEAD
SMALL	.4515 .4485	.3835 .3885	102800
STANDARD	.4515 .4485	.479 .484	102801
MAGNUM	.4515 .4485	.539 .544	102802
SMALL MAX.	.4515 .4535	.3835 .3885	102803
STD. MAX.	.4515 .4535	.479 .484	102804
MAG. MAX.	.4515 .4535	.539 .544	102805

NBAR		BOLT HEAD	
DATE OF ORDER	DATE OF DELIVERY	DATE OF RECEIPT	DATE OF PAYMENT
BOLT HEAD (NBAR)		BOLT HEAD (NBAR)	
D-102800		REMINGTON ARMS CO. INC.	