

6E9E6-C

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS GRAPHING: UPON TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON ORIGINAL DIMENSIONS ARE:
1 PLACE LH - TOLERANCE ± .005
2 PLACE LH - TOLERANCE ± .002
3 PLACE LH - TOLERANCE ± .005
6 ON FRACTIONAL DIMENSIONS ± .001
6 ON ANGULAR DIMENSIONS ± .0030
7 DIMENSIONS ARE DESIGNATED BY ROOT MEAN
SQUARE (RMS) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH DIMENSIONS TO BE $\sqrt{1.6}$ OR BETTER.


RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL C-10225
HEAT TREAT MS.
HARDNESS RC 37-42
COLOR NITRE BLACK
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALTERATIONS

NOTES:

1. PIECE MUST BE FLAT AND FREE FROM BURRS. ENTIRE SURFACE OF PART MUST PASS THROUGH .091 SLOT.
- 2.FOR BLANK ORDER 9363B

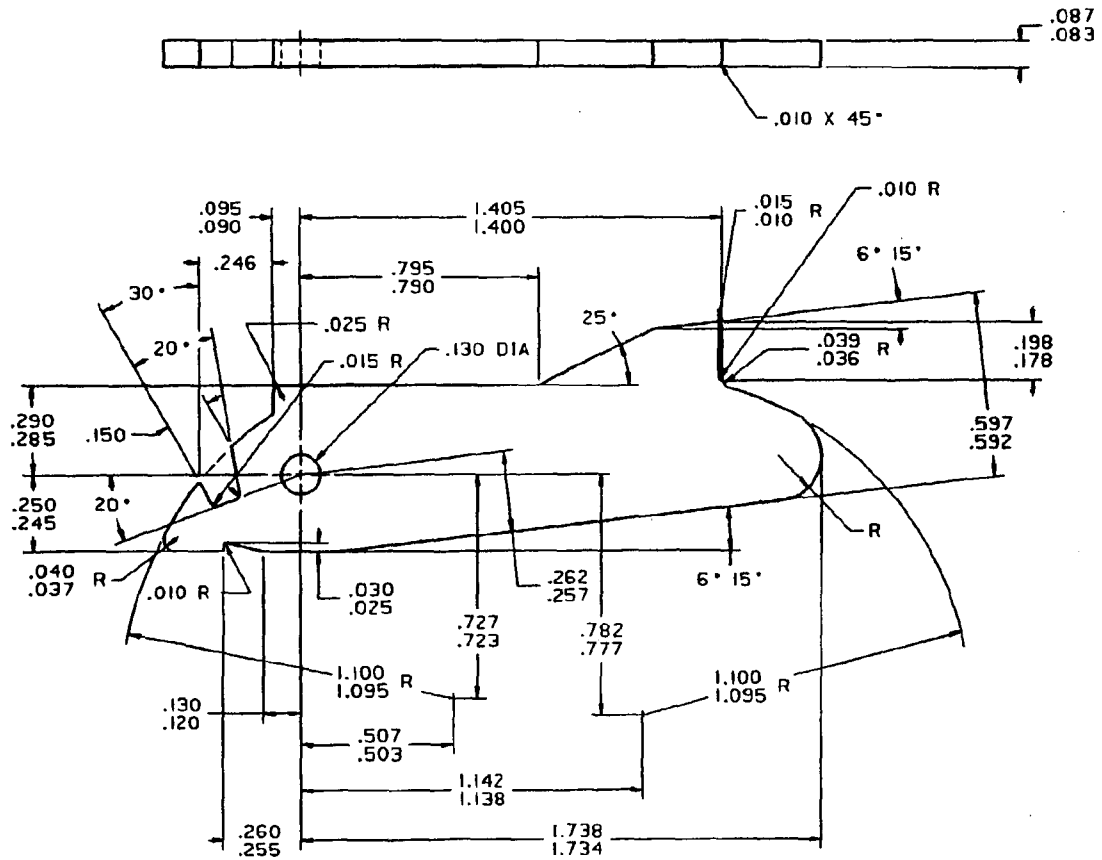

CV FULNAME - RES.T.P.NEAR BOLT-STOP

NOAR	93639	BOLT STOP	
SERIAL	PART NO.	PART NAME	
QTY. PER ASSEMBLY	QTY. PER DRAWING	QTY. PER DRAWING	QTY. PER ASSEMBLY
	MISC 9-5-85	FEM 3-13-86	
TITLE			
BOLT STOP			
REVISIONS			
DATE	BY	APPROVED	DESCRIPTION
4/1			
C-93639			
REWINSON ARMS CO. INC.			
AUGER BLANCH, PC.			

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

R2522442