

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.



DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (.1) — TOLERANCE $\pm .015$
2 PLACE (.01) — TOLERANCE $\pm .010$
3 PLACE (.001) — TOLERANCE $\pm .004$
4 ON FRACTIONAL DIMENSIONS $\pm 1/100$
5 ON ANGULAR DIMENSIONS $\pm .00^\circ$ TO $.30^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE 1.0 OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT


MATERIAL C-1095 SPRING STEEL
HEAT TREAT R 72-75
HARDNESS REN 85-87
COLOR TEMPER
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALTERATIONS

ALT.	WAS	REV.	BY	DATE

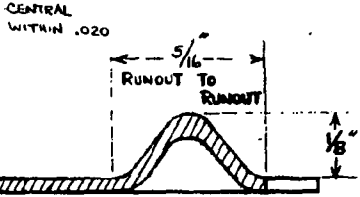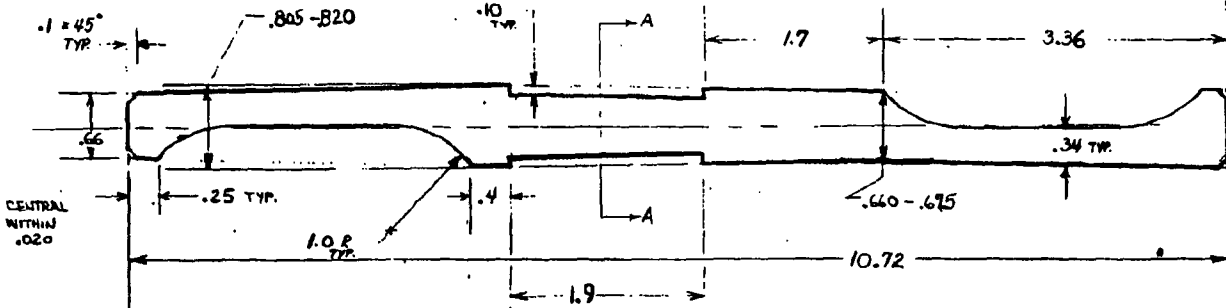

A-A SCALE 5:1

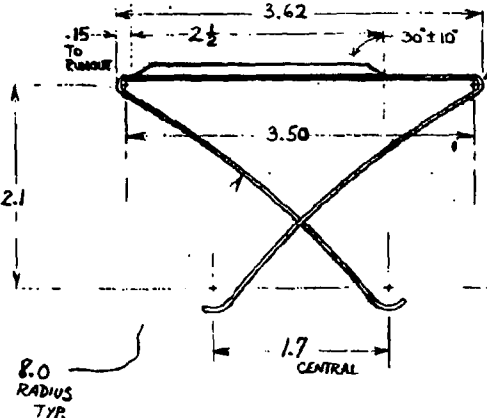

BEND ($\frac{1}{8}$ " DIA. PIN)

BEND ($\frac{3}{8}$ " DIA. PIN)

NBAR		PART NO.		PART USE	
DES. BY DATE	REV. BY DATE	ENL. BY DATE	APP. BY DATE		
TITLE		SCALE		REVISIONS	
MAGAZINE SPRING-FOLLOWER		1:1			
B-EXP-1673		EX-1673			
REMINGTON ARMS CO. INC. SOUTH RESEARCH DIV.					